



→ Execution starts with main, and exits with main

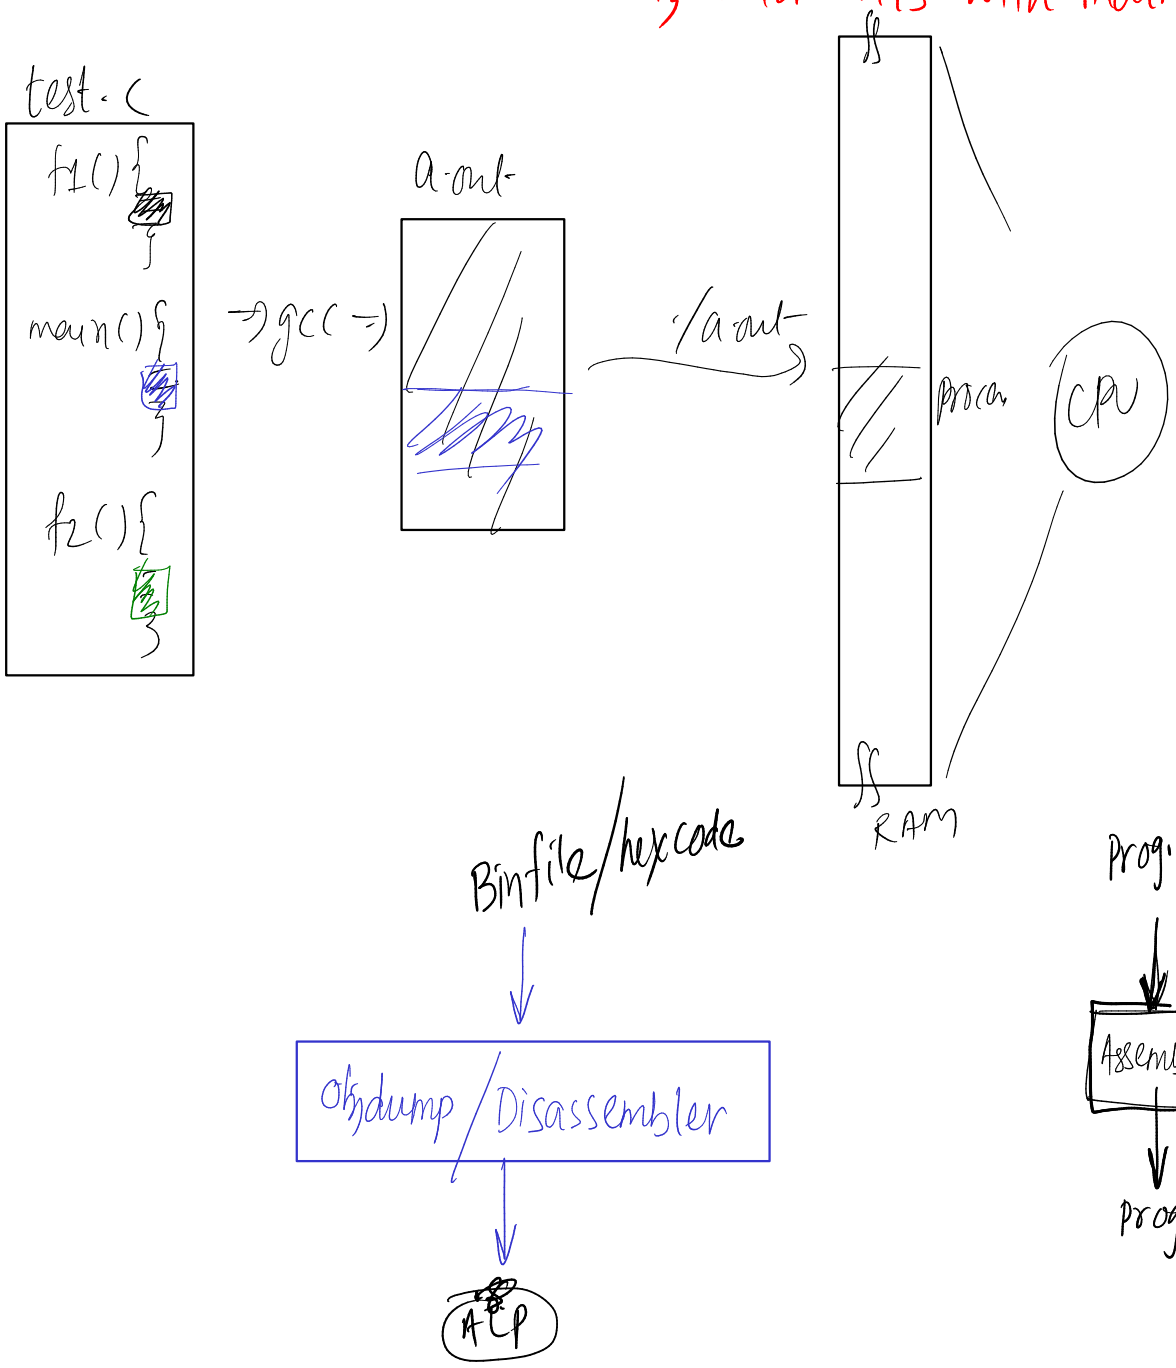

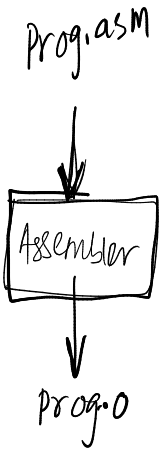

```c
void f1()
{
printf("in f1...\n");
f2();
printf("in f1...\n");
}
int main()
{
        printf("in main\n");
        f1();
        printf("in main\n");
        f2();
        printf("in main\n");
        return 0;
}
void f2()
{
printf("in f2...\n");
}
```

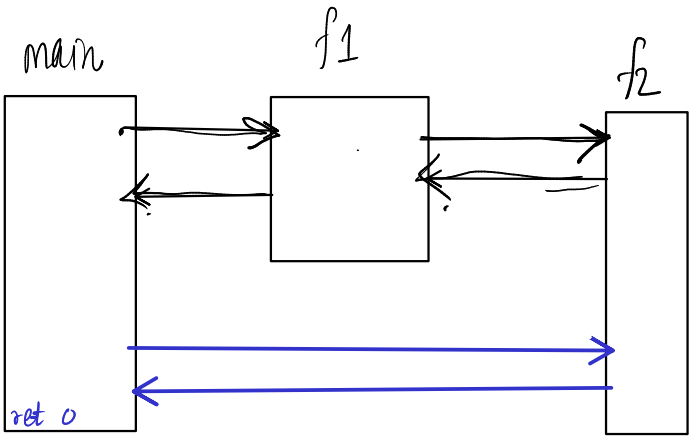

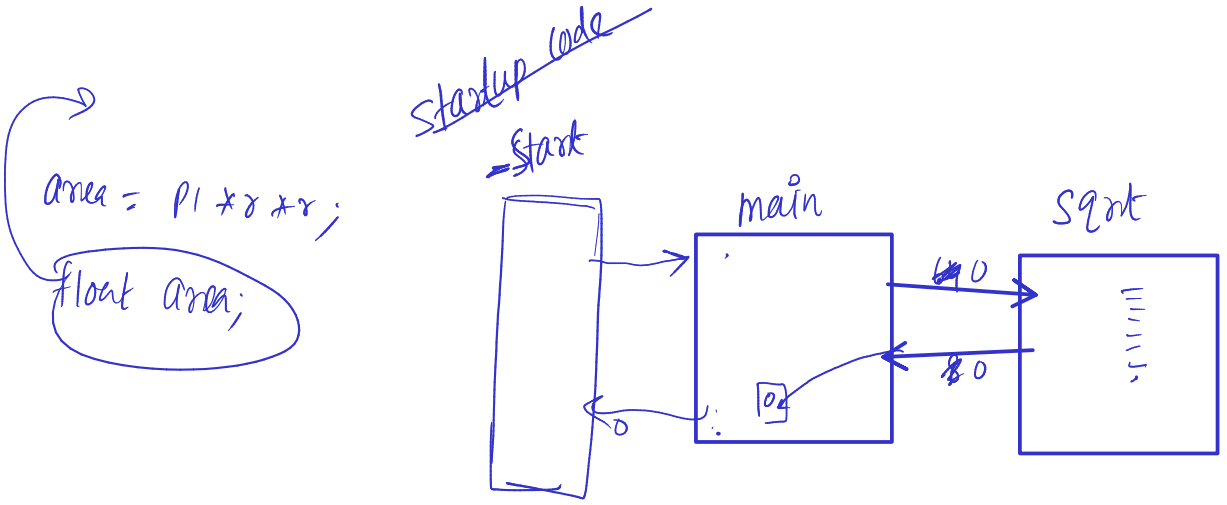

→ Function Declarations are generally done at the top of program.

→ Function Declaration is NOT needed if the body is above the call.

```
main( int argc, char **argv, char **envp)
{
=
=
}
```

- Datatypes
- operators

} Next week W1

control stmts | W2 ✓

function | W3

Storage class & Pointers | W4