Print/Display/List N prime Nos from S

N → count

S → start

I/P

N: 5

S: 10

O/P

11, 13, 17, 19, 23

```
main() { int N, S
puts("Enter count of prime nos you want:");
sf("%d", &N); puts("what's the start nos");
sf("%d", &S);
```

S: 10

data

~~10~~

11

~~12~~

13

~~14~~

~~15~~

~~16~~


17

...

cnt = ~~0~~ 1 2 3

```
data = S;
loop {
  data++;
}
```

```
data = (S % 2) ? S : (S+1);
loop {
  data+=2
}
```

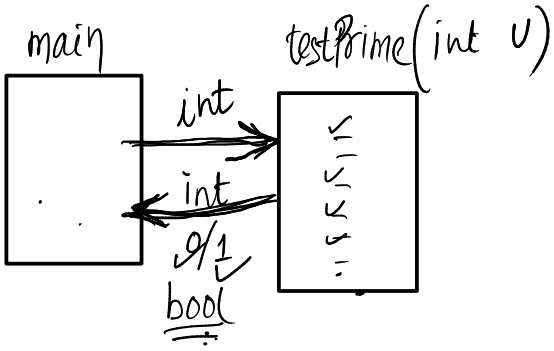


Q. List N prime nos from S, where

→ at least one occurrence of supplied Digit found.

and → Digits are in Ascending order (from left → Right)

1234 ✓ 1321 ✗

1333 ✓

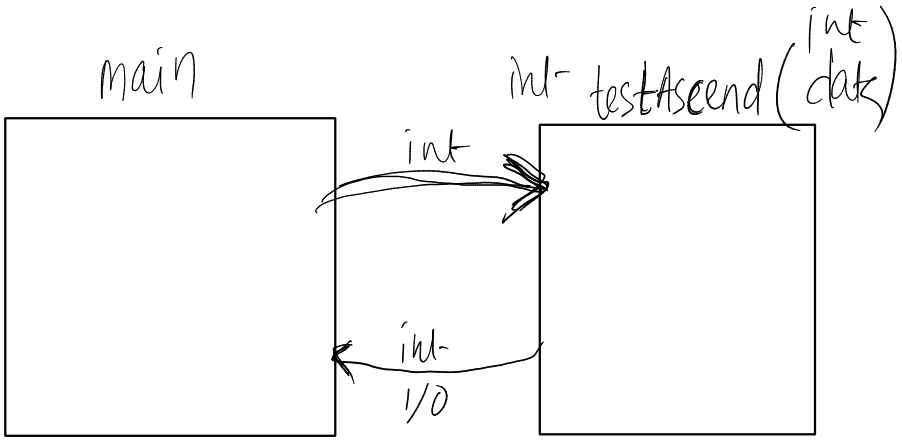

data

5 6 6 7

Descend

curdigit		prevDigit
(7) ✓	<=	9
6	<=	7 ✓
6	<=	6 ✓
5	<=	6 ✓

data = 1 3 2 5 7

curDigit = data%10

preDigit

flag = ✗ / 0

7 - - - <= - - - - 9 ✓

data = data/10 → 5 <= 7 ✓

2 <= 5 ✓

3 <= 2 ✗

data = 1 3 5 7 9

curDigit	<=	preDigit
9	<=	9 ✓
7	<=	9 ✓
5	<=	7 ✓
3	<=	5 ✓
1	<=	3 ✓

flag = 1

```
int testAscend(int data)
{
    int preDigit = 9, curDigit, flag = 1;
while(data) { curDigit = data % 10;
                if(curDigit > preDigit) {
                    flag = 0; break;
                }
preDigit = curDigit;
 data /= 10;
 }
return flag;
}
```

Print all prime Numbers in a Supplied Range, where

→ at least one occurrence of supplied Digit found


and → Digits are sorted

min: 1000 max: 9999 Digit: 5

....., 2557, ...

```
if( testAsc( ) && testDesc( ) ) {

}
```

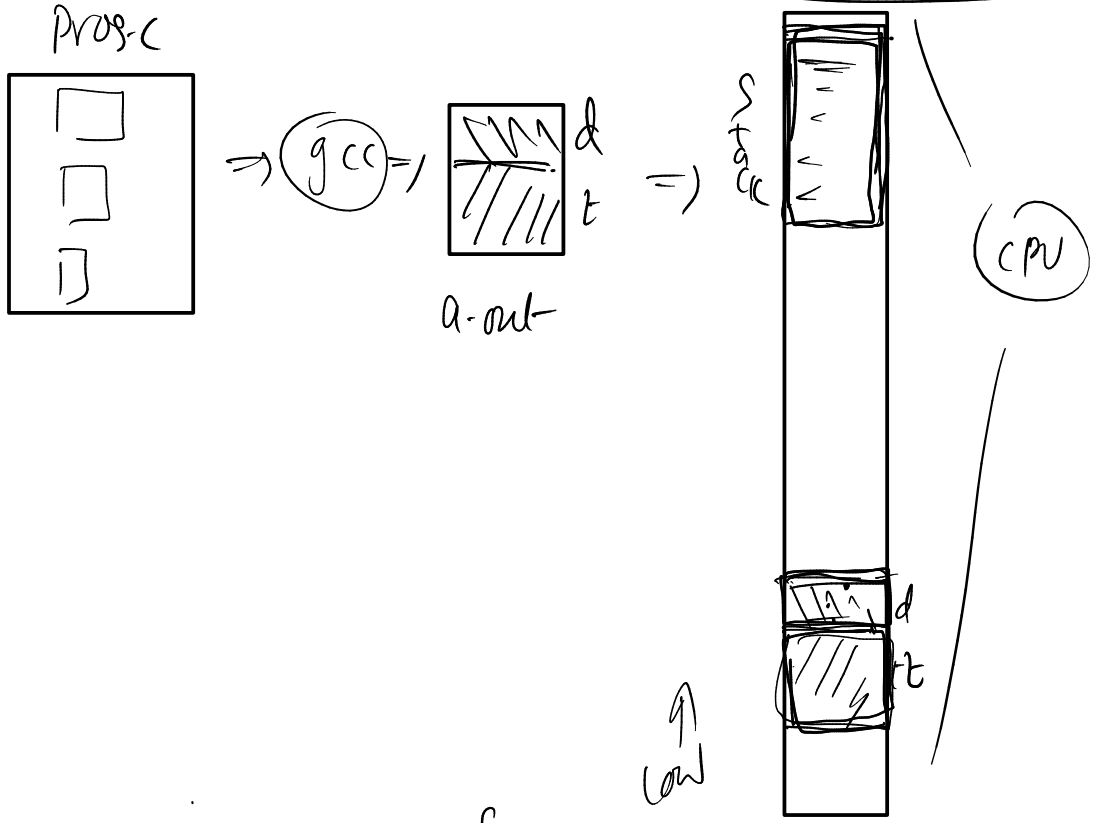

Name of function, Represents Address of function


Unary & => Reference operator


Address of operator

```
main(); // call
main;
f1(); // call
f1;
```

ptr = f1;

Role of Stack

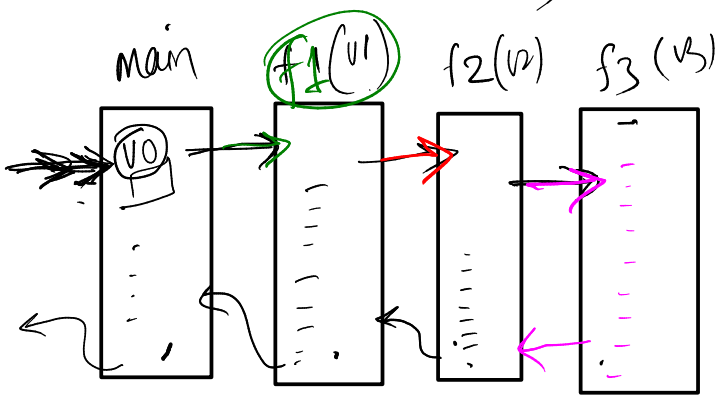

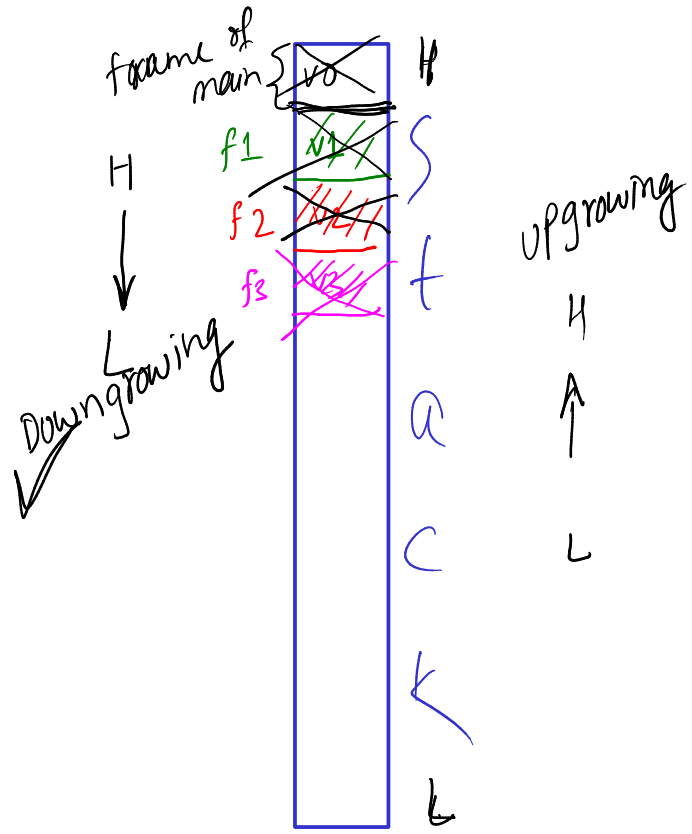

1 — 100

you Don't have 2nd session till 8th Jan