
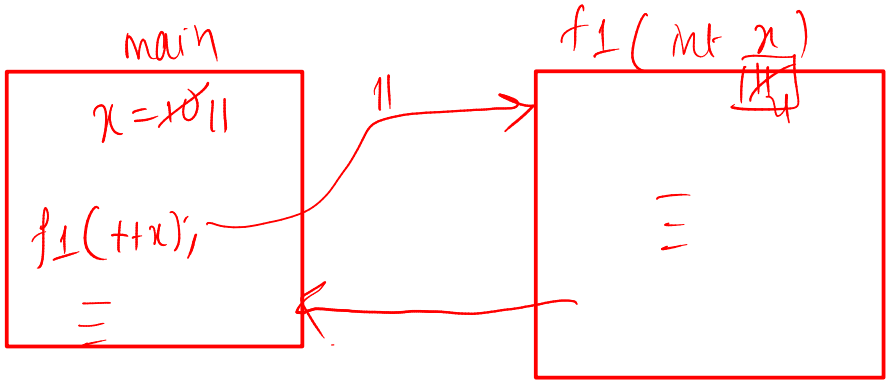


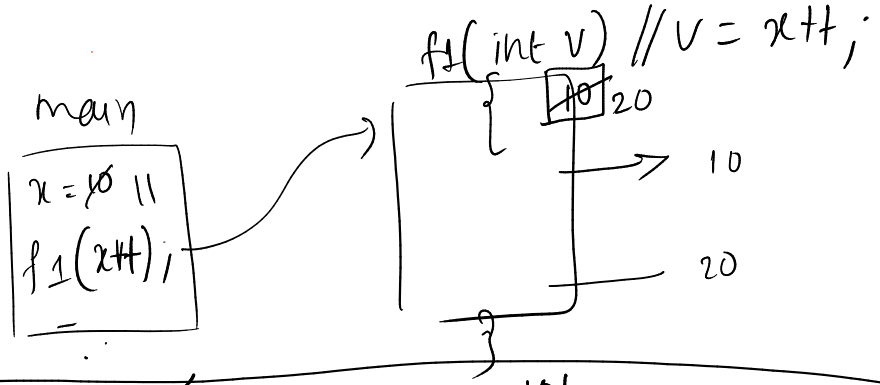

{

a = 1 (103), b = 10 (2), c = 100 (101)

f2(a = ++b + ++c , b = a++);

DATA PASSING IN function are Right to left

}

f2(int x, int y)

{

103

1

1st y = (b = a++);

2nd x = a = (++b + ++c);

10 100

main() { a = 1, b = 10, c = 100,

f3(a=b, a=c, ++a);

}

a = 10 (100)

z = ++a;

y = a = c;

x = a = b;

f3(int x, int y, int z){

10 100 2

a a a

}

Optimization in Data passing

efficient
- time efficiency ✓
- Space Efficiency ✓

---

volatile : type qualifier - in C.

-> Used to inform compiler, to prevent optimization - applied on a variable

practical use: in optimization techniques.

gcc -O1 -O2 -O3 etc..

Multithread - signal handler Debug effect -

---

main() { a=1234

f3(a++, a++, a++);


f3(int x, int y, int z)
[3] [2] [1]
{


}

z = a++
y = a++
x = a++

z = a++
y = a++
x = a++

```
printf("%d %d %d %d %d %d\n",++a,a++,a,a++,++a,++a);
```

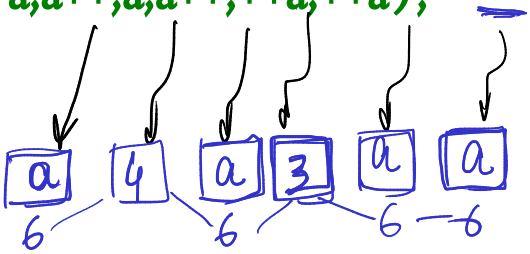



main() {

① int a = 1, b = 0, c = 0;

b = a++; a = 2

a = 2, c = 0

c = ++a

}

main() {

int a = 1, b = 0, c = 0;

b = ++a + ++a; a = 3 b = 6

a = 1;

c = a++ + a++;

}

USELESS

a = 1, b = 0

b = ++a + ++a + ++a + ++a + ++a;

TC

b = 30

a = 6

a = 1, b = 0

a = 1 2 3 4 5 6

b = ++a + ++a;

INC

ADD

INC

MOV

a++ + a

6 + 4

10 + a

15 + a

21

a = 6, b = 21

pf("%d", ——————); // TC => 20

a + a

2 + 3

5 + 4

9 + 5

14 + 6

20

Recursion, call by Reference, storage class

1st Jan: 10 AM. | LAB: 8AM