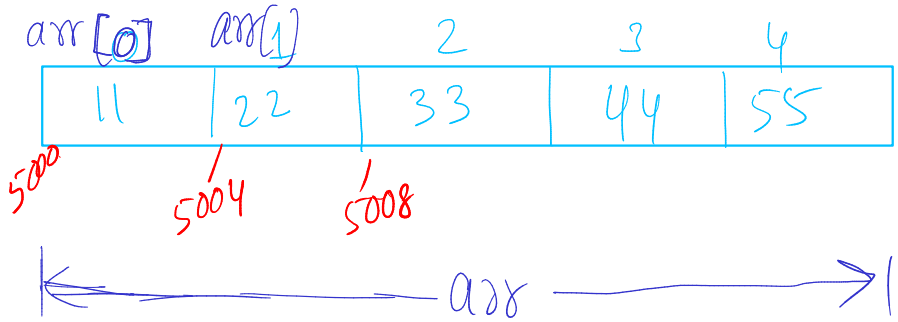


pf("%u", arr);//5000

*arr => 11

*arr+1 => 12

arr+1 => 5004 | *(arr+1) => 22

Array is NOT a variable, it's a collection of variables

Name of Array is ADDRESS of Array.

```
for(i=0; i<5; i++)
    pf("%u", *(arr+i));
```


arr[i]

Why Array-indexing starts with zero?

-> Name of array is Address of array.

-> If we use +1 from the base address, then we reach the 2nd element.

The 1st element is present at Displacement of zero.

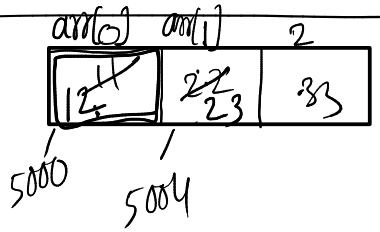


```
main(){ int arr[]={11,22,33};
        //++arr; //Error
        ++arr[1];
        ++*arr;
        pf("%u", arr);
        pf("%u %u %u", arr[0], arr[1], arr[2]);
}
```

```
{ int a[] = {11, 22, 33, 44}, b[4];
```


Error, Array can't be in LHS of assignment;

```
b = a;
```

because, Array is Not a variable, rather it is a collection

```
printf("%d", *b);
```

```
}
```

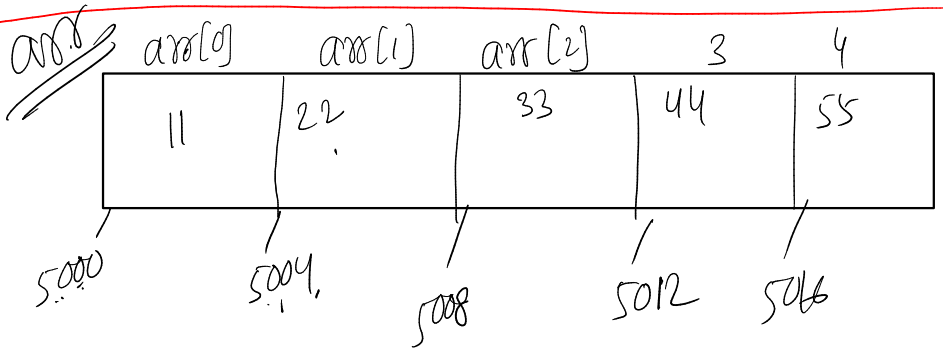


```
ptr = arr;
```

arr => 5000

ptr => 5000

```
int *ptr
```

5000


5030

```
ptr[2] = *(ptr+2)
```

arr+1	ptr+1
5004	5004

$*(x+y) \Leftrightarrow x[y]$

$*(i+a) \Rightarrow i[a]$

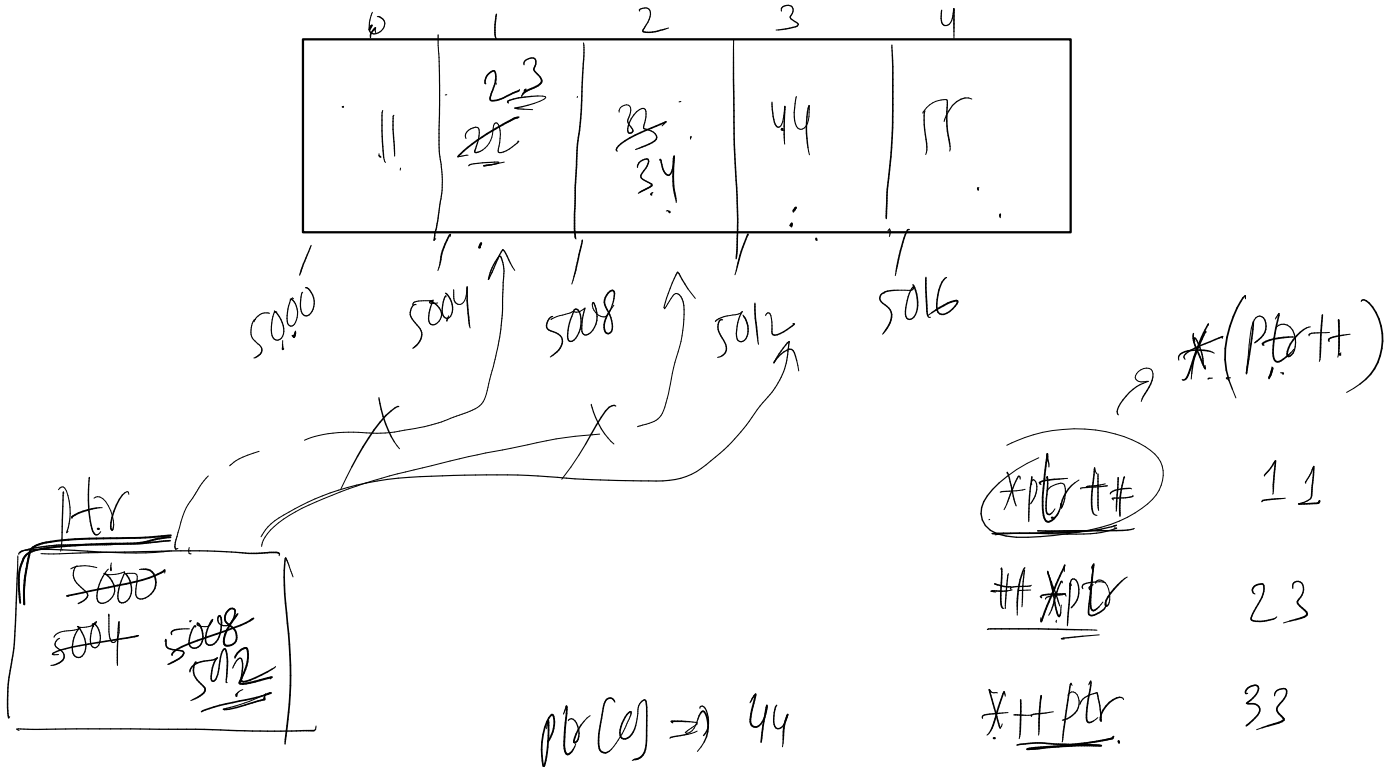

ptr[0] => 44

ptr[-2] => 23

ptr[1] => 55

*(ptr++)	
*ptr++	11
++*ptr	23
*++ptr	33
(*ptr)++	33
*(ptr+1)	34

Passing Array to function

