
Qualifier

Qualifier is a keyword or attribute which changes the behaviour of a Variable

It gives information to the compiler

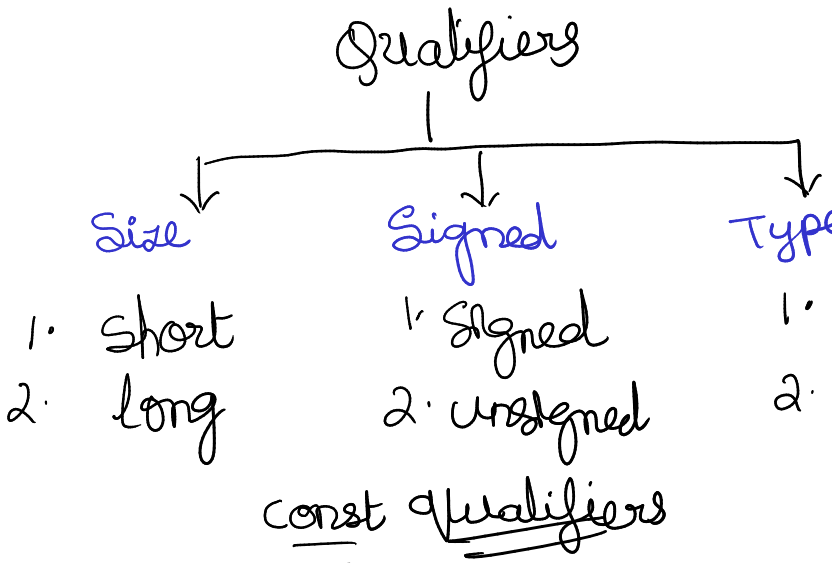

const qualifiers

1. Const Variable:

```
const int x = 20;
int const x = 20;
```

1. Value is constant
2. Can change the value by using pointers

2. const pointervariable

```
const int *x;
int const *x
```

1. cannot change the value by using pointer

2. Value can be changed
3. address allocated to the pointer can be changed

3. Constant pointer

int *const p

1. Address which is allocated to the pointer cannot be changed
2. Value can be changed
3. Through pointer value can be changed

4. ① & ③

const int * const p

1. Value can be changed directly
2. Value cannot be changed through pointer
3. address allocated to the pointer cannot be changed

5

```
int const X=10;
int const *p=&x;
```

↕


```
int const X=10;
int *const p=&x;
```

```
int const X=10;
const int const* p=&x;
```

1. use
2. how many parameters
3. what it returns

predefined String functions

1. Strlen
2. Strcpy
3. Strcat
4. Strcmp
5. Strchr
6. Strncpy
7. Strncat
8. Strncmp
9. Strstr
10. Strtok
11. memove
12. memcpy
13. memset

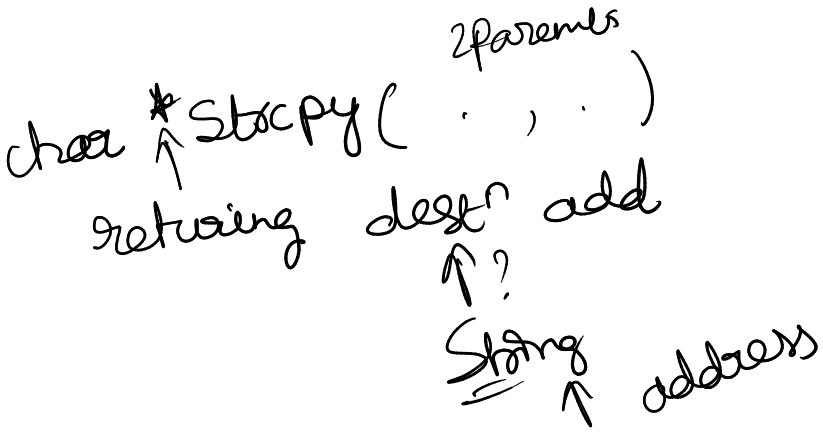

8) Convert the first & last character in a word to uppercase.


I/P → this is Vector
O/p → This IS VectoR

1. run a loop till you reach NULL
2. whenever a Space is encountered before & after character to be checked and converted into uppercase

for 1st char → S[0]

for last char 2 ways

1. Keeping 1 index more to the present index & observing weather NULL or not
2. strlen-1 char check is enough



This is vector → s[0] = s[0] - 32 (if it is lowercase)

for (i=0; s[i] ; i++)

{

if (s[i] == ' ') ⇒ checking for space

{

if (s[i-1] >= 'a' && s[i-1] <= 'z')

s[i-1] = s[i-1] - 32;

if (s[i+1] >= 'a' && s[i+1] <= 'z')

s[i+1] = s[i+1] - 32;

}

}

if (s[strlen(s)-1] >= 'a' && s[strlen(s)-1] <= 'z')

s[strlen(s)-1] = - 32;

