


# StrStr

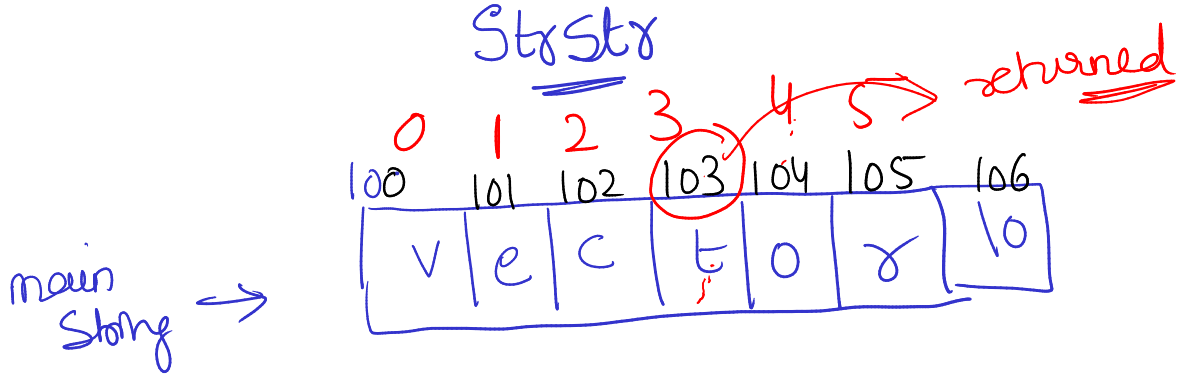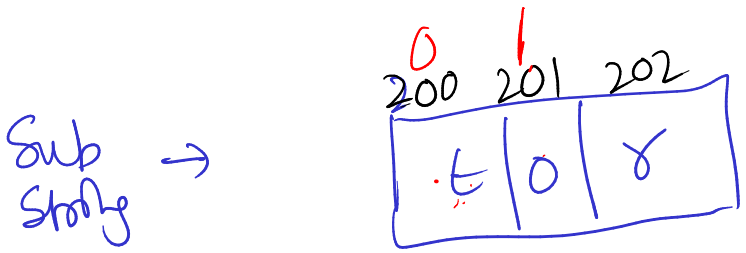


if Sub Strng




i/p main → This is vector institute

Substrng vector

Substrng Van

1. run the loop (outer) starting from 1st char till
   a) either you reach NULL
   b) or Substrng is found

2. when the first char of Substrng is matching with char in the main strng then another loop (inner) should start

3. inner loop

if substring reaching NULL
means substring is present
return (address)

else
return NULL

user defined char *my_strstr(const char *m, const char *s)

```
int j=0, i
for(i=0; m[i]; i++)
{
    if(m[i]==s[j])
    {
        for(j=1, k=i+1; s[j]; j++, k++)
        {
            if(m[k]!=s[j])
                break;
        }
        if(s[j]=='\0')
            return(m+i);
    }
}
return NULL;
```

# Strcmp

i/p → Vector - $S_1$
Vector - $S_2$

returns

o/p → 0

both the strings are same

i/p → Hello
→ Hella

return

Ascii dec val of 'o' - Ascii dec val of 'a'

1. run a loop starting of the char of $S_1$ or $S_2$ till either of them reaches NULL

2. in the loop have to check each respective character is matching or not

3.

```
for ( i=0; S1[i] && S2[i]; i++ )
{
    if ( S1[i] != S2[i] )
        break;
```

```
}
if (S1[i] == S2[i])
    return 0;
else
    return S1[i] - S2[i];
```

(char, char)

i/p

$S_1 \rightarrow$ abcd\0

$S_2 \rightarrow$ abcd\0


1) This is vector
o/p → reverse the Substring

o/p Thsi si vector

2) This is vector
reverse the (word is)

o/p This si vector

## Strcat

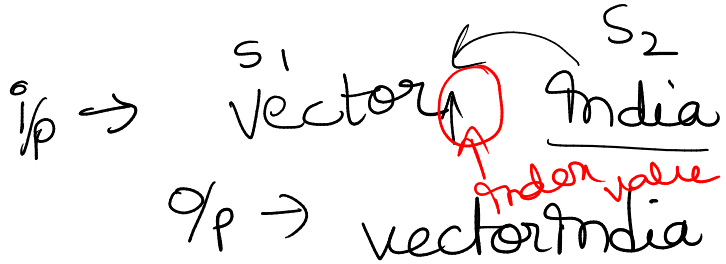


① for ( i=0; S1[i]; i++);

i value → required index value


```
for(j=0; s2[i]; j++, i++)
    {
        s1[i] = s2[j];
    }
    s1[i] = '\0';
}
return s1;
```

① reversing the substring in the main string

i/p → This is vector
substring → is

o/p Thsi si vector

1. strstr
2. strrev
3. strncpy

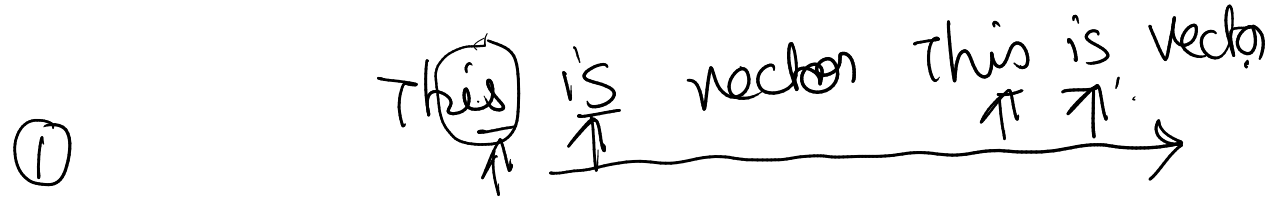


①

```
while((p) = strstr(m, s))
{
```

present array

rev of the substring

main()
{

Static array


rev[10], m[10], S[10];

strrev(S, rev);

1. 1st method
2. declare rev as a static array
3.

}

char *strrev(const char *s, char rev[10])
{
or not rev
reverse logic
return rev;
}

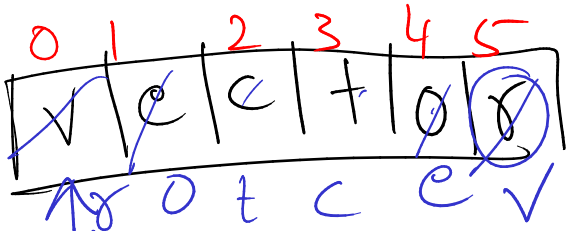


globally declare rev

temp = s

temp = 0

memove( p , rev , strlen(s) )

dest

sour

strrev(rev, S)