
Strtok

delimiter

Strtok(s, " ")

i/p : This is vector

Starting character of a word to uppercase
ending

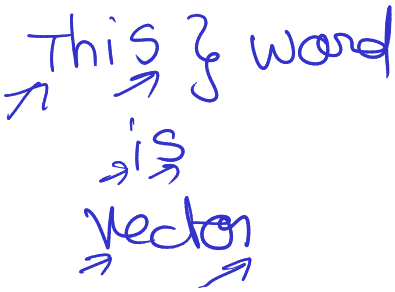

1. print the words which start and end with vowel
2. print the words which has starting char of a word as uppercase
3. print the words which have contigous 2 vowels in the given string.

Anagram → not anagrams

Ex:

rat

cat } anagrams
act

not anagrams

Silent } anagrams
listen

not anagrams

Cat
Act

cat
act

cat → s_1
act → s_2

for(i=0; s_1[i]; i++)
{
→ 2nd loop → strlen of s_2

s_1 & s_2 } ⇒ Should be sorted
the use strcmp

s_1 → cat → sorting act
s_2 → act → sorting act

if(strcmp(s_1, s_2) == 0)

Test wheather the given String is palindrome or not by removing one char

aaa → already palindrome

abaab → o/p : index 3

madsam

madsfam

1. check_pali (to check whether given string is palindrome not)

```
main()
{
    strcpy(temp, str);
    check_pali(temp)
}
```

for(i=0; str[i]; i++)

temporary

original string


aaab

memove



aab

memmove (pti, pti+1, strlen(pti+1)+1)

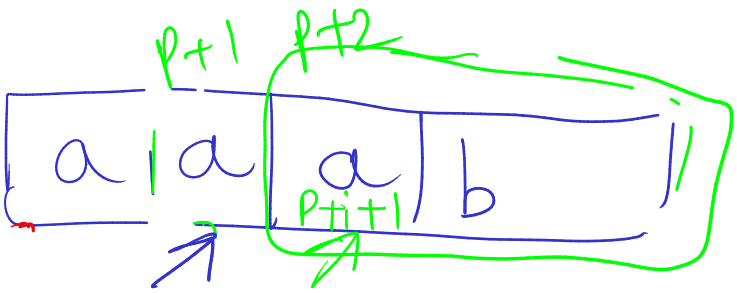

i = 0

memove (p+i , p+i+1 , strlen(p+i+1)+1)

temp

aab

i = 1

p+1 , p+2 , strlen(p+i+1)+1

aaab

i=0 aaab aab

i=1 aaab aab

i=2 aaab aab

O/P i=3 aaab NULL aaa palindrome

temp → adda3b

j<3

i = 0

```
for ( j=i ; j<(strlen(s)-1); j++)
  {
    tem[j] = temp[j+1];
  }
temp[j] = '\0';
```

i = 1

```
tem[1] = temp[2]
temp[2] = temp[3]
```

i/p

i am in the country
↑
India


o/p

o/p : iam
in
India

} print the words which start with vowel

o/p :

india } starting & ending vowel

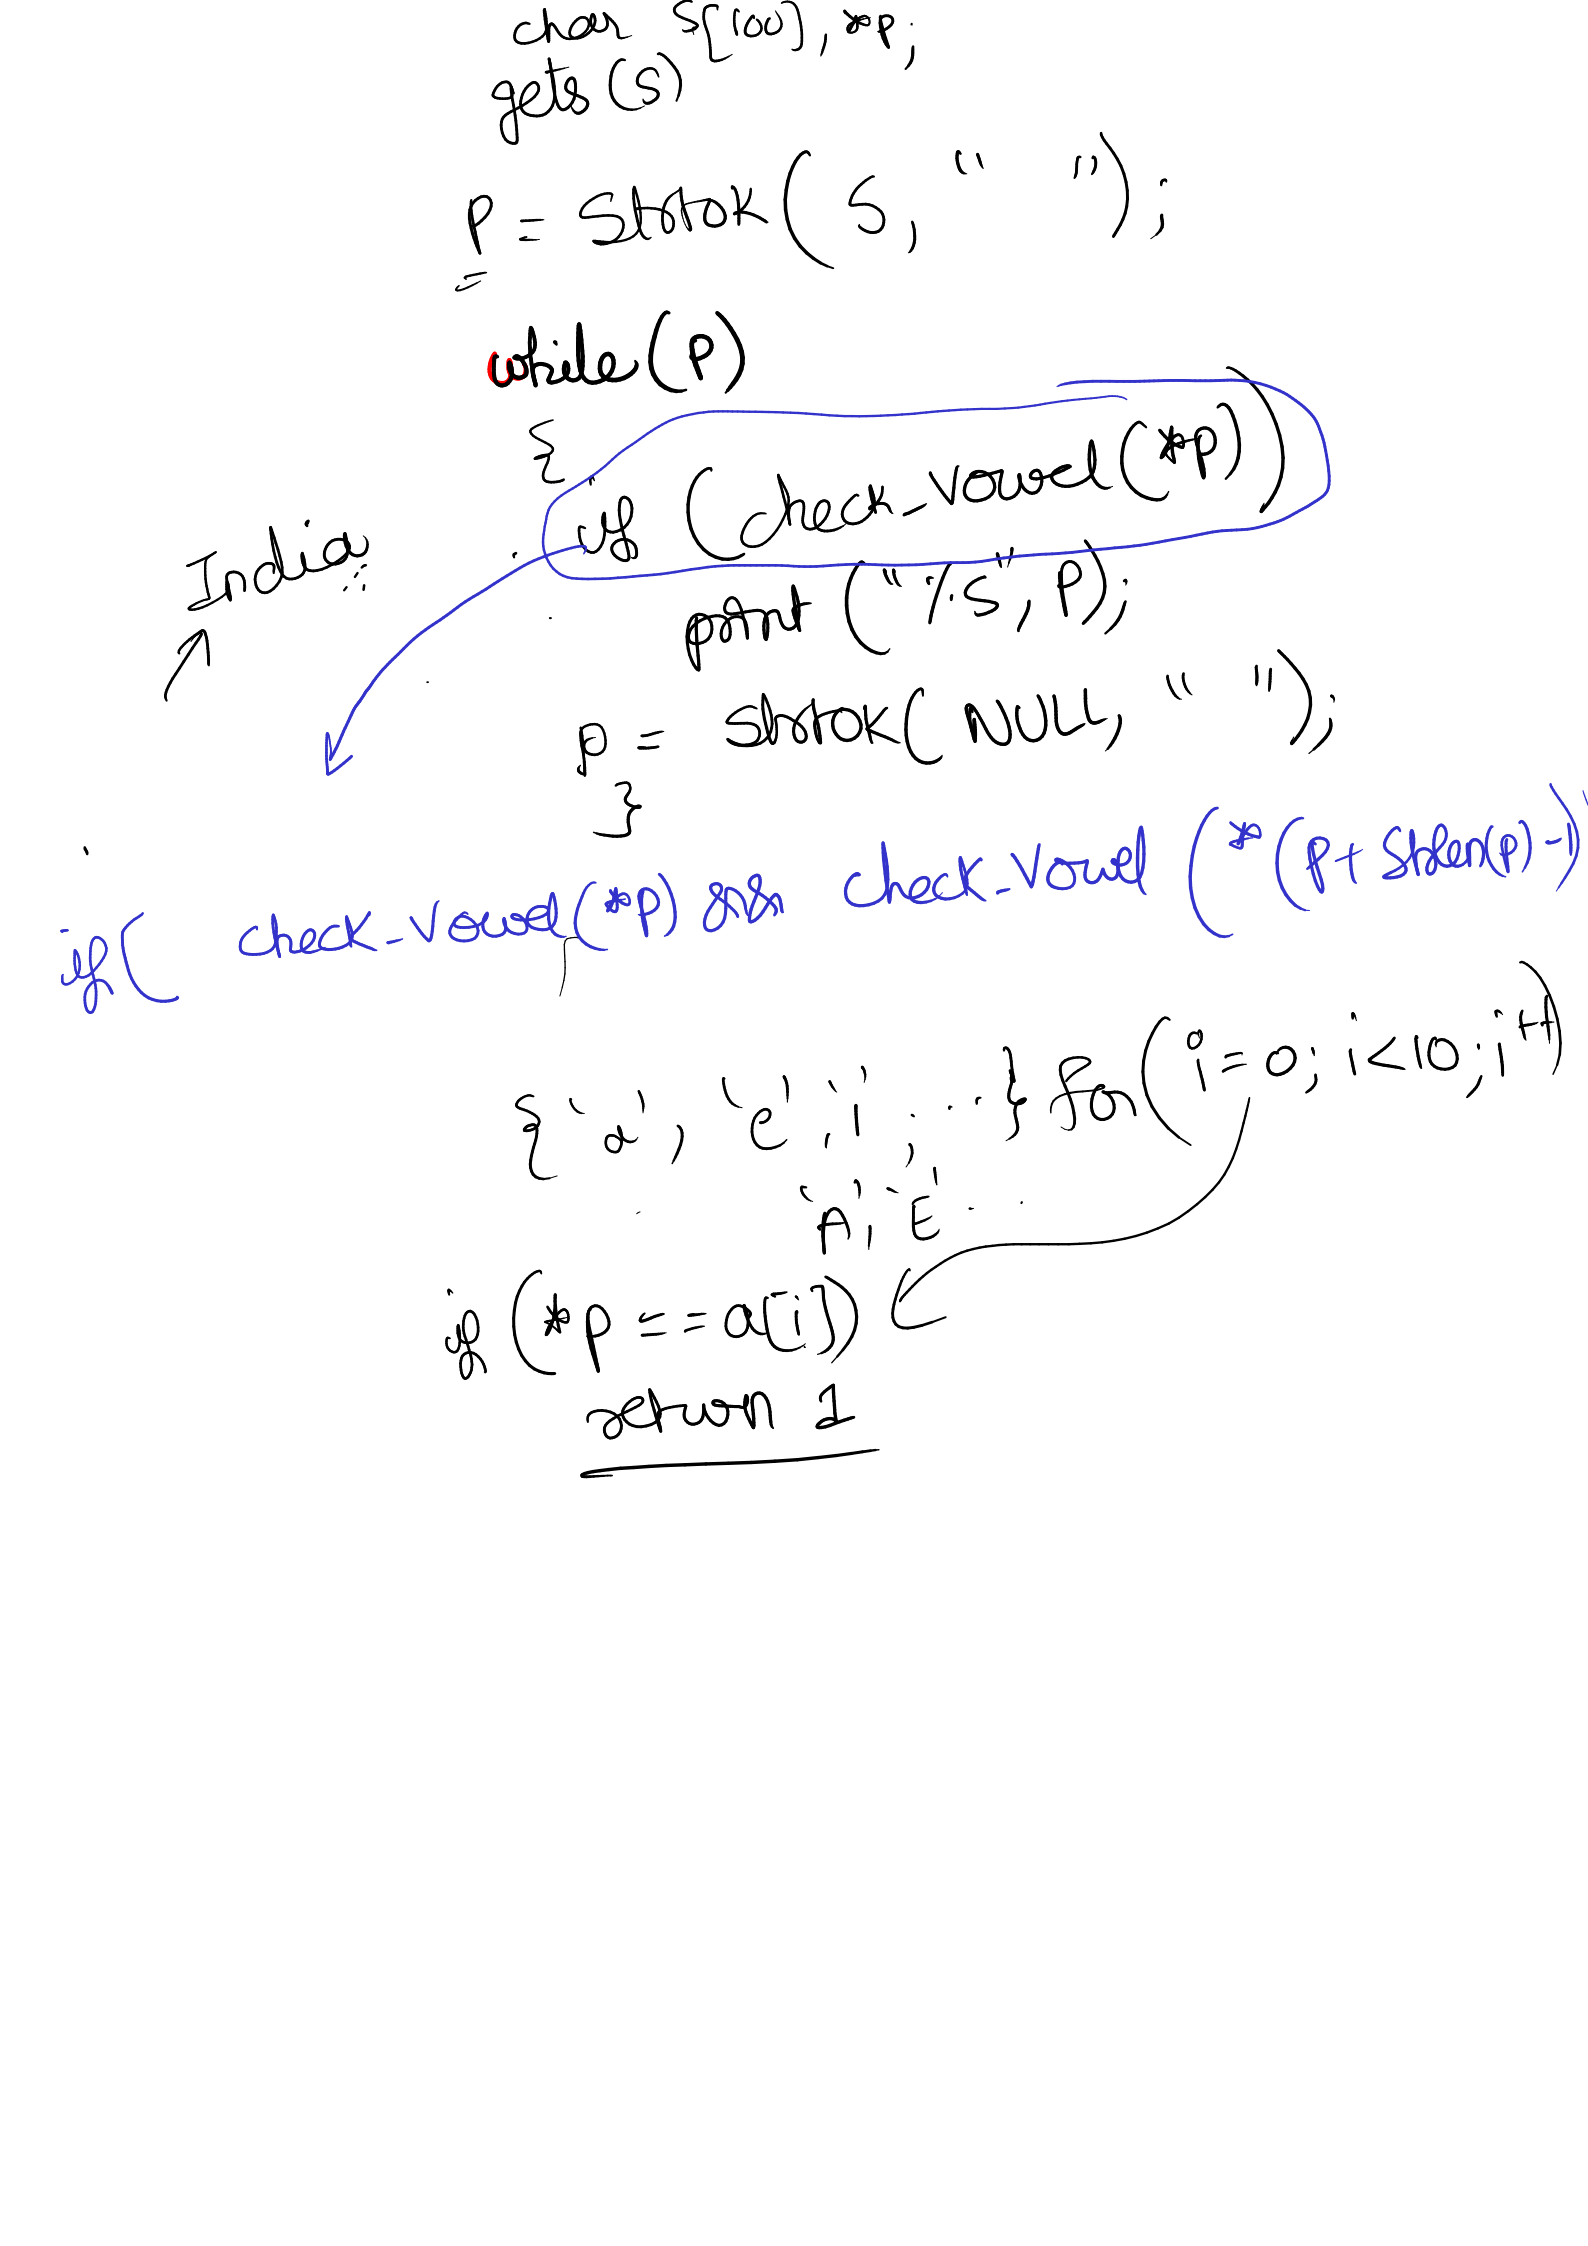
char s[100], *p;
gets(s)
p = strtok(s, " ");
while(p)
{
if (check_vowel(*p))
printf("%s", p);
p = strtok(NULL, " ");
}
India
if(check_vowel(*p) && check_vowel(*(p+strlen(p)-1))
{'a', 'e', 'i', ...} for(i=0; i<10; i++)
'A', 'E'
if (*p == a[i])
return 1