1Q) Remove repeated characters from a string

2Q) Remove nonrepeated characters from a string

3Q) Taking i/p for an array using rand fucn & print fib numbers present in it.

4Q) print the max sum of subarray from the main array

i/p size of mainarray
elements of the array
size of subarray

1. outer loop should run from starting ele to n-sn
   (n: main array size; sn: subarray size)

2. inner loop should start at i
   k=0
   j = i
   j k<sn
   { sum = sum + a[j]
   k++;
   }

```
if (maxSum < Sum) @n) if (Sum > maxSum)
{
    maxSum = Sum;
}
```

Eg i/p in a range

0 to 200

less than 0 to 100

array

{ 0, 1, 1, 2, 3, 5, 8, 11 }

rand → array ele

{ 10, 1, 3, 5, 8, 1, 6 }

① i/p the array

{ 15, 12, 22, 33, 1, 5 }

Select the array ele 12 (1st ele)

check-prb(15)

fun

```
a=0
b=1
c=a+b;
```

0 1 1 2 3 5 8 13 21


20) removing nonrepeated

i/p embedded

eedded → o/p

Take each ele Cnt > 1

1. i/p a String. memory
2. Take each character & compare with other characters

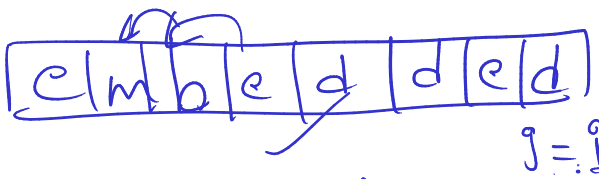



2 character arrays

S

S1

j = i+1

if (Cnt >= 1)

or if (Cnt > 1 ..)

j = i

another array S1 ele (m b)

eedded

S1 = eedded

Strcpy (S, S1)

S = eedded

but removing in S

e m b e d d e d


```
int cnt;
for(i=0; s[i]; i++)
{
    cnt=0;
    for(j=0; s[j]; j++)
    {
        if(s[i]==s[j])
            cnt++;
    }
    if(cnt==1)
    {
        memmove((s+i), (s+i+1), strlen(s+i+1)+1);
        i--;
    }
}
puts(s);
```


embeddedd

mbddd

mbdd

d

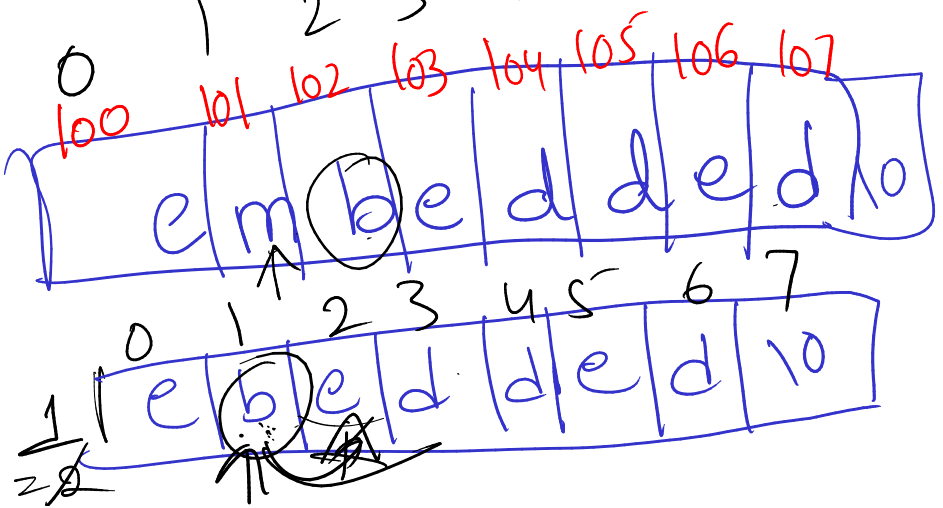

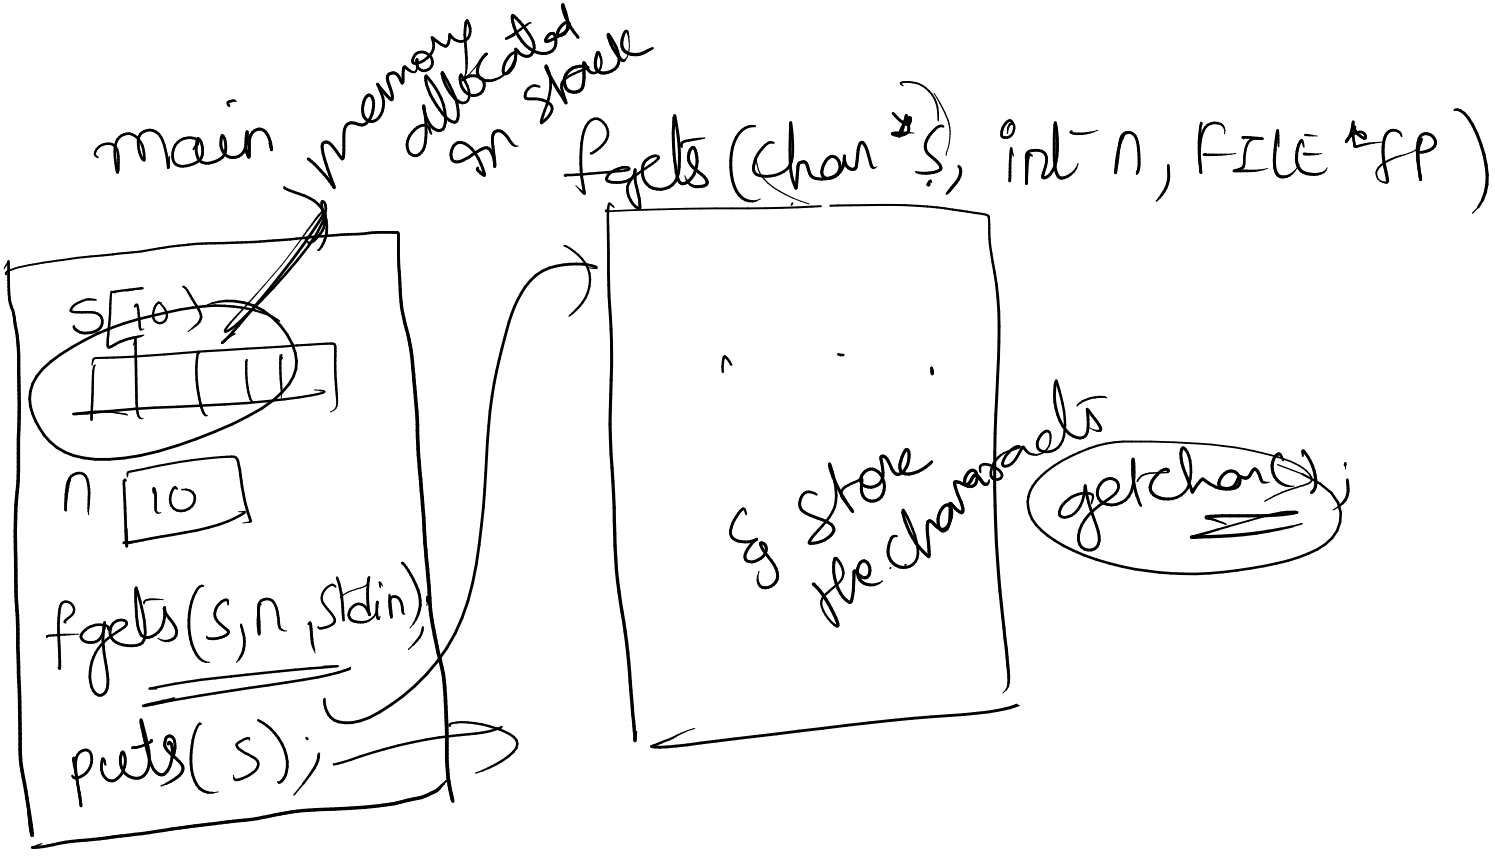



getline (3 parameters)

int (&str, &n, stdin)

main → no. of characters it has taken as i/p



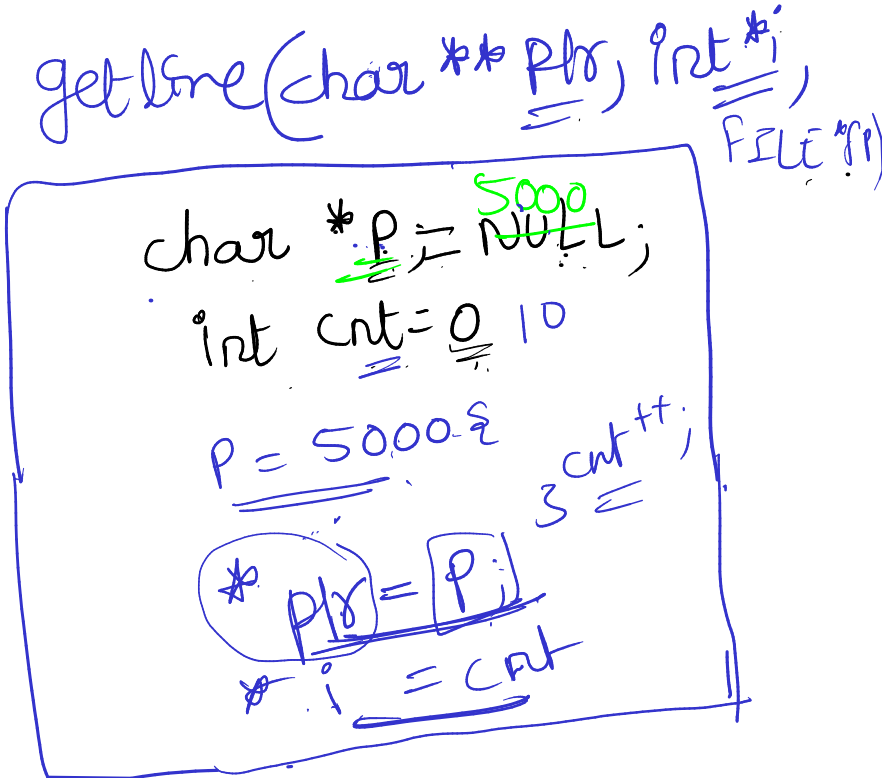

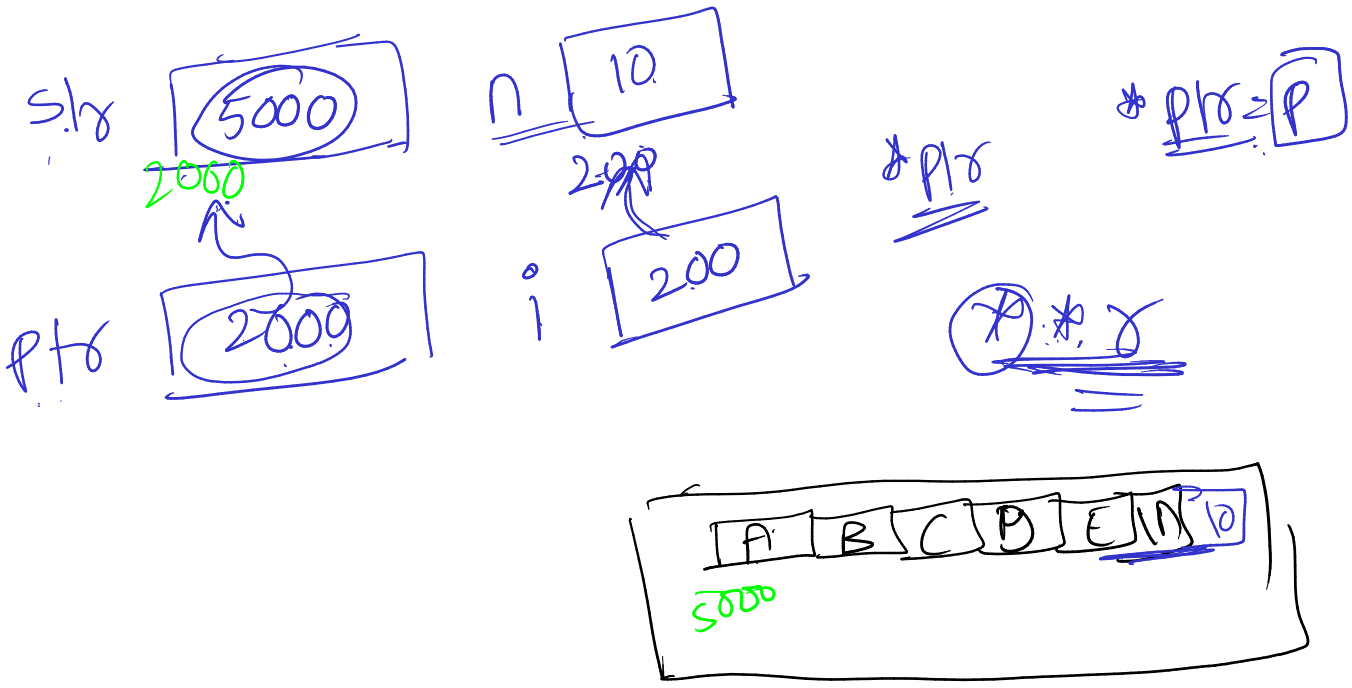
str
5000
2000
ptr
2000
n
10
200
i
200
*ptr
*ptr=p
*p=x
A B C D E N 10
5000