`int *a[5];`

a is An Array.

a is an Array of 5 elements

a is an Array of 5 pointers

array of 5 integer-pointers

```
pf("%lu", sizeof a);//40//Array
        , sizeof *a)//8 //Pointer
          sizeof **a)//4//int.
```


`int (*b)[5];`

b is a Pointer

b is a pointer-to-array

b is pointer to array-of-5-integers


```
pf("%lu", sizeof (b) )//8 //Pointer
          sizeof (*b) )//20//Array
          sizeof (**b))//4 //int
```

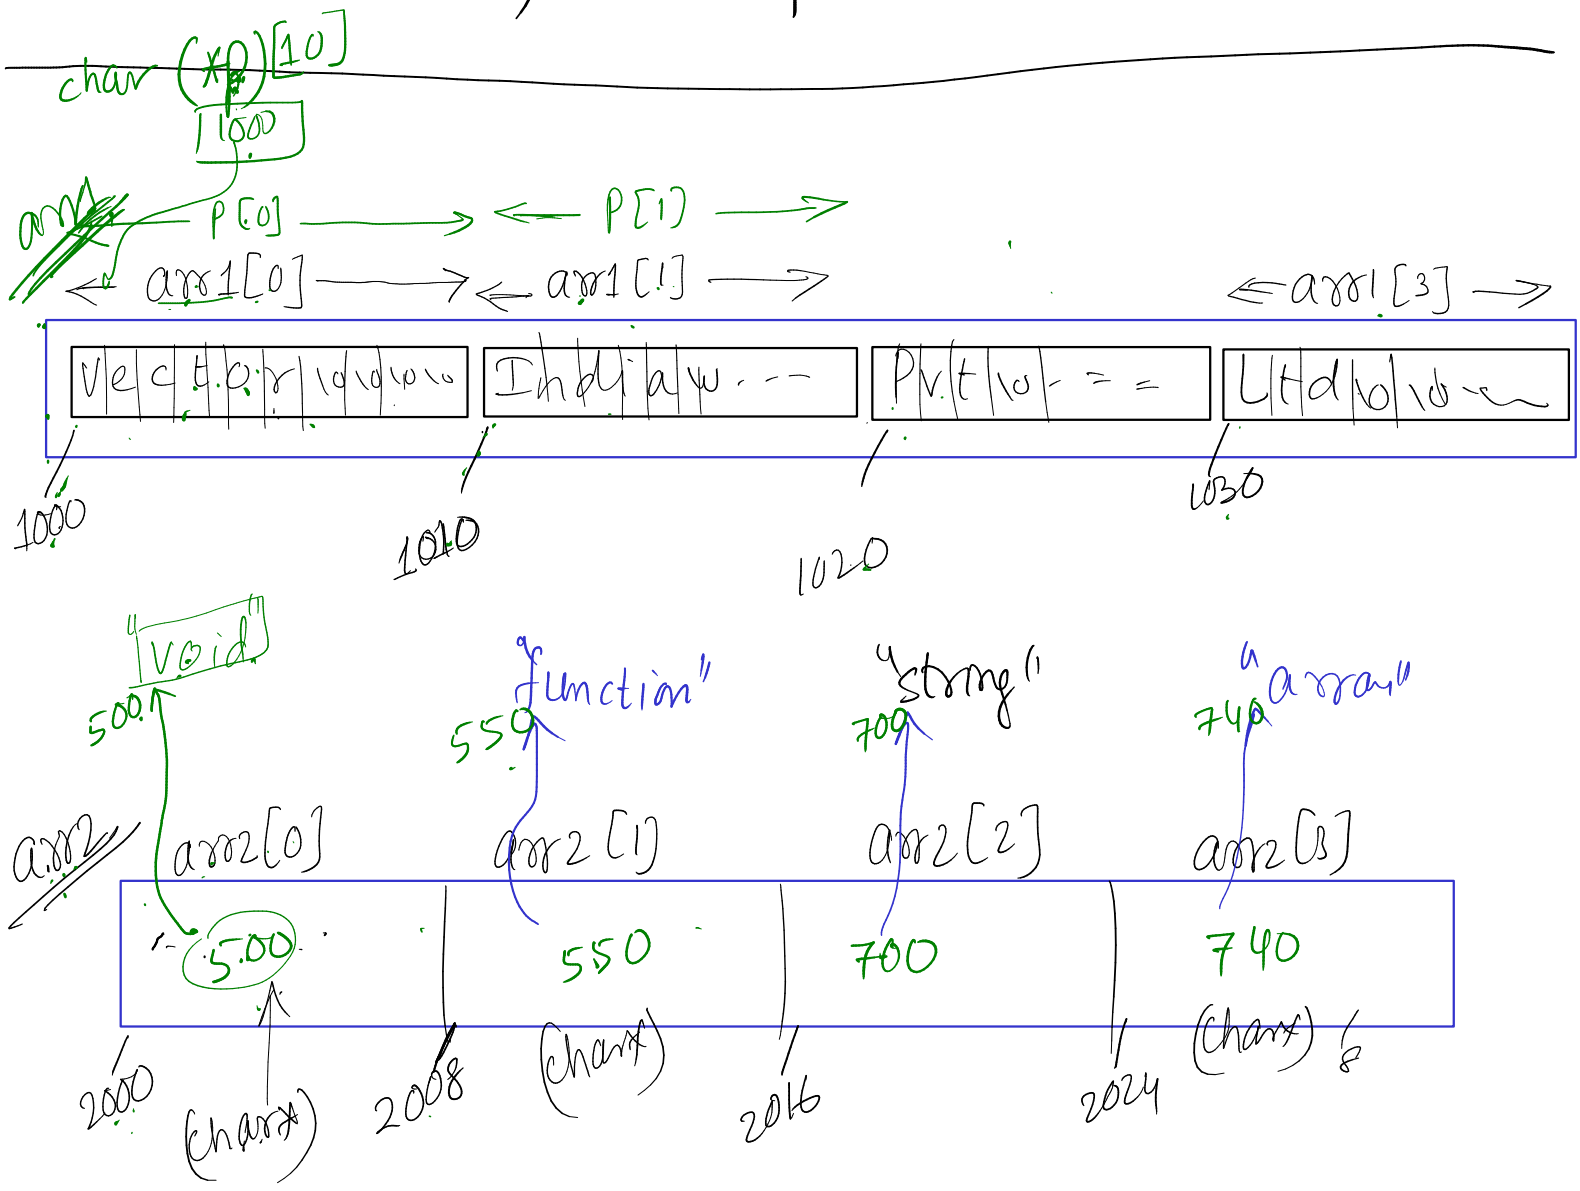


```
char *p = "Hello";
char s[] = "vector";
```

~~Array Pointer~~


~~Pointer Array~~

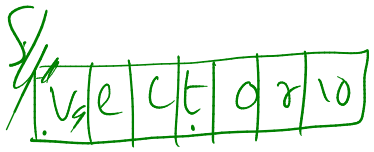


```
Pf("%s", s);
```

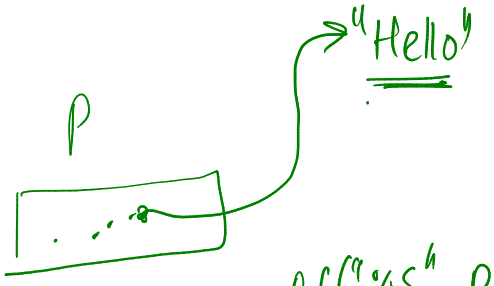


```
Pf("%s", p);
```

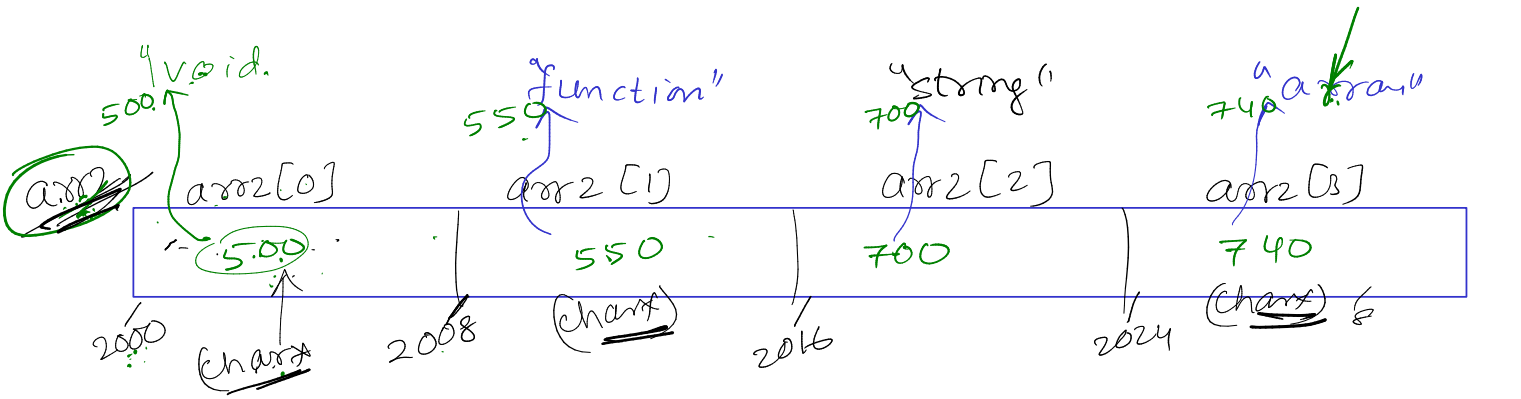

~~arr2[3][1]~~

```
main()
{
print2(arr2, 4);
}
```

```
print2(char *Ptr, int n)
{
```

Ptr: 2000 (1800)

```
pointer = array;
```

```
char *ptr = arr2
```