16/03 Copy comand using fgetc and fputc

EOF ---> macro with -1 as a value

int fgetc(FILE *stream); → reads a single character at a time

int fputc(int,FILE *stream); → writes a single character at a time

fgetc on success returns the character read by it, on failure returns EOF

fgets fputs

char * fgets(char *,size_t , FILE *stream);

```
char s[10];
fgets(s,10,fp);
```

abcdefxyzparin

a	b	c	d	e	f	x	y	z	\0

2000

```
char s[20]; fgets(s,20,fp);
```


abcdefxyzin
Parin

a	b	c	d	e	f	x	y	z	in	10				. . .

int fputs(const char *,FILE *stream);

random accessing functions


fseek(FILE *stream,size_t offset,int Whence);

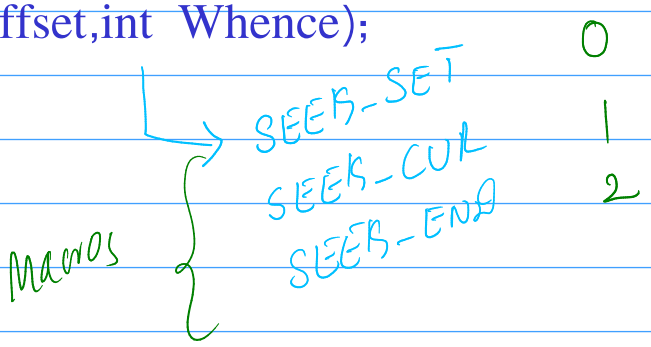

from which position offset value has to be consider is decided by Whence
ex:
fseek(fp,10,SEEK_SET); // fseek(fp,10,0);

fseek(fp,-3,1);

fseek(fp,-5,2);

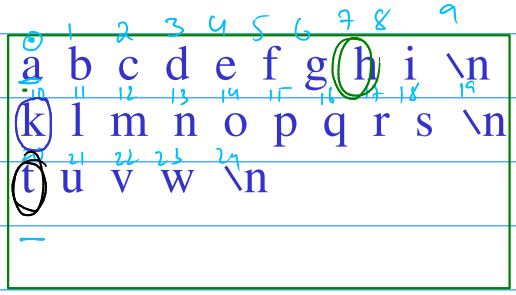

ftell(fp)----> gives current position
in above example, ftell returns 20

Now we will use seek and ftell to find the size of file.

step 1: using fseek take the control to end of the file
fseek(fp,0,2);
step2 : find the position using ftell

for taking control to starting position
we use
fseek(fp,0,0);
or
rewind(fp); will take the control to begining of the file.

```
int fread(void *,size_t size,size_t blocks,FILE *stream);
int fwrite(void *, size_t size, size_t blocks, FILE *stream);
```

ex :

```
fread(buf,100,5,fp);
```

fread reads 5 blocks (each of 100 bytes) from fp connected with fp and stores in buf

on success they return no of blocks
on failure they return less than no of blocks not guaranteed to retun zero

fwrite writes the data in raw format the way data storted in RAM ie binary format