
19/03

sort lines in a file

1. read the line by line and store in a dynamic array using pointer to an array.
2. sort the dynamic array based on length.
3. update the sorted array to file

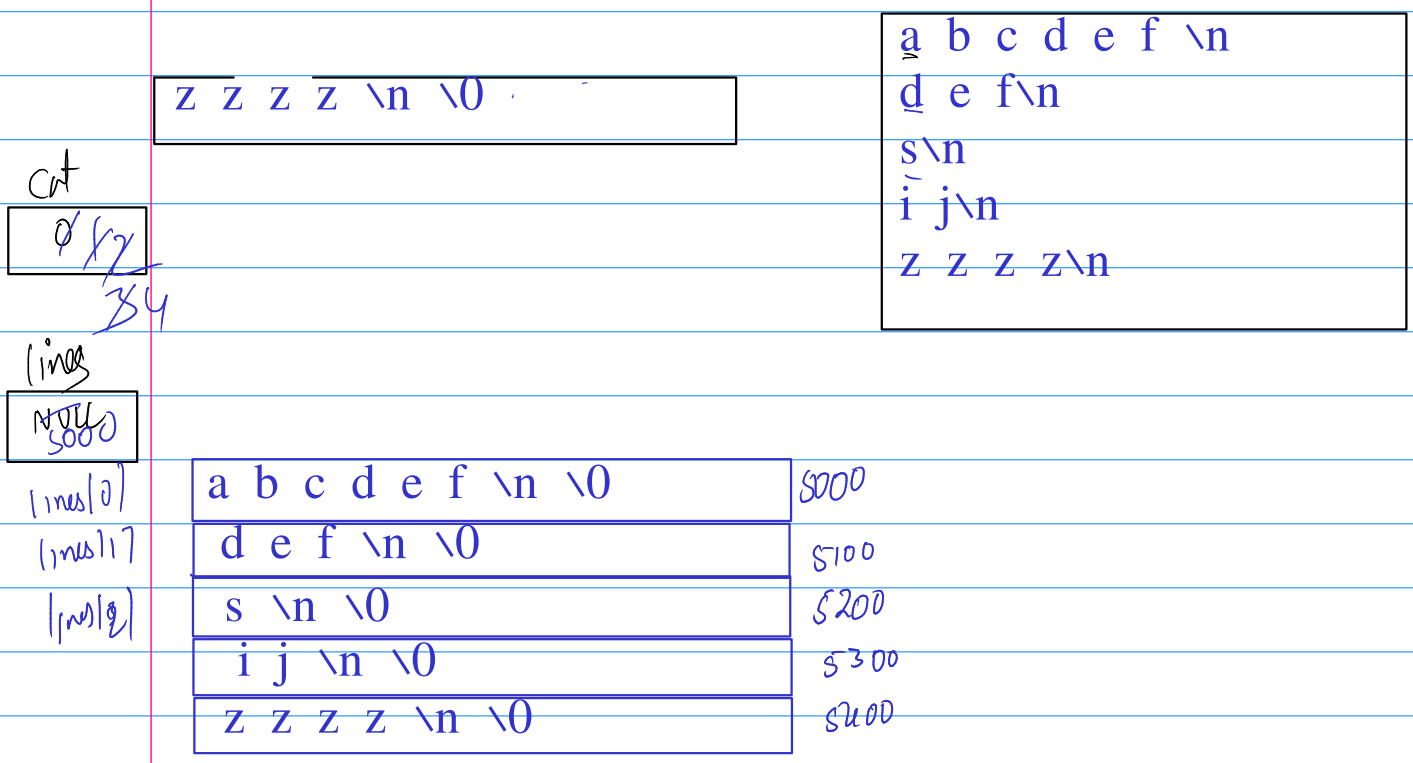


replace all occurrances of substr with another string
Note : should work with same or different lengths

case 1: if length of newstring greater than substring
- a. resize the memory
- b. memmove
- c. strncpy


case 2: if length of newstring smaller than substring
- a. memmove
- b. resize
- c. strncpy

case 3: strncpy

ex : newstr > substr

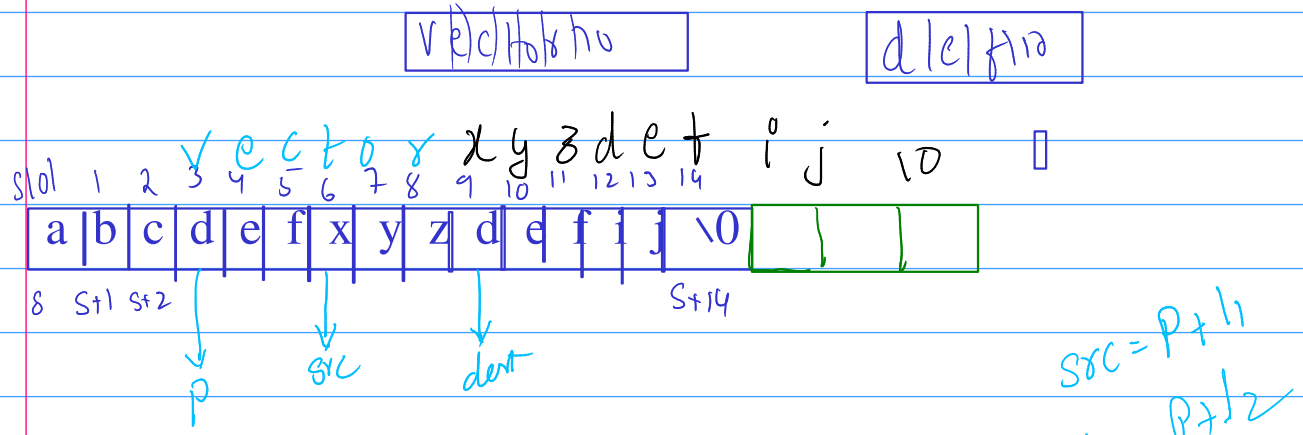



```
s=realloc(s,strlen(s)+1+(l2-l1)
memmove(p+l2,p+l1,strlen(p+l1)+1)
strncpy(p,newstr,l2);
```

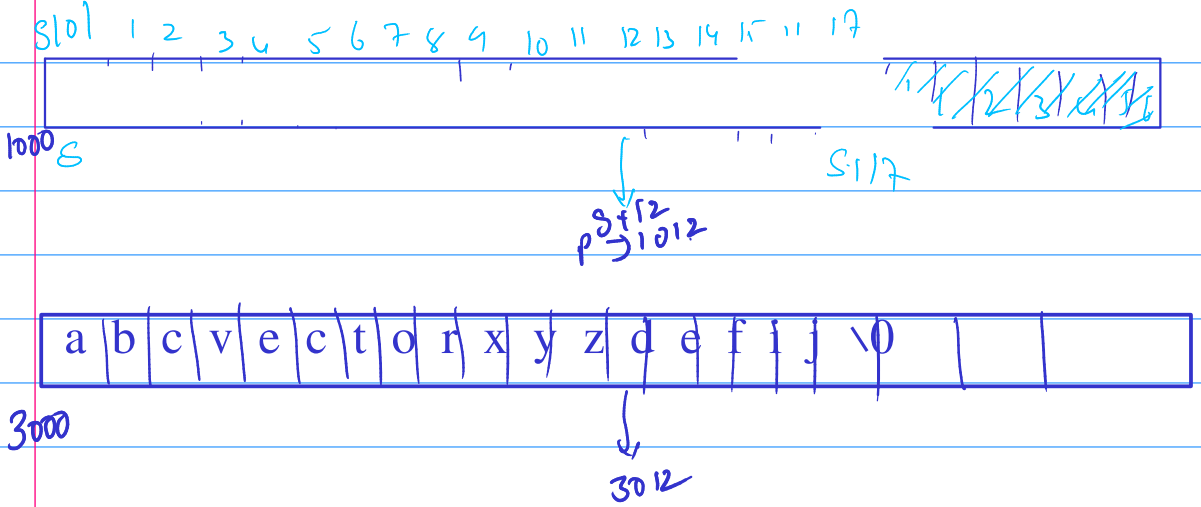

vector dut

case 2

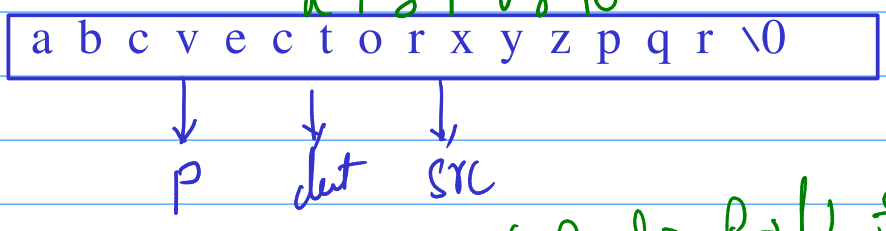


```
memmove(p+l2,p+l1,strlen(p+l1)+1);
realloc(s,strlen(s)+1);
strncpy(p,newstr,l2);
```

src = p+l1
dut p+l2