20/04

top down Approach
bottom up Approach

} these approaches are not related to program execution but related to program design

Datatypes

primary datatypes	secondarydatatypes	
char	derived datatypes	userdefineddataty
int	arrays	structures
float	pointers	unions
double		enums
wchar_t		typedef
bool		class
string		


character char 1byte 256 symbols of Ascii table

unicode table universal code table
which contians the symbols of the langauges which are world wisely certified
to represent this unicode table c++ provide a newdata type called wide character wchar_t.

Note : Ascii table is also apart of unicode table

syntax to declare wide character variable

wchar_t ch;

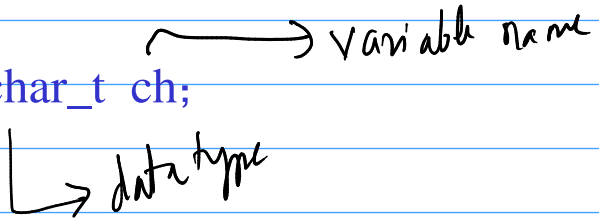

What is the size of wchar_t?
2 bytes on 16bit compiler
4 bytes on 32bit and 64 bit compiler

setlocale(Mode,flag)

Boolean -------- > bool

```
while(true)   while(1)
{             {

}             }
```

```
int isPrime(int n)
{


return 1   or 0;
}
```

char s[30]; // cstyle string
this works in c++

the problem with this declaration is sometimes memory wastage or memory shortage

to over this in c++ they introduced a new datatype called string

syntax :

string name;

ex :

string s1;

i this declaartion we dont mention the size , c++ compiler will allocate the memory dynamicallt based on guven input.

ex : string s1="vector embedded";

such type of declaartion is called C++ Style string

Note : C predefined string funcitons will not work on C++ Style string

new operators introduced in c++

scoperesolution	::	
line feed	endl	→ used for providing newline
new	new	→ DMA
delete	delete	→ deallocation
typeid	typeid	→ to know the datatype of a variable