

Copy constructor

Array A1;---> A1.Array

Array A2=A1; ---> A2.Array(A1);


A2.Reverse()



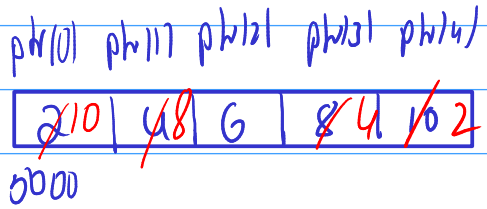



```
Array(Array &e)
{
size=e.size;
ptr=e.ptr;
}
```


shallow copy

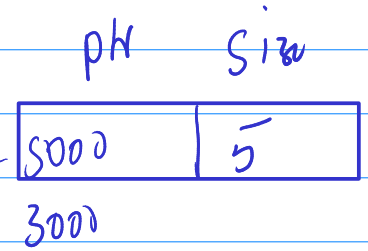



```
Array(Array &e)
{
      size=e.size;
      ptr=new int[size];
for(int i=0;i<size;i++)
ptr[i]=e.ptr[i];
}
```

Deep copy

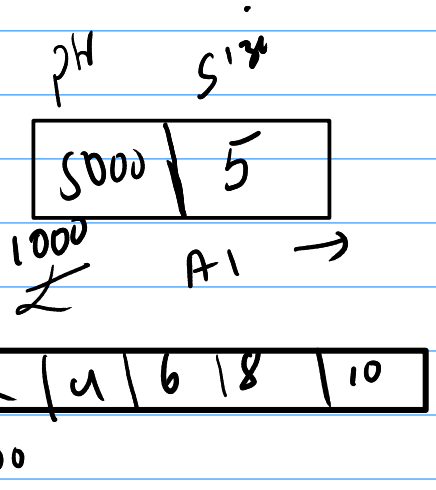



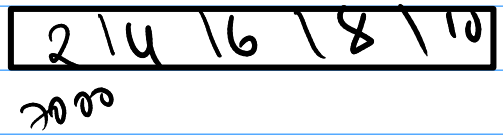

shallow copy


In shallow copy it copies field by field or address instead of data pointed by address, Shallow copy happends when we depend onthe compilers copy constructor with data members as pointers and dynamically allocated.

In Deep Copy we copy the data pointed by the fields instead of address, so that every object has its own individual copy.

Refer to demo.cpp in Constructor

```
void foo()
{     Array obj;
      obj.Print();}
int main()
{ for(int i=0;i<3;i++)
      foo();
}
```

2, 4, 8

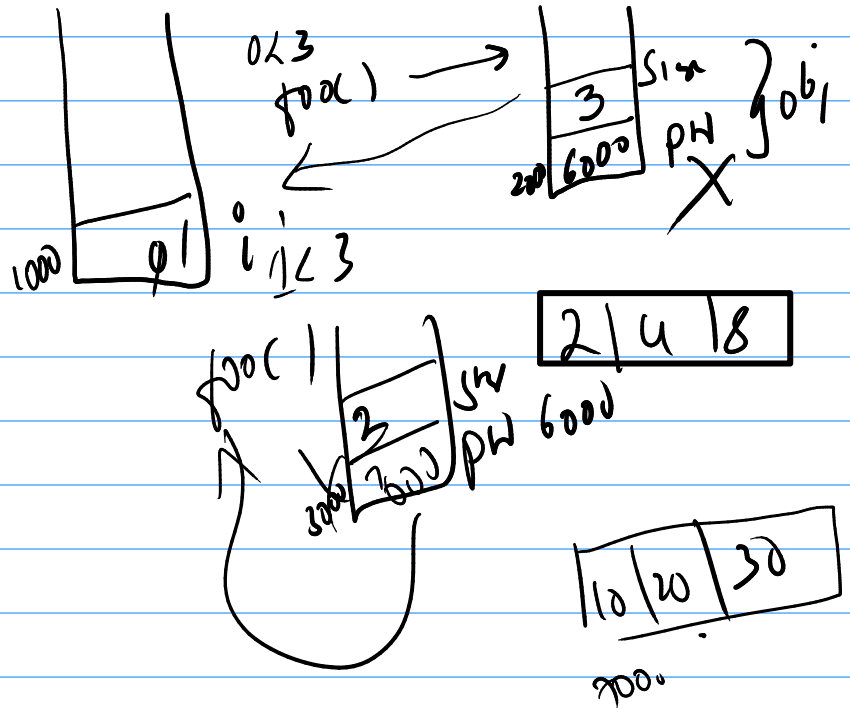

Destructor is a special member function invoked by the compiler when it is about to die.
its name is same as class name prefix ~ operator

Static Keyword on Members of class

static data member: static data member of a class is commonly shared by all objects created for that class

```
class ABC
{       int a,b;
        static int z;
        ________
        ________
};

ABC obj1,obj2,obj3;
```

