
28/03


Delete the first node

1. list is empty , print list empty
2. else assign head to temp, then move head to next node
   free the temp
3. return firstnode

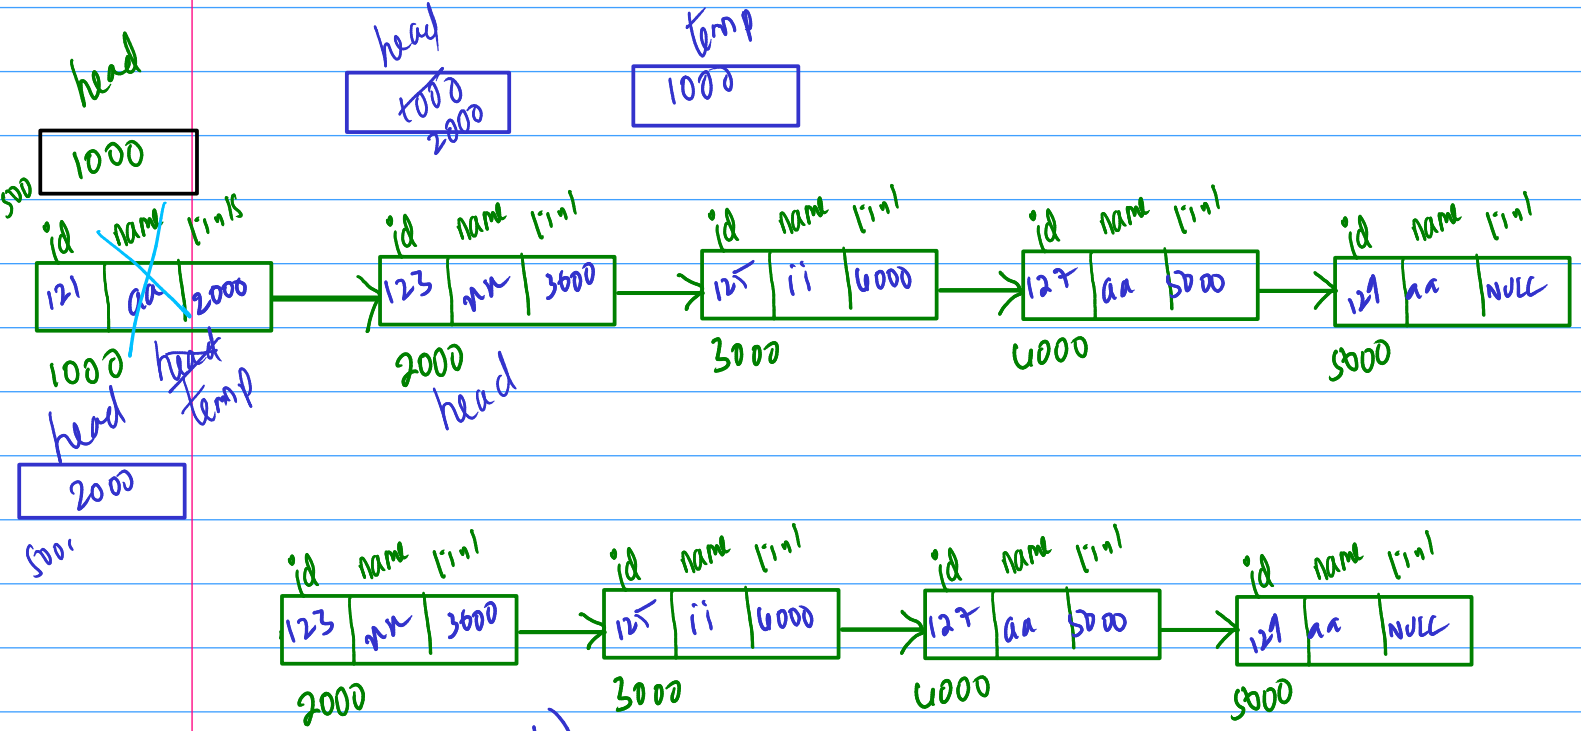


```
if (head == NULL)
    list empty

else
{   temp = head;
    head = head->link;
    free(temp);
}
return head;
```

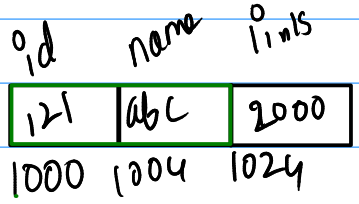

fwrite(ptr, sizeof(struct student), 1, fp);

this also copies link or address of next node

size = sizeof(STUDENT) - sizeof(STUDENT *);

32 - 8


24


fwrite(ptr, size, 1, fp);

this copies only information part

while(fread(&V, size, 1, fp)==1)

121	abc	75	125	nn
42	int	i	i	89

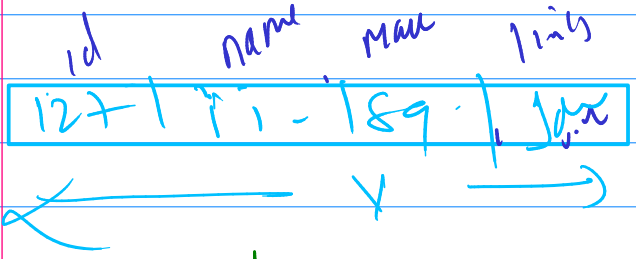

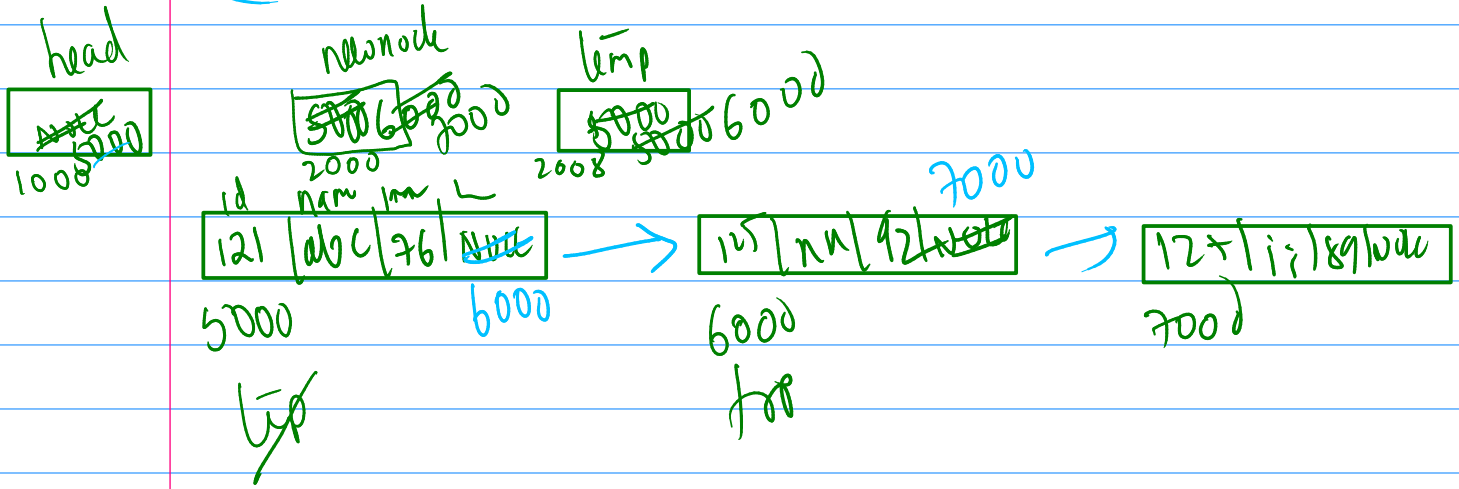

makeutility

makeutility is a linux tool which is used to reduce or save recompilation time.

Makeutitliy is implemented using
make command and makefile

makefile format

```
targetfile : dependency or requiredfilesnames
    <tab> command to generate the targetfile
subtarget : reuire file
    <tab> command to generate the subtarget
```