

29/03

AddinSortedorder

1. list is empty or newnode id is smaller than first node id ,assign head to newnode link,
assign newnode to head
2. else traverse upto end of the list or unitil newnode id is greater than current node id.
Note : when current pointer moving to next node save current node address in the previous pointer
3. Once loop terminated we insert the newnode between the previous and current node
4. return first node address

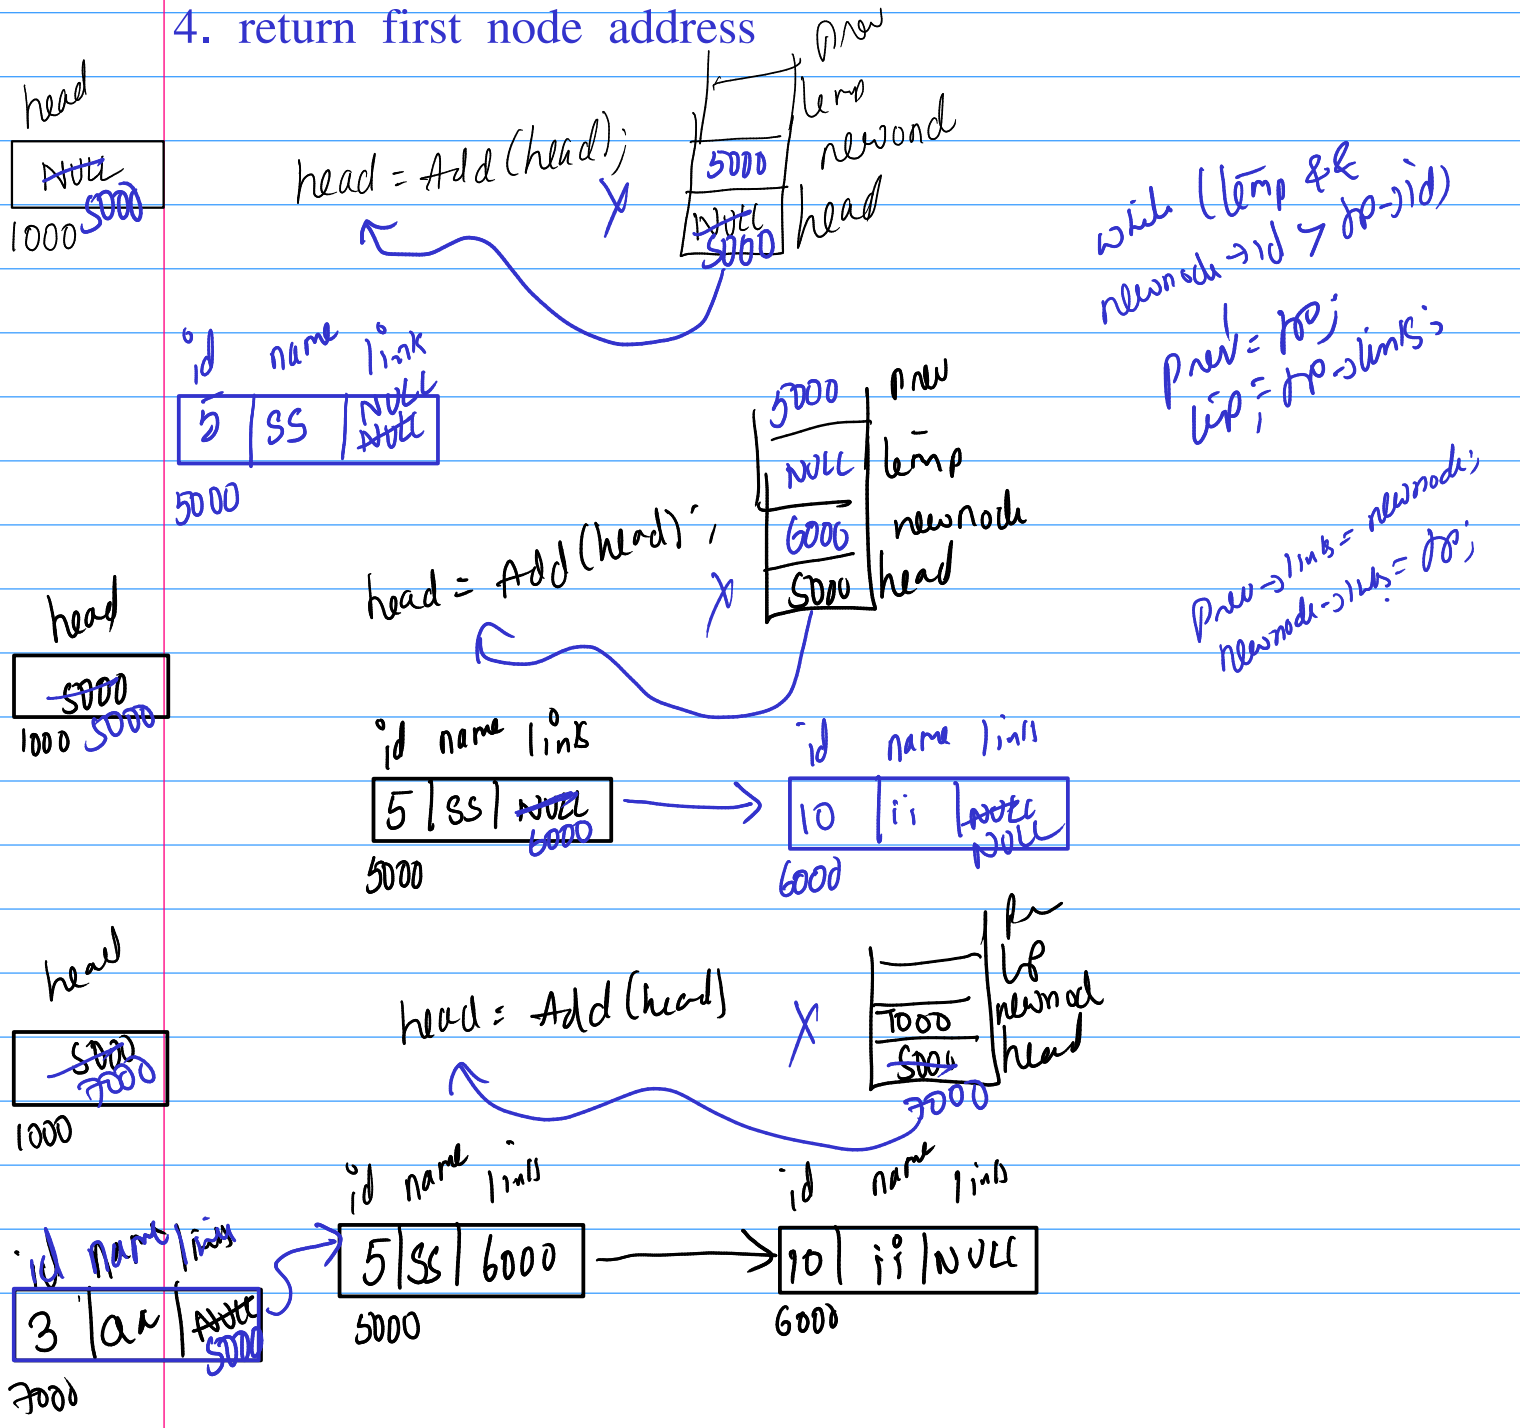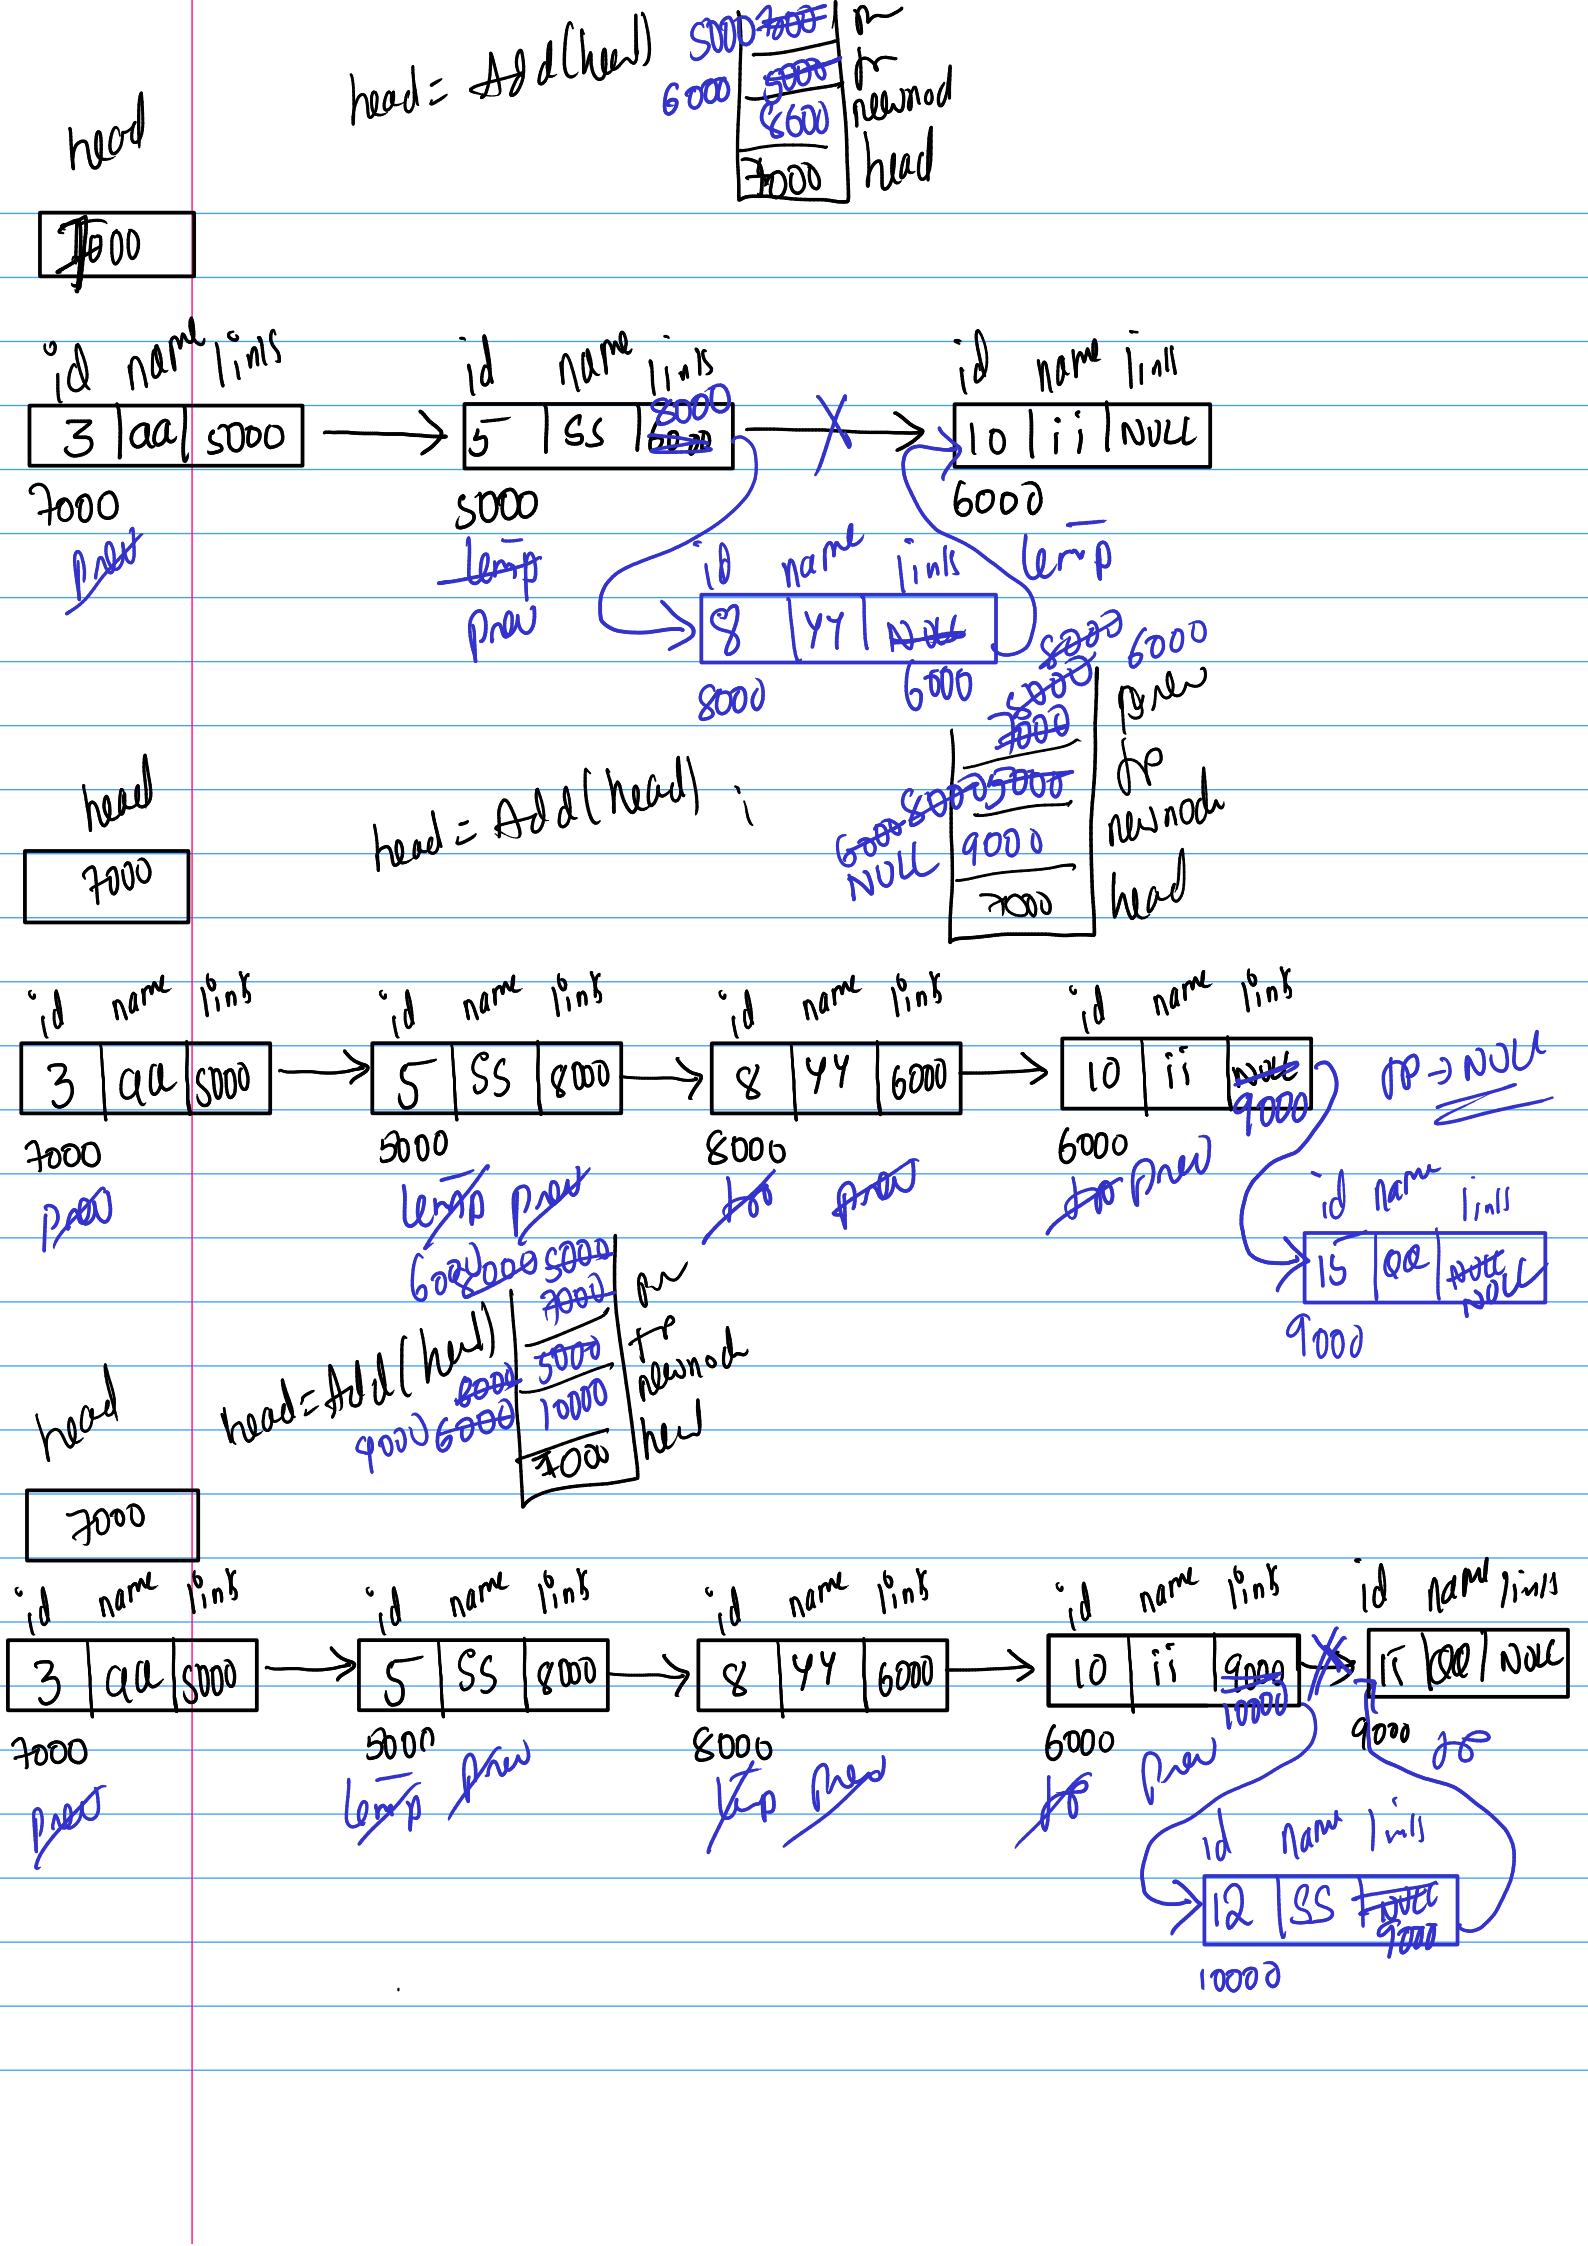


head
7000
id name link
3 aa 5000
7000
id name link
5 ss 8000
5000
id name link
8 yy 6000
8000
id name link
10 ii NULL
6000
temp
prev
head = Add(head);
newnod
head
id name link
3 aa 5000
7000
id name link
5 ss 8000
5000
id name link
8 yy 6000
8000
id name link
10 ii 9000
6000
id name link
15 qq NULL
9000
temp
prev
newnod
head
head = Add(head);
id name link
3 aa 5000
7000
id name link
5 ss 8000
5000
id name link
8 yy 6000
8000
id name link
10 ii 9000
6000
id name link
15 qq NULL
9000
id name link
12 ss 9000
10000
temp
prev
newnod
head

Delete lastnode

1. list is empty , print empty msg
2. list having only one node, delete the head assign NULL to hea
3. else traverse up to last before node , free its next node and assign current node link NULL.
4. return first node address

