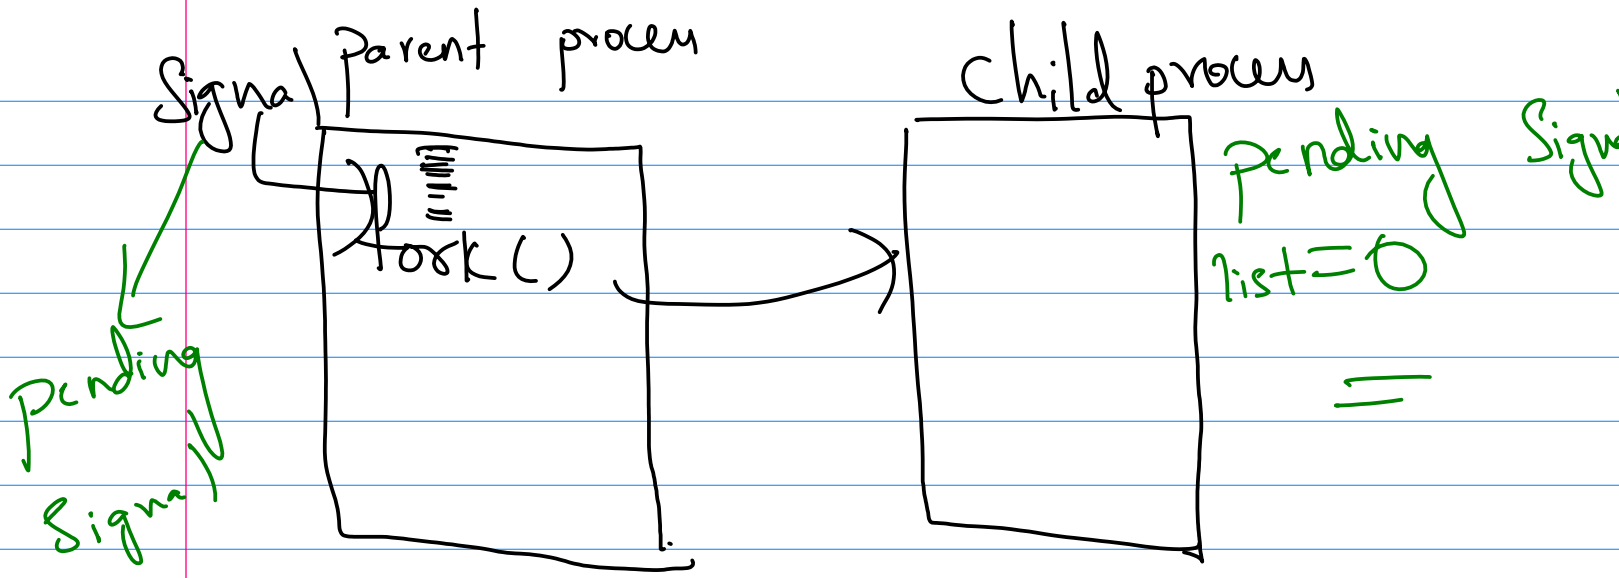


child proces created is a exact duplicate of parent proces


except


(1) PID, PPID will be different for newly created proces & calling proces.


(2) pending signals of parent proces are not inherited by the newly creat proces.

(3) Memory locks of parent proces are also not inherited by the

child proces.

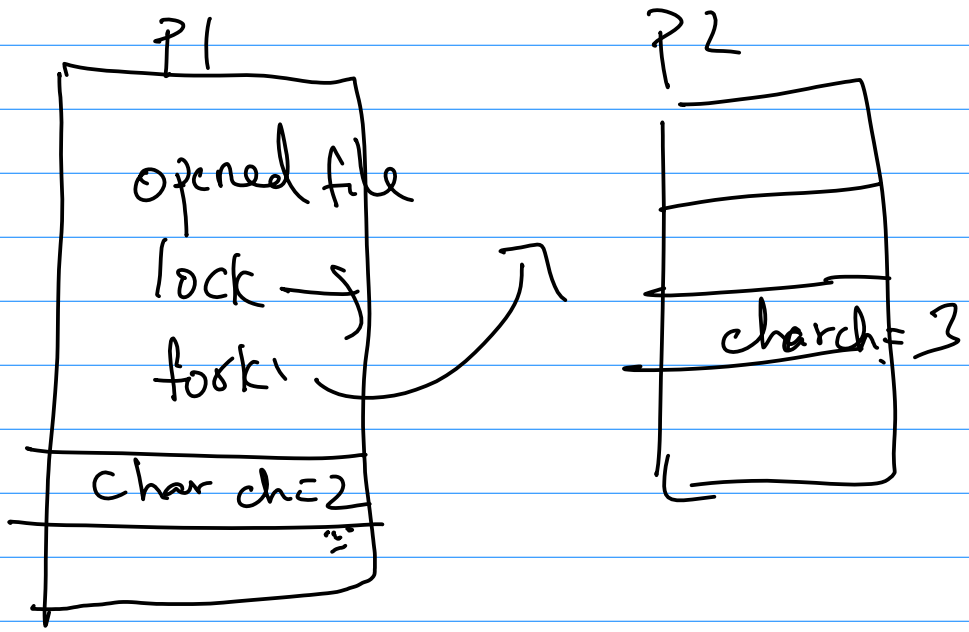


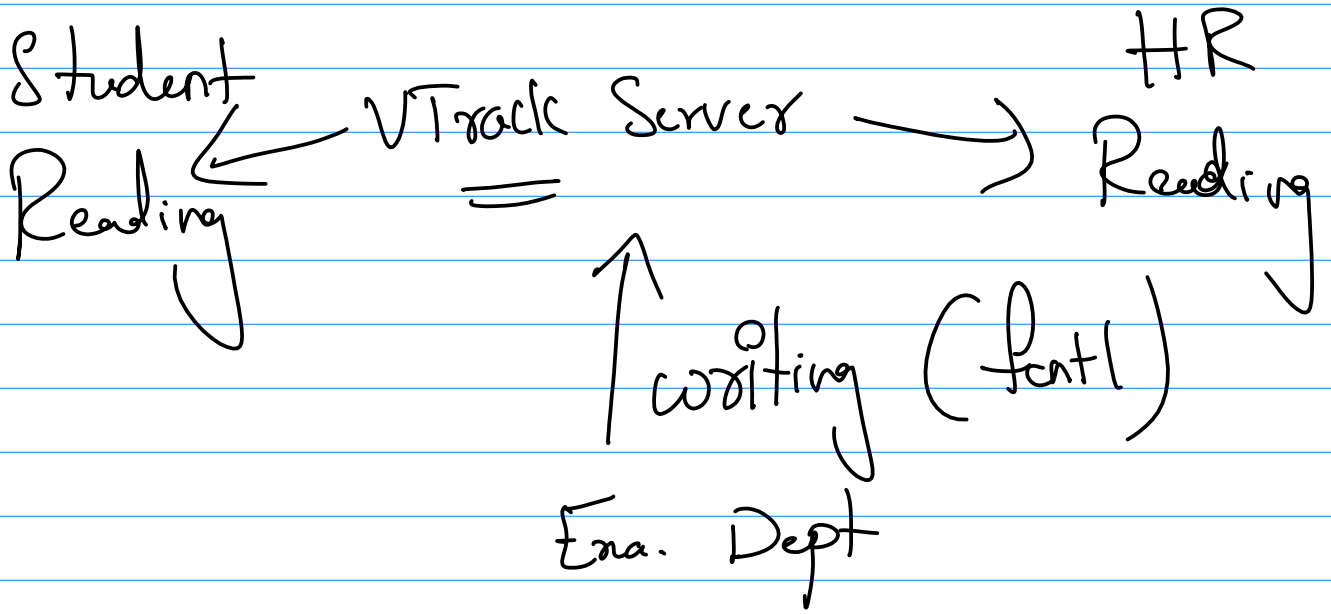


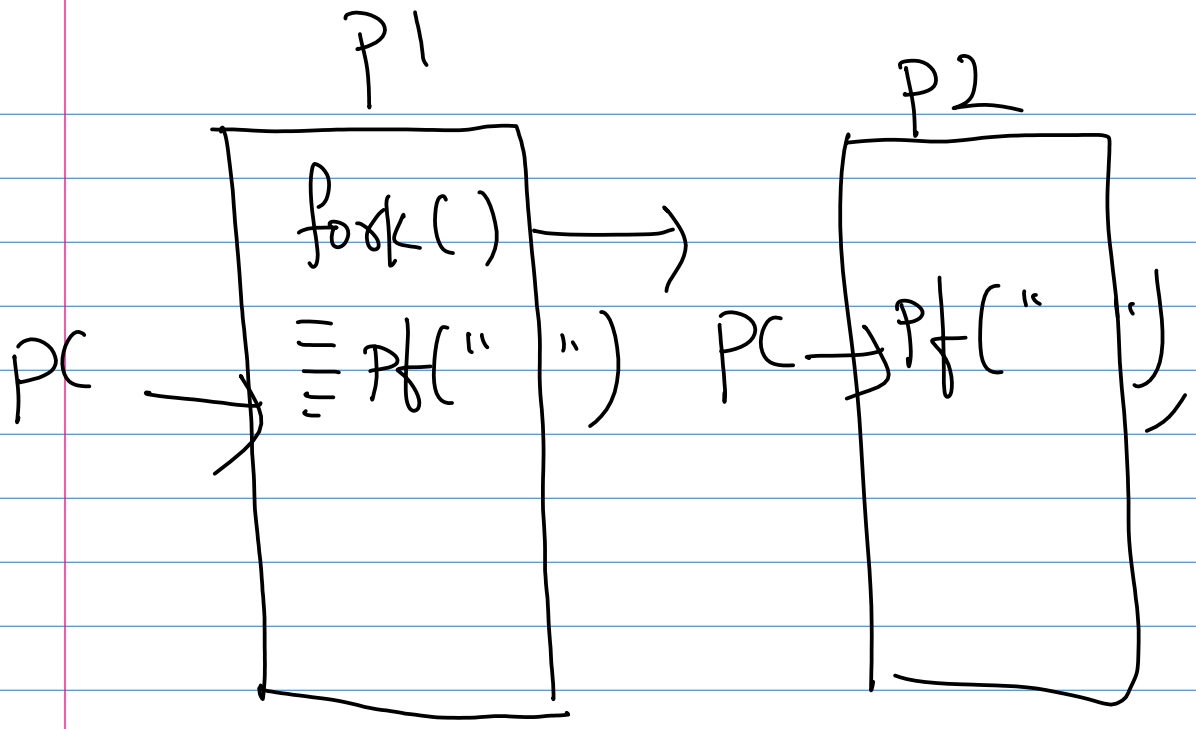

part of process management ← Scheduler will decide whom to give the CPU

Hello world
Hello world

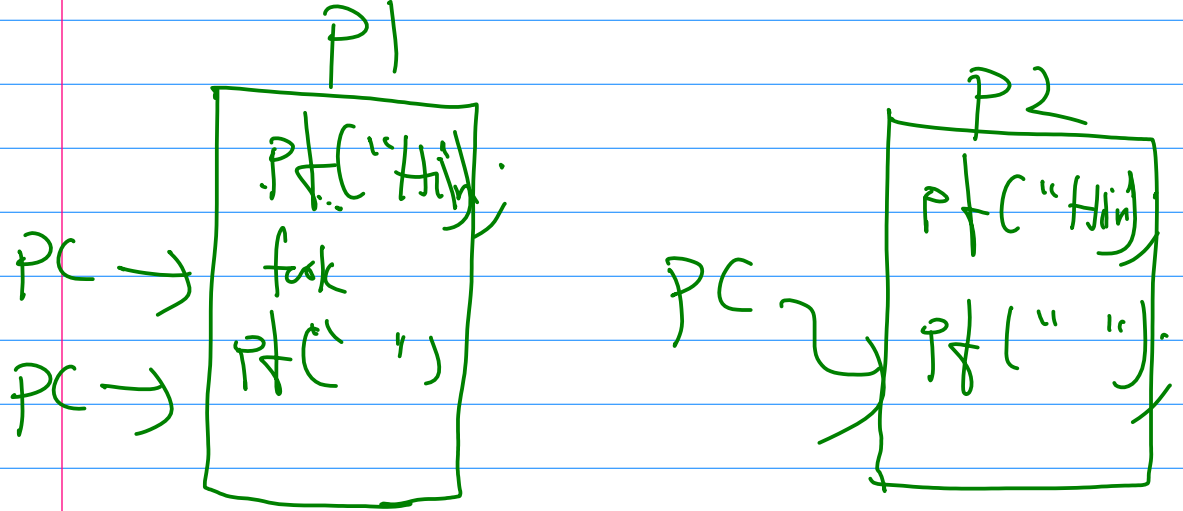

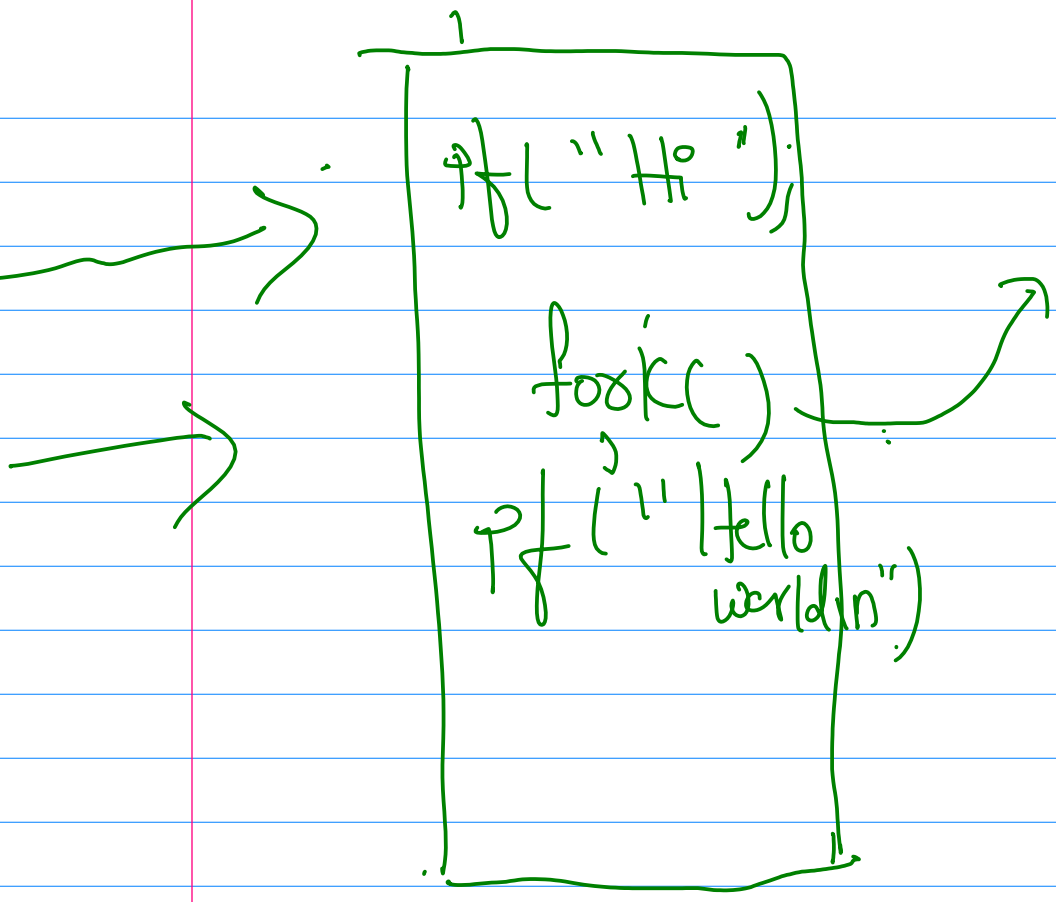

Hi Hello world

Cannonical form

pf("==");

user space

kernel space Buffer | 1KB

flushed out

device

pf (" ");

10

kernel buffer

pf (" ..... ");

10 — 10

Corrupted