

PCB

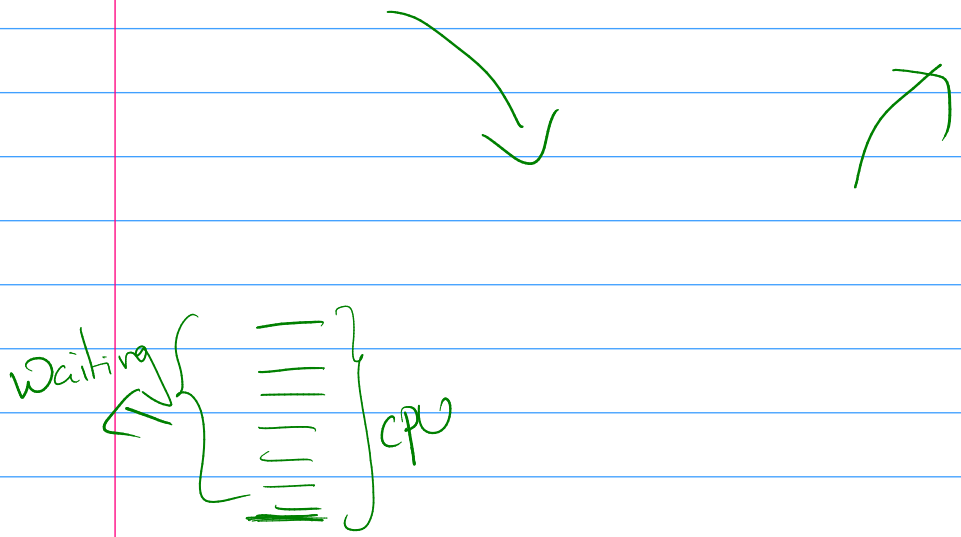

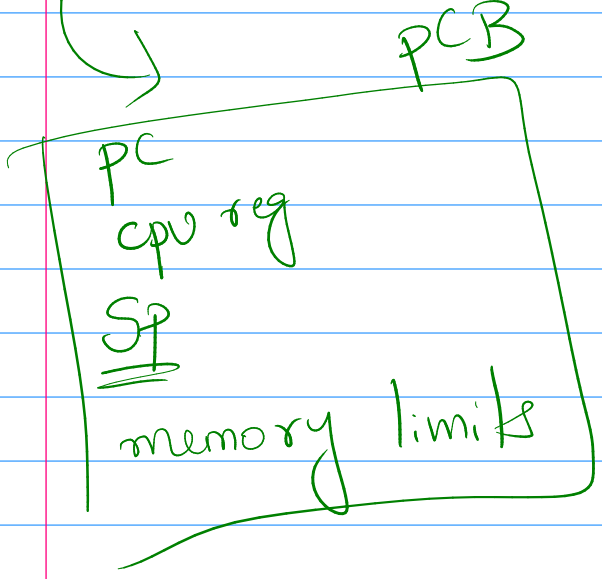

→ Content Switching → CPU is idle

→ procey

child proces → orphan proces.

All the orphan processes in the system are adopted by init proces.

→ proces can collect exit status of its child/children proces only when

1) parent proces gets terminated. Status of all its terminated children processes.

Soln not to make child zombie ← 2) wait() waitpid() system calls Can be used in parent proces to collect the exit Status of its children proceus.

Sequential execution.

Soln

3) Removal of zombie with signal handling.

Q what is zombie / defunct state?

Ans:- A child process can be in a zombie state when it is terminated but exit status is not been collected by the parent process.

↳ partial destroyed.

Child process

Q what is daemon process?

init systemd

a.out n/w httpd

gcc first.c -o execd

↳ daemon

→ Daemon process is a

a) background process

b) It starts with System start & stops with system off.

fork() → child process background

→ Background process will not have control over the terminal to read the input.

→ process is created

wait, waitpid.

Child not to turn as zombie & also simultaneous execution.