
FCFS
SJF
LJF
SRJF
LRJF

Prediction of burst time is not possible in all the cases

RR (Round Robin)

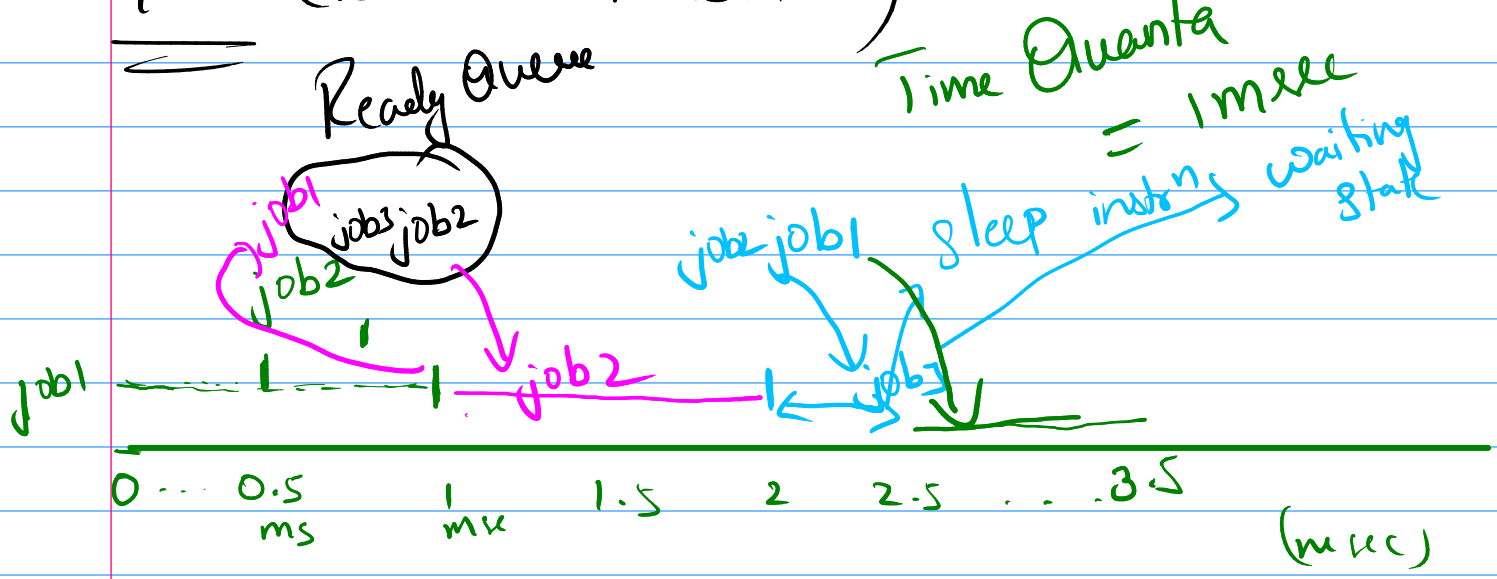


→ Dispatch latency :-

Time taken to store the Current running process states into its PCB & load the the newly scheduled process states.

Time Quanta ≥ Context Switching time.

	job1	job2	job3	job4
Burst time	5 msec	10 msec	15 msec	8 msec
A.T	0 msec	1 msec	5 msec	10 msec
R.T =	0	1	3	3

Time Quanta = 2 msec

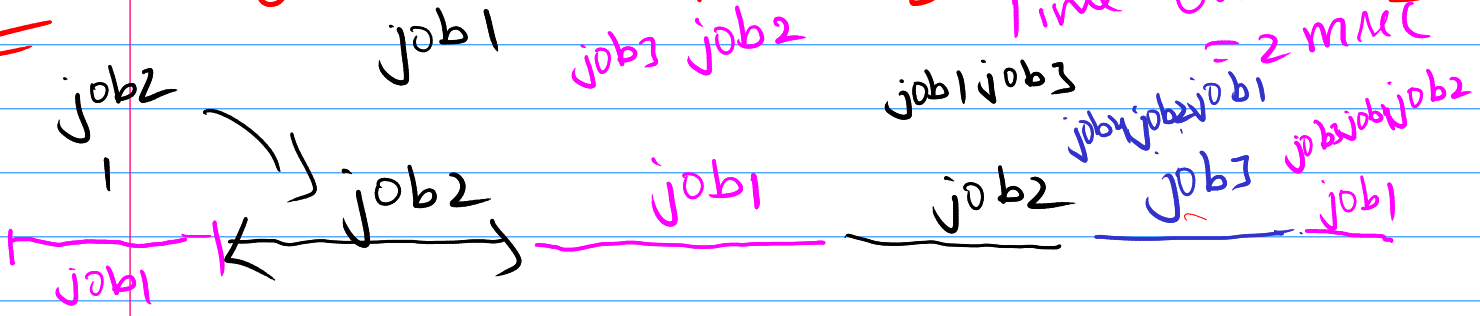

0 2msec 4msec 6msec 8msec 10msec 11msec


(3msec) (8msec) (1msec) (6msec) (1msec)

job3 job4 job2 job4 job3 job4 job2 job4 job3 job2

11 13 15 17 19 21 23 25


(4msec) (11msec) (2msec) 4msec 9msec

job4 job3 job4 job3 job2 job3

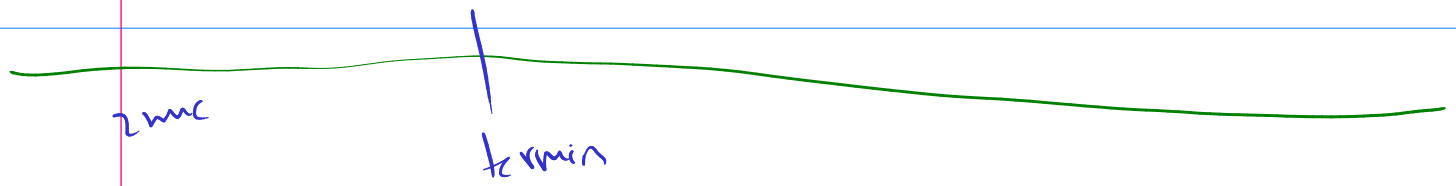

T.Q. = 4 msec

→	job1	job2	job3
B.T	10msec	12msec	8msec
A.T	0	5	8

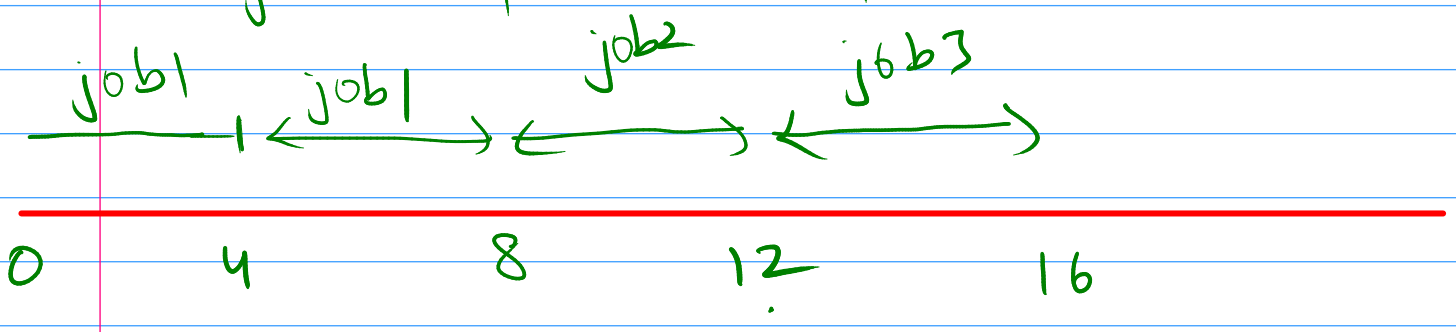

MLQ :-

Ready Queue 1.

Foreground


Background

Ready Queue 2

Note :-

Most of the OS follows priority band RR.

MLFQ :-

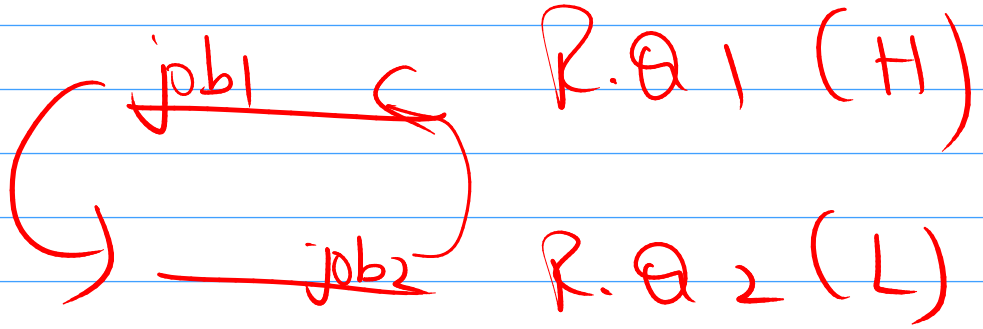

job priority can be modified.

nice Command :-

```
$nice -nicenoval ./a.out
      --15
```

→ nicenoval = -15

renice Command :-

used to modify the priority of a procm.

```
$renice nicenoval PID
```