Replace a process

exec →

Replace a process with a executable which is PATH variable

↓

file name

PATHNAME

$ ls

a.out

exe1

$ ./a.out

Shell → creating one process

↓


Replacing it with a.out

a.out is running exe1

↓

one job

a.out is replaced with exe1

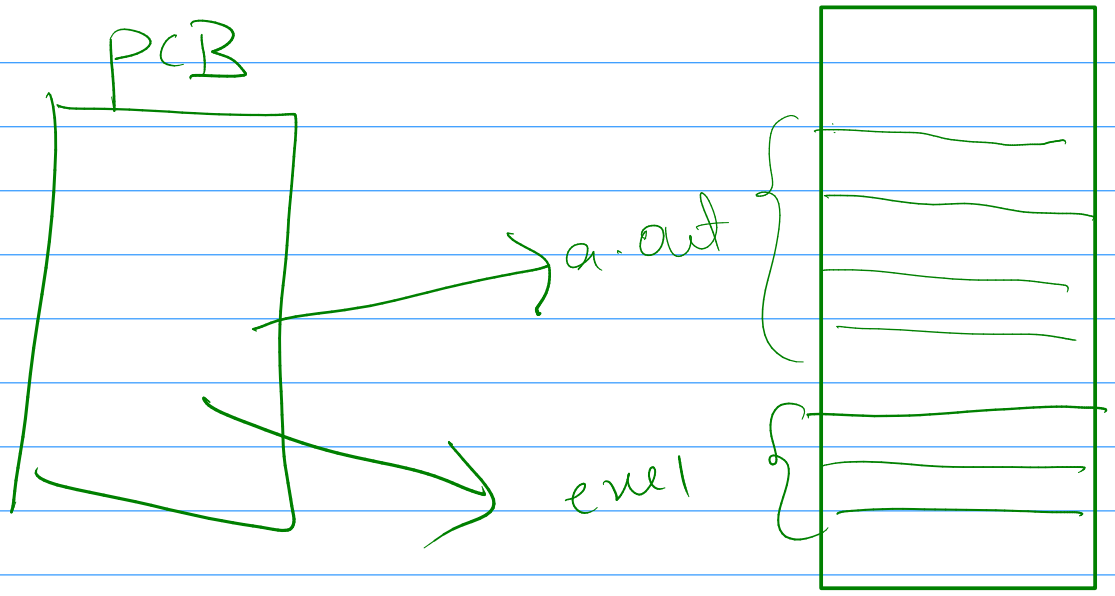


System function :-

→ Calling process → fork

↓

parent

wait()

↓

child process


↓

replaced with "clear"

# File Management

→ what is a file?

file is a collection of related data.

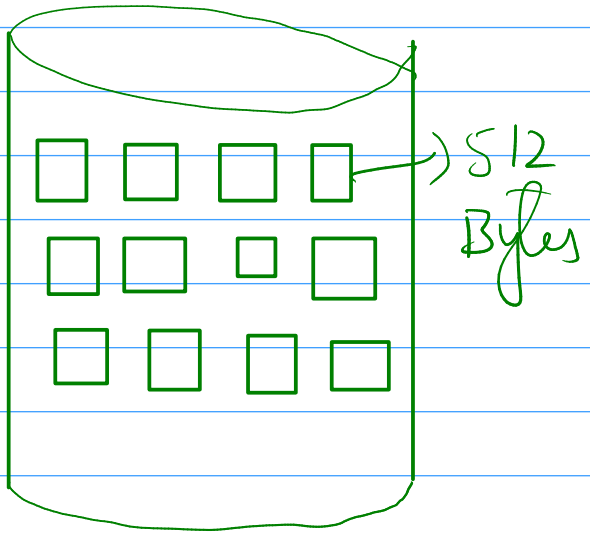


- .c
- .obj
- .doc
- .docx
- .pdf
- .png

→ Regular files

Q2 List the file types?

1) Reg files
2) Directory files
3) Linked files
4) device files ← character, block, N/W

spl files ← 4)

Q what is a file management?

Ans: It is a kernel service to manage the files storage like file creation, file deletion, copy appending and etc.

Q what all the operations can be done on files?

create
open
read
write
append
copy
close and etc.

| fp | fd (file descriptor) |
| --- | --- |
| → High level handling of files | → low level handling of files. |
| → fp referring to a structure | → It is a integer referring to the opened file |
| → fopen, fwrite, fread and etc (Library functions) | ex: open, read, write, close, lseek and etc (System calls.) |
| → It is used only for working with regular files. | → It is used for regular as well as spl files (/dev directory.) |
| → Every fp is associated with a low level file descriptor. | |

# file systems

NTFS → DOS

FAT → Windows / Linux

ext2, ext4 → Linux

UNIX file system → UNIX

→ when a file system gets installed

↓

creates inodes

↳ unique identific (Inode number)

number of blocks

& Block Size (sector)

Q what is mean by formatting a Disk ?