→ open

mode bits

User Group others

RWX RWX RWX

0777

O_CREAT

If pathname given existing then it will open.

If not existing then it will creat.

O_EXCL

→ O_EXCL must be used along with O_CREAT.

→ If pathname exists then it will fail.


→ If not existing then Creates new one.

→

100 bytes

↓

dst → free 50 bytes

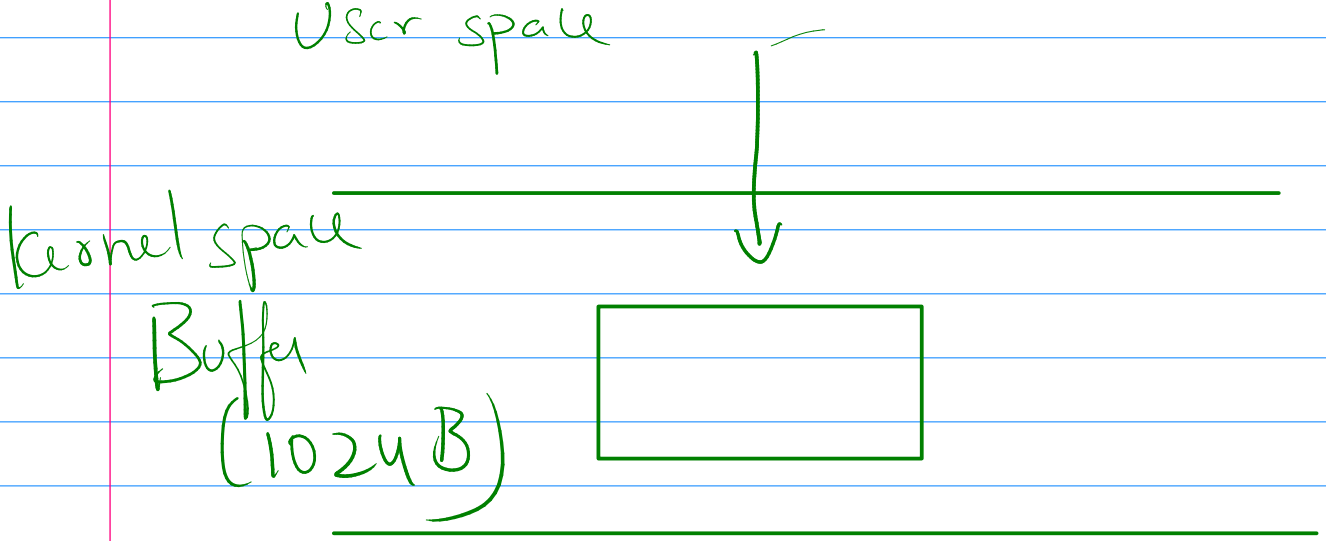

Hardware file (Disk), Device (Serial (tty, pts, usb))

Cannonical form

kernel Buffer data is flushed out only when

1) '\n' is found
2) Buffer is Full

3) process gets terminated.