

JAVASCRIPT BOOTCAMP



[we will be starting teaching at 8:10]


→ ECMA ?
 ↪ ecmascript ?

→ let/var/const → difference

→ Hoisting.

→ Execution contexts.

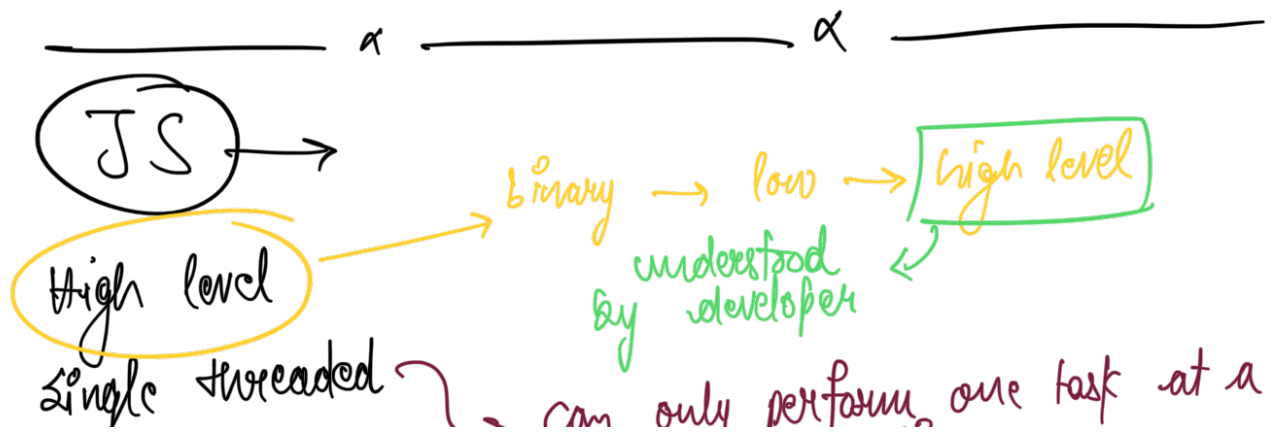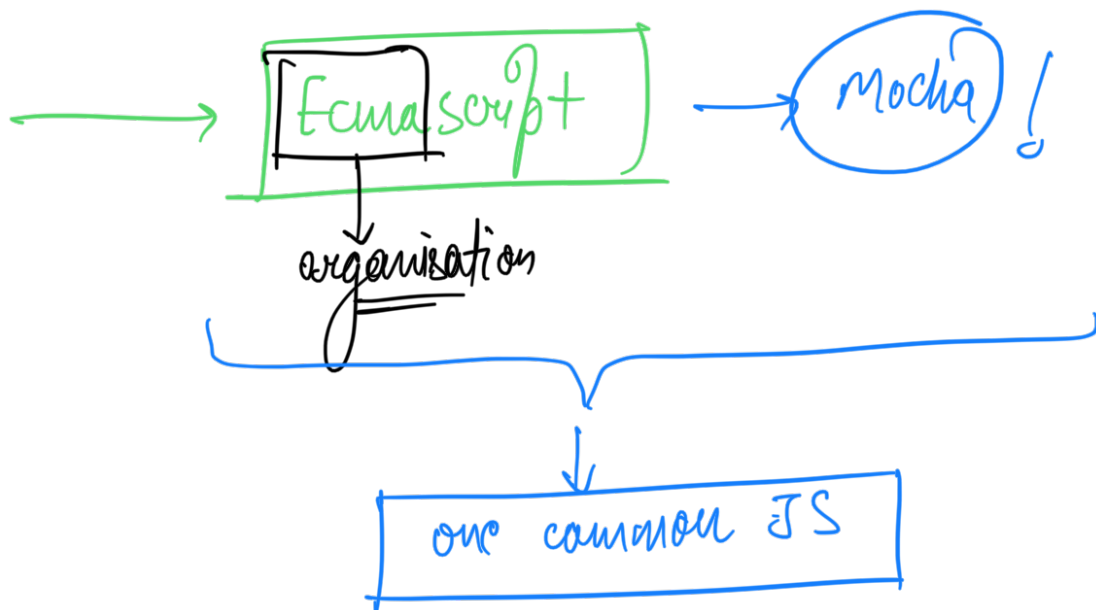


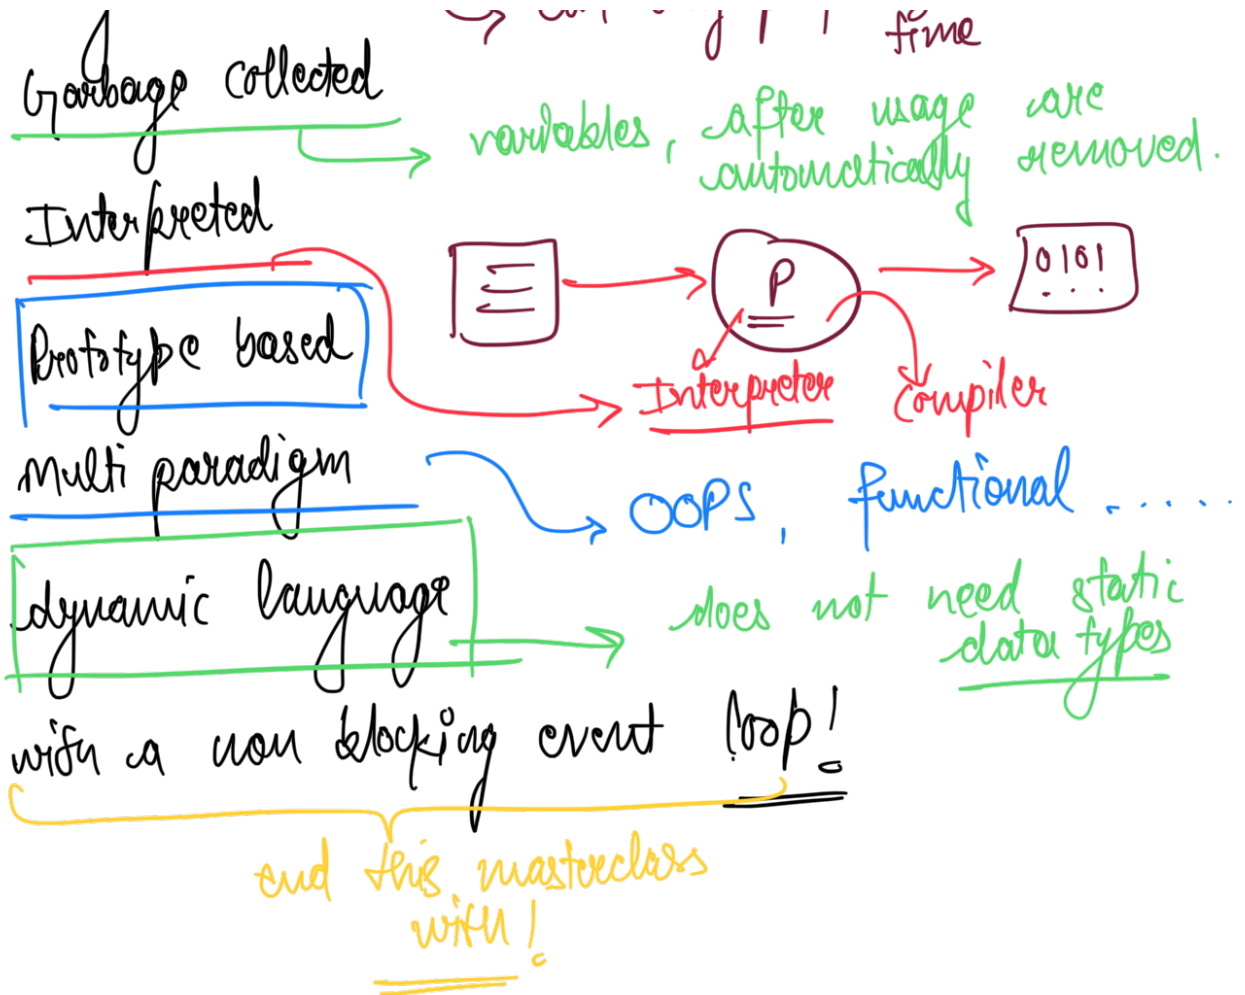

	reassignment	redeclaration	hoisted?
let	✓	✗	✗
var	✓	✓	✓
const	✗	✗	✗

Hoisting

→ everything in JS happens within

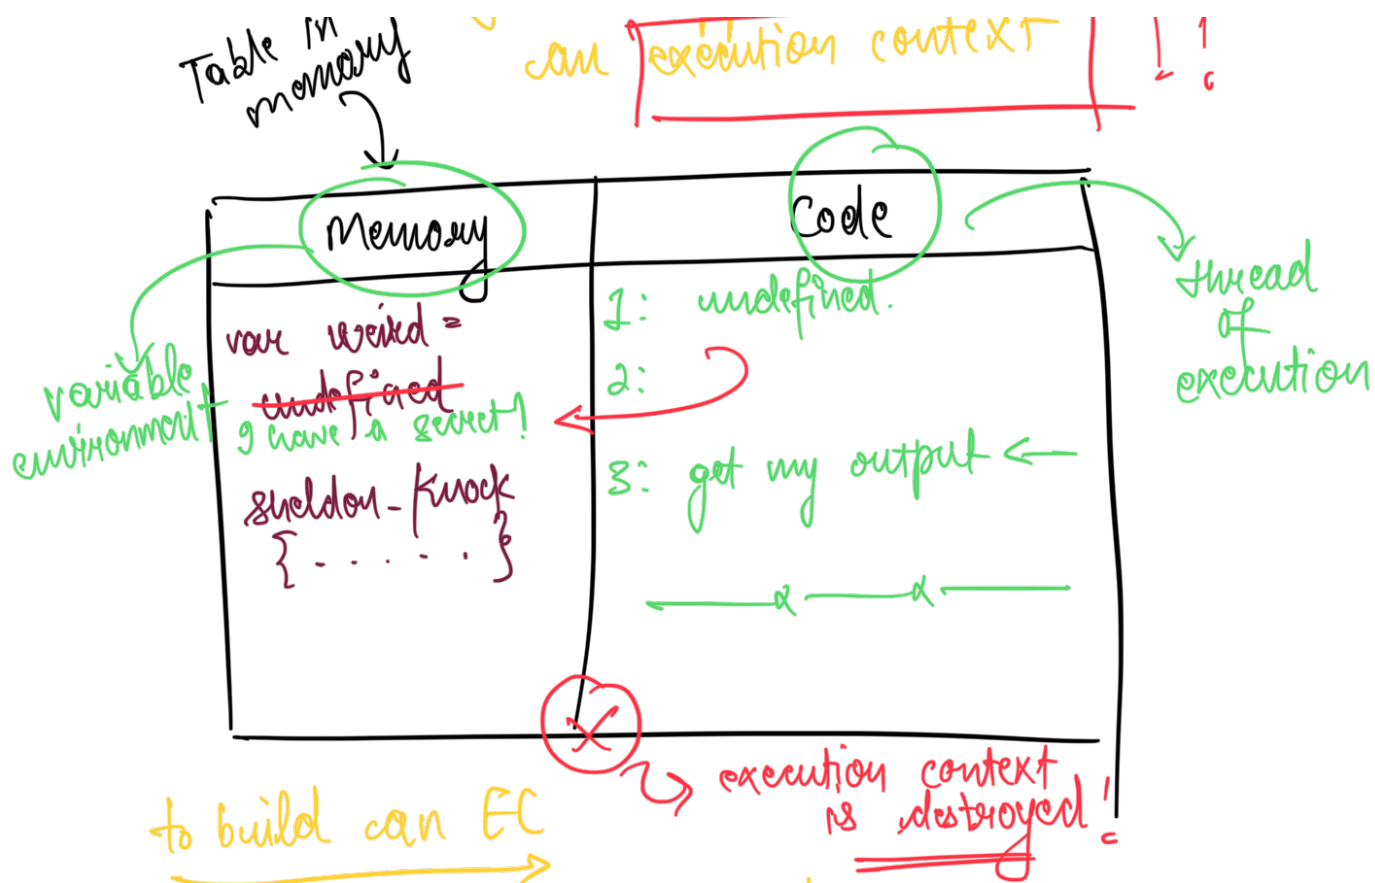

to build an EC

- Read the entire code
 - if variable, save that with undefined
 - if function, save function.

we resume at 9:30

Execution contexts

```

1 | var n1 = 5
2 | function cubennum(num){
3 |   var ans = num * num * num
  
```

4
5
6
7
8

```

return ans;
}
var c1 = cubenum(n1)
var c2 = cubenum(10)



```

① Global execution context

Memory	Code
n1: undefined cubenum { } c1: undefined c2: undefined	1: n1 = 5 3: 6 → function definition 8: c1 = cubenum(n1) [new local execution context created] 9: c2 = cubenum(10)

Memory	Code
num: undefined ans: undefined 125	num → n1 = 5 ans = num * num * num = 5 * 5 * 5 = 125 return ans;


1 | 7

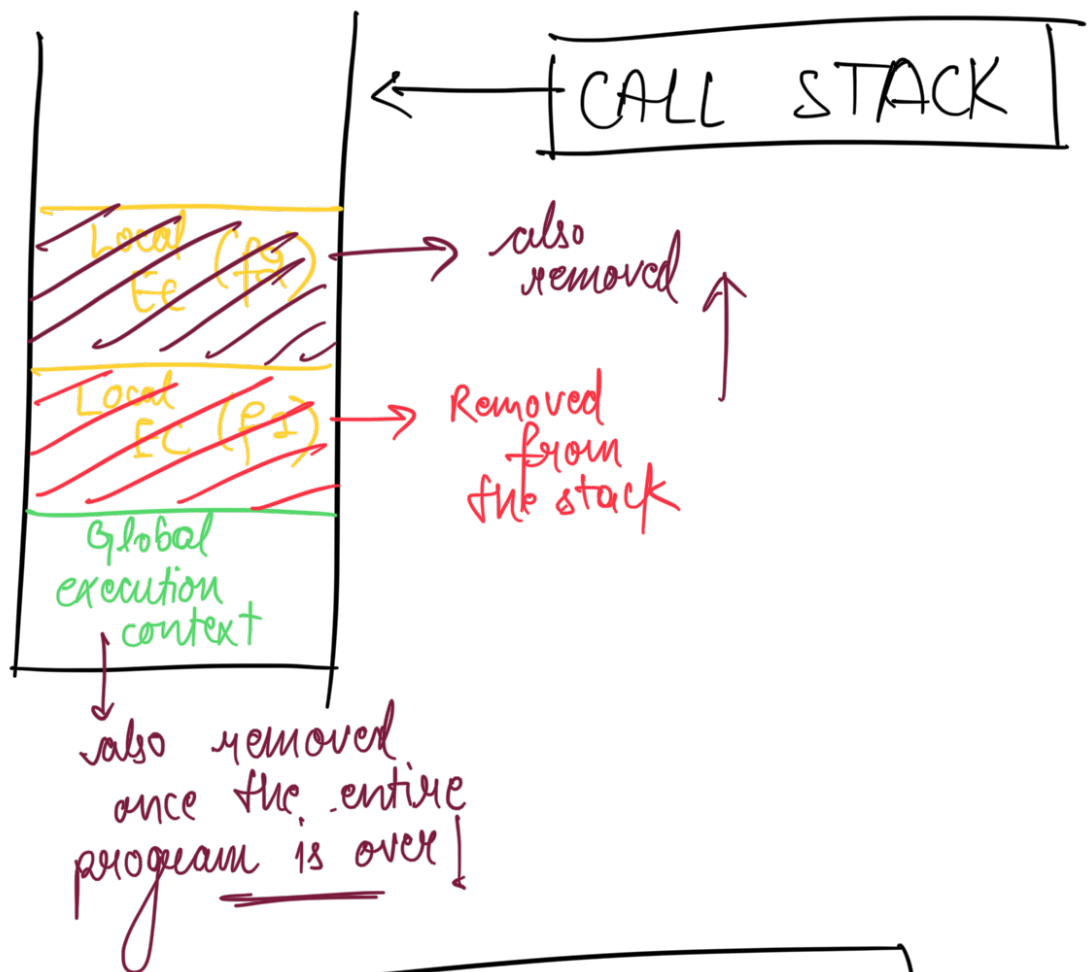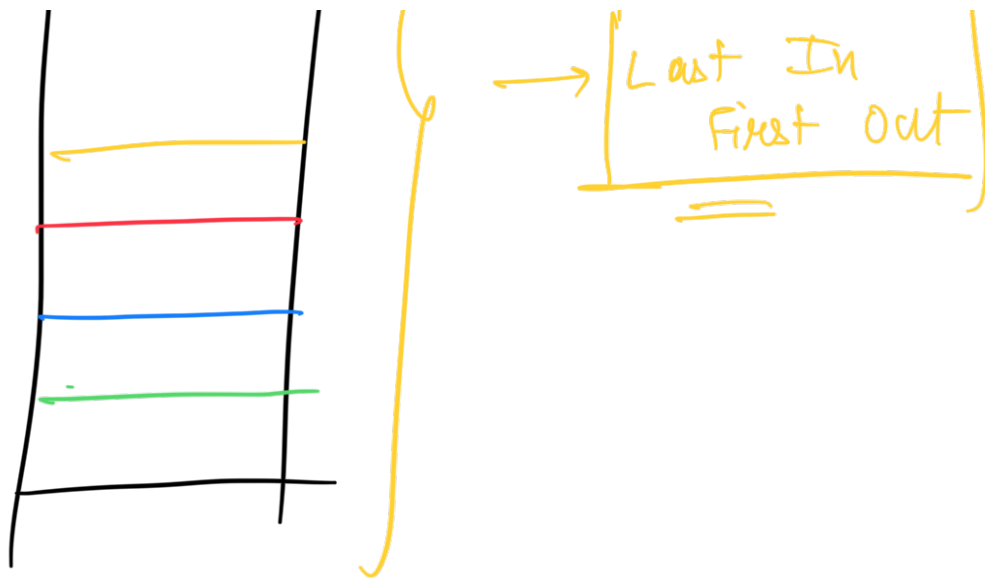

Temporal Dead Zone

let & const variables are stored here till they are declared


EVENT LOOP

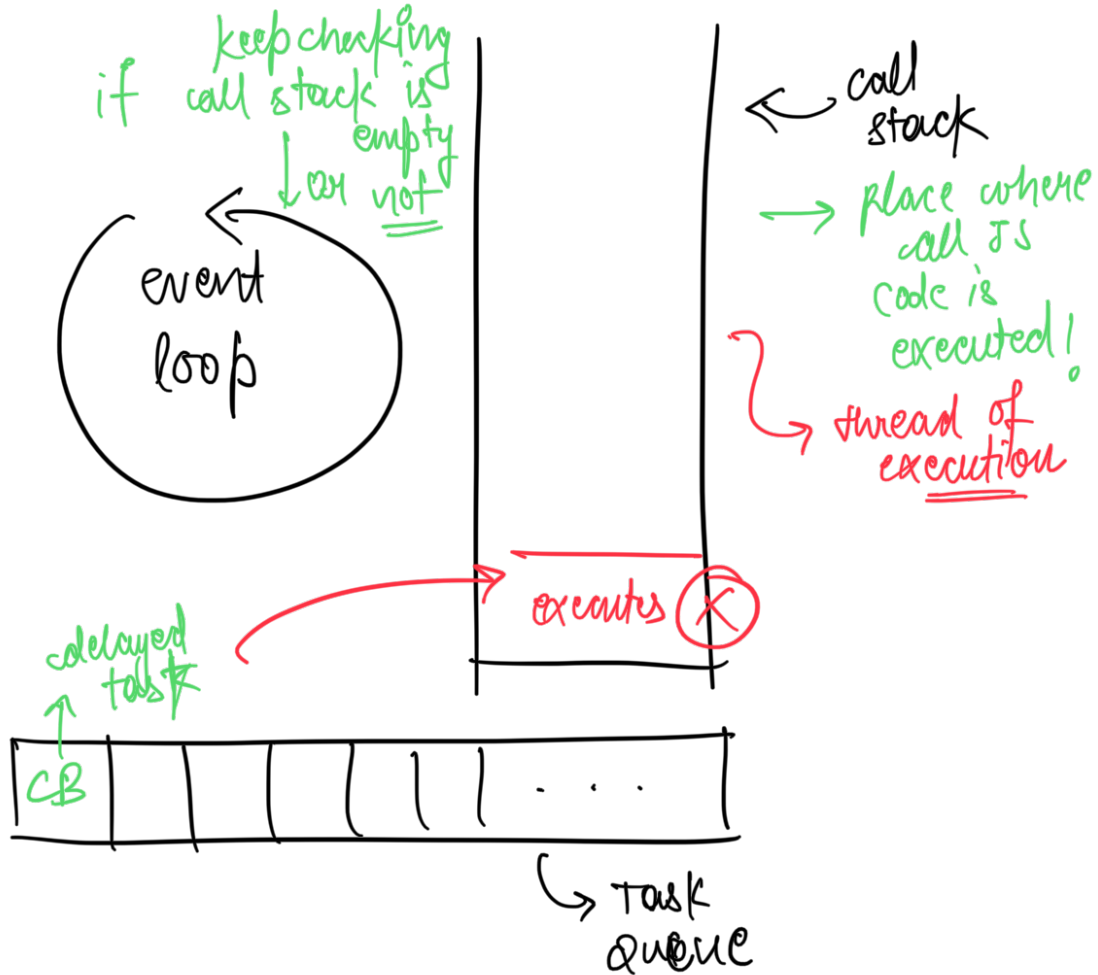

- ① → get dhaniya
- ② → get pant altered from tailor
- ③ → Do dusting
- ④ → Eat food.




tailor
altering
point

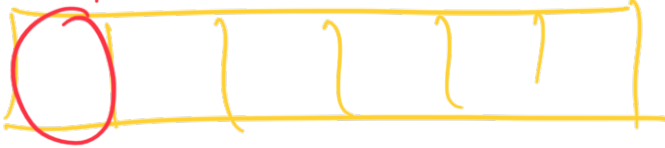

~~get money~~

~~cat food~~
~~dusting~~

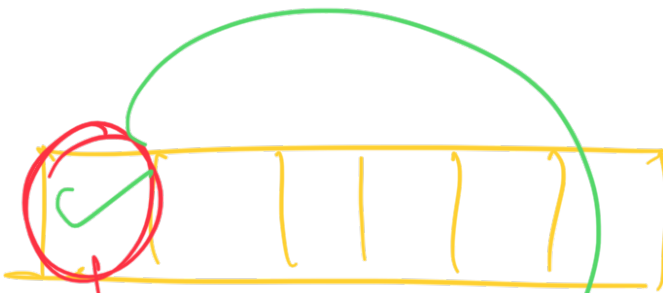

tailor
has altered
the point

~~go and
get paint~~