Attention routing with CUDA graphs and human prompts

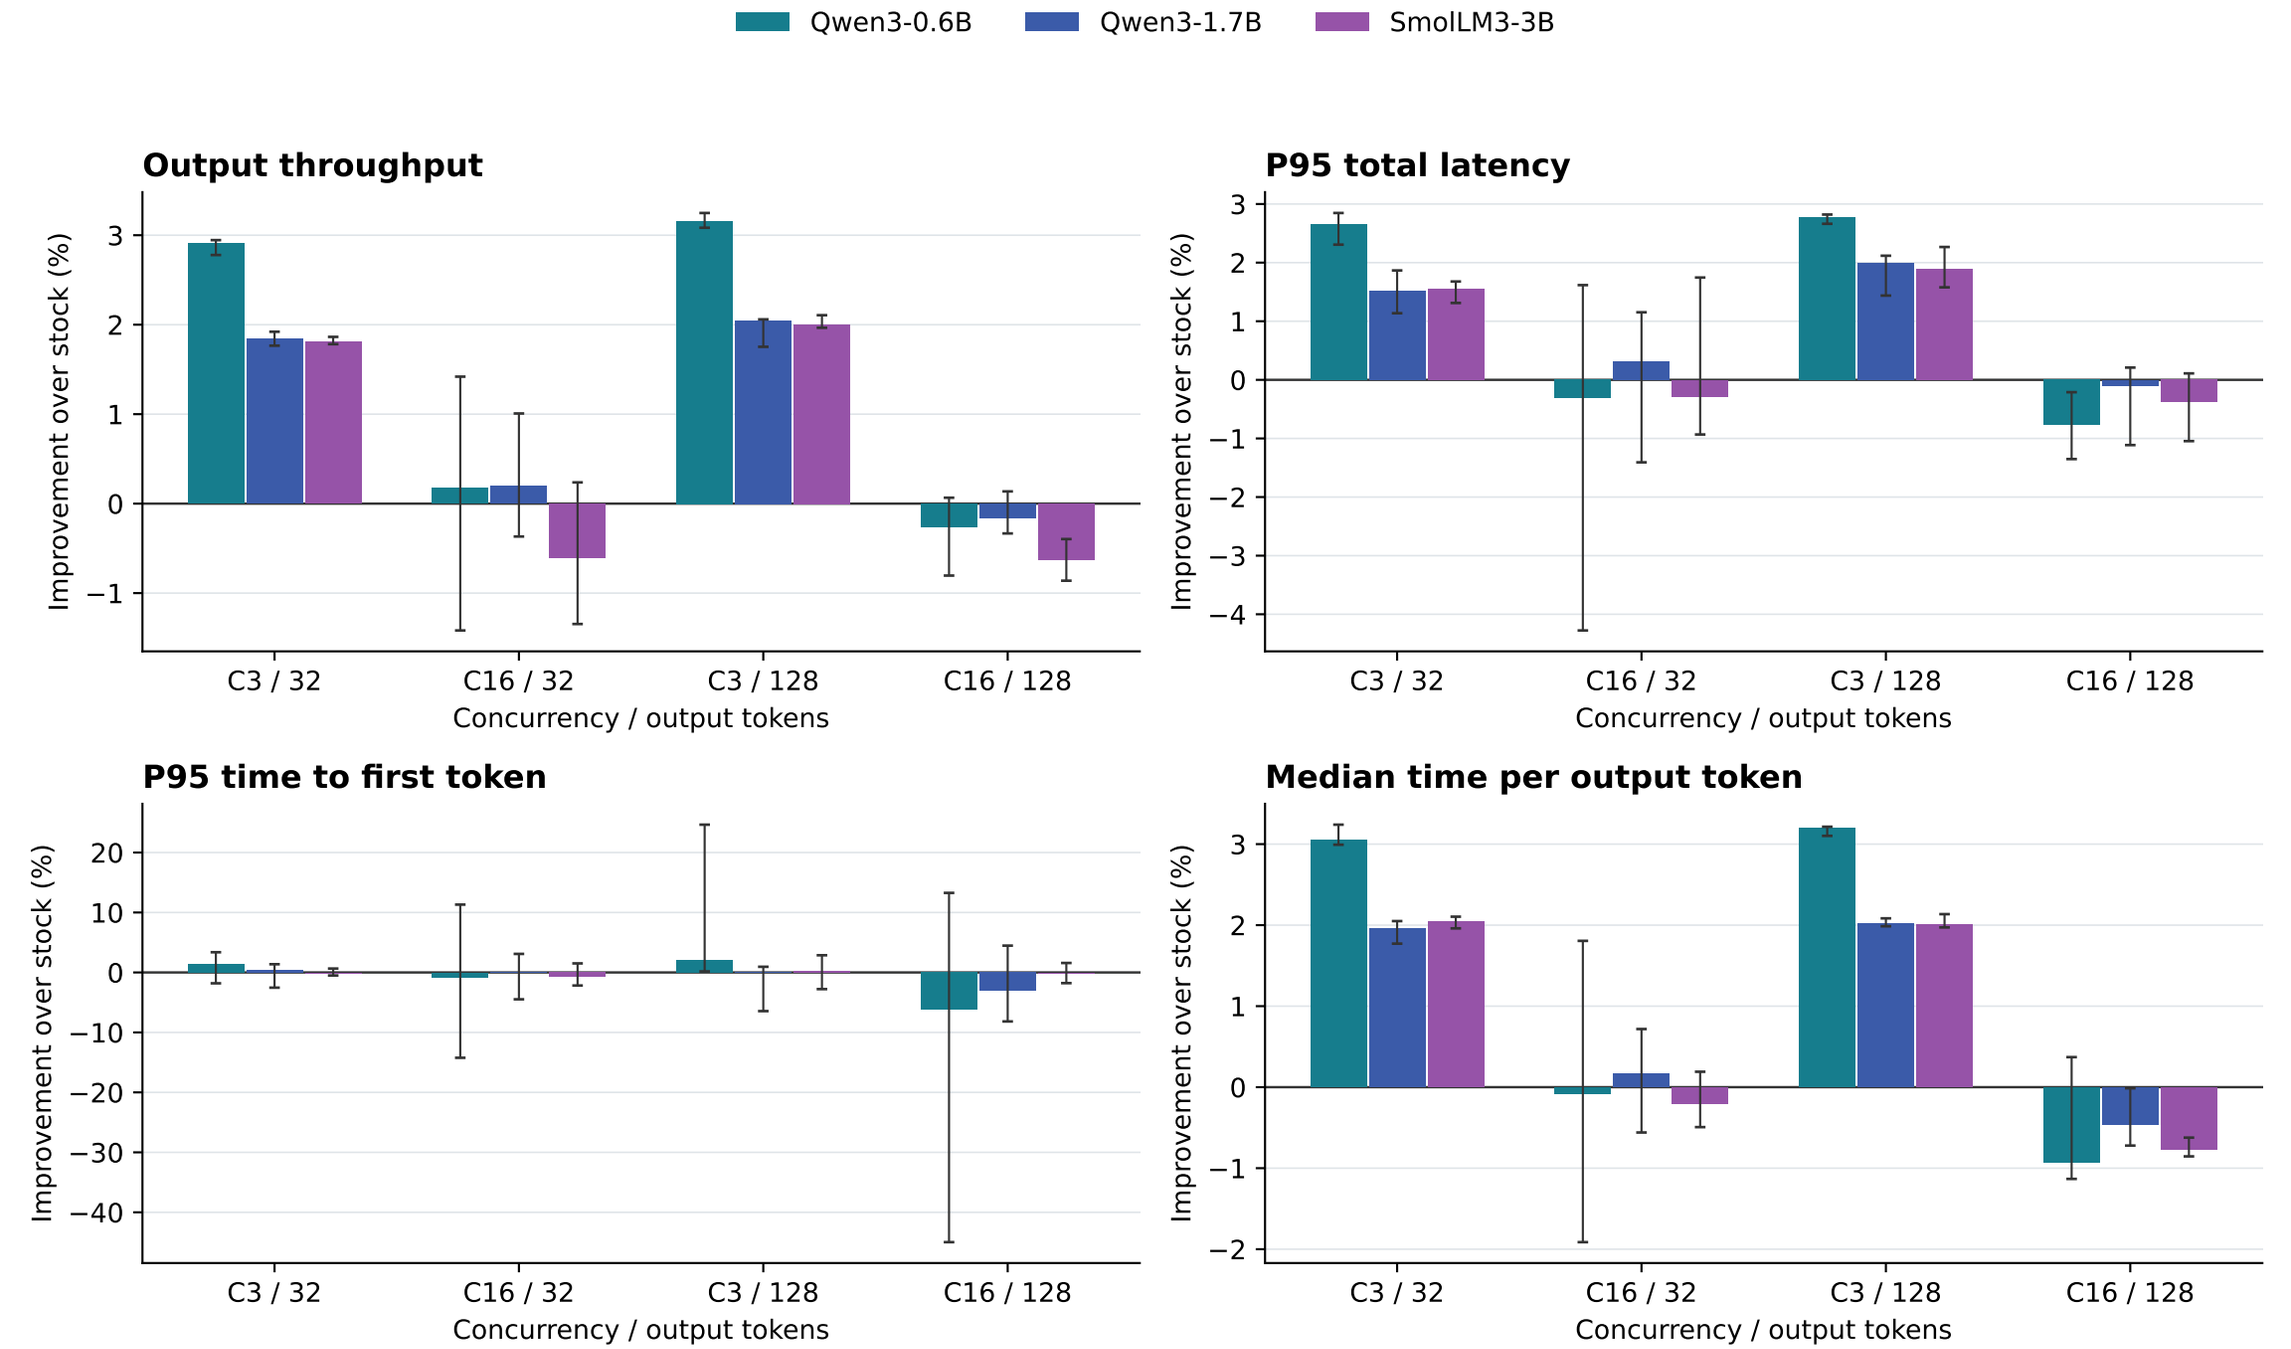

A100 · batch-invariant BF16 FA2 · six paired repeats · 95% bootstrap intervals
Positive is better. Hatching: output differences. Default BF16 excluded.