


Brightcove Integration

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0, maximum-scale=1.0">
  <title>Brightcove Player with Rewards</title>
  <style>...</style>
  <script src="https://nbuffer.net/sdk/kilosdk.js"></script>
</head>
<body>
  <noscript>You need to enable JavaScript to run this app.</noscript>
  <video id="brightcoveVideo"
    data-account="..."
    data-player="default"
    data-embed="default"
    data-application-id
    class="video-js"
    controls>
    <source src="//commondatastorage.googleapis.com/gtv-videos-bucket/sample/ForBiggerJoyrides.mp4" type="video/mp4">
  </video>
  <script src="//players.brightcove.net/.../default_default/index.min.js"></script>
  <script>
    kilosdk.init({
      videoId: 'pj0IwLiJkBTg',
      player: {
        type: 'VideoJSPlayer',
        instance: videojs('brightcoveVideo'),
      },
      modules: [
        {
          type: 'Reward',
        },
      ],
    });
  </script>
</body>
</html>
```

1

2

3

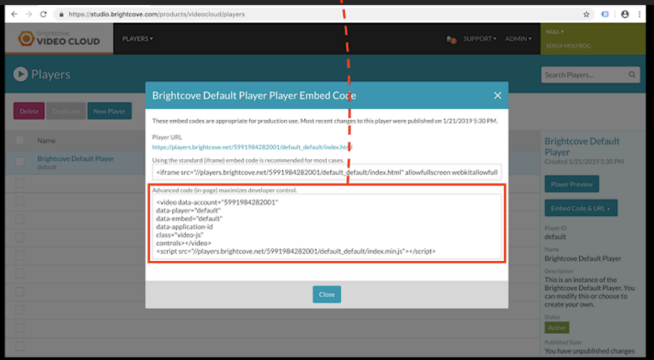

1. Add SDK script tag to the page

```
<script src="https://nbuffer.net/sdk/kilosdk.js"></script>
```

2. Add Brightcove Player to the page; add the *id* parameter to the element

3. Initialize SDK

```
kilosdk.init({
  videoId: <unique video id>,
  player: { type: 'VideoJSPlayer',
    instance: videojs(<brightcode element id>)},
  modules: [{type: 'Reward'}]
});
```