Gritty OS Recruit Hub: Admin View

Development Sprint Spec Outline: Schema Remediations

This page contains a set of suggested remediations for the Administrator View in the Gritty OS Recruit Hub Rebuild project. These remediations are designed to be completed in a single Claude Code session in sprint mode. I am utilizing the Claude Chrome Extension to help provide active context in this view.

Table of Contents

Gritty OS Recruit Hub: Admin View **1**
Scope of Remediations for Sprint 001 2
- Remediations Outline 2
- Key Documentation 2
- Overview of Remediations 2
  - Naming Page Display Categories Used by the Operator to be Translated into Technical Specs 2
- Tab Remediation 4
  - Beginning State 4
  - Desired End State 4
- Toggle Remediation: Users Tab 5
  - Beginning State 5
  - Desired End State 6
  - Acknowledgement of Justifiably Missing Data 7
- POR Tooltip Remediation: Institutions 8
  - Current State 8
- Additional Remediations: Page Row Navigation Limiters 9

Scope of Remediations for Sprint 001

This sprint session will be considered Sprint 001. Below is the outline of necessary remediations for this development sprint.

Remediations Outline

1. Tab Remediation
2. Toggle Remediation: Users Toggle
3. Point of Reference Tooltip Remediation: Institutions Toggle
4. Additional Remediations: All Toggle Page View Formatting

Key Documentation

File Description	File Location	Notes
This Dev Sprint Spec Outline	[TBD]	
ERD State (current Supabase table state my not match current ERD state)	"C:\Users\chris\dev\gritty-recruit-hub-rebuild\docs\superpowers\specs\erd-current-state.md"	Provides map of supabase data tables and connections, although visual may be stale
Asset Infrastructure Plan	"C:\Users\chris\.knowing\wiki\Asset-Infrastructure-Strategic-Plan.md"	Provides an Asset Taxonomy for Claude Code in Part 1, which indexes the platform capabilities, integrations, skills, rules and protocols, memory, configs, and records that can be invoked to assist with development in this sprint. “Agents” can be ignored as our sprint mode uses a different agent invocation approach.

Overview of Remediations

Naming Page Display Categories Used by the Operator to be Translated into Technical Specs

Tabs → Top-level aggregate categories of data tables from Supabase (Red)
|
|
Toggles → Subcategories of Supbase data tables set within Tabs (Green)
|
|
Field Headers → Names translated from Supabase fields into Admin data field displays (Blue)

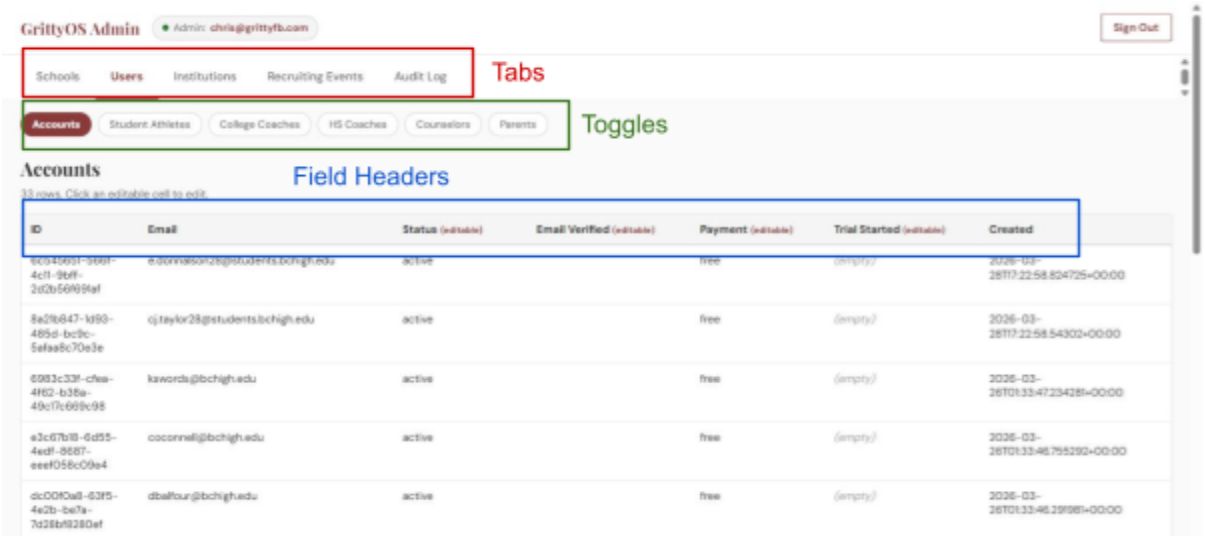

Tab Remediation

Beginning State

Currently, the Admin View has five tabs in the following order (numbered orders read left-to-right across the screen):

1. Schools
2. Users
3. Institutions
4. Recruiting Events
5. Audit Log

Since the Schools Tab and the Institutions Tab are representative of the same data, I would like to eliminate the Schools tab from the Admin View, while retaining one of its page view formatting attributes, which should be applied to the other four Tabs – specifically, its row limiters of 25, 50, and 100 rows.

Beginning State	
Tab Number	**Tab Name**
~~1~~	~~Schools~~
2	Users
3	Institutions
4	Recruiting Events
5	Audit Log

Desired End State

End State	
Tab Number	**Tab Name**
1	Users
2	Institutions
3	Recruiting Events
4	Audit Log

Toggle Remediation: Users Tab

Beginning State

Currently, six user types are allotted distinct Toggles within the Users Tab.

1. Accounts → A data table that aggregates all of the five user type categories, even though there is no data pulled for two of these categories.
2. Student Athletes → Student athlete data tables
3. College Coaches → College coach data tables
4. HS Coaches → High School coach data tables
5. Counselors → High School guidance counselor data tables
6. Parents → Parent data tables (parent emails are assigned to student athlete data tables)

There are two types of remediations needed in five of these Toggles:

- User name convention translation – Assigning “First Name” / “Last Name” field headers when names are only listed as “Full Name” in the Supabase tables
- Failure to assign needed field headers and data, which has occurred with the following data types:
    - User Type field → Accounts Toggle (differentiates Accounts by type of user)
    - Email field → Parents Toggle (derived from Student Athlete data)
    - Associated Student Athlete → Parents Toggle (derived from Student Athlete data)

Beginning State: Users Tab						
Toggle	**Accounts**	**Student Athletes**	**College Coaches**	**HS Coaches**	**Counselors**	**Parents**
Header Field 1	ID	ID	***No coaches found***	ID	ID	***No parents found***
Header Field 2	Email	Position		First Name	First Name	
Header Field 3	Status	Recruiting Status		Last Name	Last Name	
Header Field 4	Email Verified	Grad Year		Phone	Phone	
Header Field 5	Payment	Height		Head Coach	Email	

Header Field 6	Trial Started	Weight		School	School	
Header Field 7	Created	40yd		Created	Created	
Header Field 8		AGI				
Header Field 9		Captain				
Header Field 10		All-Conf				
Header Field 11		All-State				
Header Field 12		Starter				
Header Field 13		GPA				
Header Field 14		SAT				

Desired End State

End State: Users Tab						
Toggle	**Accounts**	**Student Athletes**	**College Coaches**	**HS Coaches**	**Counselors**	**Parents**
Header Field 1	ID	ID	***No coaches found***	ID	ID	***Email***
Header Field 2	Created	***Full Name***		***Full Name***	***Full Name***	***Associated Student Athlete***
Header Field 3	***User Type***	Position		Phone	Phone	
Header Field 4	***Full Name***	Recruiting Status		Head Coach	Head Coach	
Header Field 5	Email	Grad Year		School	School	
Header Field 6	Password	Height		Created	Created	
Header Field 7	Email Verified	Weight				
Header Field 8	Status	40yd				
Header Field 9		AGI				
Header Field 10		Captain				
Header Field 11		All-Conf				
Header Field 12		All-State				
Header Field 13		Starter				

Header Field 14		GPA				
Header Field 15		SAT				

Acknowledgement of Justifiably Missing Data

The “College Coaches” user type Toggle has no data because we have finished the scraping, staging, and migration process of that data into the respective data table within Supabase. This is an ongoing project that will be completed in future sprint sessions. This is noted in the yellow-shaded box in Field Header 1 of the “College Coaches” column in the Beginning State and Desired End State tables above. This means that the College Coaches user type Toggle produces no data and has no field headers, just a message saying “No college coaches found.”

POR Tooltip Remediation: Institutions

Currently, the tooltip design for the Institutions tab should be picking up “Athletes Interested” but it is not. For example, both Student Athlete Ayden Watkins and Jesse Bargar have drawn interest and completed Short List steps for Bates College, yet their profiles are not linked to the tooltip view.

We need to determine the technical cause for this lapse and design a remediation to solve and display the appropriate data for this tooltip systematically. In other words, the solution cannot just be resolving the problem by linking only Jesse and Ayden’s data to Bates. The solution must be technically sound and systematically applied to all schools and all student-athletes.

Current State

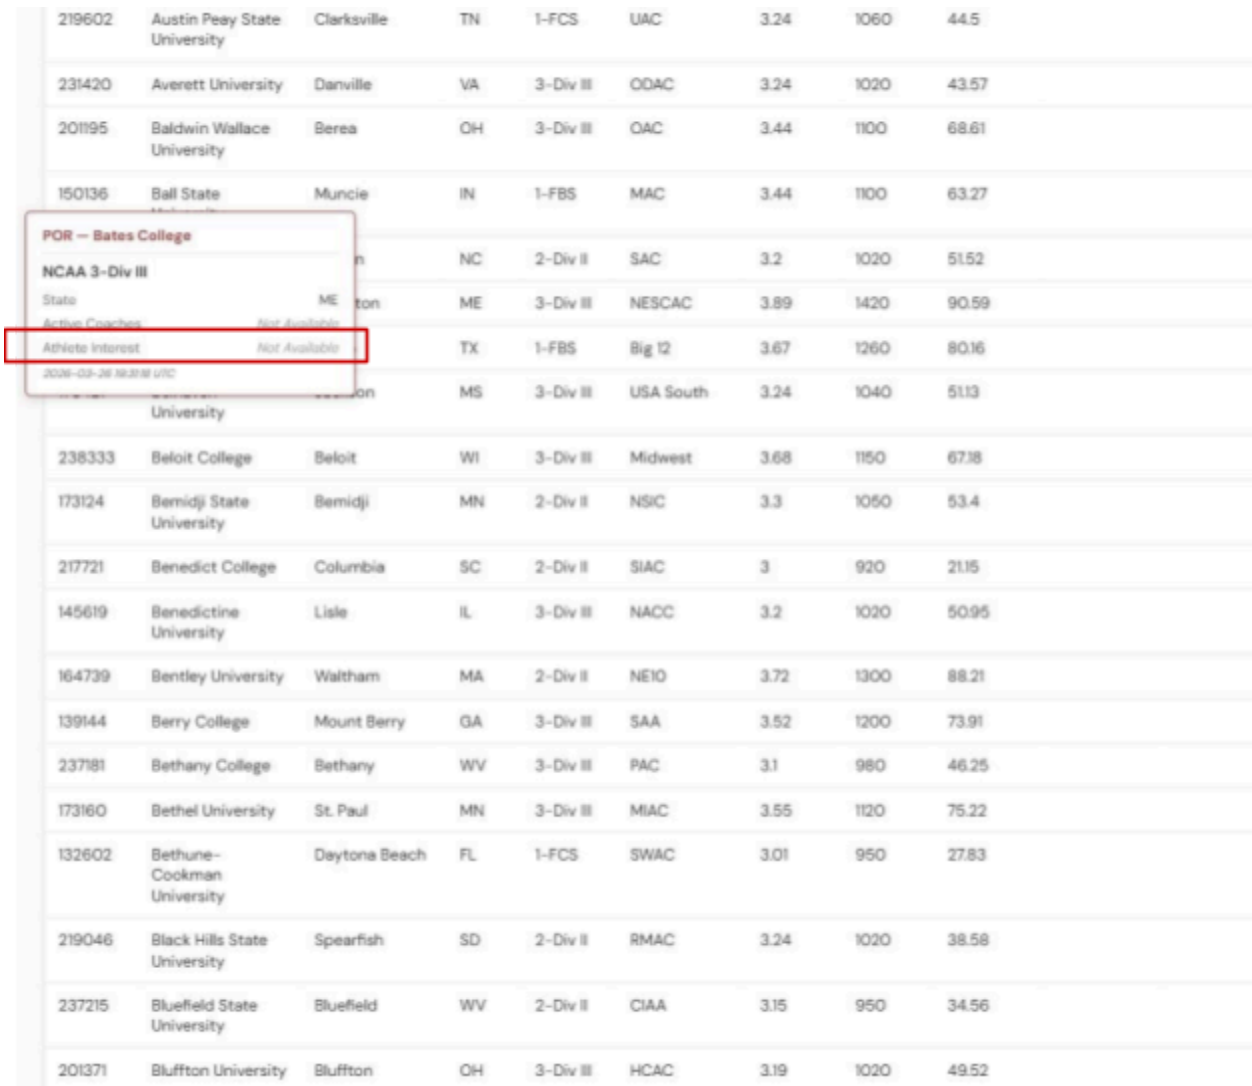

219602	Austin Peay State University	Clarksville	TN	1-FCS	UAC	3.24	1060	44.5
231420	Averett University	Danville	VA	3-Div III	ODAC	3.24	1020	43.57
201195	Baldwin Wallace University	Berea	OH	3-Div III	OAC	3.44	1100	68.61
150136	Ball State	Muncie	IN	1-FBS	MAC	3.44	1100	63.27
			NC	2-Div II	SAC	3.2	1020	51.52
			ME	3-Div III	NESCAC	3.89	1420	90.59
			TX	1-FBS	Big 12	3.67	1260	80.16
	University		MS	3-Div III	USA South	3.24	1040	51.13
238333	Beloit College	Beloit	WI	3-Div III	Midwest	3.68	1150	67.18
173124	Bemidji State University	Bemidji	MN	2-Div II	NSIC	3.3	1050	53.4
217721	Benedict College	Columbia	SC	2-Div II	SIAC	3	920	21.15
145619	Benedictine University	Lisle	IL	3-Div III	NACC	3.2	1020	50.95
164739	Bentley University	Waltham	MA	2-Div II	NE10	3.72	1300	88.21
139144	Berry College	Mount Berry	GA	3-Div III	SAA	3.52	1200	73.91
237181	Bethany College	Bethany	WV	3-Div III	PAC	3.1	980	46.25
173160	Bethel University	St. Paul	MN	3-Div III	MIAC	3.55	1120	75.22
132602	Bethune-Cookman University	Daytona Beach	FL	1-FCS	SWAC	3.01	950	27.83
219046	Black Hills State University	Spearfish	SD	2-Div II	RMAC	3.24	1020	38.58
237215	Bluefield State University	Bluefield	WV	2-Div II	CIAA	3.15	950	34.56
201371	Bluffton University	Bluffton	OH	3-Div III	HCAC	3.19	1020	49.52

Additional Remediations: Page Row Navigation Limiters

All Admin Tab views should be formatted so that:

- Row limiters provide the option to view 25, 50, or 100 rows of data at any one time, with 25 rows of data being the default view. (Red Box)
- Field headers should be sortable and should remain at the top of the page as the Admin user scrolls down the table list, so that field categories remain visible and clear during the scroll. (Green box)