

# A Comparative Analysis of Classical Machine Learning Methods and Variational Quantum Methods for Breast Tumor Classification

Charisis Nikolaos

National and Kapodistrian University of Athens, Department of Informatics and Telecommunications, Data Science and Information Technologies

February 27, 2026

# Outline

- 1 Classical Machine Learning Introduction
- 2 Quantum Computing and Quantum Machine Learning Basics
  - The Qubit
  - Qubit Manipulation
  - Quantum Gates
  - Input Encoding Techniques
  - Variational Quantum Classifiers
- 3 Results from Classical Machine Learning methods
- 4 Results from Variational Quantum methods
  - One qubit results
  - Two qubit results
  - Three qubit results
  - Four qubit results
  - Five qubit results
- 5 Comparison & Conclusion
  - Comparison
  - Conclusion

Our goals:

- Tumor Classification using Classical ML methods

- Tumor Classification using Variational Quantum methods

- Comparison of the results

# Classical Machine Learning Basics

**Two** types of ML:

- Supervised (Labeled Datasets)

- Unsupervised (Hidden patterns, no labels)

**Unsupervised** ML:

- Clustering

- Anomaly Detection

- Dimensionality Reduction

**Supervised** ML:

- Regression

- Classification

We will focus on **Classification**



# Binary Classification with Classical ML Methods

**Binary** Classification: Choose between **two categories**

**Classical** ML methods:

- Logistic Regression**

- Gaussian Naive Bayes (GNB)**

- Linear Discriminant Analysis (LDA)**

- Support Vector Machines (SVM)**

- Random Forests**

- Light Gradient Boosting Machine (LightGBM)**

# Quantum Computing and Quantum Machine Learning Basics

Key points:

- The Qubit

- Qubit Manipulation and Quantum Entanglement

- Quantum Gates

- Quantum Circuits

- Data Encoding

- Variational Quantum Classifiers

# Quantum Mechanics and Quantum Computers

## Quantum Theory or Quantum Mechanics:

Mathematical **Framework** for the results of measurement of **quantum systems**

## Quantum Systems:

**Microscopic** entities where **Newtonian** mechanics **fail** (e.g hydrogen atom)

## Quantum Computer:

Computational device that **exploits quantum mechanical effects** (superposition, entanglement) to carry out **operations on information**

Uses **Qubits** instead of bits

**Quantum characteristics** of particles can be **utilized**

**Quantum processes** can **manipulate** this information

# The Qubit

Fundamental building blocks of quantum computers

The quantum mechanical analogue of a classical bit

Created by manipulating and measuring systems that exhibit quantum mechanical behavior

**Superconducting qubits:** **superconducting** materials at **cryogenic** temperatures, offer **rapid** gate speeds and **precise** control

**Trapped ion qubits:** individual **ions confined** by electromagnetic fields, **long coherence** times and **high-fidelity measurements**, slower than **superconducting**

**Quantum dots:** tiny **semiconductors** capture a **single electron**, potential for **scalability**

**Photons:** particles of **light**, encode quantum information and transmit via **optical fibers**, applications in quantum **communication** and **cryptography**

# The Qubit, more formally

A two-state quantum system defined by the **basis vectors**  $|0\rangle$  and  $|1\rangle$

A qubit may exist in a **superposition**, a mathematical **linear combination** of both basis states,  $|\psi\rangle = \alpha |0\rangle + \beta |1\rangle$

$|0\rangle = \begin{pmatrix} 1 \\ 0 \end{pmatrix}$ ,  $|1\rangle = \begin{pmatrix} 0 \\ 1 \end{pmatrix}$ ,  $\alpha, \beta$  probability amplitudes with complex values

Hermitian conjugate:  $\langle\psi| = (\alpha^* \quad \beta^*)$

$|\cdot\rangle$  is called "**ket**",  $\langle\cdot|$  is called "**bra**"

Upon **measurement**, Qubit **collapses** with  $P(|0\rangle) = |\alpha|^2$  and  $P(|1\rangle) = |\beta|^2$

Thus, it must hold  $|\alpha|^2 + |\beta|^2 = 1$  or  $\|\psi\| = \sqrt{\langle\psi|\psi\rangle} = 1$

If not, then we do  $|\tilde{\psi}\rangle = \frac{|\psi\rangle}{\|\psi\|}$


A qubit is defined as a **vector** residing in a **two-dimensional complex Hilbert** space  $\mathbb{C}^2$

# Bloch sphere

$$|\psi\rangle = \cos\left(\frac{\theta}{2}\right) |0\rangle + e^{i\phi} \sin\left(\frac{\theta}{2}\right) |1\rangle$$

$|\psi\rangle = |0\rangle$  occurs at  $\theta = 0$

$|\psi\rangle = |1\rangle$  occurs at  $\theta = \pi$



**Figure:** A qubit can be mapped to a point on the surface of this unit-radius sphere ( $r = 1$ ), uniquely determined by the angular coordinates  $\theta$  and  $\phi$

We transition qubits through **different states** with the use of **operators**

$$\hat{A}|\psi\rangle = |\phi\rangle, \hat{A}\langle\psi| = \langle\phi|$$

Vital set of operators called **Pauli** operators:

$$\hat{I}|\psi\rangle = |\psi\rangle$$

$$\hat{X}|0\rangle = |1\rangle, \hat{X}|1\rangle = |0\rangle \text{ (NOT operator)}$$

$$\hat{Y}|0\rangle = -i|1\rangle, \hat{Y}|1\rangle = i|0\rangle$$

$$\hat{Z}|0\rangle = |0\rangle, \hat{Z}|1\rangle = -|1\rangle$$

We can also express an operator as an outer product

$$(|\psi\rangle\langle\phi|)|\chi\rangle = |\psi\rangle\langle\phi|\chi\rangle = \langle\phi|\chi\rangle|\psi\rangle$$

# Operators as Matrices

Another method for representing an operator is through matrix notation

For an  $n$ -**dimensional** vector space  $\rightarrow n \times n$  **matrices**. We focus on  $\mathbb{C}^2$ , so  $2 \times 2$  **matrices**

$$\hat{A} = \begin{pmatrix} \langle 0 | \hat{A} | 0 \rangle & \langle 0 | \hat{A} | 1 \rangle \\ \langle 1 | \hat{A} | 0 \rangle & \langle 1 | \hat{A} | 1 \rangle \end{pmatrix} \quad (1)$$



# Pauli Operators as Matrices

Following Equation 1 we get that:

$$\hat{I} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad (2)$$

$$\hat{X} = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \quad (3)$$

$$\hat{Y} = \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix} \quad (4)$$

$$\hat{Z} = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix} \quad (5)$$

# Hermitian & Unitary Operators

A given operator  $\hat{A}$  is classified as **Hermitian** iff:

$$\hat{A} = \hat{A}^\dagger \quad (6)$$

$\hat{A}^\dagger$  denotes the Hermitian adjoint  $\rightarrow$  transposing the matrix and taking the complex conjugate of every entry

Hermitians possess **real eigenvalues** and their **main diagonal** consists solely of **real** numbers.

Therefore they represent **physical observables**

A given operator  $\hat{U}$  is classified as **Unitary** iff:

$$\hat{U}\hat{U}^\dagger = \hat{U}^\dagger\hat{U} = \hat{I} \quad (7)$$

They characterize the **temporal evolution** of a quantum state

The **Pauli** operators are **both** the Hermitian and Unitary

To explore more sophisticated and advantageous quantum algorithms, we need systems of **multiple interacting qubits**

Construction of a **composite** Hilbert space

The mathematical operation used is the Kronecker or tensor product ( $\otimes$ )

If  $H_1$  and  $H_2$  two Hilbert spaces with dimensions  $N_1$  and  $N_2$ , then we can form a composite Hilbert space  $H$  with dimension  $N_1 N_2$ , defined as:

$$H = H_1 \otimes H_2 \quad (8)$$

# States derived from tensor product

The tensor product can be employed to construct a state residing within the composite space  $H$ :

$$|\psi\rangle = |\phi\rangle \otimes |\chi\rangle \quad (9)$$

For two-dimensional subspaces, the following procedure is employed to calculate the product:

$$|\psi\rangle = |\phi\rangle \otimes |\chi\rangle = \begin{pmatrix} a \\ b \end{pmatrix} \otimes \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} ac \\ ad \\ bc \\ bd \end{pmatrix} \quad (10)$$

Usually, the  $\otimes$  symbol is omitted; for example,  $|\phi\rangle \otimes |\chi\rangle$  may be written as  $|\phi\rangle |\chi\rangle$ , or even more compactly as  $|\phi\chi\rangle$ .

# Basis vectors and operators of a composite system

If  $|u_i\rangle$  and  $|v_i\rangle$  are the basis vectors of  $H_1$  and  $H_2$ , the resulting basis for the joint space  $H$  is:

$$|w_i\rangle = |u_i\rangle \otimes |v_i\rangle \quad (11)$$

We can define operators that act upon our composite system. If  $|\phi\rangle \in H_1$  and  $|\chi\rangle \in H_2$ , and  $A$  acting on  $|\phi\rangle$  and  $B$  acting on  $|\chi\rangle$ . A new operator, which acts on a state  $|\psi\rangle \in H$  is:

$$(A \otimes B) |\psi\rangle = (A \otimes B)(|\phi\rangle \otimes |\chi\rangle) = (A|\phi\rangle) \otimes (B|\chi\rangle) \quad (12)$$

The matrix representation is computed as:

$$A \otimes B = \begin{pmatrix} \alpha_{11}B & \alpha_{12}B \\ \alpha_{21}B & \alpha_{22}B \end{pmatrix} = \begin{pmatrix} \alpha_{11}\beta_{11} & \alpha_{11}\beta_{12} & \alpha_{12}\beta_{11} & \alpha_{12}\beta_{12} \\ \alpha_{11}\beta_{21} & \alpha_{11}\beta_{22} & \alpha_{12}\beta_{21} & \alpha_{12}\beta_{22} \\ \alpha_{21}\beta_{11} & \alpha_{21}\beta_{12} & \alpha_{22}\beta_{11} & \alpha_{22}\beta_{12} \\ \alpha_{21}\beta_{21} & \alpha_{21}\beta_{22} & \alpha_{22}\beta_{21} & \alpha_{22}\beta_{22} \end{pmatrix} \quad (13)$$

# Quantum Entanglement

A composite system **cannot always** be expressed as a tensor product of individual states, only if the qubits are prepared separately and kept in isolation. If the qubits are permitted to **interact**, they form a single integrated closed system and are described as **entangled**:

**Quantum Entanglement** is a fundamental phenomenon and a vital resource for quantum computation

**Particles** sharing a common origin remain fundamentally **linked** regardless of the distance between them

Any measurement or interaction of one particle instantaneously **influences** the state of its entangled **partners**

Information can be transmitted **faster** than the speed of **light**

# Quantum Gates

**Transformations** applied to qubit states are referred to as quantum gates, and a sequence of such operations forms a **quantum circuit**:

**Quantum gates** represent unitary **operations** performed on **qubits**

The terms "gate" and "unitary operator" are used **interchangeably**

A gate processing  $n$  **inputs** and outputs is represented by a  $2^n \times 2^n$  **matrix**

A **single-qubit** gate is depicted as a  $2 \times 2$  **matrix**

A quantum gate acting on **two qubits** requires a  $4 \times 4$  **matrix** representation

The most fundamental single-qubit operation is the quantum *NOT* gate, which is equivalent to the Pauli  $X$  operator. This gate effectively swaps the basis states. Represented as a matrix in the computational basis, we have:

$$\hat{U}_{NOT} = \hat{X} = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \quad (14)$$

# Hadamard and Rotation gates

The Hadamard gate, which transforms the standard basis states into a balanced superposition

$$\hat{H} = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix} \quad (15)$$

Rotations of a qubit along the x, y, and z axes of the Bloch sphere:

$$\hat{R}_x(\theta) = e^{-i\theta\frac{X}{2}} = \begin{pmatrix} \cos(\frac{\theta}{2}) & -i\sin(\frac{\theta}{2}) \\ -i\sin(\frac{\theta}{2}) & \cos(\frac{\theta}{2}) \end{pmatrix} \quad (16)$$

$$\hat{R}_y(\theta) = e^{-i\theta\frac{Y}{2}} = \begin{pmatrix} \cos(\frac{\theta}{2}) & -\sin(\frac{\theta}{2}) \\ \sin(\frac{\theta}{2}) & \cos(\frac{\theta}{2}) \end{pmatrix} \quad (17)$$

$$\hat{R}_z(\theta) = e^{-i\theta\frac{Z}{2}} = \begin{pmatrix} e^{-i\frac{\theta}{2}} & 0 \\ 0 & e^{-i\frac{\theta}{2}} \end{pmatrix} \quad (18)$$

Any arbitrary single-qubit gate can be represented as a specific sequence of rotations around the z and y axes (Z-Y decomposition)



## The *controlled-NOT* (*CNOT*) gate

Two-qubit gate where the target qubit remains unchanged if the control qubit is in the state  $|0\rangle$ ; however, if the control qubit is in the state  $|1\rangle$ , the target qubit undergoes a bit-flip, as if a *NOT* gate had been applied

$$CNOT|00\rangle = |00\rangle$$

$$CNOT|01\rangle = |01\rangle$$

$$CNOT|10\rangle = |11\rangle$$

$$CNOT|11\rangle = |10\rangle$$

Its matrix representation is :

$$CNOT = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix} \quad (19)$$

# Quantum Circuits

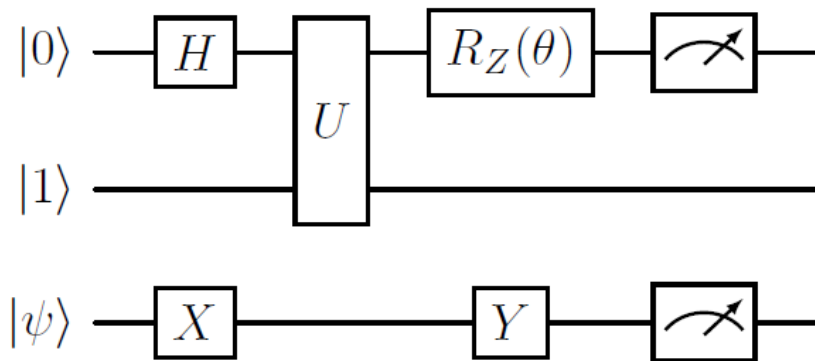


Figure: An example of a quantum circuit diagram

# Input Encoding Techniques

Various techniques to **embed classical data** into an  $n$ -qubit quantum system:

- Basis** encoding

- Time-evolution** encoding

- Hamiltonian** encoding

- Amplitude** encoding

We will be using **Amplitude** encoding with **Amplitude-Efficient State Preparation** to encode  $2^n$  features using  $n$  qubits

# Variational Quantum Classifiers

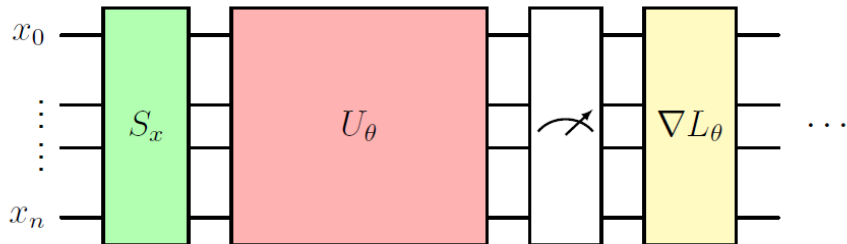


Figure: General structure of a variational quantum classifier

# Breast Cancer

**Most common** malignancy among women worldwide

**36%** of all oncological cases

An estimated **2.089 million** women diagnosed in 2018

**Lifestyle** related factors:

**Unhealthy dietary** habits

**Nicotine** use

Chronic **stress**

**Low** levels of **physical** activity

**Other** risk factors:

Advanced **age**

Family **history** of breast cancer

Infection with **oncogenic** viruses


**Early** onset of **menstruation** or **late menopause**

**First** pregnancy at an **advanced** age or the **absence** of pregnancy

Use of **hormone replacement therapy**

# Fine Needle Aspiration

We will be working with samples derived from Fine Needle Aspirates

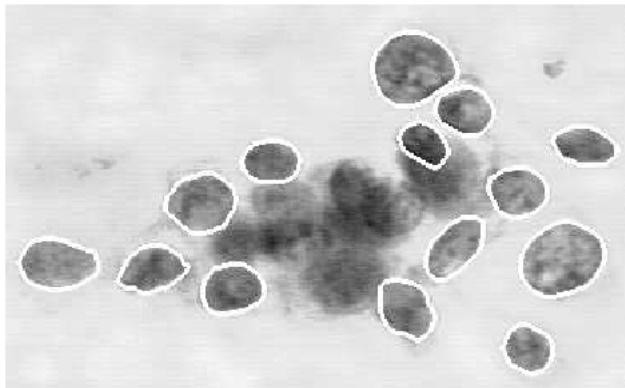

**Figure:** A magnified image of a malignant breast FNA with the visible cell nuclei having been outlined with the help of a curve fitting program.

# Evaluation Metrics

**Six** models from before with **nine** key **metrics**:

$$\text{(Balanced) Accuracy } \left( \frac{1}{2} \left( \frac{TP}{TP+FN} + \frac{TN}{TN+FP} \right) \right)$$

$$\text{Precision } \left( \frac{TP}{TP+FP} \right)$$

$$\text{Recall } \left( \frac{TP}{TP+FN} \right)$$

$$\text{F1-Score } \left( 2 \cdot \frac{\text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}} = \frac{2TP}{2TP+FP+FN} \right)$$

$$\text{MCC } \left( \frac{TP \cdot TN - FP \cdot FN}{\sqrt{(TP+FP)(TP+FN)(TN+FP)(TN+FN)}} \right)$$

$$\text{ROC AUC } \left( \int_0^1 \text{TPR}(\text{FPR}) d(\text{FPR}) \right)$$

$$\text{PR AUC } \left( \int_0^1 \text{Precision}(\text{Recall}) d(\text{Recall}) \right)$$

$$\text{Specificity } \left( \frac{TN}{TN+FP} \right)$$

$$\text{NPV } \left( \frac{TN}{TN+FN} \right)$$

**Exploratory Data Analysis** (feature distribution, class imbalance)

Finding the **best** model (80-20 split, rncv, data cleaning)

**Fine tune** the winner (bootstrapping, 95% confidence intervals)



# Exploratory Data Analysis

**30** features with **569** entries


Class **imbalance**: **357** instances of **benign**, **212** instances of **malignant** (62.74% - 37.25%)

Majority of features exist on **different** scales, will **scale inside** rnCV

**15** out of 30 features heavily **correlated** with **prognosis**

**No correlation** among features that we did not expect

# Logistic Regression as the best model

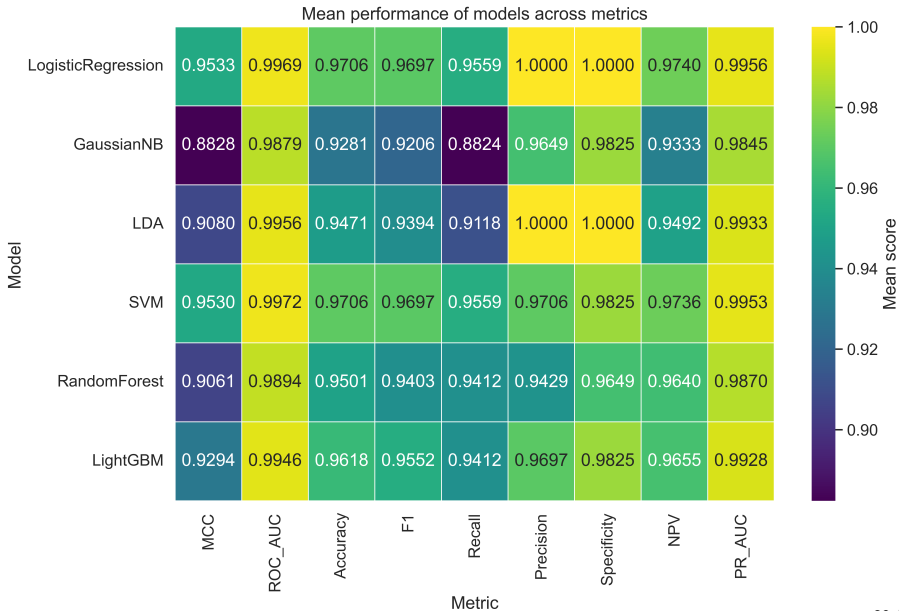

# Finetuning and bootstrapping

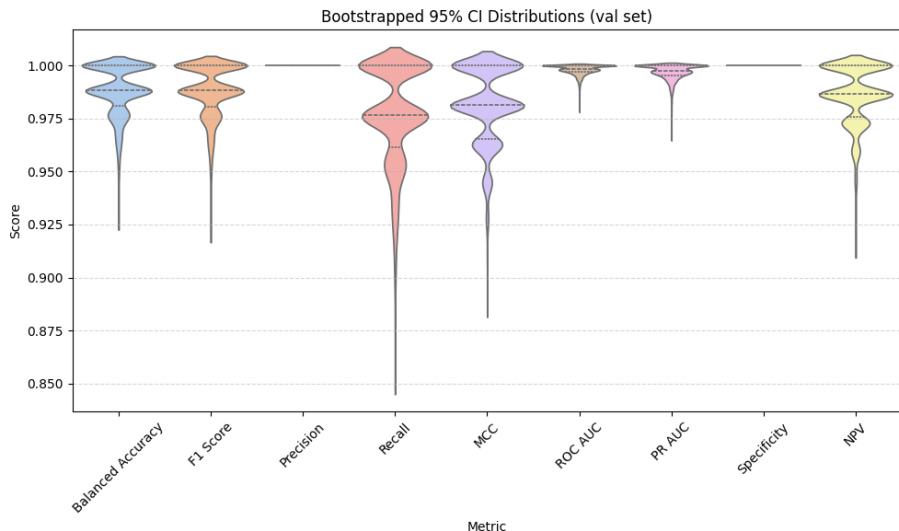


Figure: Violin plot of the confidence intervals

# Quantum Experimental Framework

**1, 2, 3, 4** and **5** qubits with **2, 4, 8, 16** and **30** features through **PCA**  
**60-20-20** train-validation-test split

**-1** for **benign** and **1** for **malignant**

Mean Squared Error (**MSE**) for **loss** function, **Nesterov** Momentum for **optimizer**

Focus on **4** metrics: Accuracy, Recall, Precision, F1-score

Circuit consisting of **3** parts: Data **encoding**, **Variational** and **Measurement**


**Same** architecture for Variational: **Layers** consisting solely of **Rotations** and **CNOTs**

**Two** variants of VQCs: **Unbiased** vs **Biased**

**Set** number of training **epochs** for each **qubit**, we keep track of **time**  
**Average** over **10** runs, keep **track** of the **best** performers per variation

# One qubit results

Performance & Efficiency Trends: Biased vs Unbiased for 1 Qubits (10 Runs)

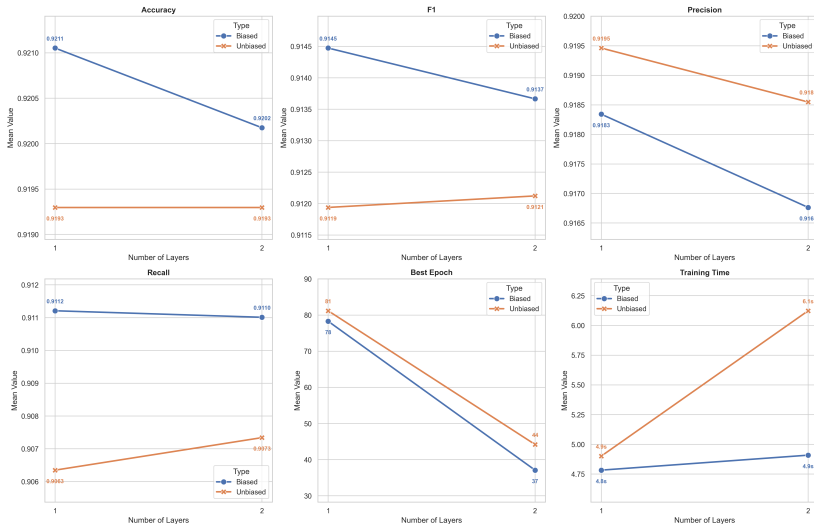

**Figure:** Performance and Efficiency Trends of Biased and Unbiased VQC for 1-Qubit

# One qubit results, circuit of best unbiased VQC

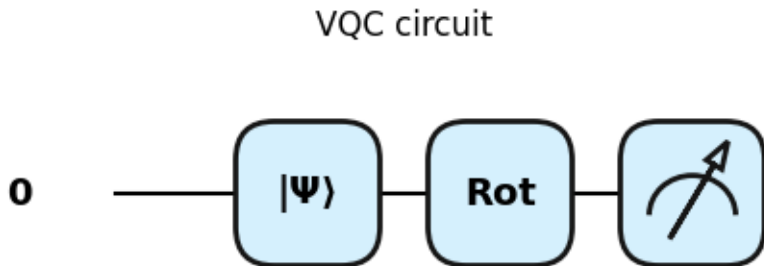


Figure: Circuit of the best unbiased 1-qubit VQC

# One qubit results, loss evolution of best unbiased VQC


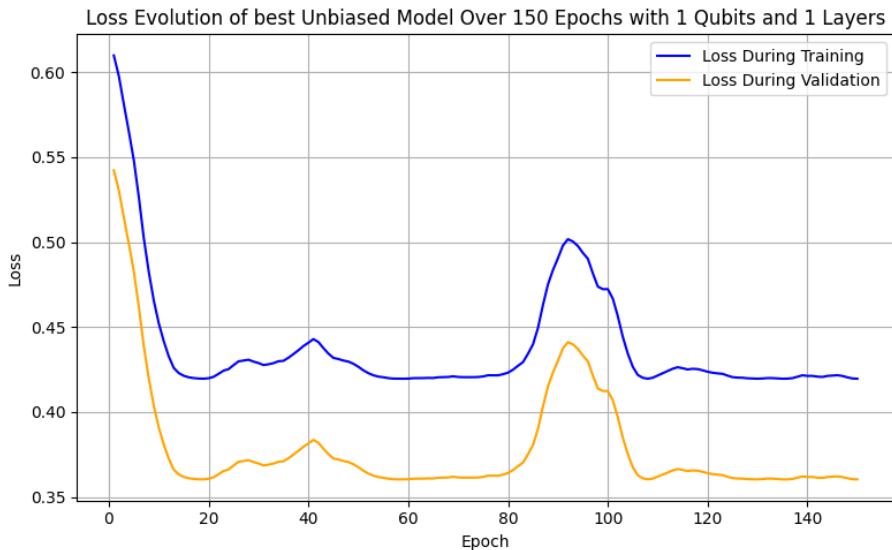


Figure: Evolution of the loss function of the best unbiased 1-qubit VQC

# One qubit results, performance evolution of best unbiased VQC

Training vs Validation Metrics of best Unbiased model Over 150 Epochs for 1 Qubits and 1 Layers

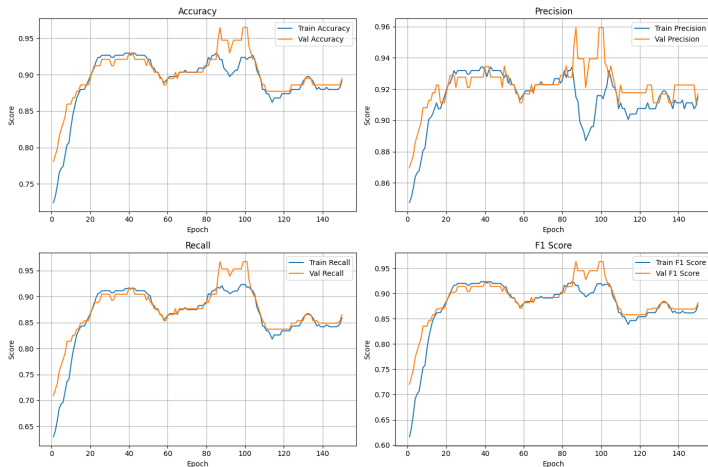

**Figure:** Validation and Training curves for the 4 key metrics of the best unbiased 1-qubit VQC



# One qubit results, circuit of best biased VQC

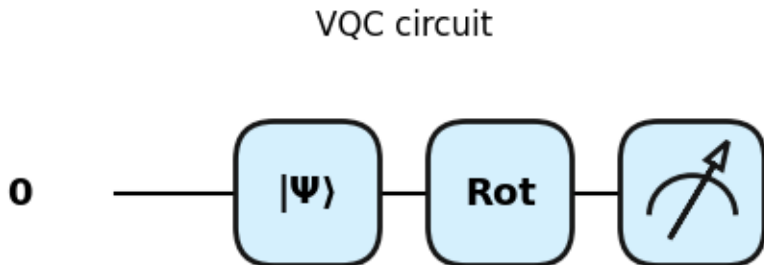


Figure: Circuit of the best biased 1-qubit VQC

# One qubit results, loss evolution of best biased VQC


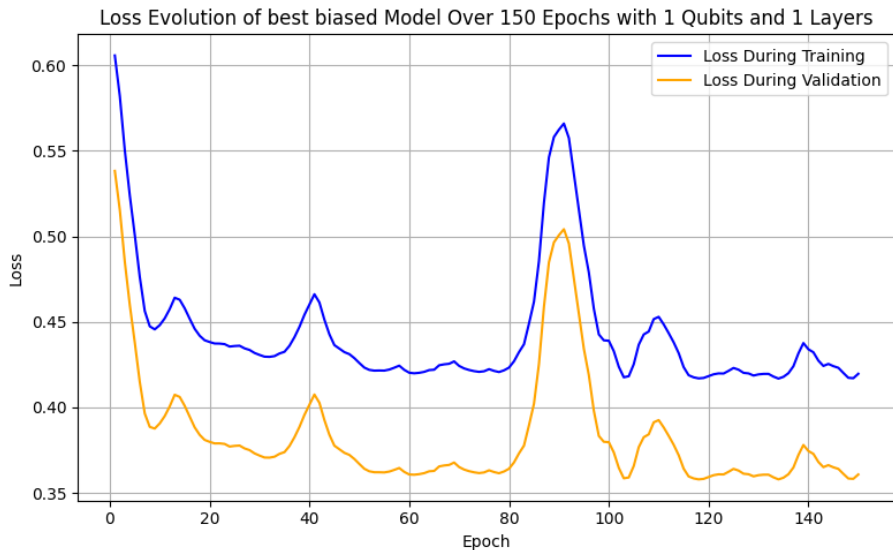


Figure: Evolution of the loss function of the best biased 1-qubit VQC

# One qubit results, performance evolution of best biased VQC

Training vs Validation Metrics of best Biased model Over 150 Epochs for 1 Qubits and 1 Layers

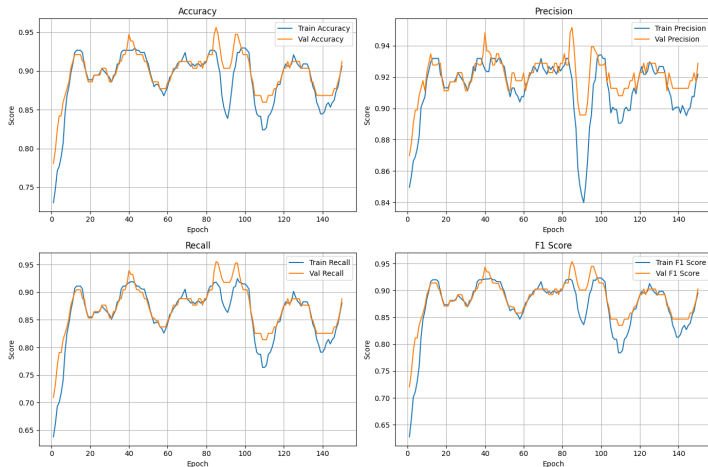

**Figure:** Validation and Training curves for the 4 key metrics of the best biased 1-qubit VQC

# Two qubit results

Performance & Efficiency Trends: Biased vs Unbiased for 2 Qubits (10 Runs)

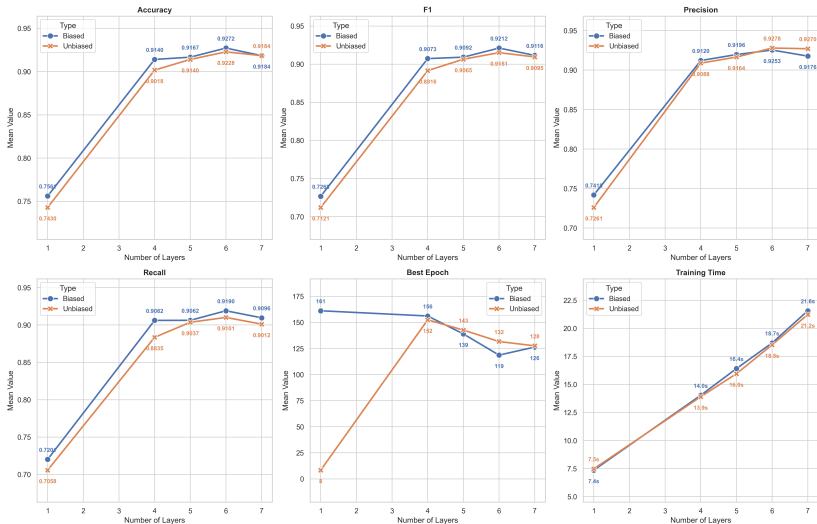


Figure: Performance and Efficiency Trends of Biased and Unbiased Classifier for 2 Qubits

# Two qubit results, circuit of best unbiased VQC




Figure: Circuit of the best 2-qubit unbiased classifier

# Two qubit results, loss evolution of best unbiased VQC


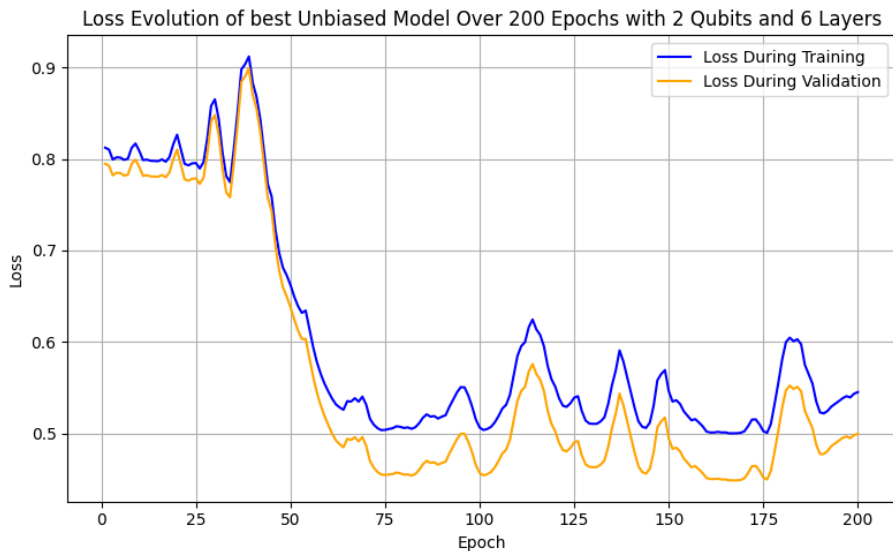


Figure: Evolution of the loss function of the best 2-qubit unbiased classifier

# Two qubit results, performance evolution of best unbiased VQC

Training vs Validation Metrics of best Unbiased model Over 200 Epochs for 2 Qubits and 6 Layers

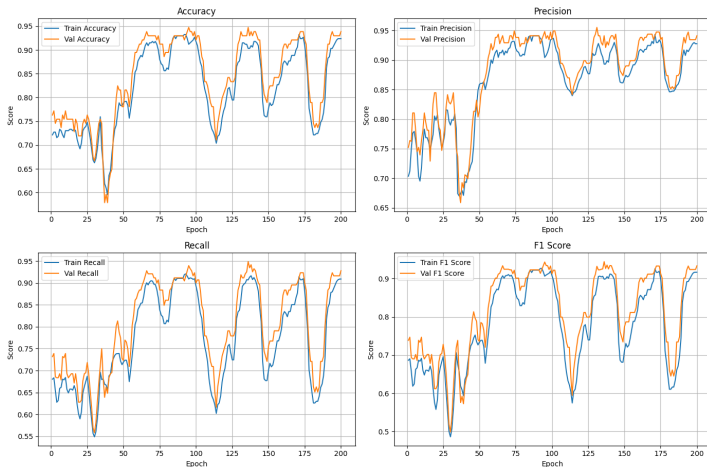

**Figure:** Validation and Training curves for the 4 key metrics of the best 2-qubit unbiased classifier

# Two qubit results, circuit of best biased VQC




Figure: Circuit of the best 2-qubit biased classifier



# Two qubit results, loss evolution of best biased VQC


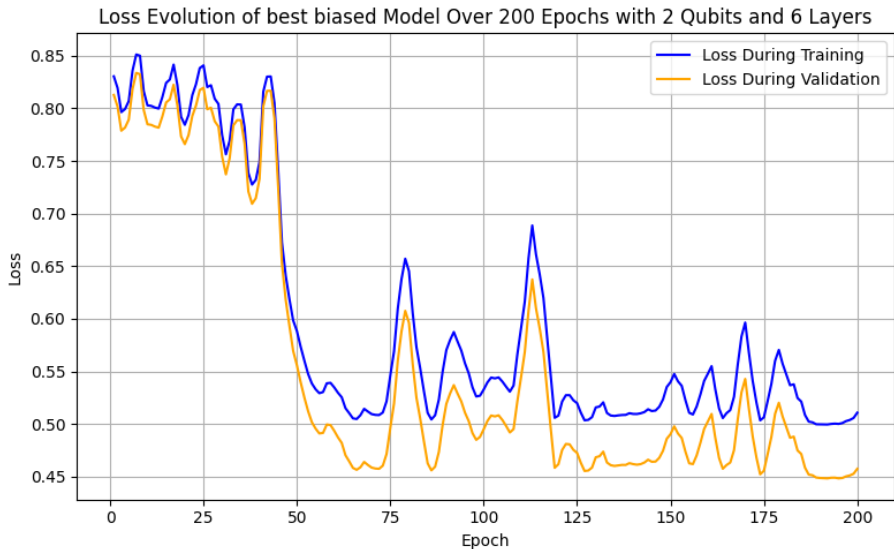


Figure: Evolution of the loss function of the best 2-qubit biased classifier

# Two qubit results, performance evolution of best biased VQC

Training vs Validation Metrics of best Biased model Over 200 Epochs for 2 Qubits and 6 Layers

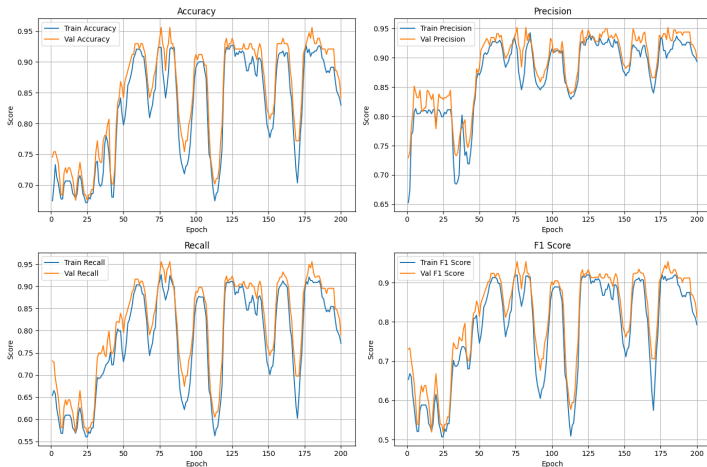

**Figure:** Validation and Training curves for the 4 key metrics of the best 2-qubit biased classifier

# Three qubit results

Performance & Efficiency Trends: Biased vs Unbiased for 3 Qubits (10 Runs)

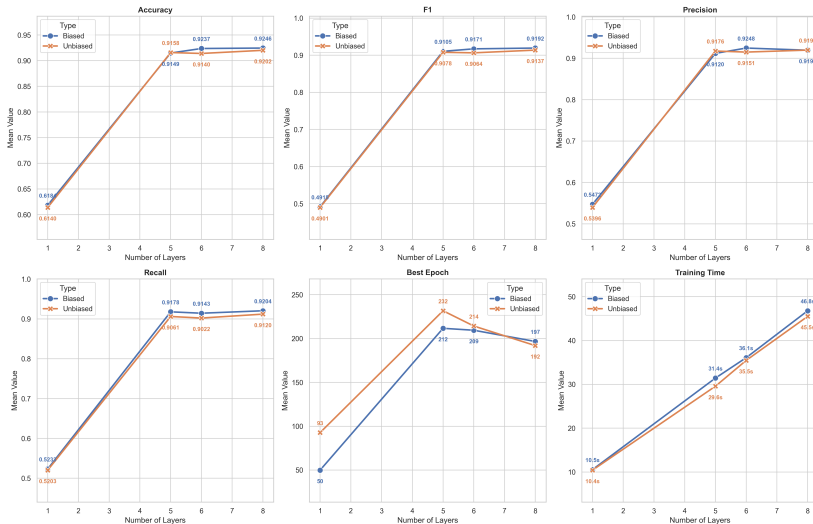


Figure: Performance and Efficiency Trends of Biased and Unbiased Classifier for 3 Qubits

# Three qubit results, circuit of best unbiased VQC




Figure: Circuit of the best 3-qubit unbiased classifier

# Three qubit results, loss evolution of best unbiased VQC


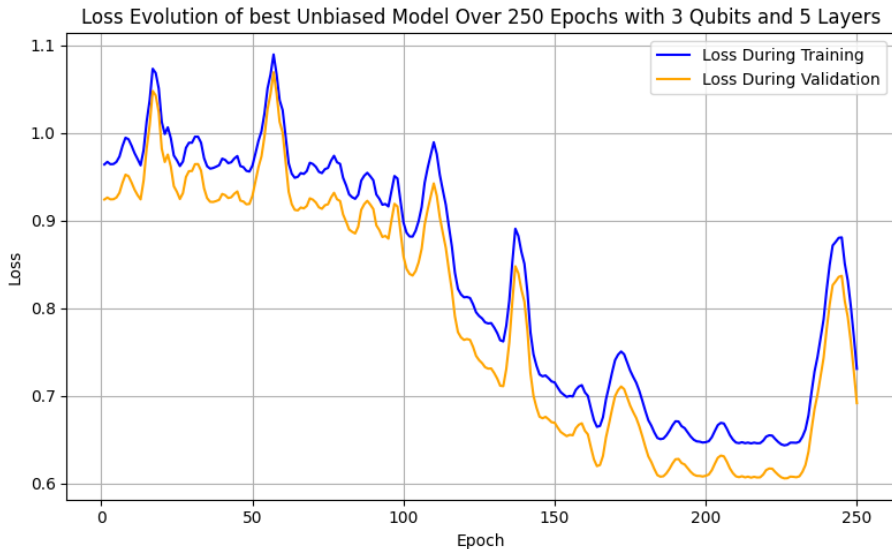


Figure: Evolution of the loss function of the best 3-qubit unbiased classifier

# Three qubit results, performance evolution of best unbiased VQC

Training vs Validation Metrics of best Unbiased model Over 250 Epochs for 3 Qubits and 5 Layers

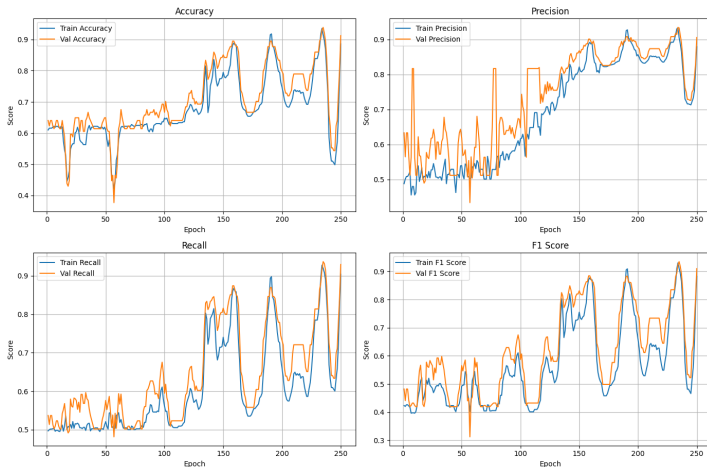

**Figure:** Validation and Training curves for the 4 key metrics of the best 3-qubit unbiased classifier

# Three qubit results, circuit of best biased VQC




Figure: Circuit of the best 3-qubit biased classifier

# Three qubit results, loss evolution of best biased VQC


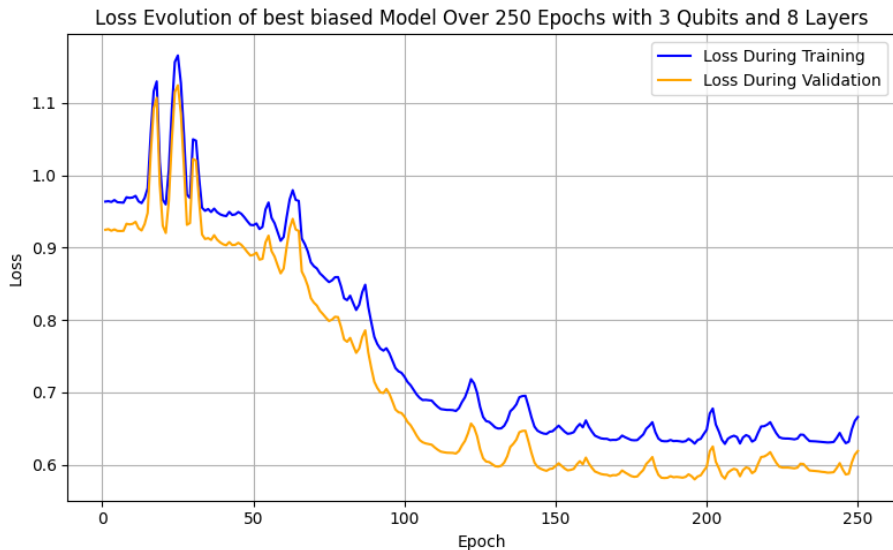


Figure: Evolution of the loss function of the best 3-qubit biased classifier



# Three qubit results, performance evolution of best biased VQC


Training vs Validation Metrics of best Biased model Over 250 Epochs for 3 Qubits and 8 Layers

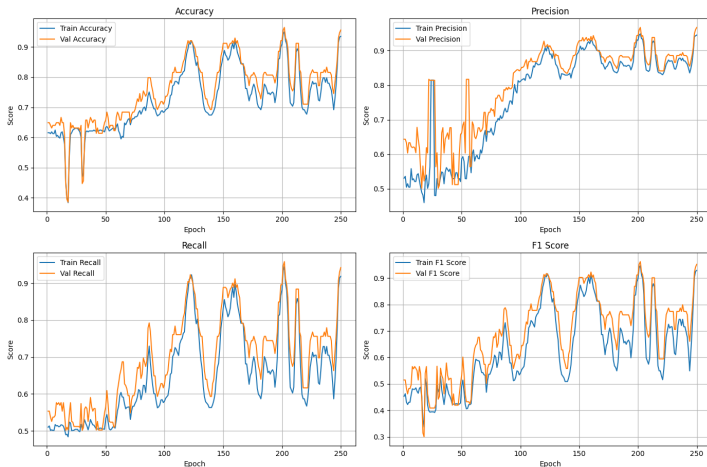

**Figure:** Validation and Training curves for the 4 key metrics of the best 3-qubit biased classifier

# Four qubit results

Performance & Efficiency Trends: Biased vs Unbiased for 4 Qubits (10 Runs)

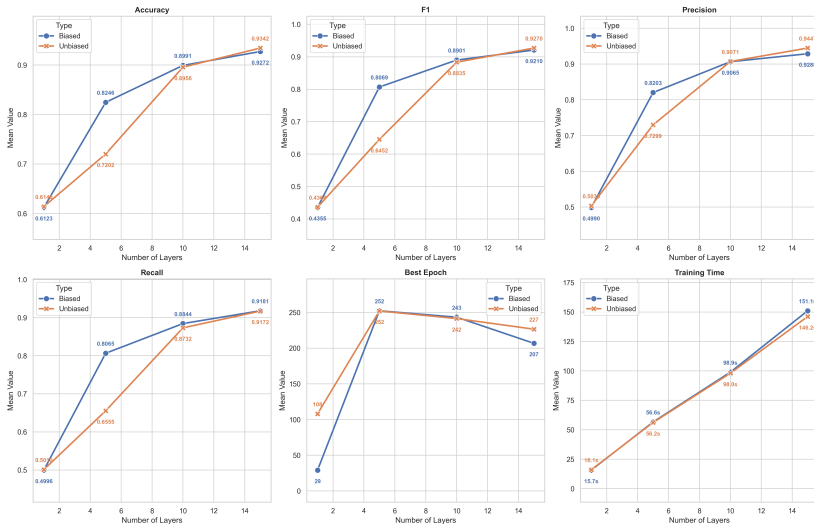

**Figure:** Performance and Efficiency Trends of Biased and Unbiased Classifier for 4 Qubits

# Four qubit results, circuit of best unbiased VQC




Figure: Circuit of the best 4-qubit unbiased classifier

# Four qubit results, loss evolution of best unbiased VQC


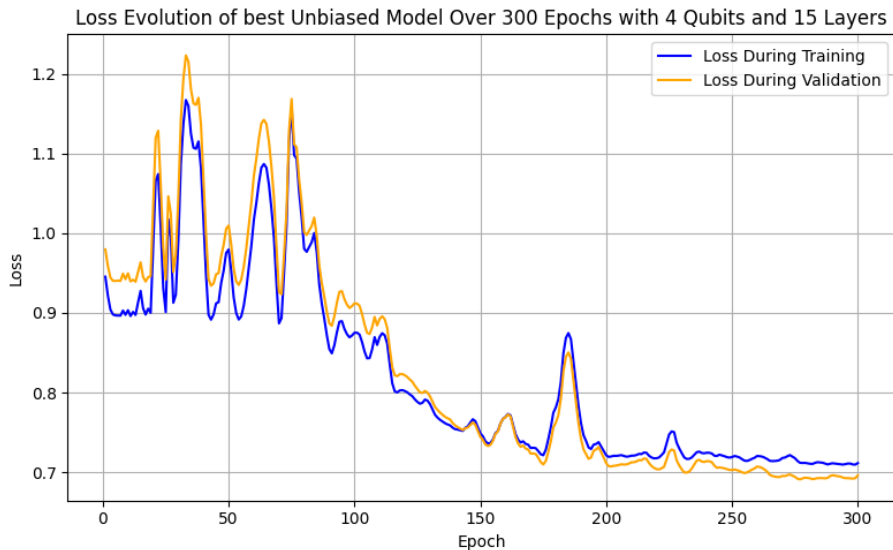


Figure: Evolution of the loss function of the best 4-qubit unbiased classifier

# Four qubit results, performance evolution of best unbiased VQC

Training vs Validation Metrics of best Unbiased model Over 300 Epochs for 4 Qubits and 15 Layers

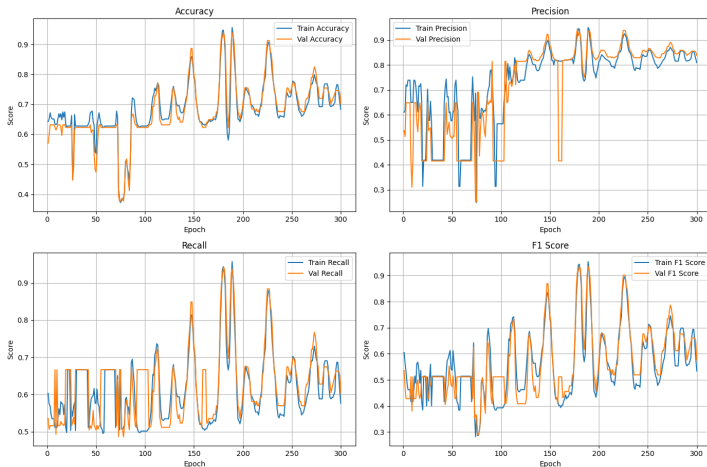

**Figure:** Validation and Training curves for the 4 key metrics of the best 4-qubit unbiased classifier

# Four qubit results, circuit of best biased VQC




Figure: Circuit of the best 4-qubit biased classifier

# Four qubit results, loss evolution of best biased VQC


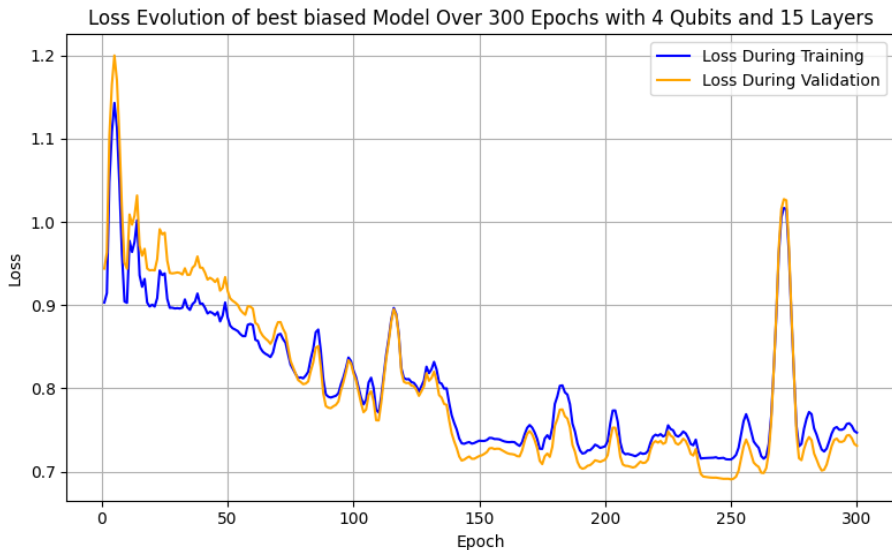


Figure: Evolution of the loss function of the best 4-qubit biased classifier

# Four qubit results, performance evolution of best biased VQC

Training vs Validation Metrics of best Biased model Over 300 Epochs for 4 Qubits and 15 Layers

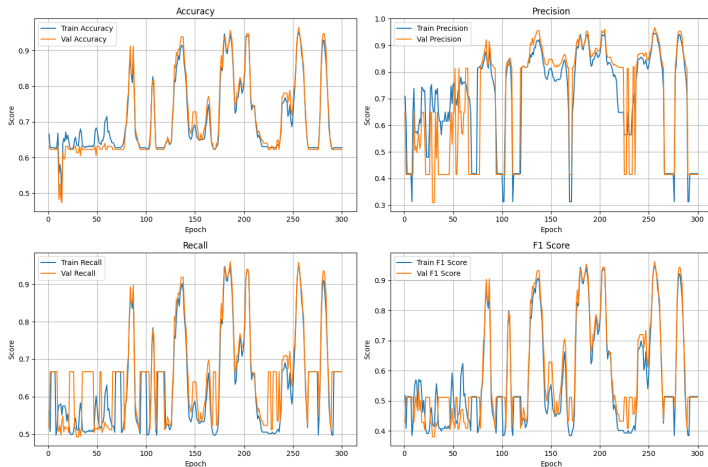

**Figure:** Validation and Training curves for the 4 key metrics of the best 4-qubit biased classifier



# Five qubit results

Performance & Efficiency Trends: Biased vs Unbiased for 5 Qubits (10 Runs)

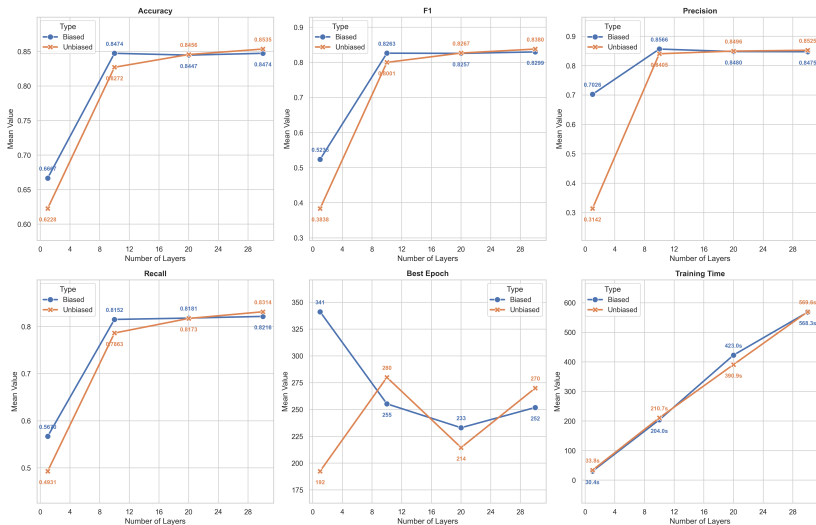


Figure: Performance and Efficiency Trends of Biased and Unbiased Classifier for 5 Qubits

# Five qubit results, circuit of best unbiased VQC



Figure: Circuit of the best 5-qubit unbiased classifier

# Five qubit results, loss evolution of best unbiased VQC


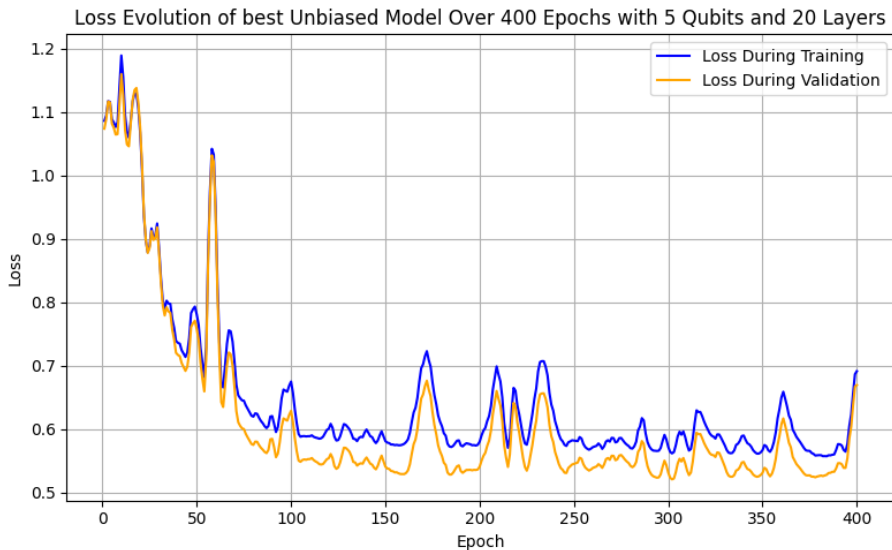


Figure: Evolution of the loss function of the best 5-qubit unbiased classifier

# Five qubit results, performance evolution of best unbiased VQC

Training vs Validation Metrics of best Unbiased model Over 400 Epochs for 5 Qubits and 20 Layers

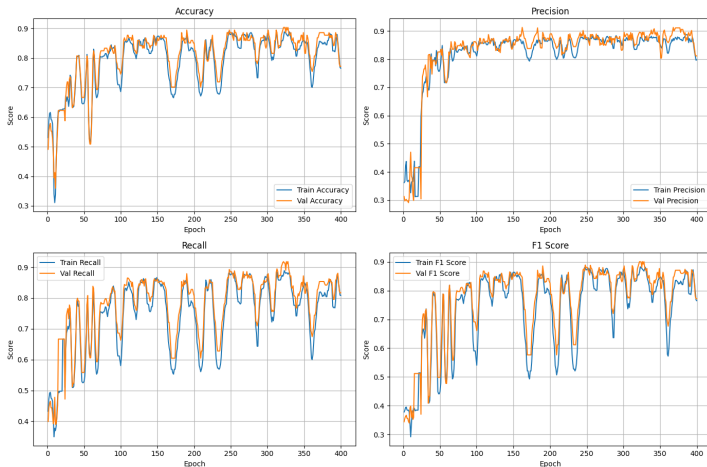

**Figure:** Validation and Training curves for the 4 key metrics of the best 5-qubit unbiased classifier

## Five qubit results, circuit of best biased VQC



Figure: Circuit of the best 5-qubit biased classifier

# Five qubit results, loss evolution of best biased VQC


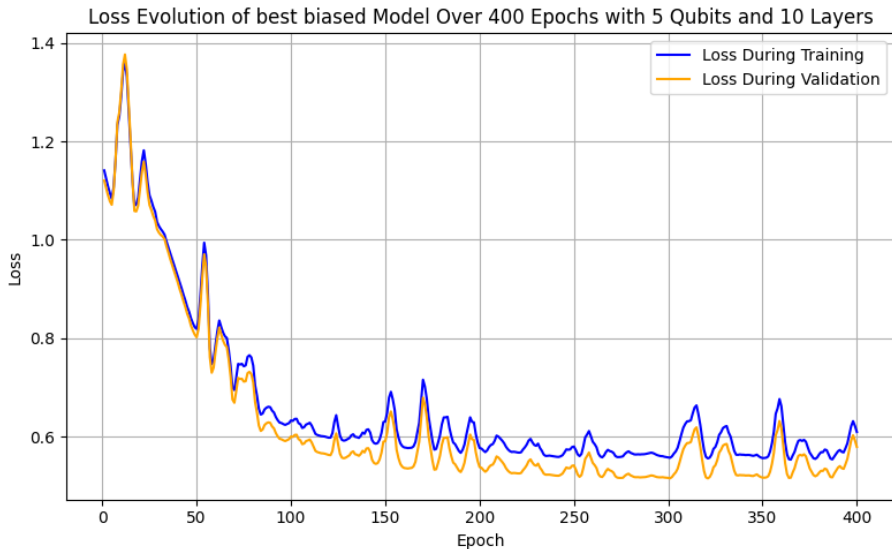


Figure: Evolution of the loss function of the best 5-qubit biased classifier

# Five qubit results, performance evolution of best biased VQC

Training vs Validation Metrics of best Biased model Over 400 Epochs for 5 Qubits and 10 Layers

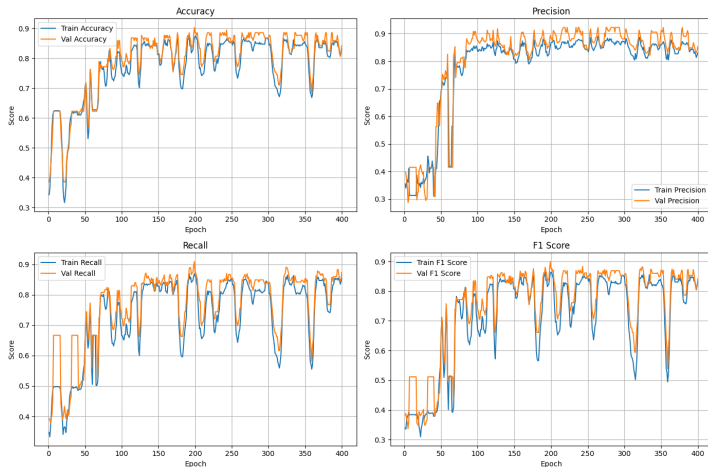

**Figure:** Validation and Training curves for the 4 key metrics of the best 5-qubit biased classifier

# Comparison, Best unbiased performers

Unbiased VQC Metrics by Qubits (10 Runs)

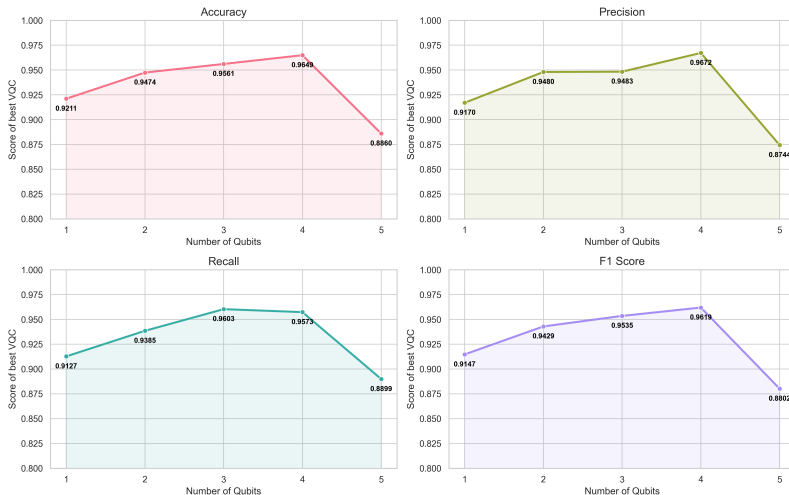


Figure: Performance of best unbiased classifier per number of qubits across all runs



# Comparison, Best biased performers

Biased VQC Metrics by Qubits (10 Runs)


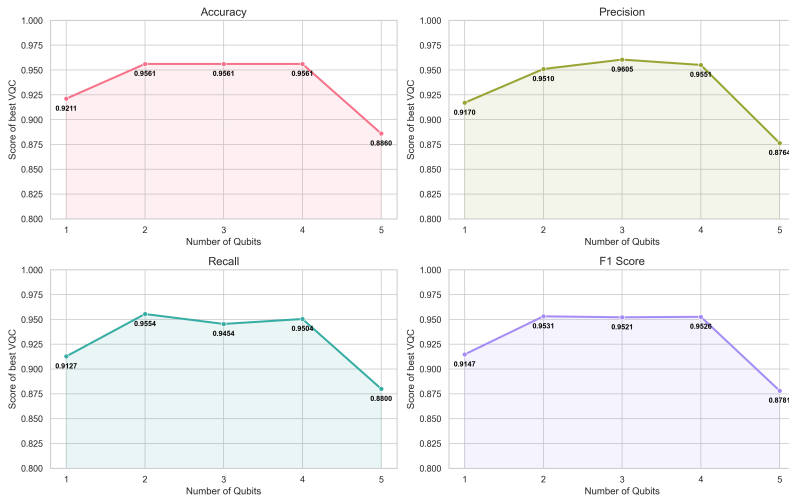


Figure: Performance of best biased classifier per number of qubits across all runs

# Comparison, parameters needed for best performers


Parameter Efficiency: Unbiased vs Biased VQC (10 Runs)

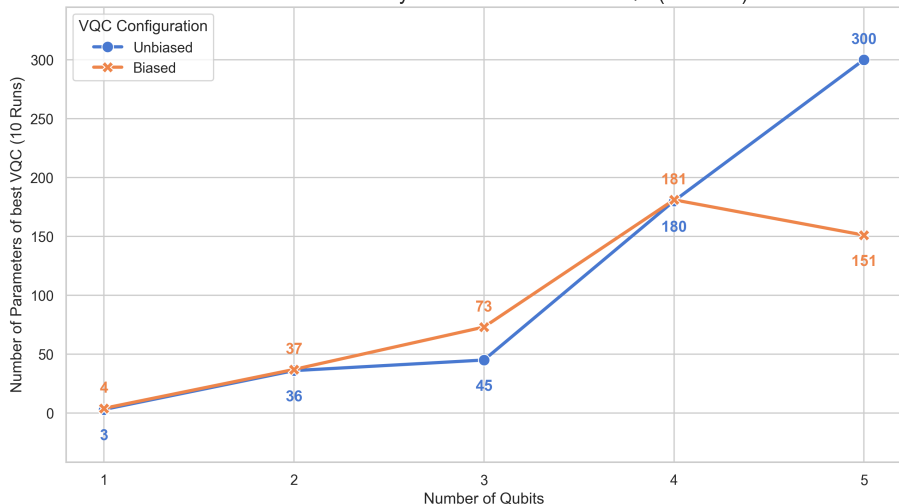

**Figure:** Number of trainable parameters in respect to the number of qubits for biased and unbiased classifiers

# VQCs vs Logistic Regression

Average Performance Metrics: Classical ML vs VQCs

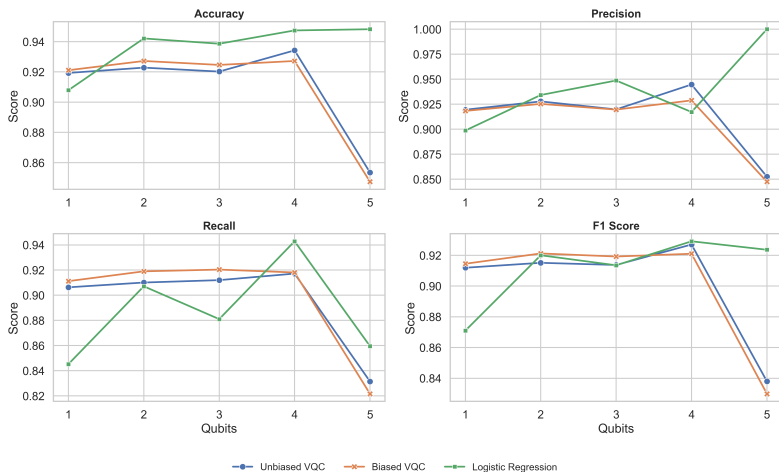

**Figure:** Average performance of the Quantum Models and the classical Logistic Regression across 10 different runs for all the different number of qubits

# Conclusion

VQCs show **strong potential**, especially in low dimensionality problems

Classical ML still **slightly** superior

**Future** quantum hardware will **improve** results

Thank you for your attention!

Questions?