

AI-NATIVE
SOFTWARE
DEV.



Builders Talk #1 - AI Native Software Development

**Kritik Denge: Prompt vs.
Context Window**

Vahid Faraji
Senior Applied AI Specialist
@ Kariyer.net

Sunum ve iletişim



github:@vfaraji89

linkedin.com/in/vahid-faraji-jobehdar/

Prompt Engineering




Focus on phrasing.



Choosing right words
(plan, ask, instruction,...)


Context Engineering

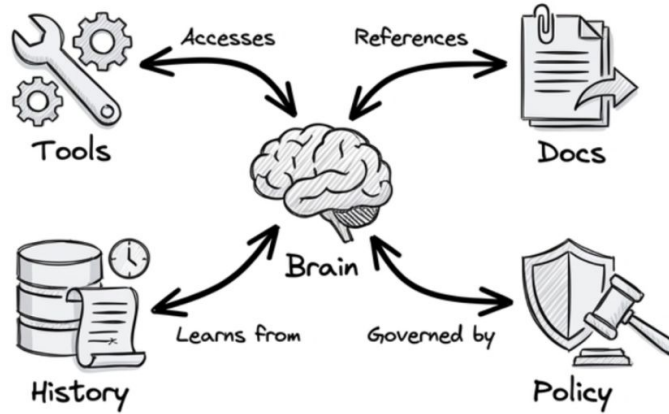


Curating the state.



Optimize tokens
(trim, compaction etc)

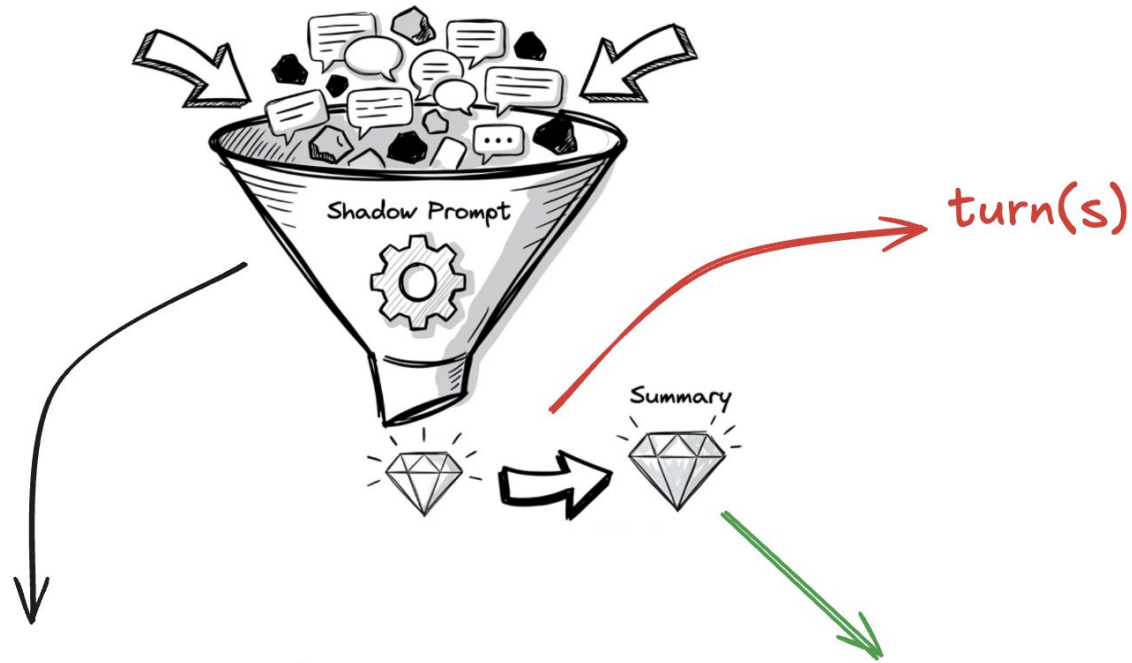


Resources: Docs, tools,
History (memory), chat-
sessions,...

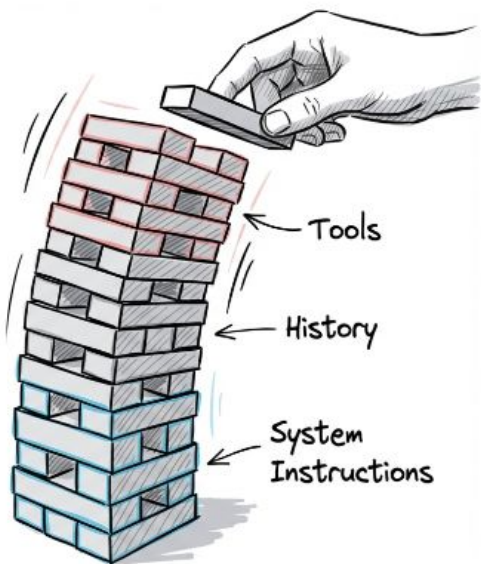

Non-Uniform Processing
The "Retrieval Tax"

Distractors

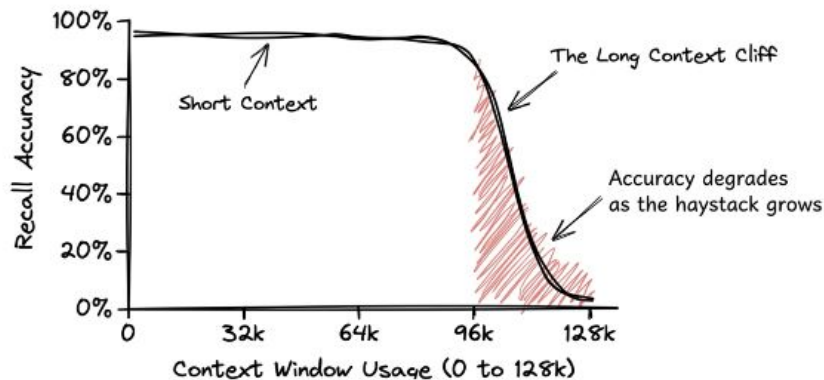


Context Rot

<https://research.trychroma.com/context-rot>

Avoid Context Rot: Performance ↓ as Tokens ↑


#1 Trimming (Context Edit) "Cut the Noise."

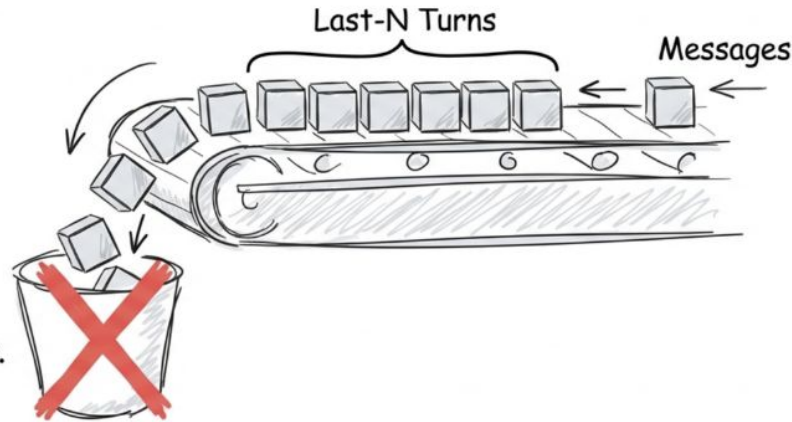

- Pros: Zero latency.
- Cons: Amnesia.

Selectively clear specific content from conversation history as it grows.

#2 Just In Time: hitting right folders at a time.
Pin, unpin, retrieve, structured instruct, skills etc

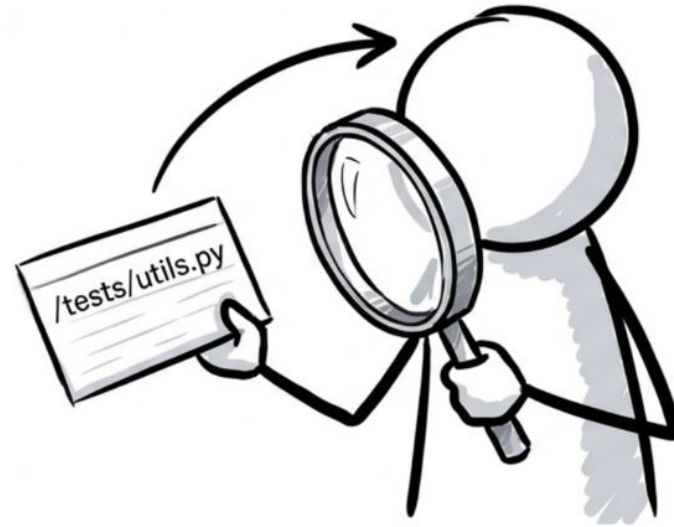

#3 Compaction

effective context length for long-running conversations

Python ▾


```
response = client.beta.messages.create(  
    betas=["compact-2026-01-12"],  
    model="claude-opus-4-6",  
    max_tokens=4096,  
    messages=messages,  
    context_management={  
        "edits": [  
            {  
                "type": "compact_20260112",  
                "trigger": {"type": "input_tokens", "value": 150000},  
            }  
        ]  
    },  
)
```

Compaction
parameter




<https://platform.claude.com/docs/en/build-with-claude/compaction>

#4 Agent Hook

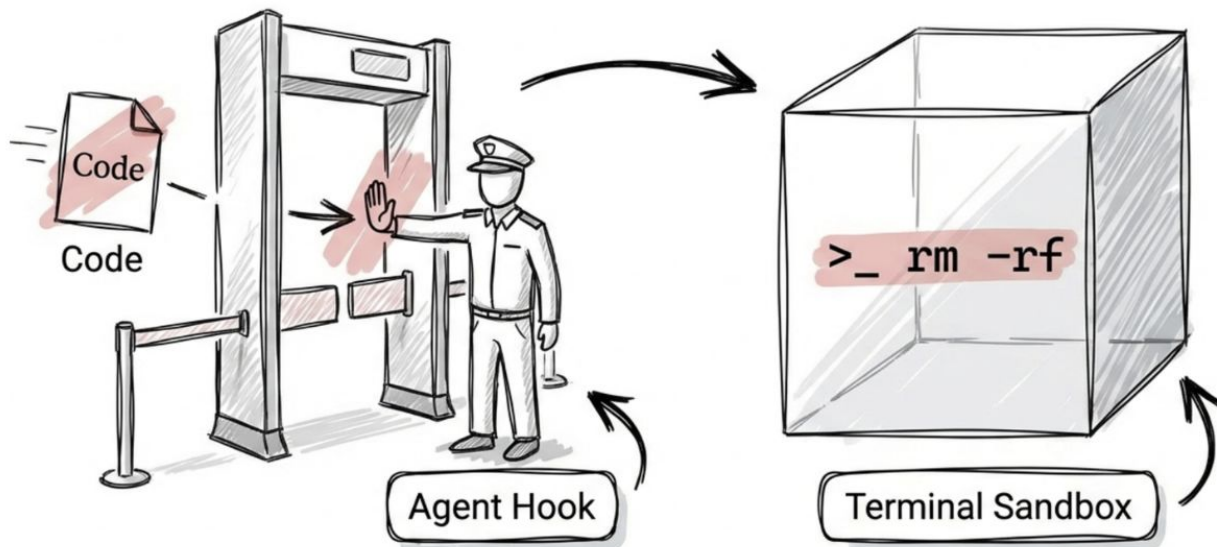

Use Timely Sub-agents: Multiple small bubbles outside the main brain

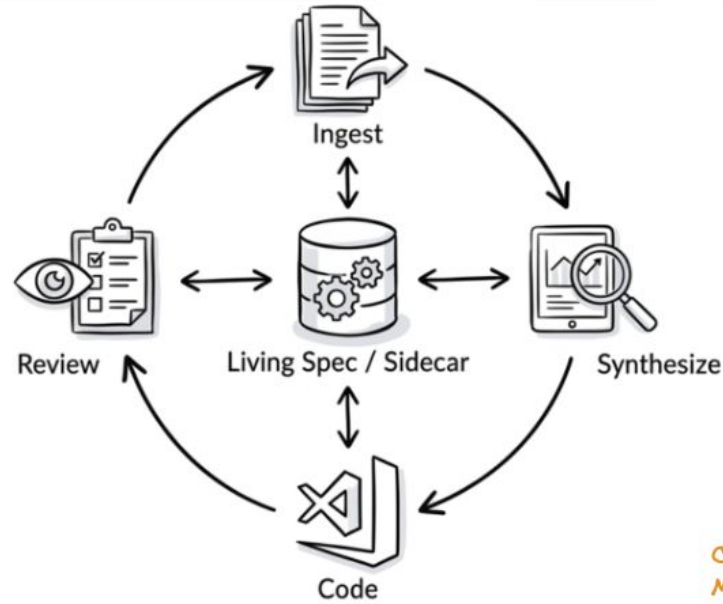

- head: Used to pull in and analyze the beginning portions of large data volumes or files.

- grep: searching through files

- tail: Used to pull in and analyze the ending portions of logs.

- glob: A primitive that allows the agent to navigate its environment or to retrieve.

Common
Messages/runs



Action (/)

delegate or automate specific task or
init/trigger: workflows. /fix

Call files (@)

mention specific sub-agents or define
the scope: @workspace / @codebase

Context Variables (#)

Standard?

add github/awesome-copilot

add github/tokalator

commands

Context Budgeting

The screenshot displays the Tokalator AI IDE interface. On the left sidebar, the 'Tokalator' panel shows a 'TOKEN BUDGET' of 'LOW' with a remaining budget of '-8.7K / 1.0M'. Below this, a 'NEXT TURN PREVIEW' indicates a cost of '+800' and '+10.5K (1.1%)' with '-1236 turns left'. A 'BUDGET BREAKDOWN' table lists: Files (-3.2K), System (-3.5K), Instructions (-500), Conversation (-8), and Output reserve (-4.5K). The 'FILES (2)' section shows 'page.tsx' (-2.7K) and 'events.json' (-800). The main editor displays a TypeScript file 'events.json' with code for event management, including imports, type definitions, and filter arrays. A terminal at the bottom shows the command 'vfaraj@bglac tokalator %'.

Files, Codes, tools

Claude Code Window

Todos (Plan-Exe)
(Chat History)

The screenshot displays the Claude Code interface with three main sections:

- CHAT (CLAUDE CODE):** The top section shows a chat history with messages from the user and the AI assistant. The messages discuss a "Kritik Denge: Prompt vs. Context Window" and a "Context Window/Prompt farkı ve token ekonomisi".
- Todos (7/7):** The middle section lists a series of tasks (todos) related to the chat history, such as "Explore wiki page format", "Check existing page structures", "Create Events/Talks page route", "Create events content data", "Add navigation link", and "Add CSS for event cards".
- SESSIONS:** The right sidebar shows a list of sessions, including "AI Prompt and Context Window Discussi...", "MIT License and Free Software Discussi...", "Installing specify-cli from GitHub reposi...", "Releasing to Version 3 of Extension", "Loading Issue Troubleshooting", "Diagnosing Bugs in Stable Version", "Loading Issue Troubleshooting", "Dashboard loading error troubleshooting", "Issues with installing Extension", "Identifying Gaps in Paper for Improvement", "Running npm fetch-wiki-agent command", "Optimizing AI Costs with Tokalator Exten...", "Marketplace version verification for 0.2.4", "Understanding Chatbot Functions", and "Pushing Changes to Repository".

Sessions
(Chat History)

@Tools

Context7 Sign in Plans Install More + Add Docs

Up-to-date Docs
for LLMs and AI code editors

Get the latest documentation and code into Cursor, Claude, or other LLMs

Search a library (e.g. Next, React) or Chat with Docs

Popular Trending Recent Skills NEW

	SOURCE	TOKENS	SNIPPETS	UPDATE
Next.js	/vercel/next.js	577K	2K	3 days
Vercel AI SDK	/vercel/ai	980K	4.3K	1 day
Shadcn UI	/shadcn-ui/ui	163K	1.4K	4 days
Better Auth	/better-auth/better-auth	466K	2.8K	1 day
Tailwind CSS	tailwindcss.com/docs	335K	2.1K	5 days

Auto Updating docs or releases



Count your tokens. Like beads on an abacus.

Every token counts -- monitor budgets, optimize context, and cut AI costs before they add up. A VS Code extension that makes the invisible visible.

Learn More

Star on GitHub

VS Code


Cursor **SOON**

Claude Code **SOON**

ext install tokalator

Copy

@tokalator /preview

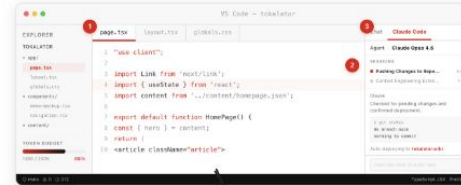

Context Window Management

Made in Istanbul ;)

Now in 2.0! Rearranged spec

**Point at bugs.
Let AI fix them.**

Install agentation

Agentation turns UI annotations into structured context that AI coding agents can understand and act on. Click any element, add a note, and paste the output into Claude Code, Cursor, or any AI tool.



Annotation of UI

4 Feb 2026 (version 1.109)-- last update

 Visual Studio Code

Message steering/ queueing:

send follow-up messages in still running turns

Agent hooks:

shell commands for lifecycle points

Use skills as slash commands

invoke agent skills on demand from chat




Introducing Checkpoints

git workflow to capture sessions on every push.

Status Quo: 2026 Q1



Chat History (Linear)

Architects Daughter



Context Graph (Network)

Architects Daughter

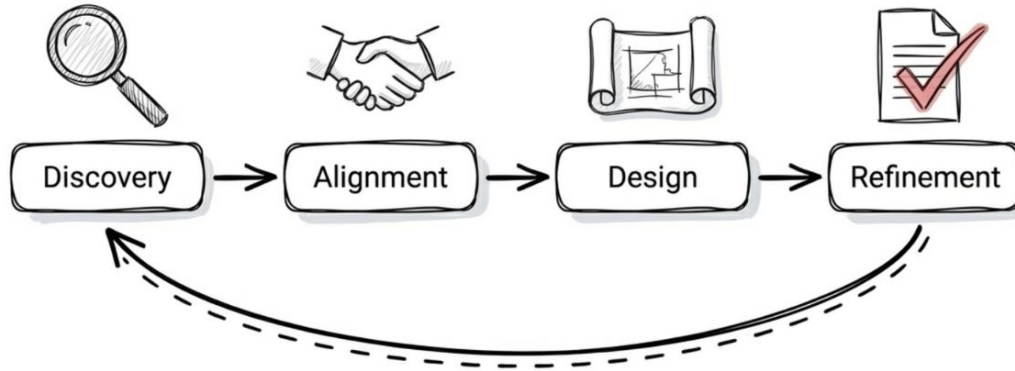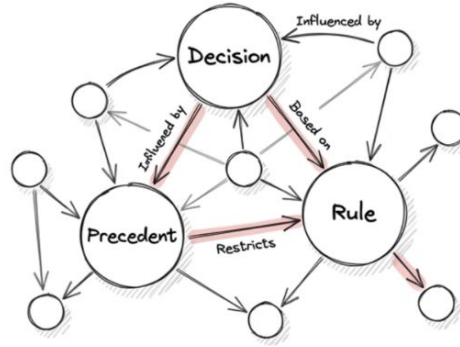

AI-NATIVE
SOFTWARE
DEV.

ONLY
BUILDERS
CLUB

DEMO TIME



`chat.askQuestions.enabled`

`chat.hooks.enabled`

```
copilot plugin install
```

```
<plugin-name>@awesome-copilot
```

Setup

A tiny macOS **menu bar app** that blocks all keyboard input while you clean your keyboard.

How it works:

1. Lives in the menu bar with a  icon
2. Click → **"Start Cleaning"** → all keyboard input is suppressed
3. Click → **"Stop Cleaning"** → keyboard works again
4. **Safety net:** Auto-stops after 5 minutes in case you forget

Prototype

Sunum ve iletişim



github:@vfaraji89
linkedin.com/in/vahid-faraji-jobehdar/