R92/A | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 40 | update 57600 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.9123	66.2037	11.417303	11.427978	11.371692	-0.1898	+0.3979	0.4085
TEST ALL	71.1395	66.1802	11.374429	11.385299	11.329932	-0.1925	+0.3907	0.3998

Dataset	n	NSS Top1 (%)	R92 Top1 (%)	NSS cost	R92 cost
TSP TEST	4500	45.888889	46.355556	7.970400719	7.972424496
CVRP TEST	4500	45.977778	46.977778	18.004802368	18.016829839
TSPLIB	49	20.408163	26.530612	8.217907074	8.209838138
CVRPLIB	100	70.000000	54.000000	67.101111717	67.432506475

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: False

R92/A | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	70.9123	66.2037	11.417303	11.427978	11.371692	-0.1898	+0.3979	0.4085	per-problem TRAIN SBS
TSP	46.3333	33.1111	8.024732	8.045354	7.990533	-0.2563	+0.4280	0.4167	T2T
CVRP	46.1778	18.7111	18.167375	18.269377	18.064087	-0.5583	+0.5718	0.7590	RELD_CVRP
ATSP	76.3556	47.4889	1.638826	1.676905	1.632471	-2.2708	+0.3893	0.3856	UNICO_MatPOENet
OVRP	40.6667	35.7556	7.462228	7.469579	7.415777	-0.0984	+0.6264	0.6397	MoSES_RF
VRPB	80.9333	80.8444	9.354546	9.354876	9.318750	-0.0035	+0.3841	0.3893	reld_mt
VRPL	37.7556	33.0889	12.431304	12.437959	12.383444	-0.0535	+0.3865	0.3924	MoSES_RF
VRPTW	79.9333	79.9556	18.818894	18.819431	18.766139	-0.0029	+0.2811	0.2962	reld_mt
OVRPTW	83.8889	83.7778	10.143168	10.143730	10.116859	-0.0055	+0.2600	0.2570	reld_mt
OVRPB	88.5556	88.5111	6.357160	6.357254	6.341078	-0.0015	+0.2536	0.2636	reld_mt
OVRPL	40.6444	35.9111	7.438181	7.445709	7.390416	-0.1011	+0.6463	0.6633	MoSES_RF
VRPBL	78.7778	78.5111	9.368936	9.371523	9.328366	-0.0276	+0.4349	0.4373	reld_mt
VRPBTW	78.5111	78.4222	19.949235	19.950430	19.851084	-0.0060	+0.4944	0.4730	reld_mt
VRPLTW	78.9111	78.7556	18.764155	18.765871	18.707843	-0.0091	+0.3010	0.3164	reld_mt
OVRPBL	89.2667	89.2000	6.369576	6.370093	6.352824	-0.0081	+0.2637	0.2747	reld_mt
OVRPBTW	83.5111	83.4444	10.660884	10.661098	10.623245	-0.0020	+0.3543	0.3282	reld_mt
OVRPLTW	83.5111	83.4889	10.157447	10.157423	10.129818	+0.0002	+0.2728	0.2762	reld_mt
VRPBLTW	79.4222	79.4000	19.794837	19.797044	19.706420	-0.0111	+0.4487	0.4385	reld_mt
OVRPBLTW	83.2667	83.2889	10.609965	10.609955	10.571302	+0.0001	+0.3657	0.3450	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R92/A | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1395	66.1802	11.374429	11.385299	11.329932	-0.1925	+0.3907	0.3998	per-problem TRAIN SBS
TSP	46.3556	34.5333	7.972424	7.989621	7.937593	-0.2152	+0.4388	0.4282	T2T
CVRP	46.9778	17.9333	18.016830	18.124983	17.918509	-0.5967	+0.5487	0.7251	RELD_CVRP
ATSP	76.0889	47.2444	1.635564	1.674207	1.629441	-2.3082	+0.3757	0.3753	UNICO_MatPOENet
OVRP	40.5333	33.6444	7.446021	7.455750	7.400487	-0.1305	+0.6153	0.6246	MoSES_RF
VRPB	80.6889	80.4000	9.350390	9.351810	9.315298	-0.0152	+0.3767	0.3803	reld_mt
VRPL	37.4667	32.2667	12.349618	12.356138	12.300958	-0.0528	+0.3956	0.4035	MoSES_RF
VRPTW	80.9778	80.8444	18.689361	18.690545	18.637408	-0.0063	+0.2788	0.2902	reld_mt
OVRPTW	83.9333	83.9333	10.093097	10.093063	10.068135	+0.0003	+0.2479	0.2387	reld_mt
OVRPB	88.0889	88.1333	6.371004	6.370826	6.352225	+0.0028	+0.2956	0.3021	reld_mt
OVRPL	41.2667	34.6000	7.464062	7.472542	7.418033	-0.1135	+0.6205	0.6320	MoSES_RF
VRPBL	79.5778	79.4222	9.395910	9.396379	9.355967	-0.0050	+0.4269	0.4298	reld_mt
VRPBTW	78.9333	78.7556	19.665524	19.665725	19.577666	-0.0010	+0.4488	0.4451	reld_mt
VRPLTW	79.2444	79.2444	18.802194	18.803136	18.745143	-0.0050	+0.3044	0.3207	reld_mt
OVRPBL	89.2889	89.2889	6.375645	6.375741	6.359310	-0.0015	+0.2569	0.2680	reld_mt
OVRPBTW	84.8667	84.8222	10.659321	10.659591	10.624748	-0.0025	+0.3254	0.2974	reld_mt
OVRPLTW	82.9111	82.8667	10.085806	10.086112	10.059001	-0.0030	+0.2665	0.2667	reld_mt
VRPBLTW	79.7556	79.7333	19.704818	19.707068	19.613284	-0.0114	+0.4667	0.4476	reld_mt
OVRPBLTW	83.5556	83.5778	10.662125	10.662149	10.625574	-0.0002	+0.3440	0.3217	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R92/A | LIB and locked provenance

Current R92 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	26.5306	10.2041	8.209838	8.240435	8.142167	-0.3713	+0.8311	0.8262
CVRPLIB	54.0000	45.0000	67.432506	67.245364	66.945093	+0.2783	+0.7281	0.7380

SHA256: 1f76aa7441cb98a8de576aa686b0f8a1f5407ae2622a821fd1a9e07365eaa02e

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode; input-only32/8 graph hierarchy; original score MLP/pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R92/A | TSP | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

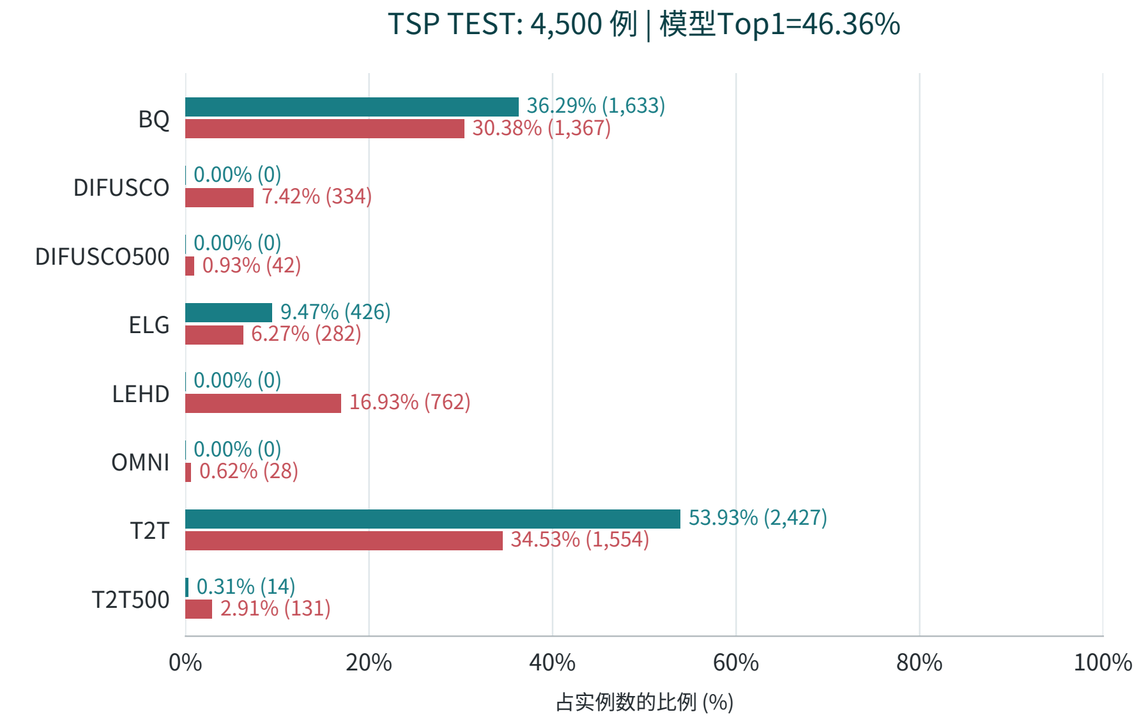

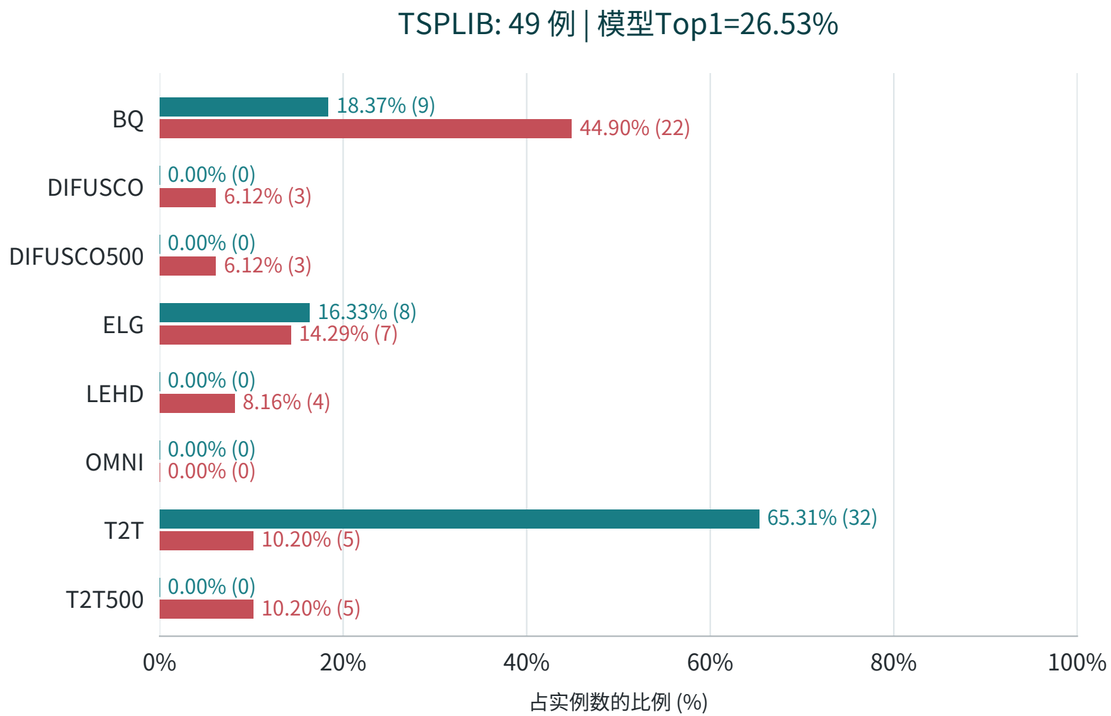

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.


R92/A | CVRP | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

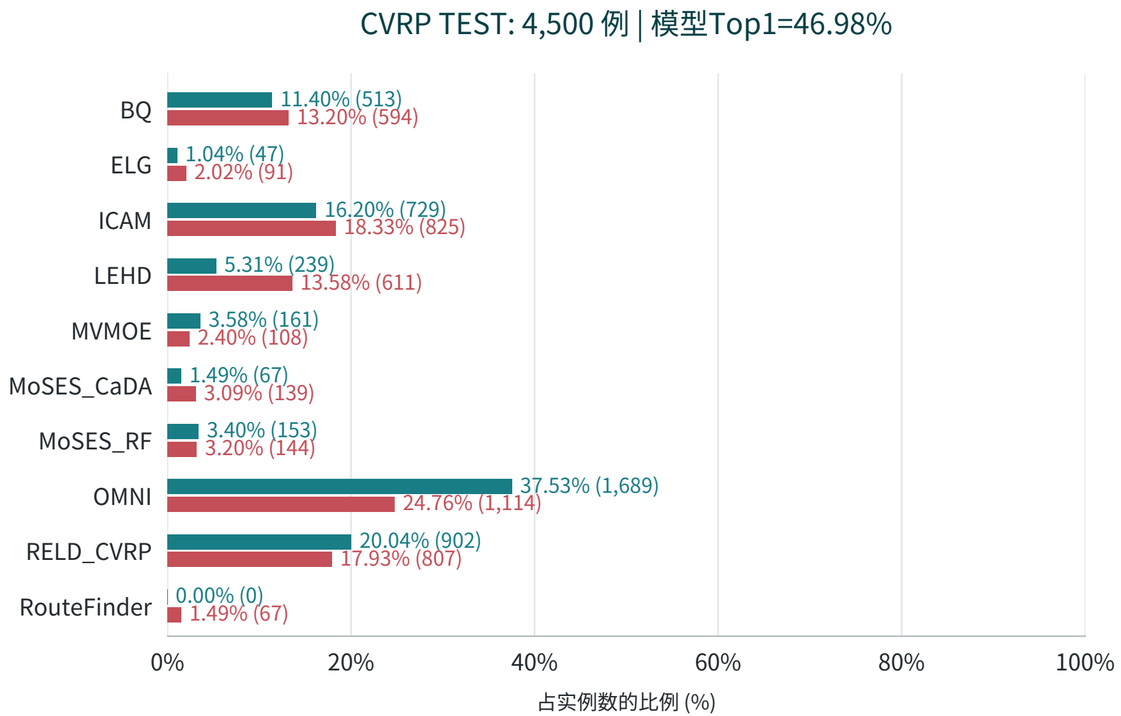

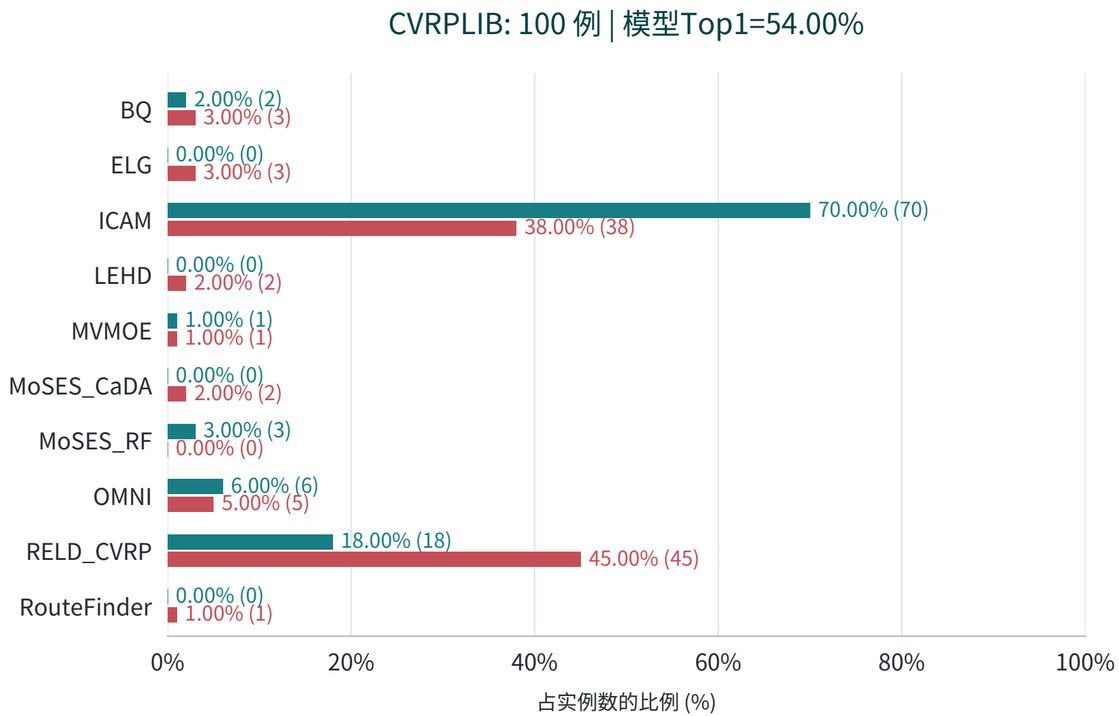

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | ATSP | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

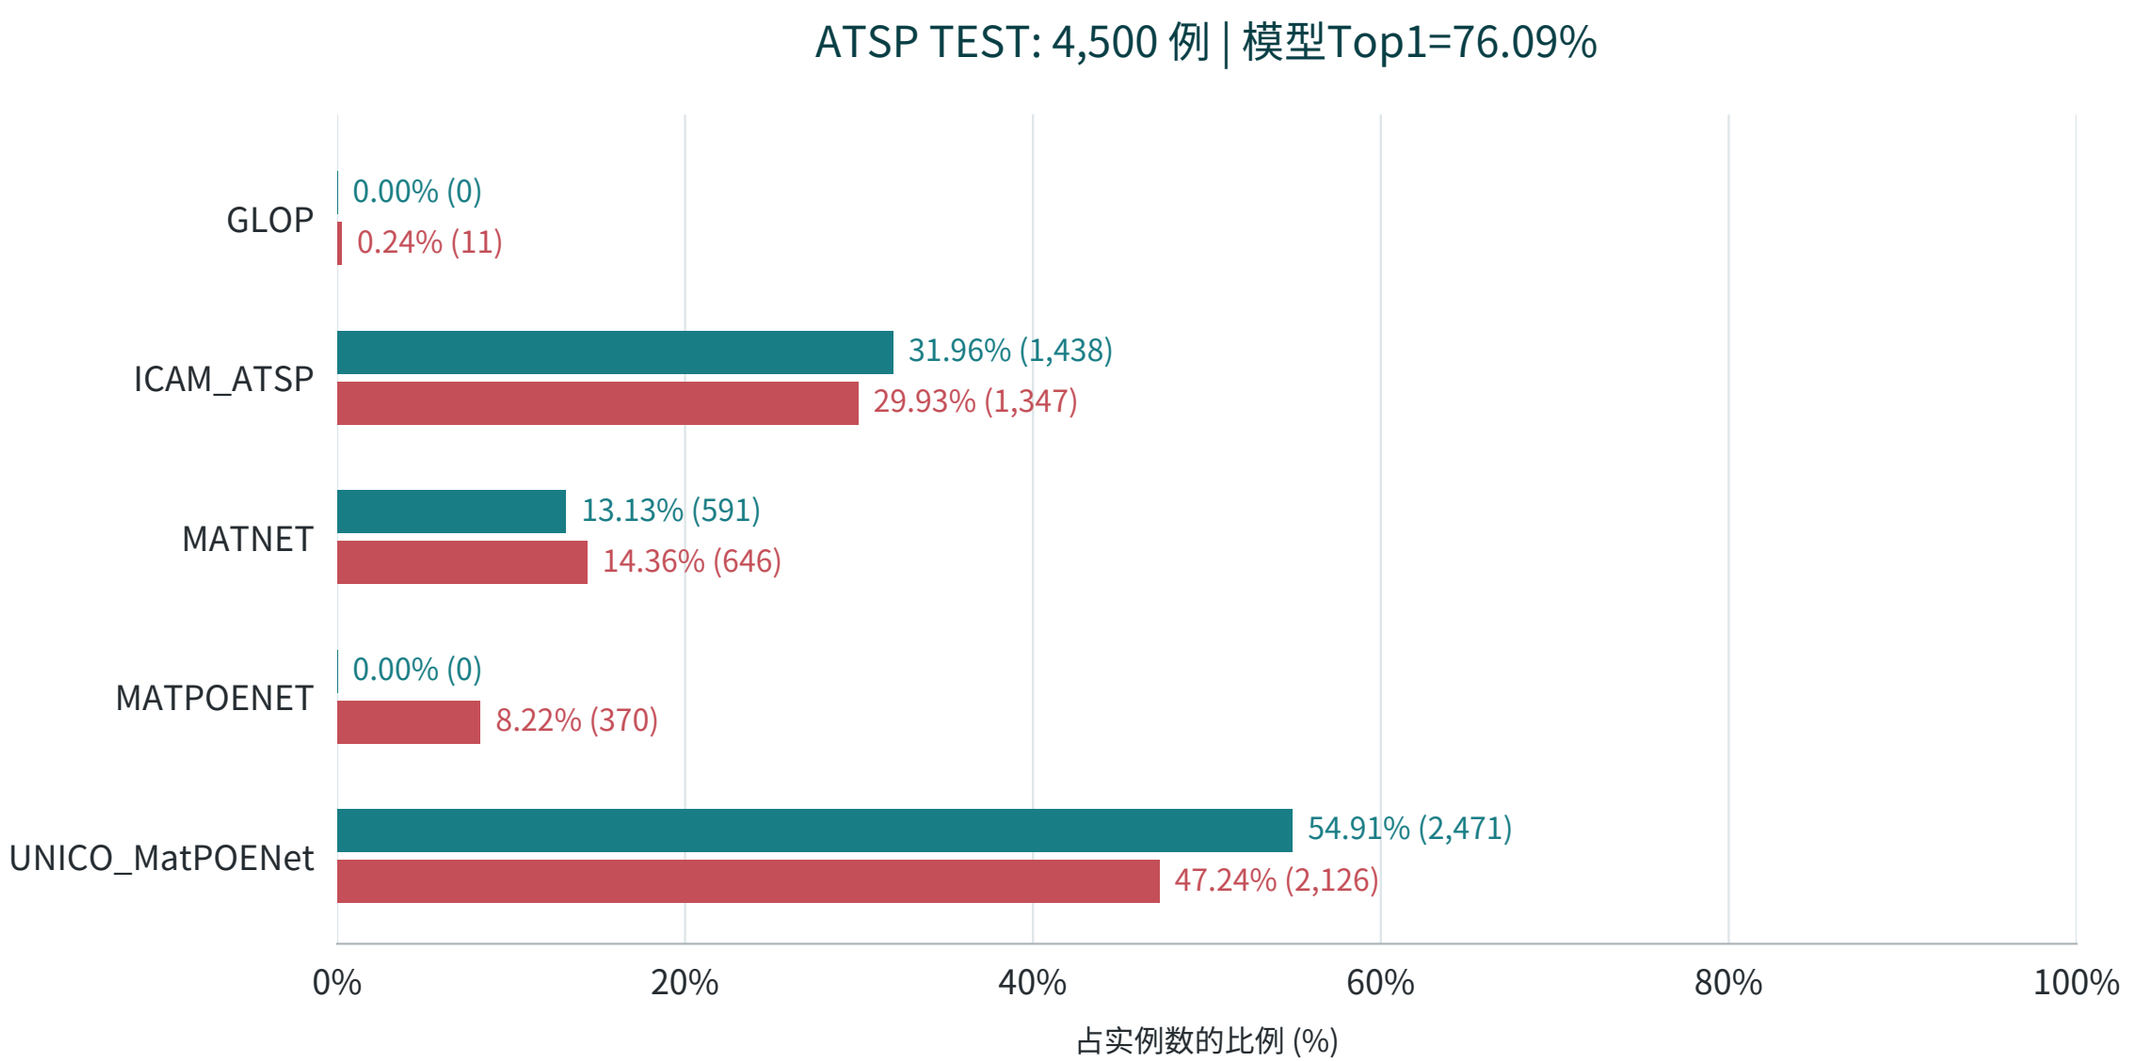

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRP | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

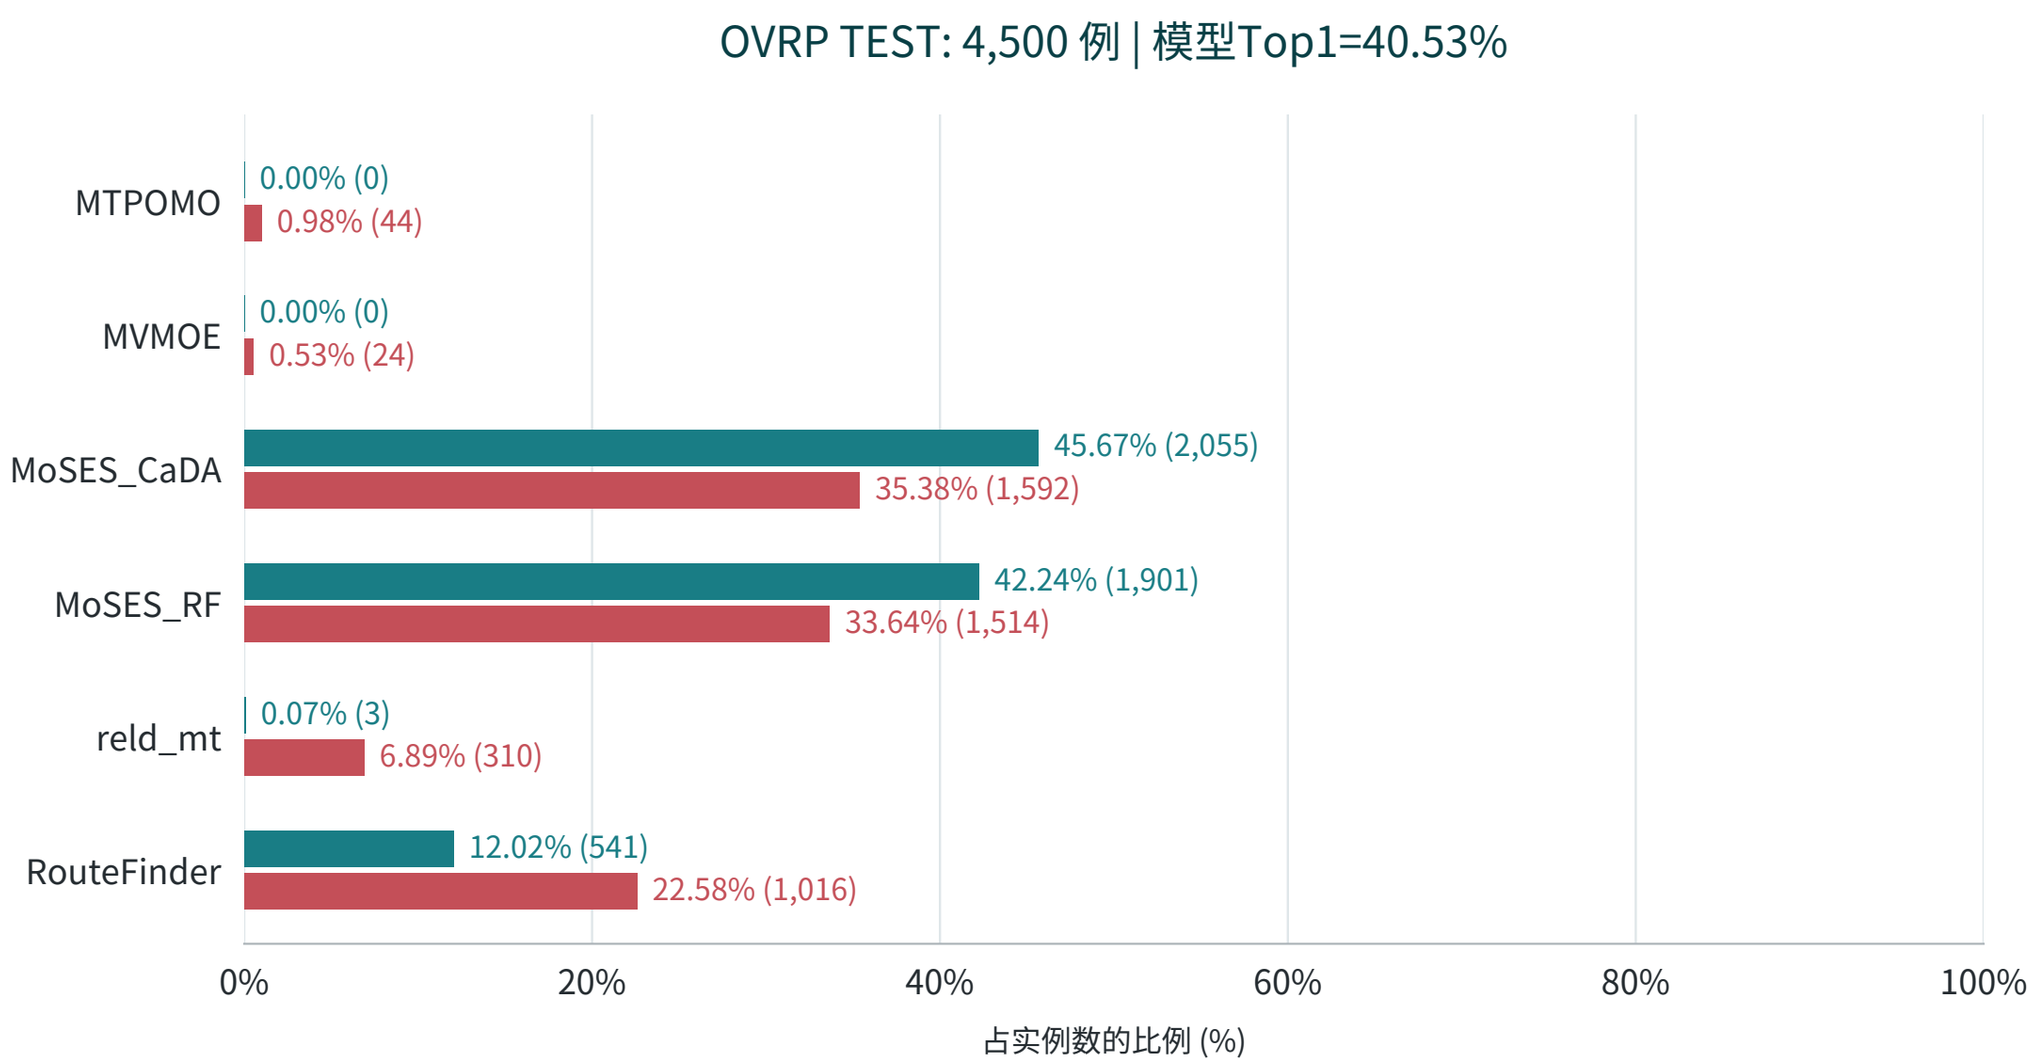

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPB | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

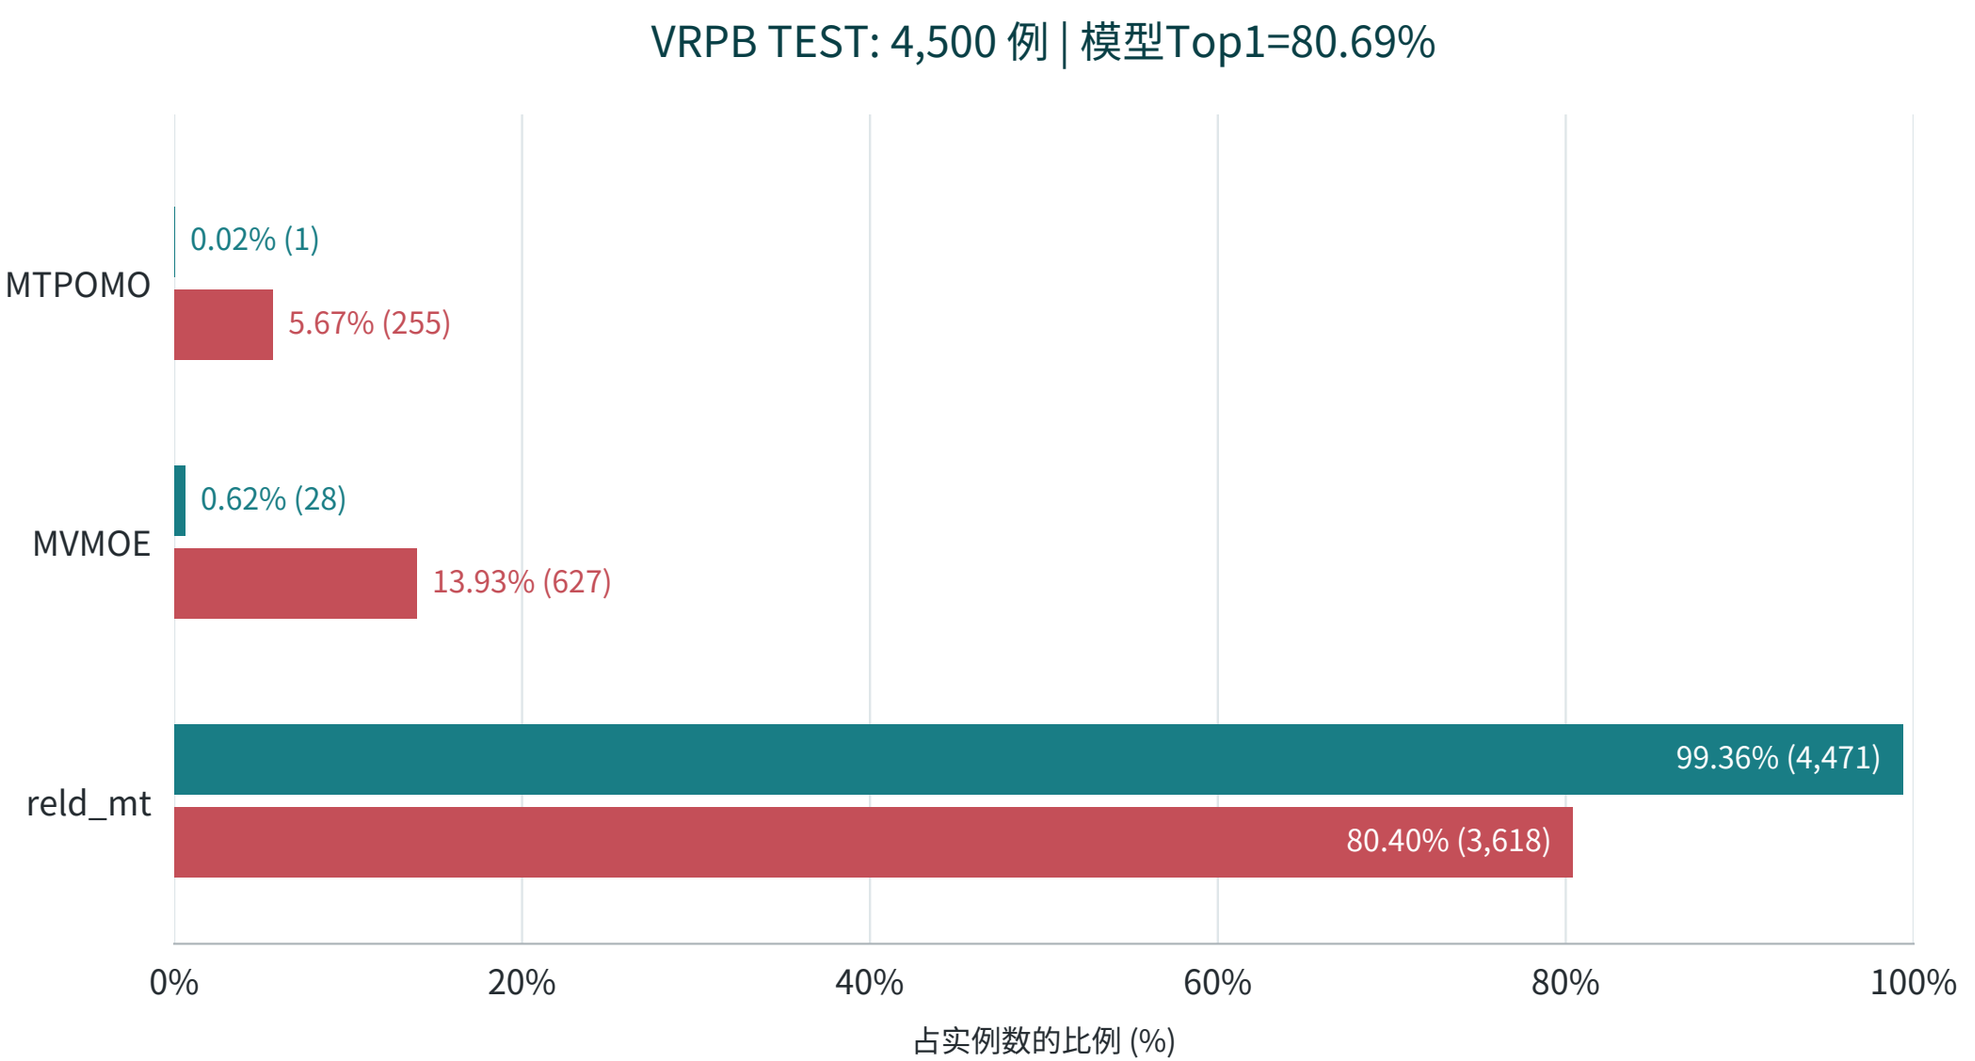

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPL | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

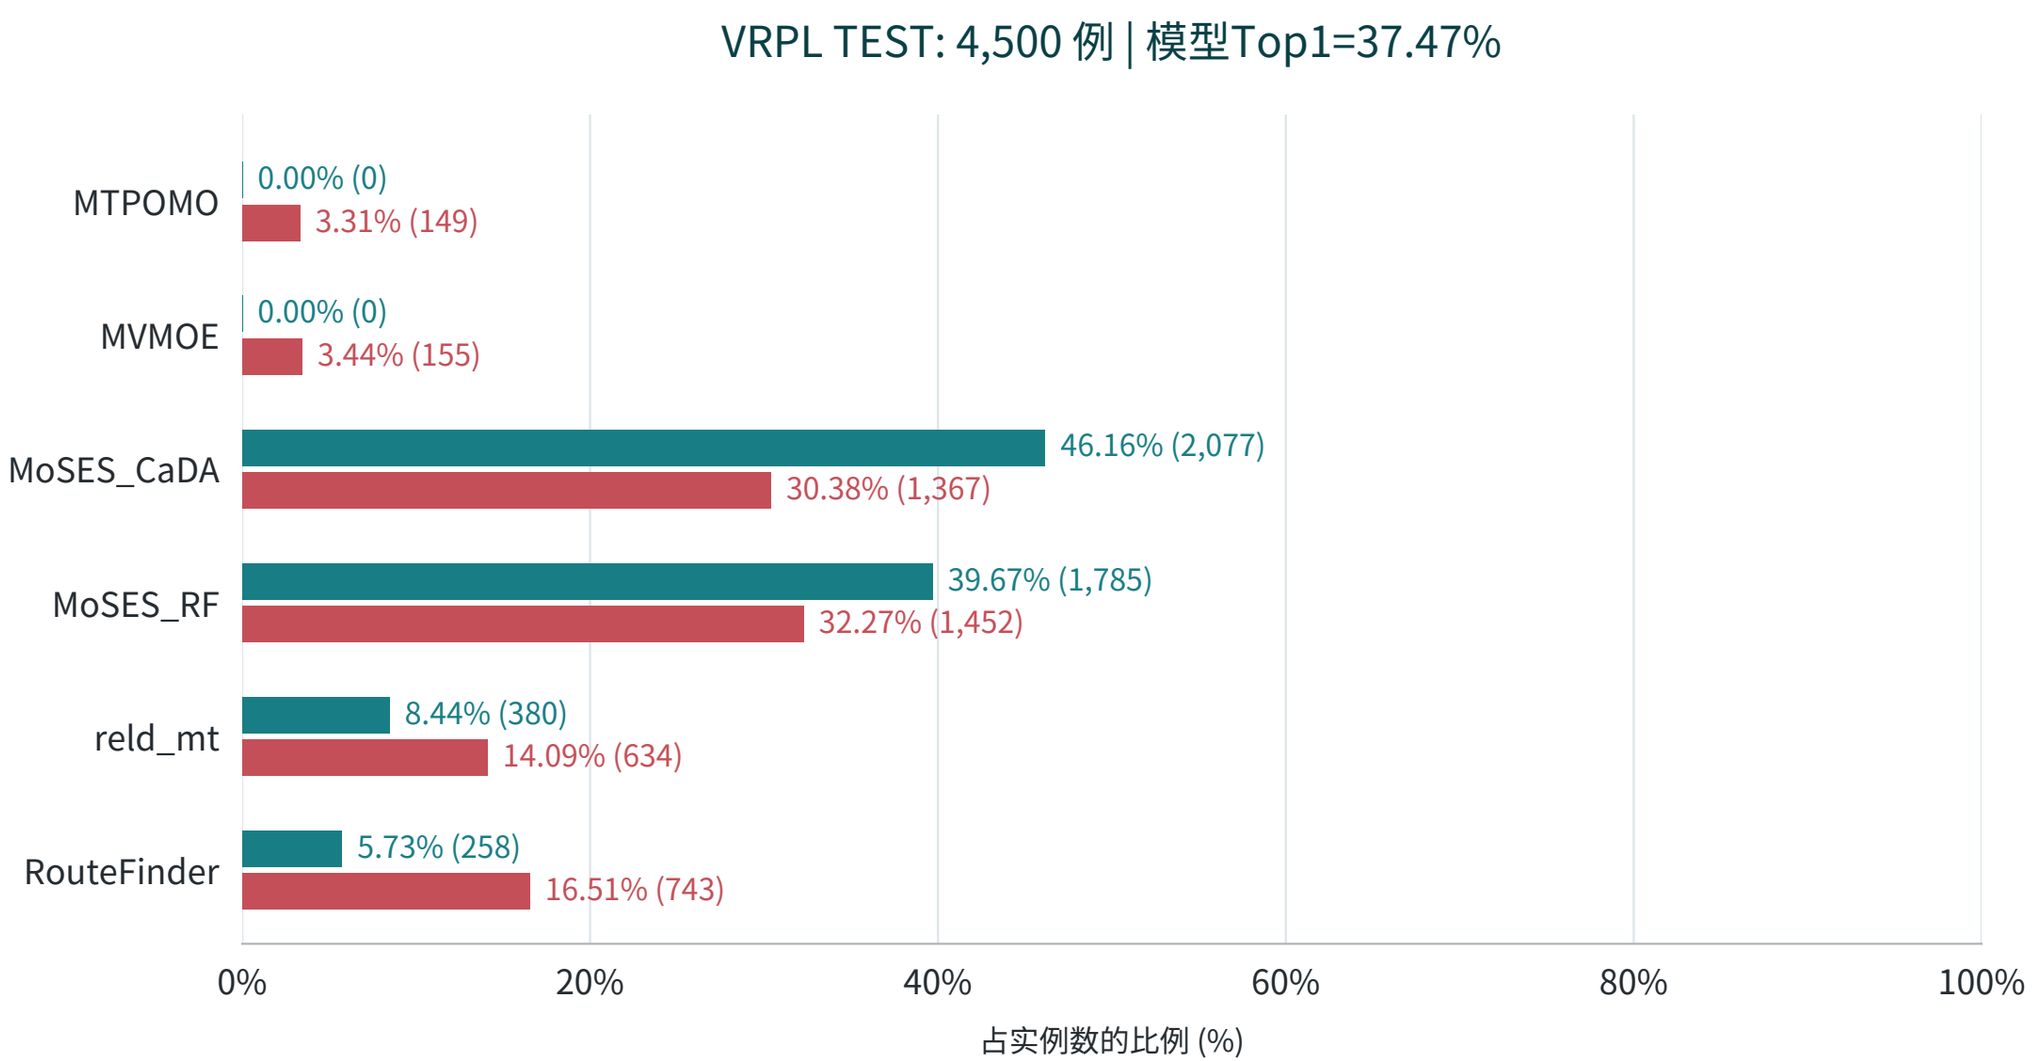

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

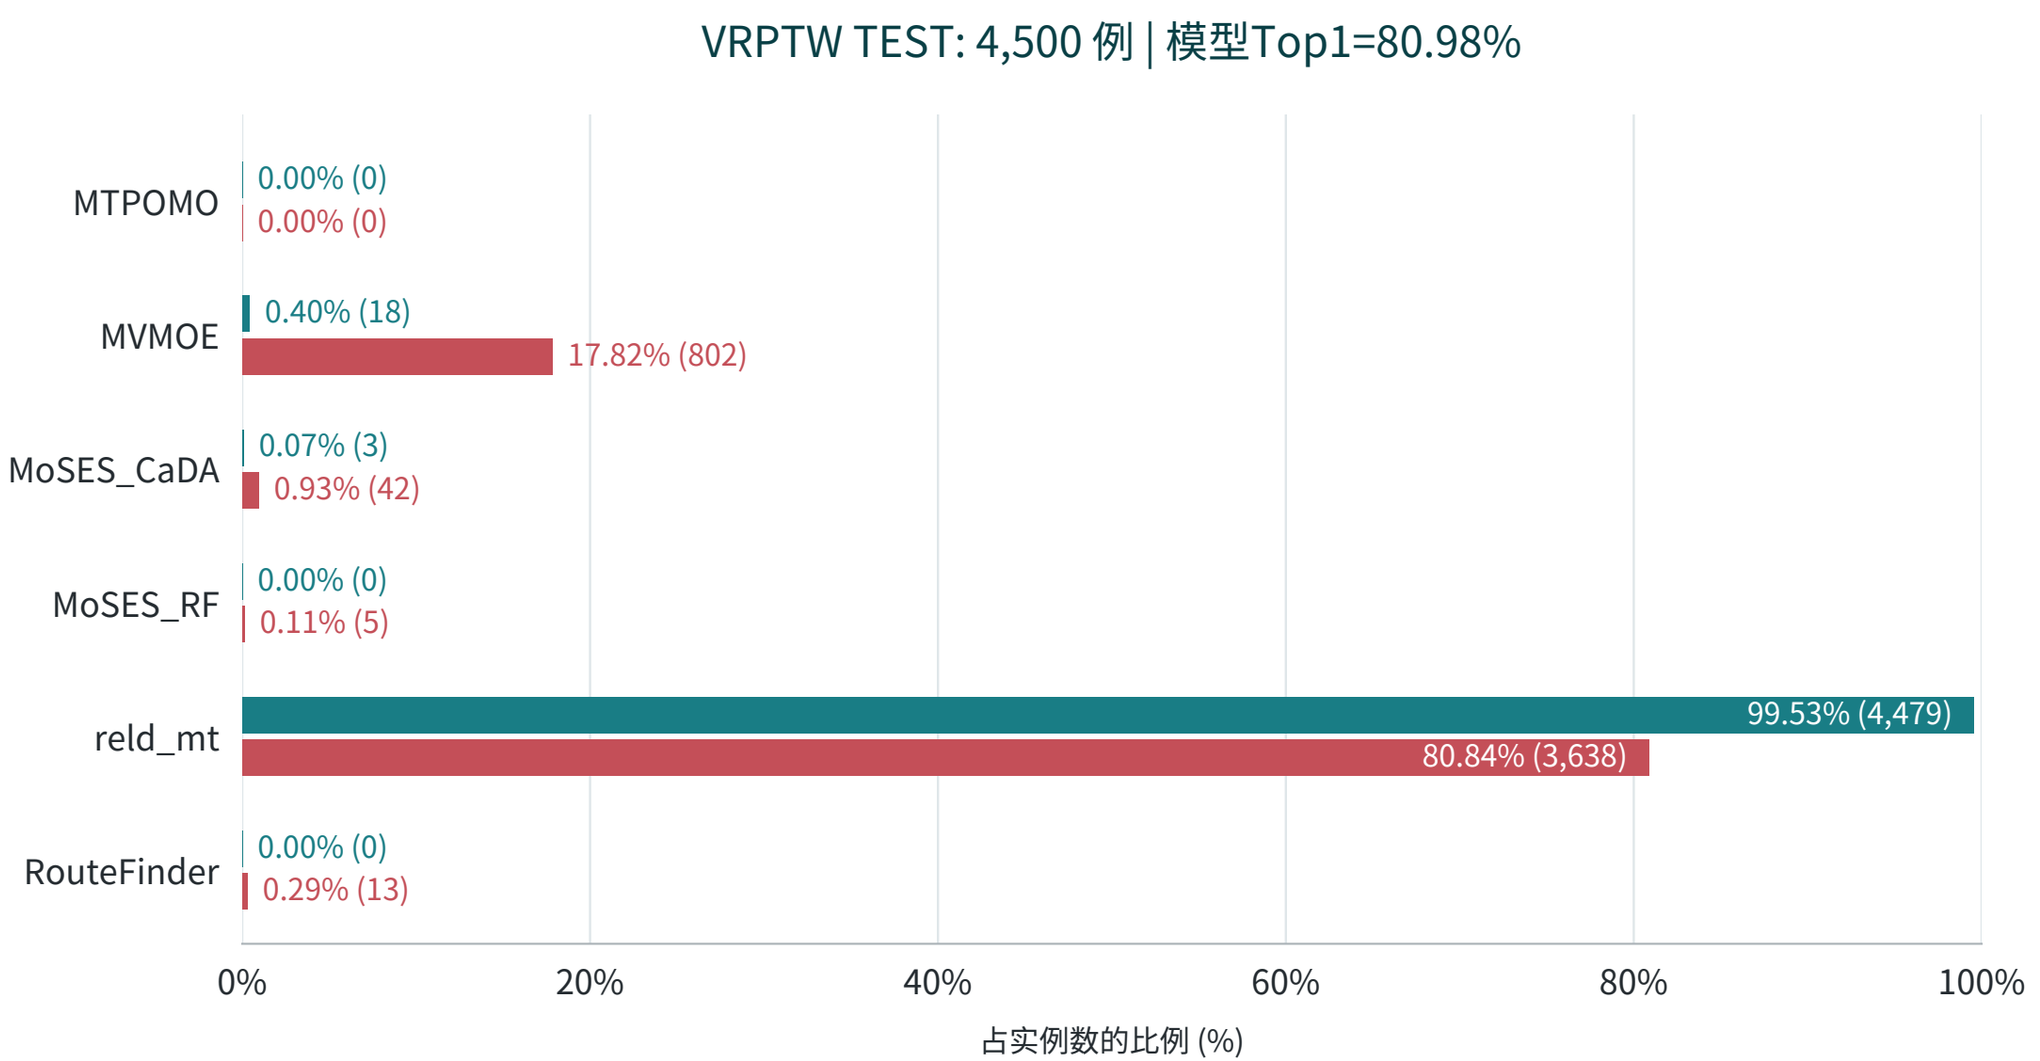

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

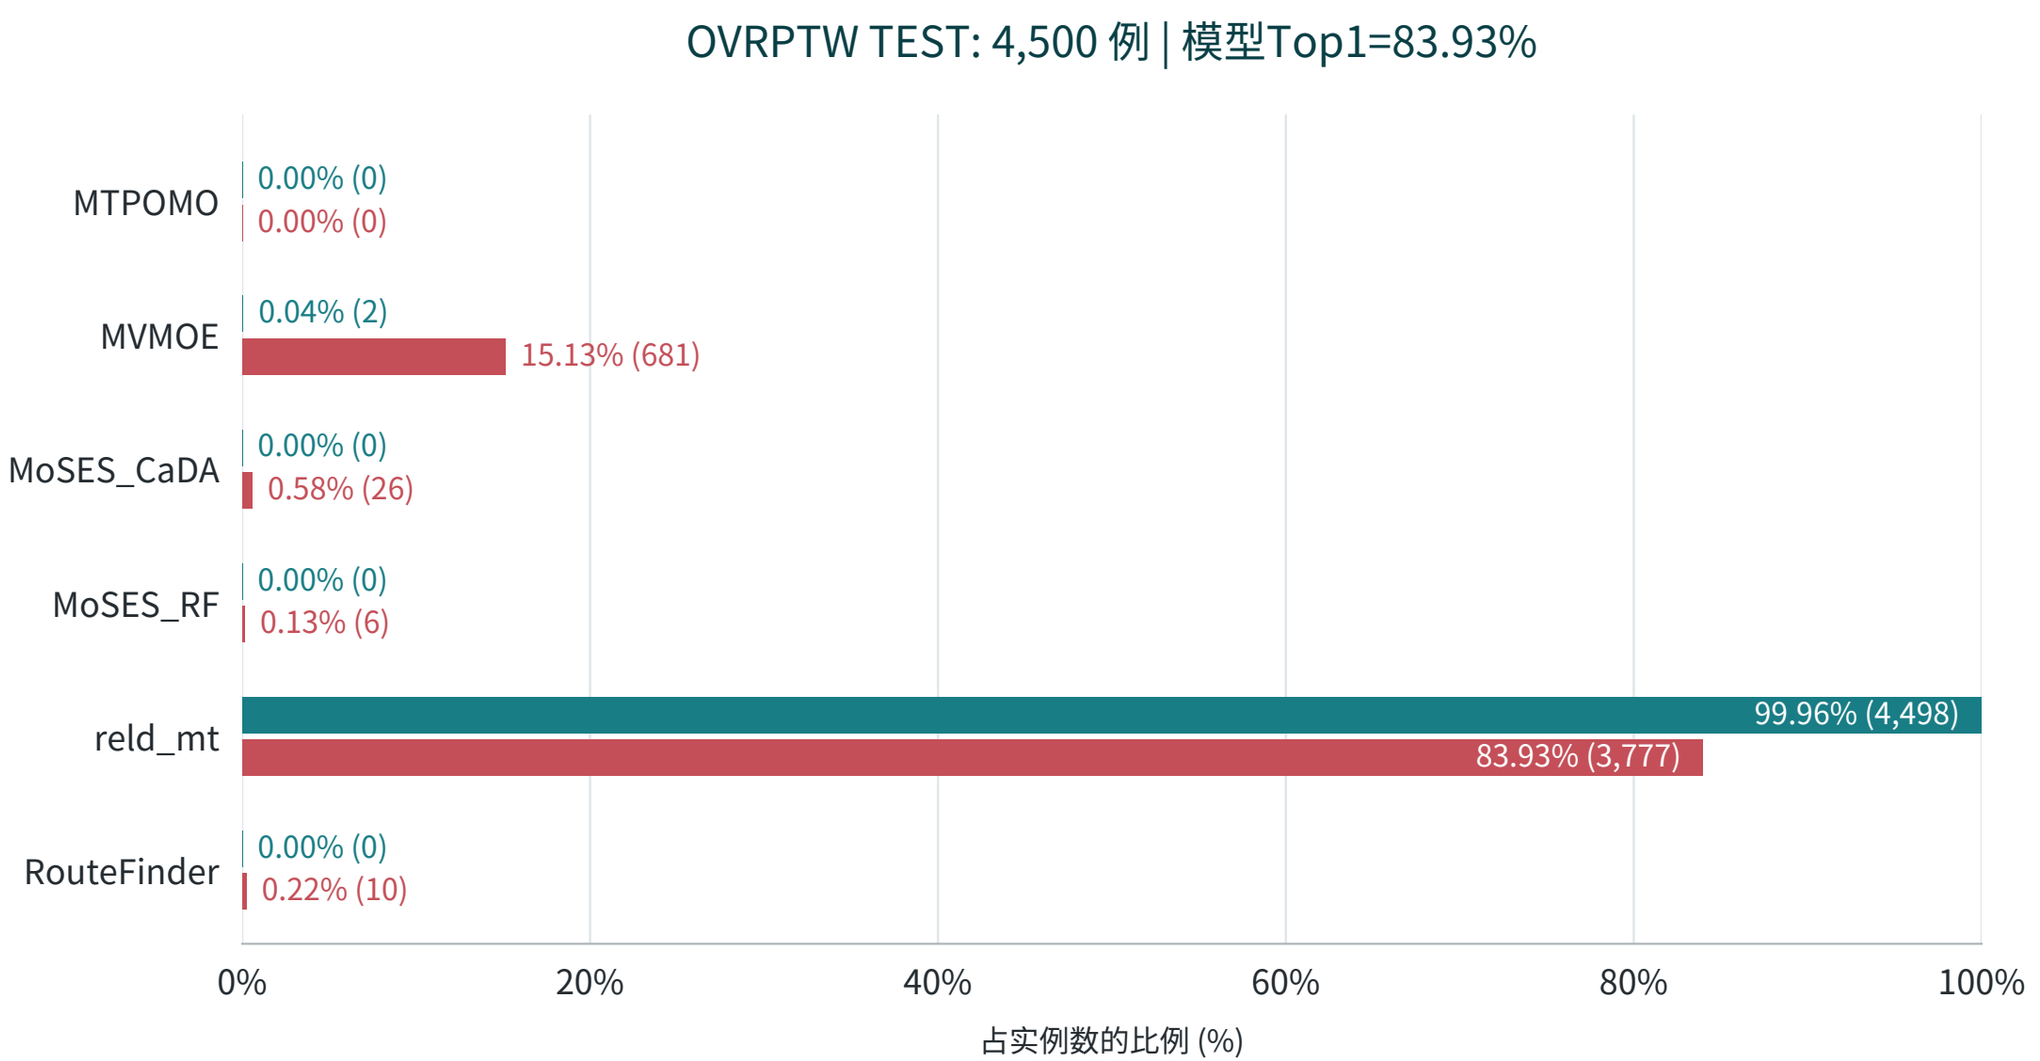

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPB | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

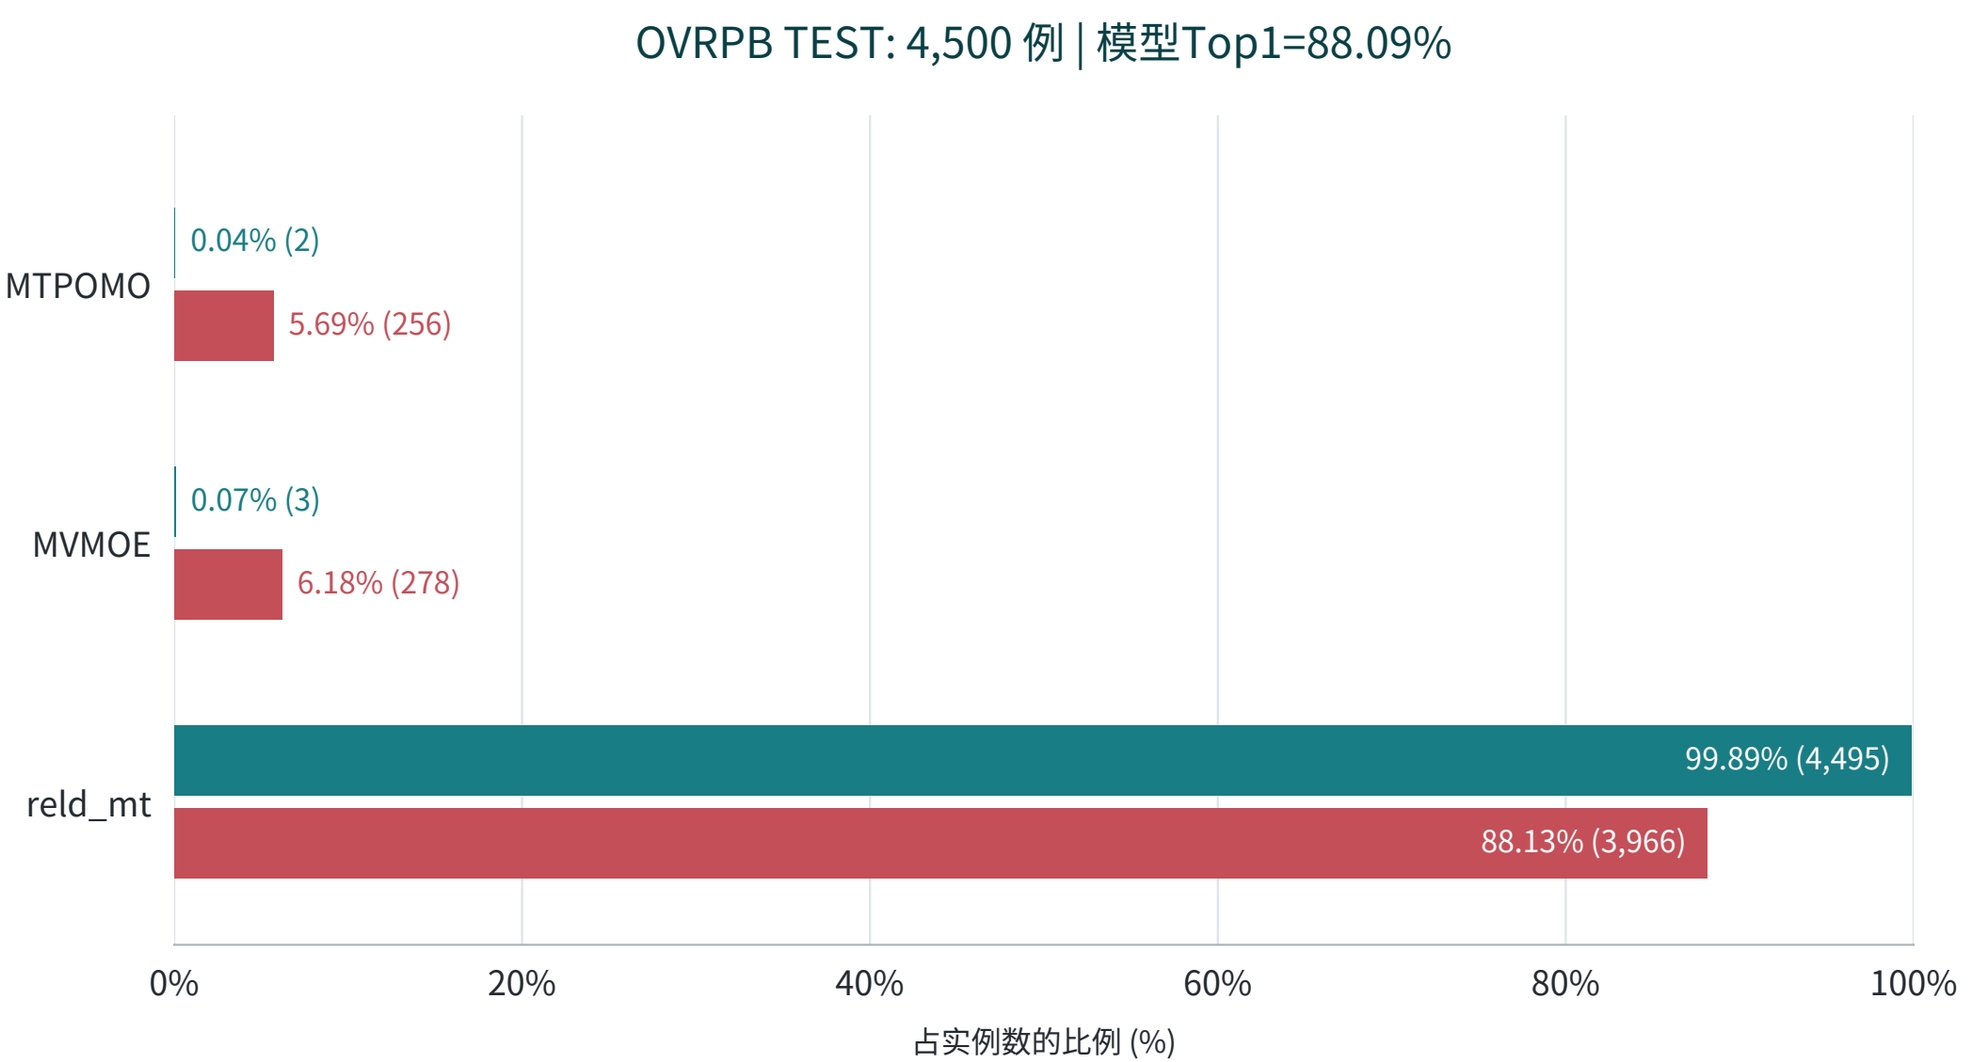

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPL | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

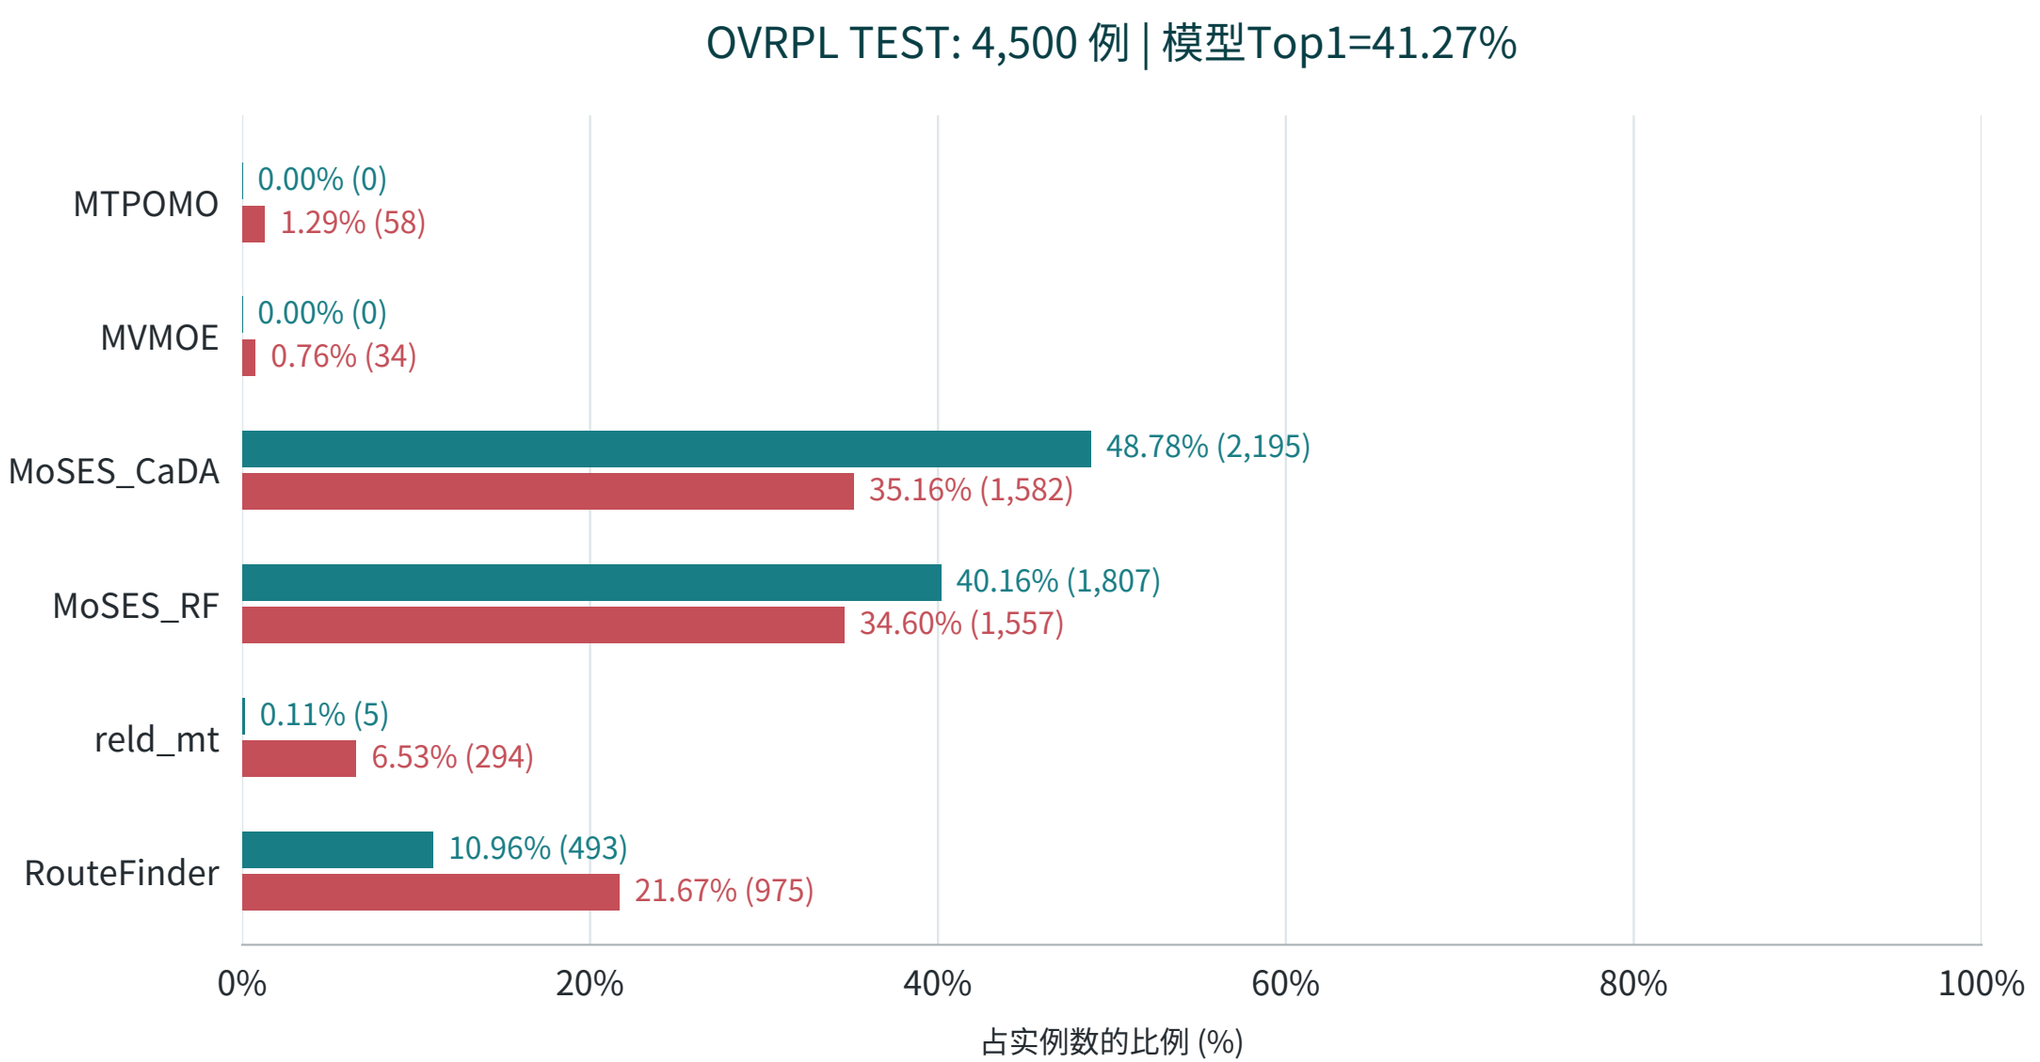

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPBL | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

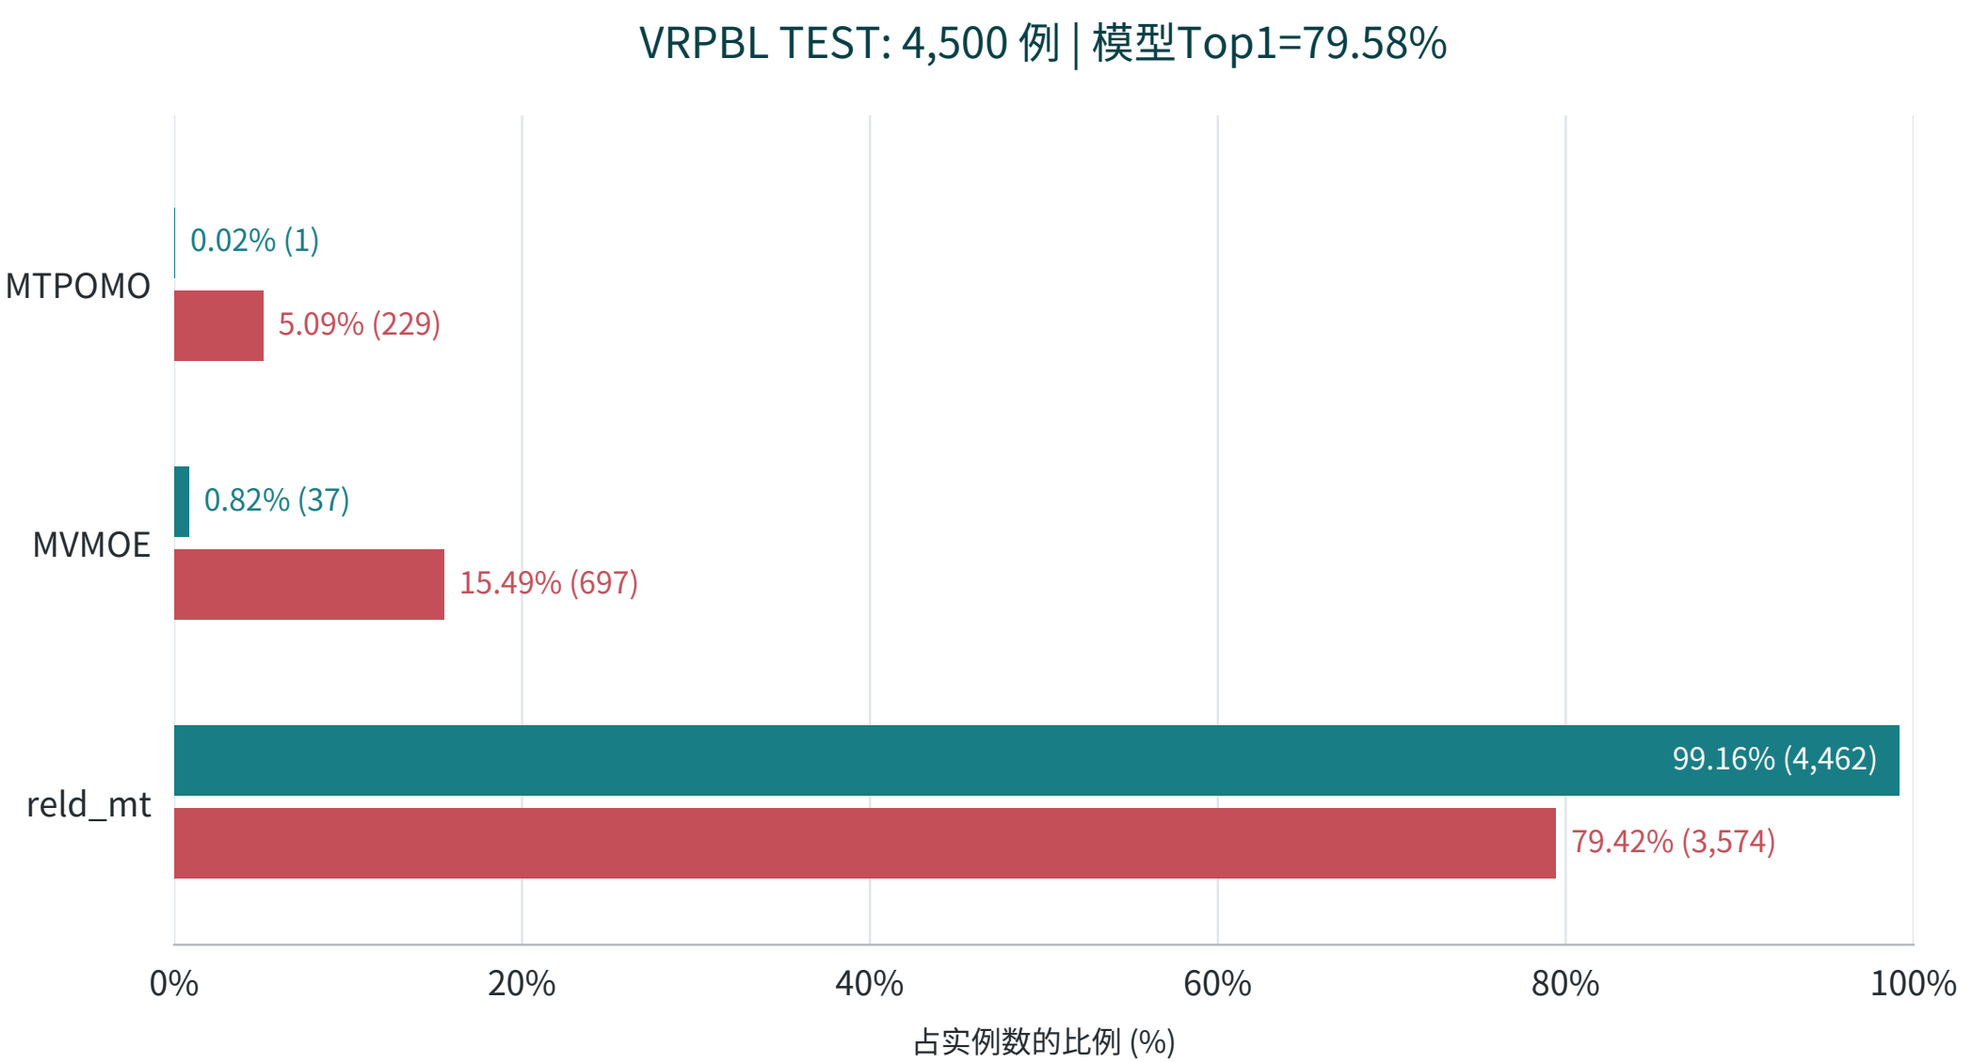

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPBTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

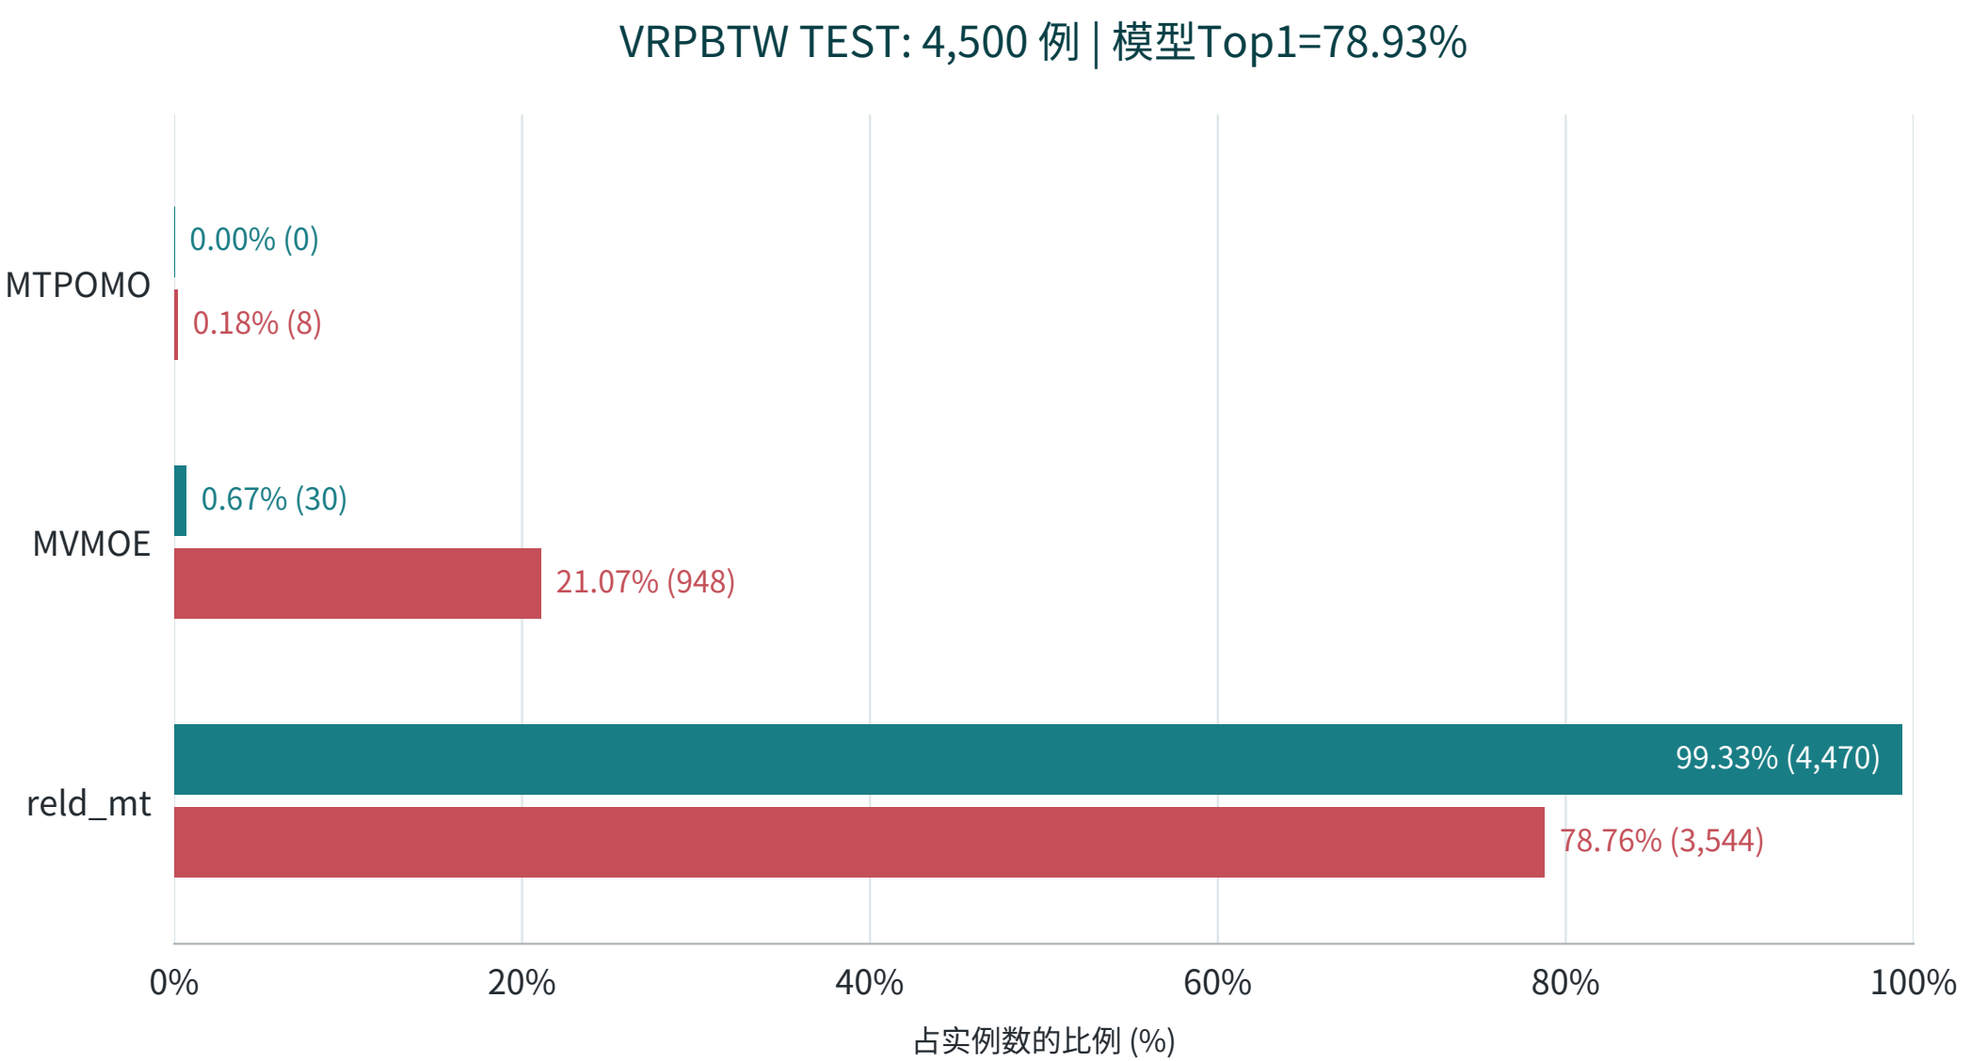

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPLTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

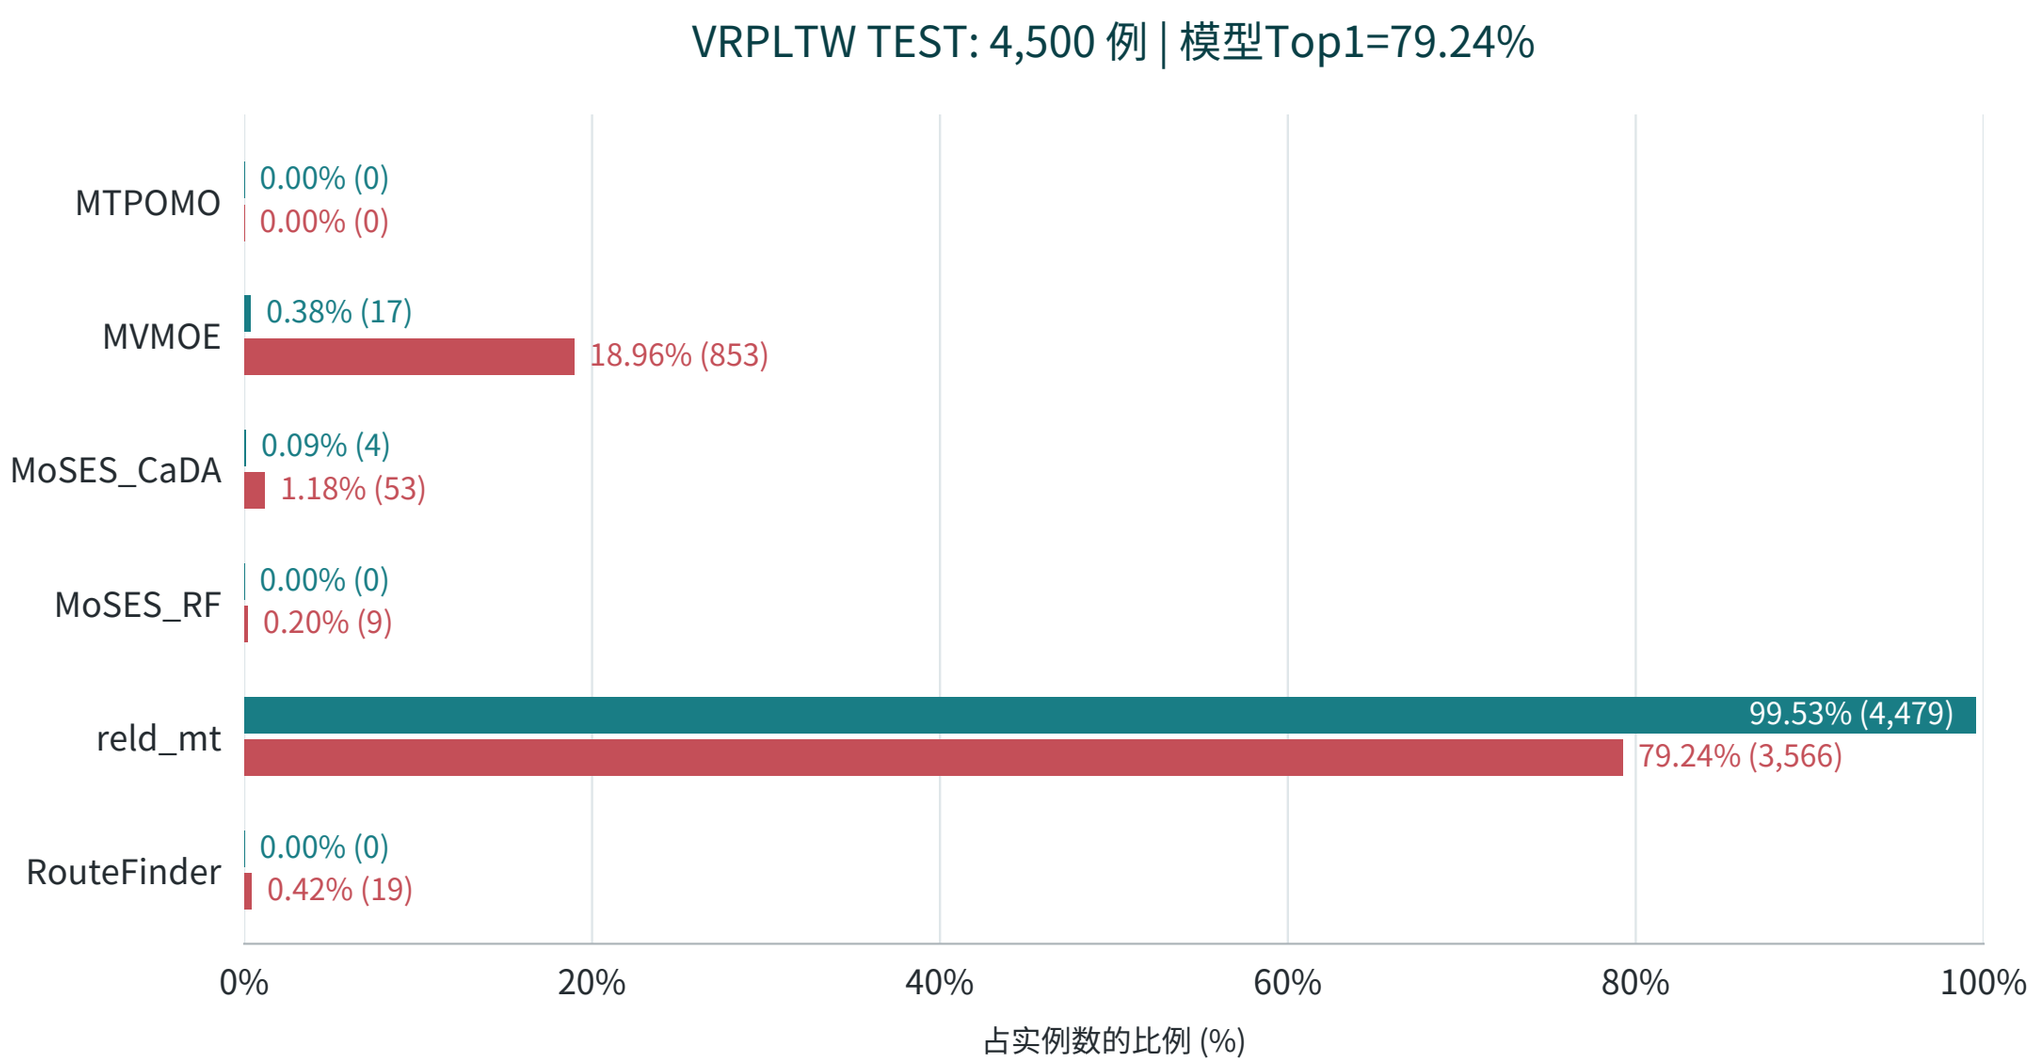

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPBL | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

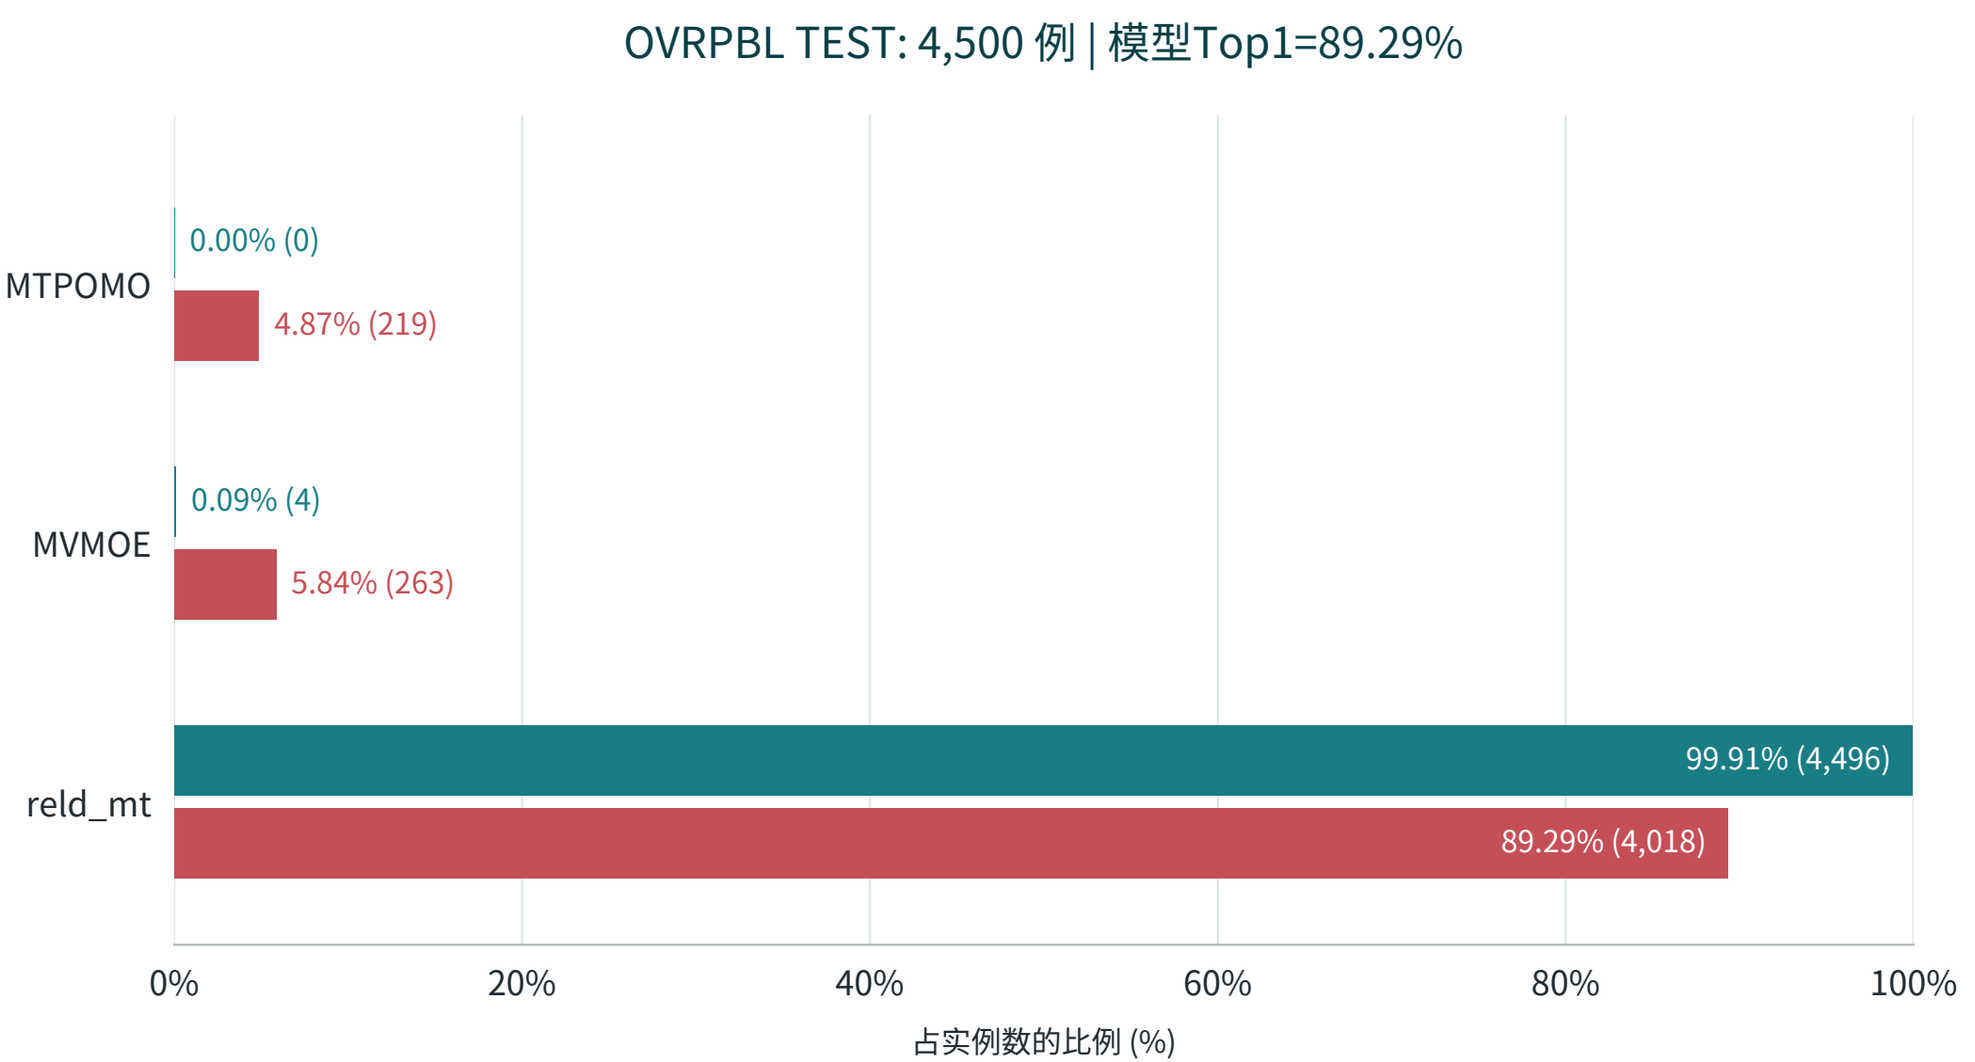

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPBTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

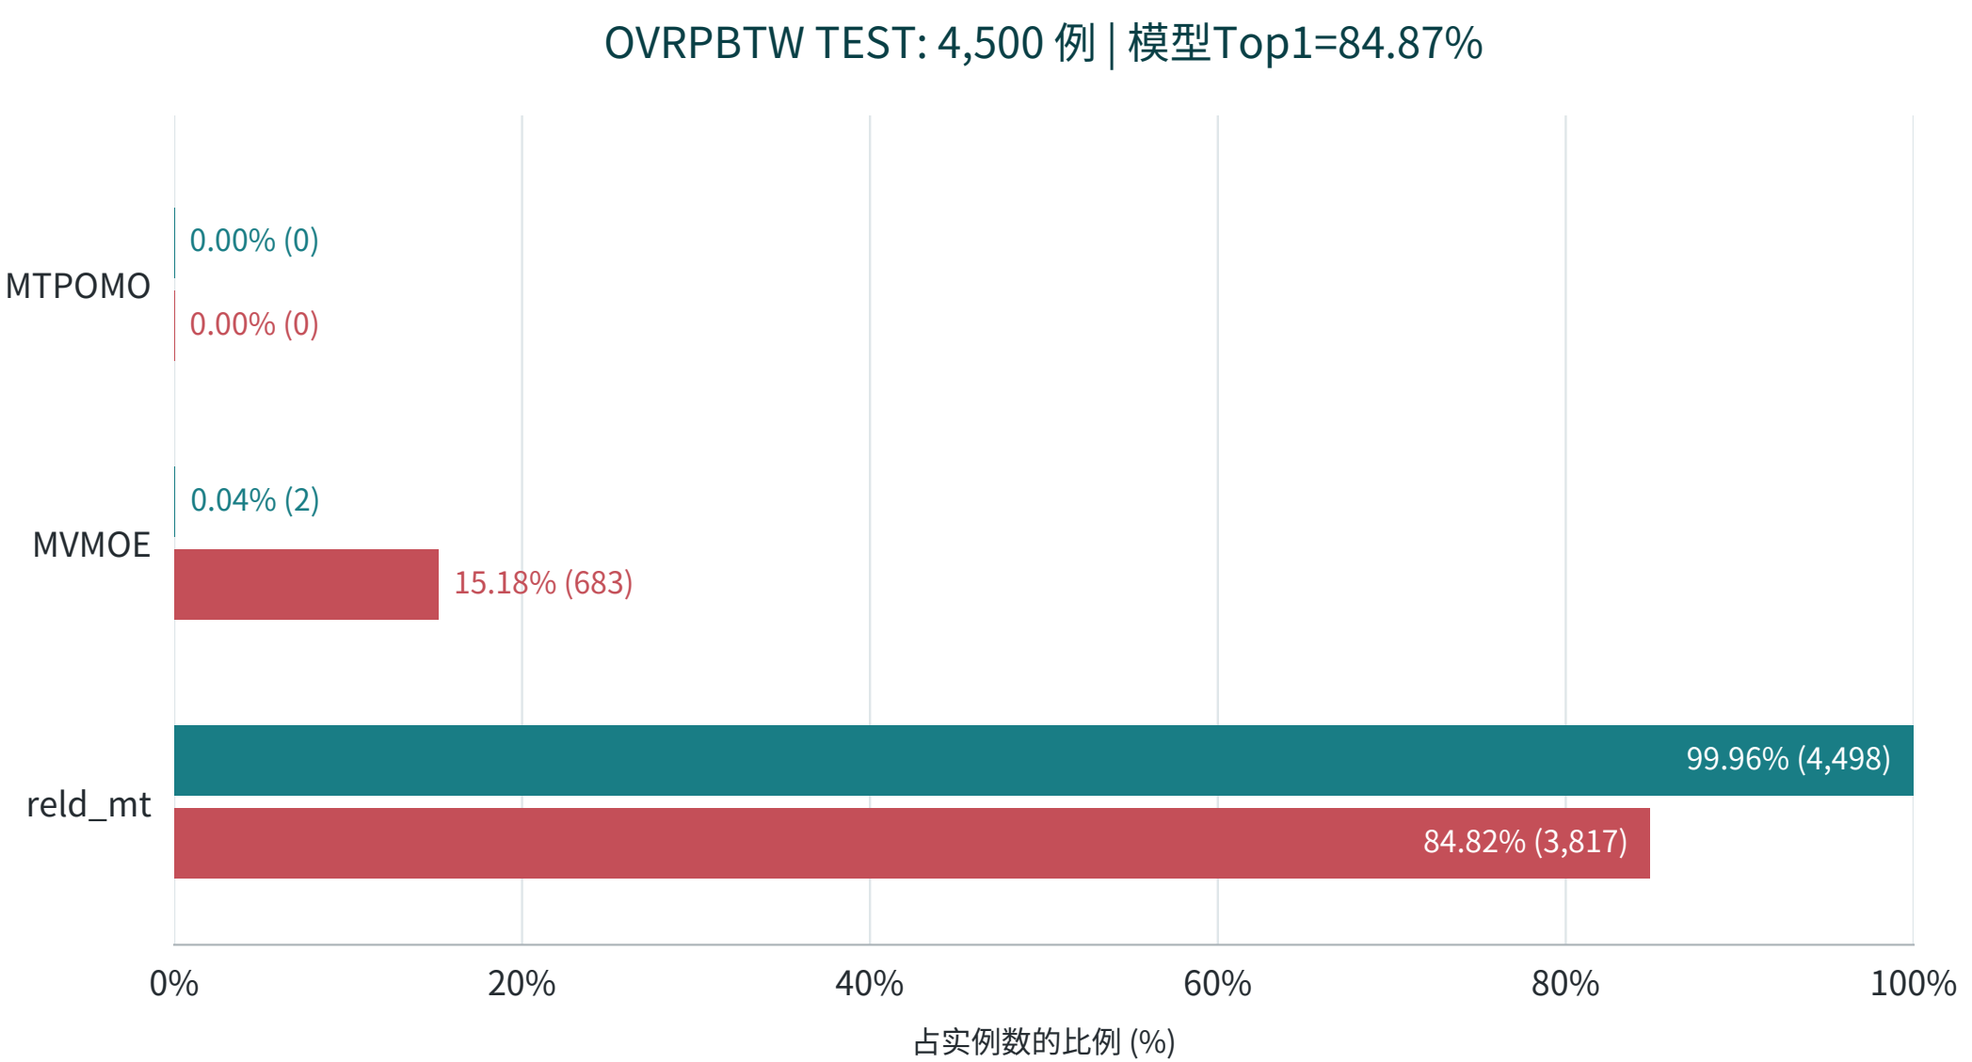

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPLTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

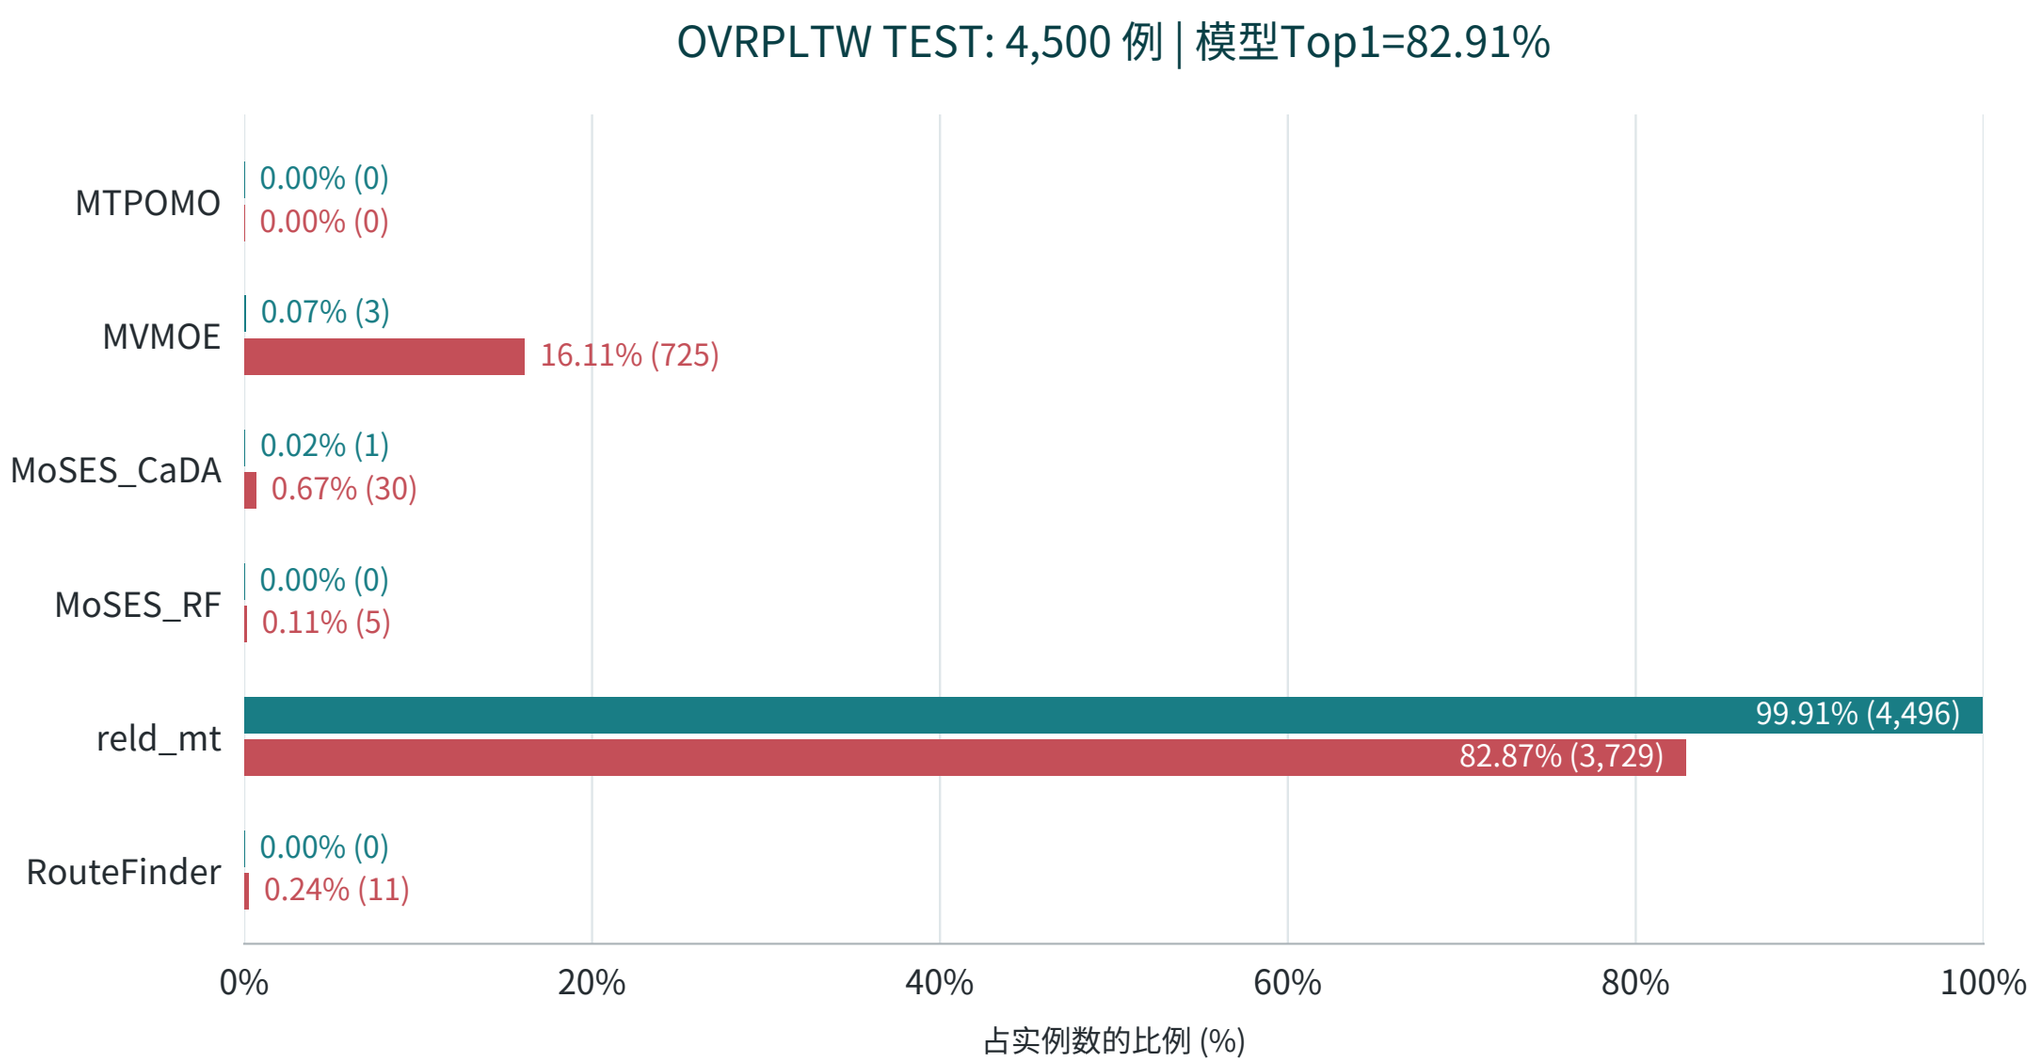

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | VRPBLTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

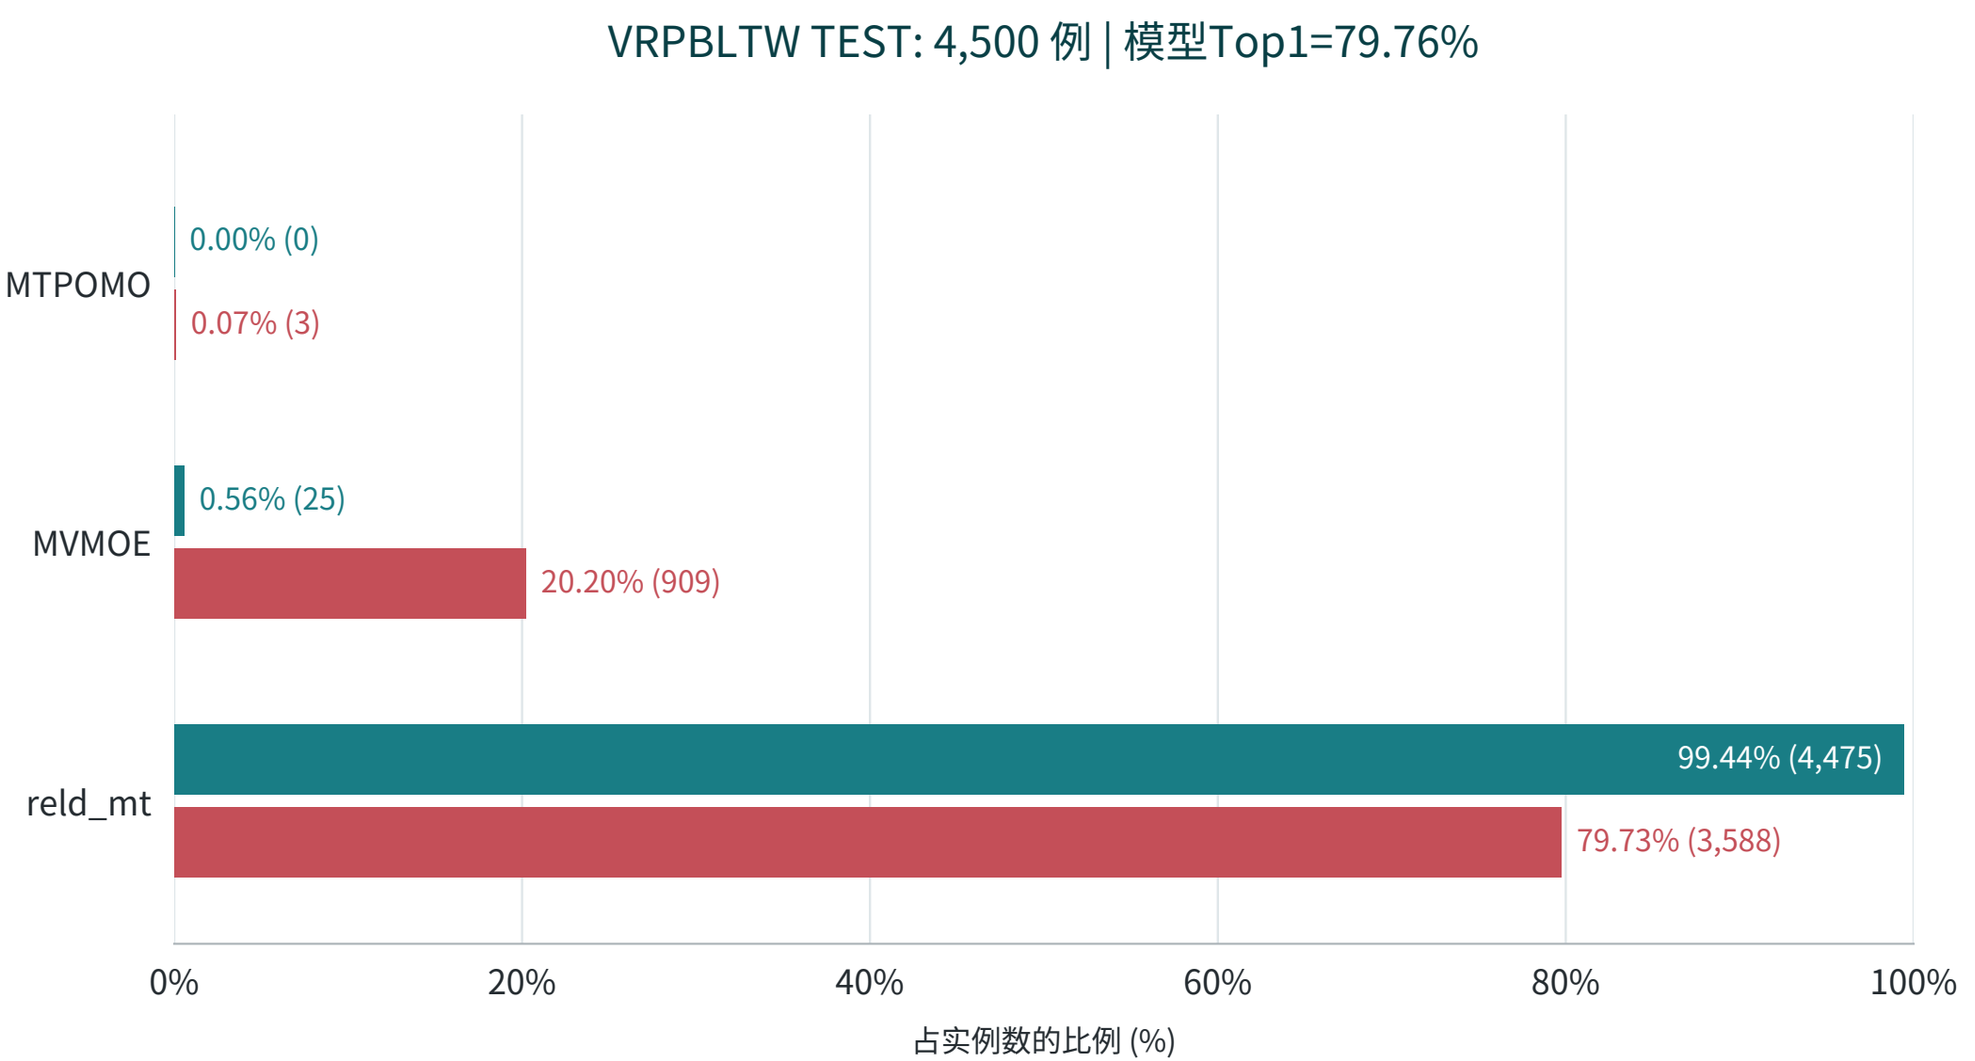

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.

R92/A | OVRPBLTW | 方法分布

同一锁定模型: epoch 40 / update 57600 / SHA256 1f76aa7441cb98a8

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

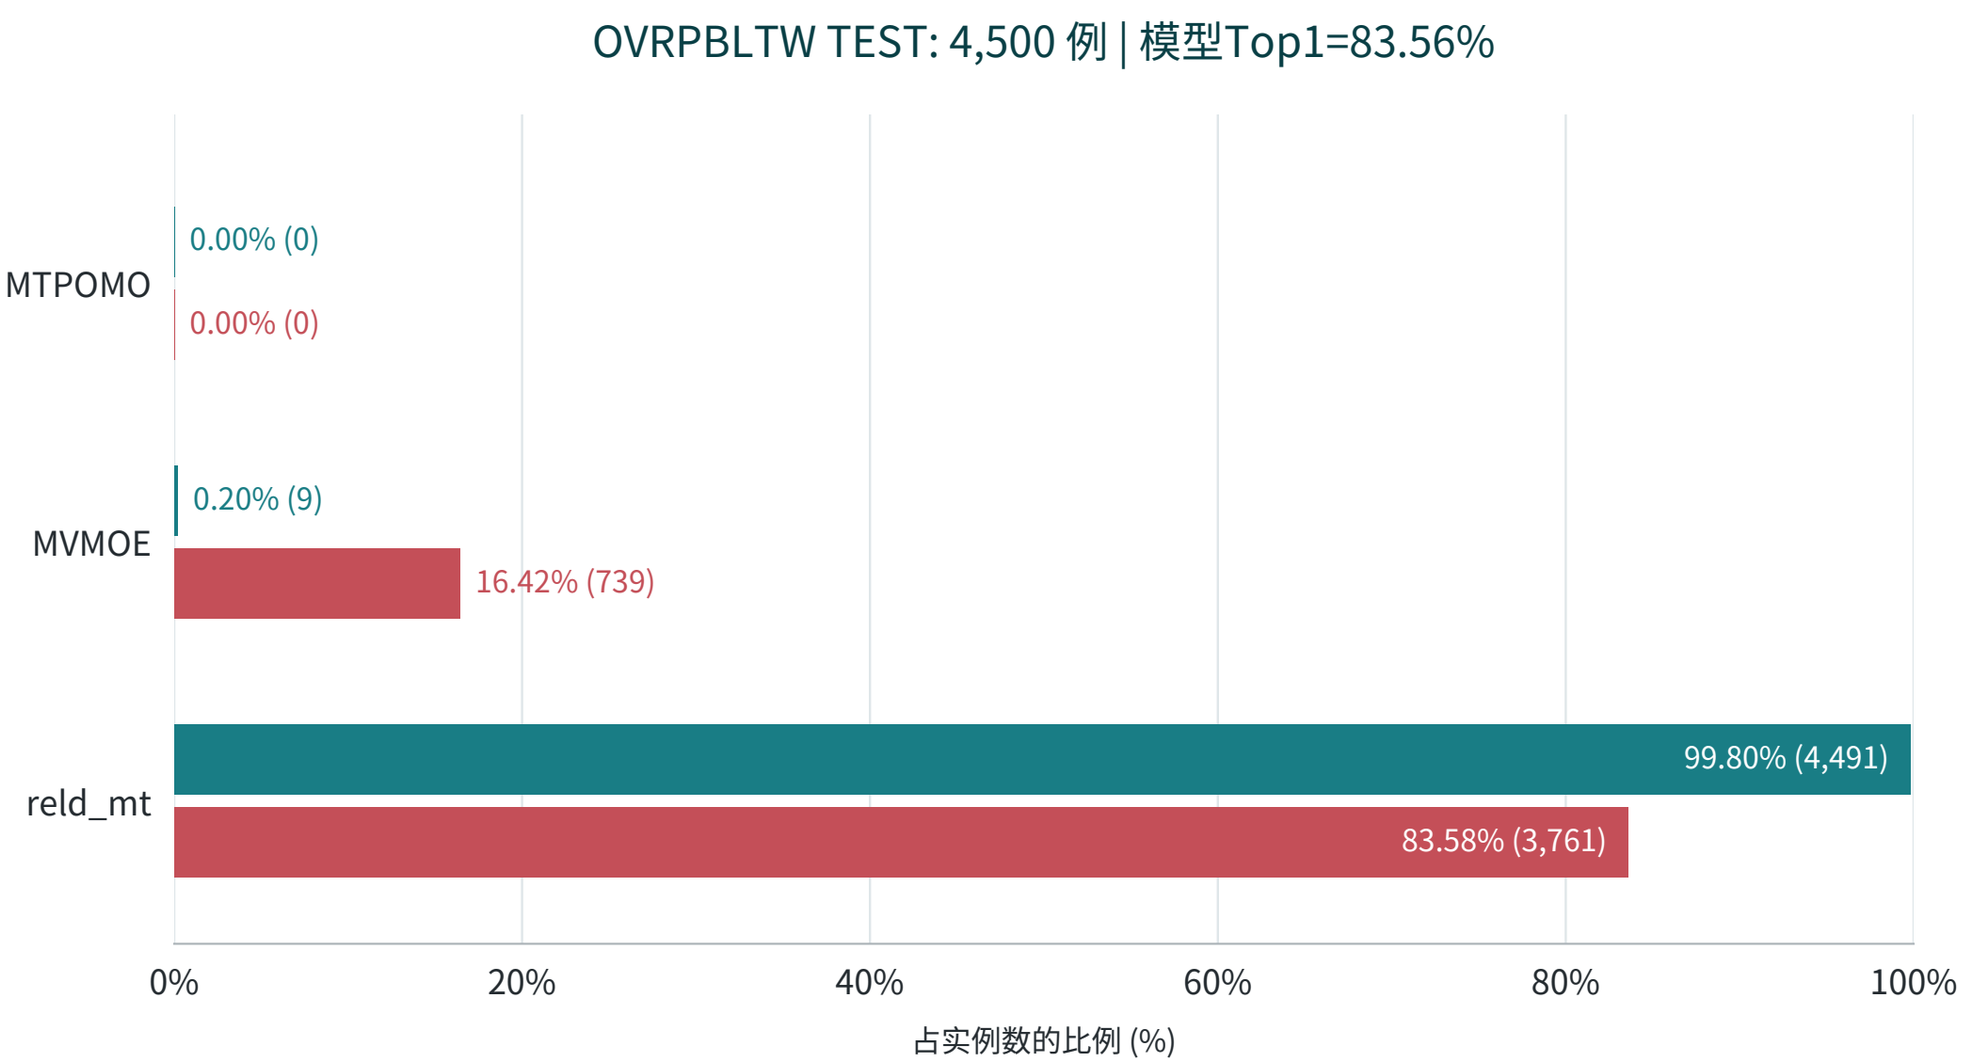

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R92/A: stable global solver-ID score ties. Same R92 lock; LIB inference only; no training/reselection/Rxx mixing.