



R92/D | Saved Training History

Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.

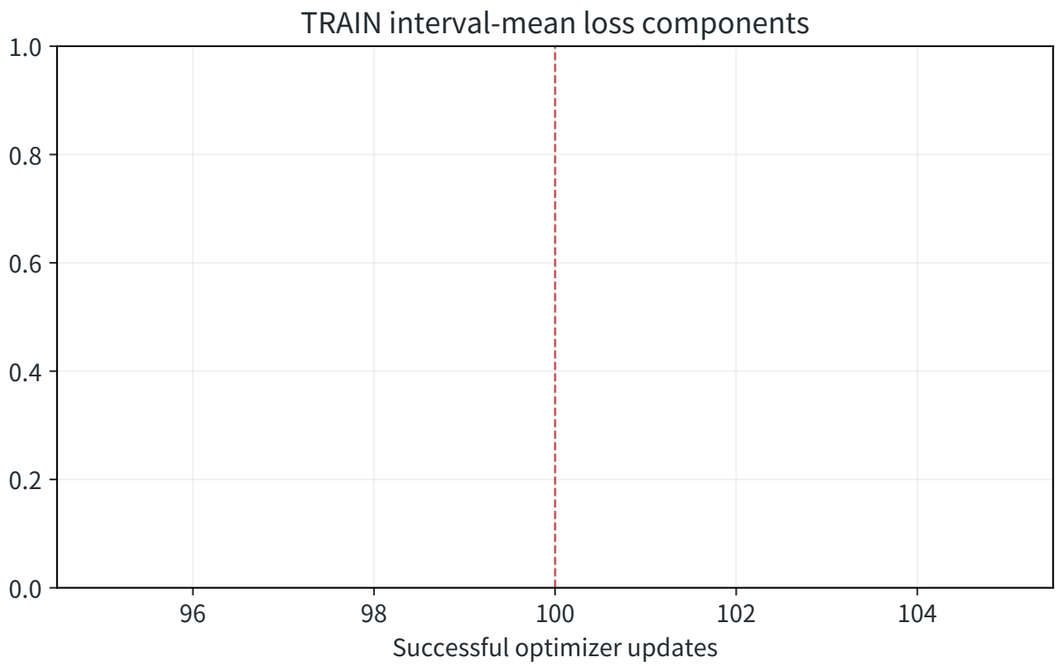

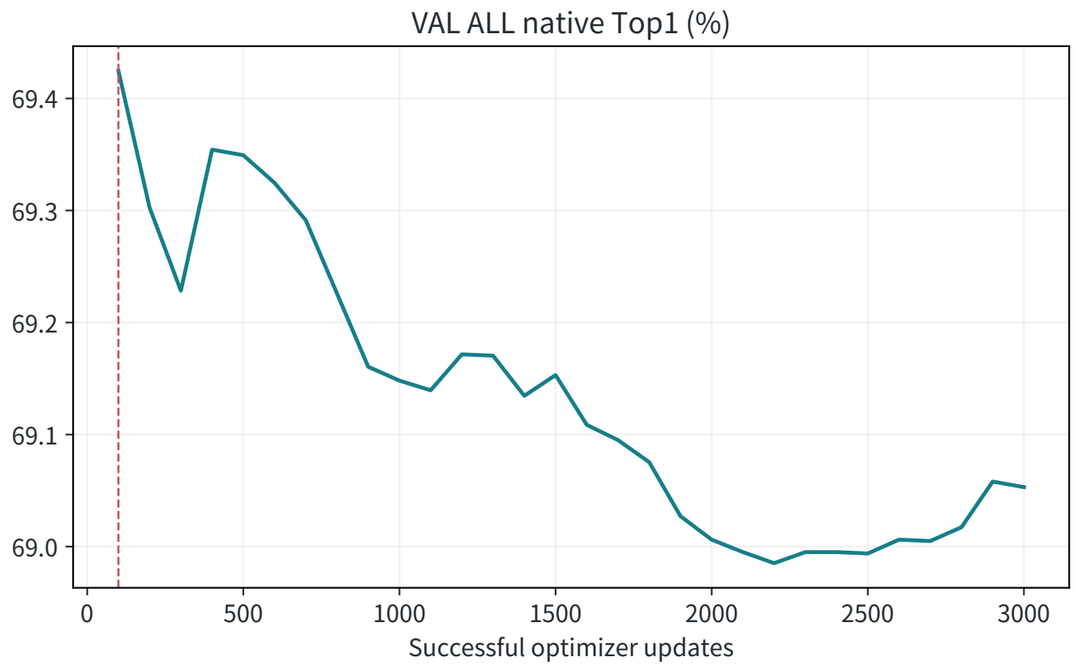


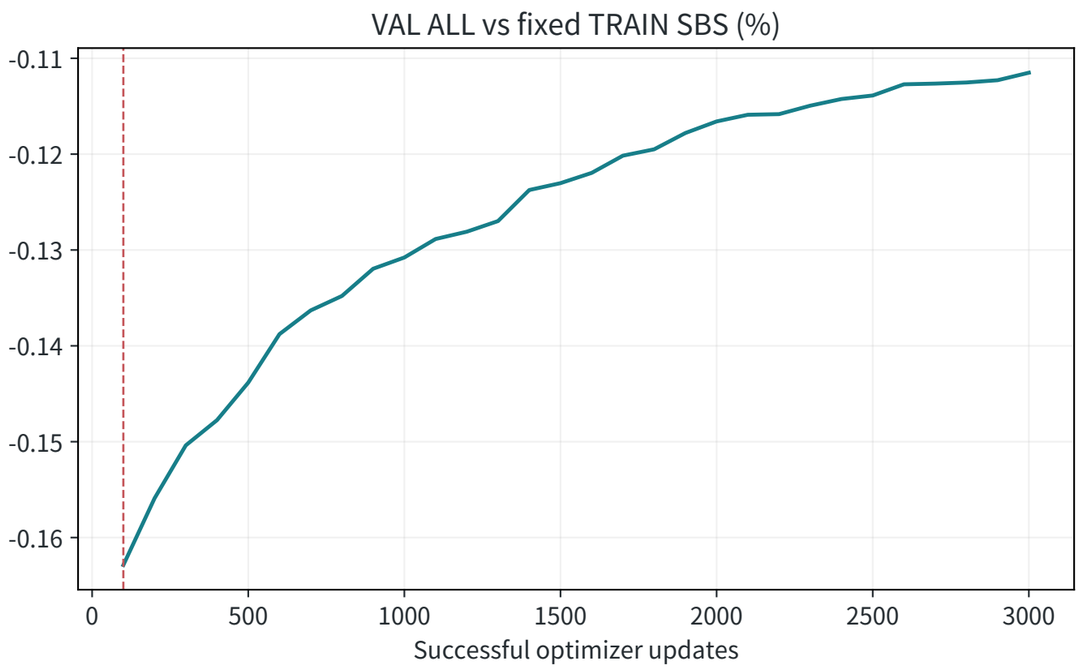


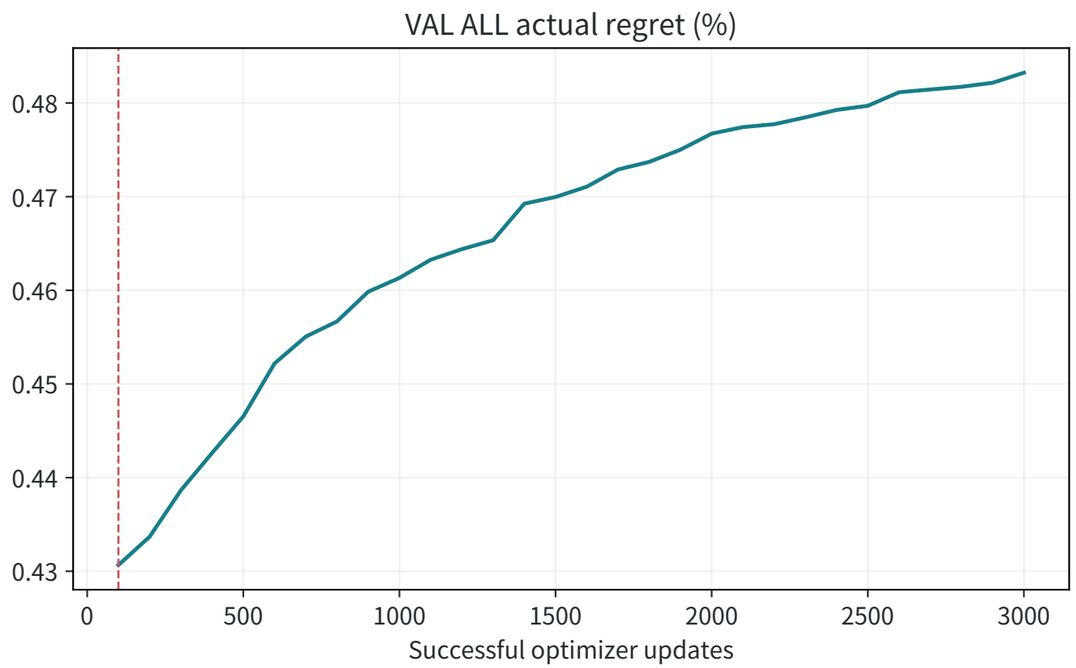



R92/D | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

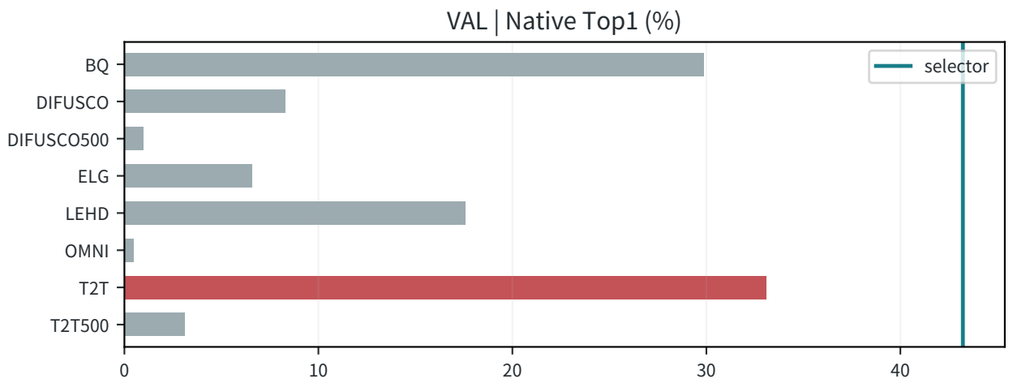


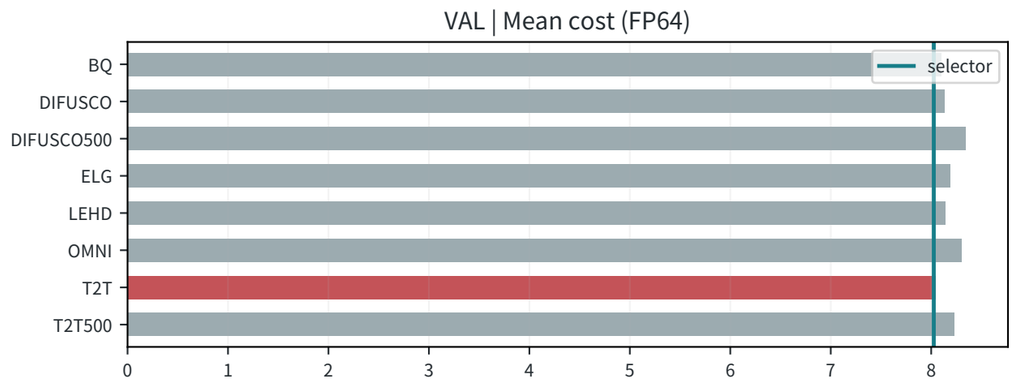

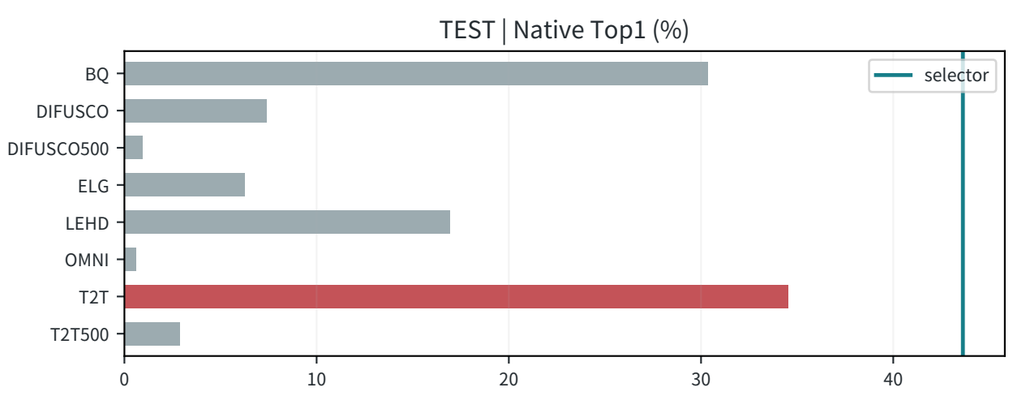

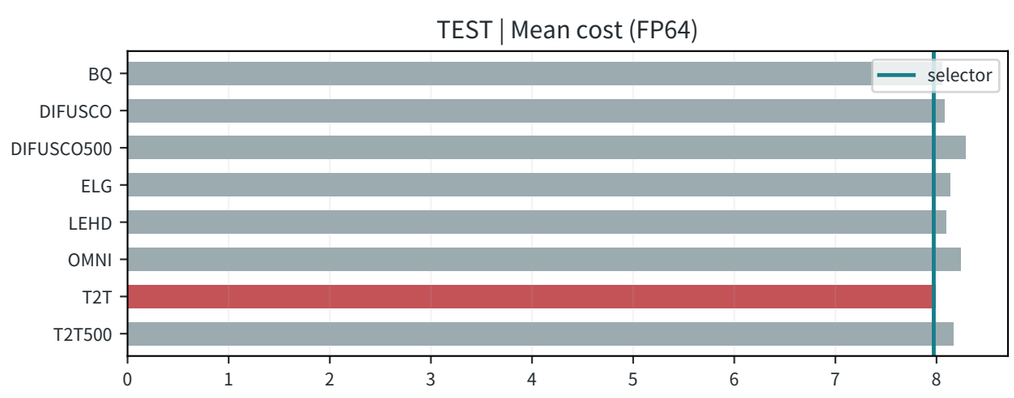


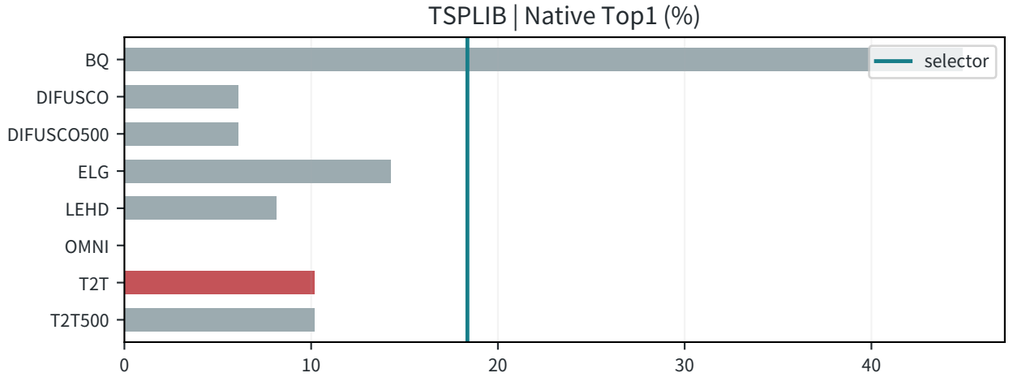


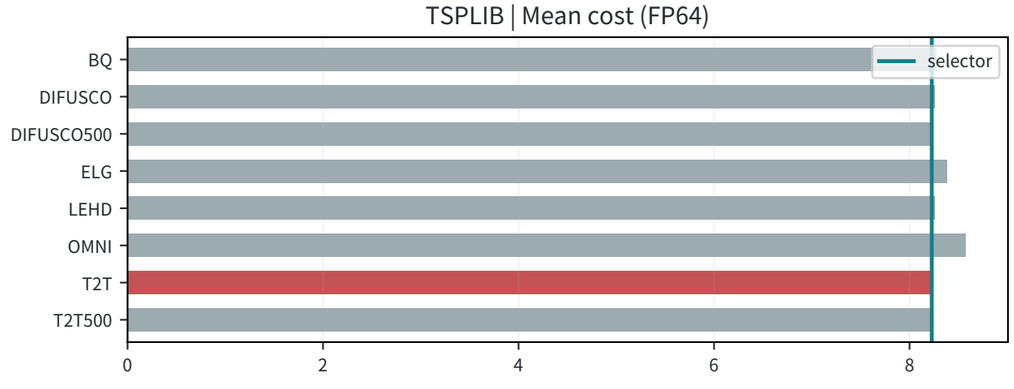



R92/D | CVRP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

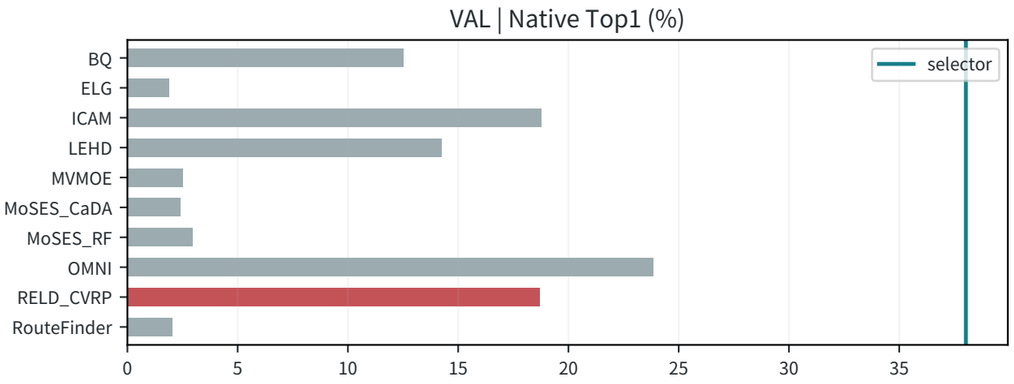


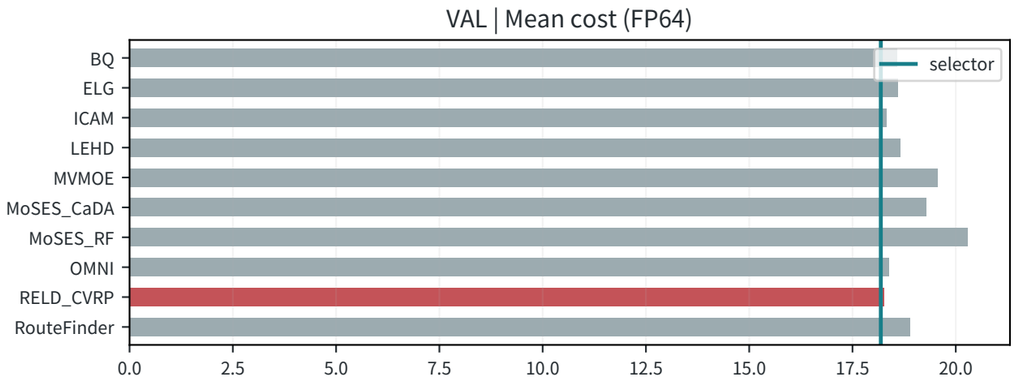

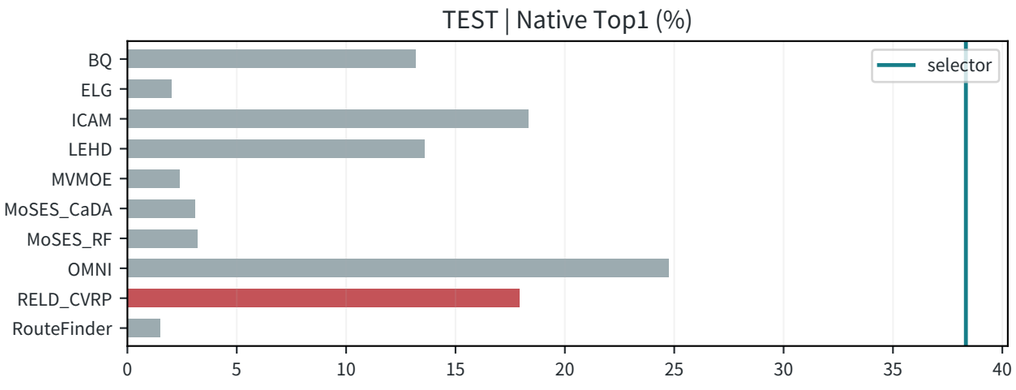

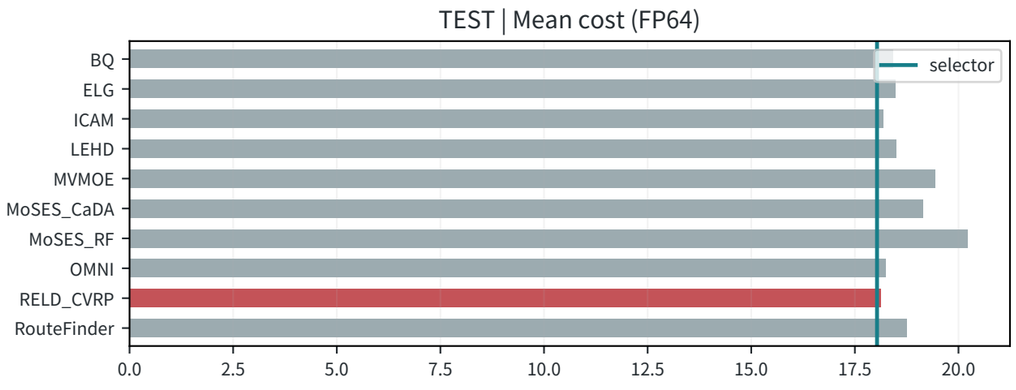


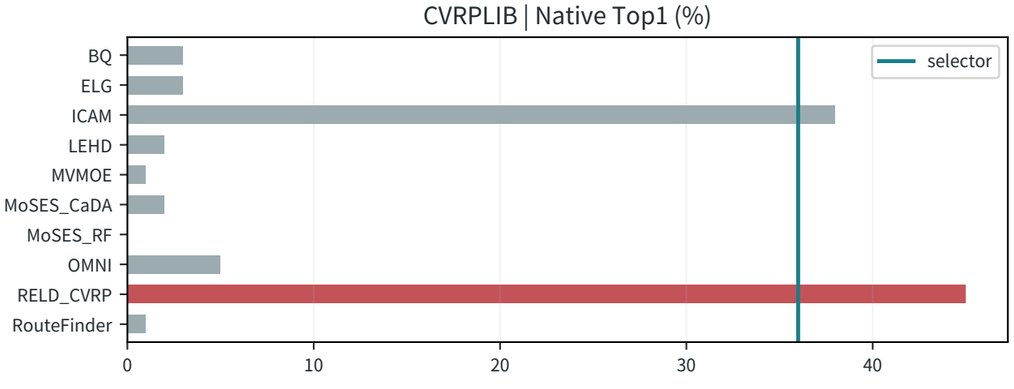


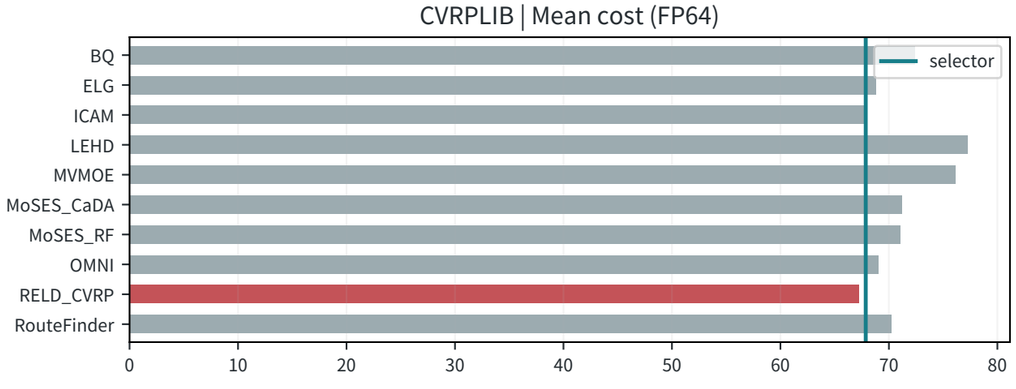



R92/D | ATSP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

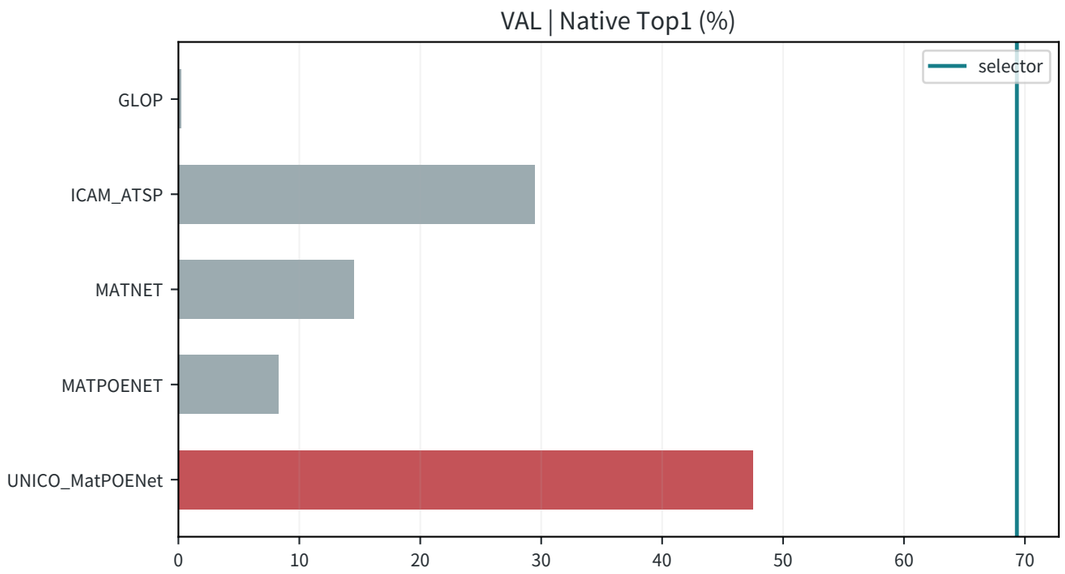

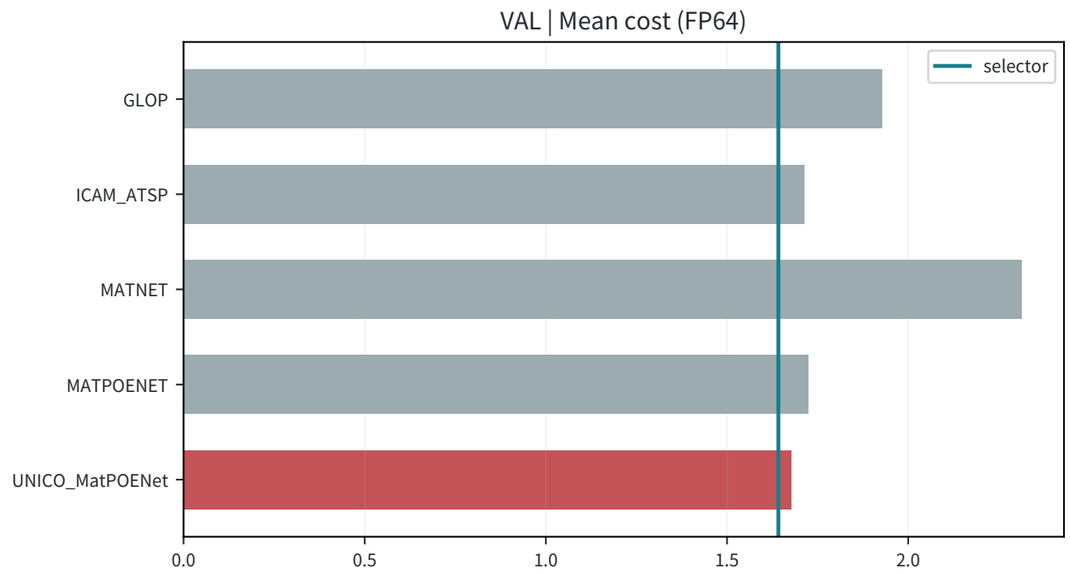


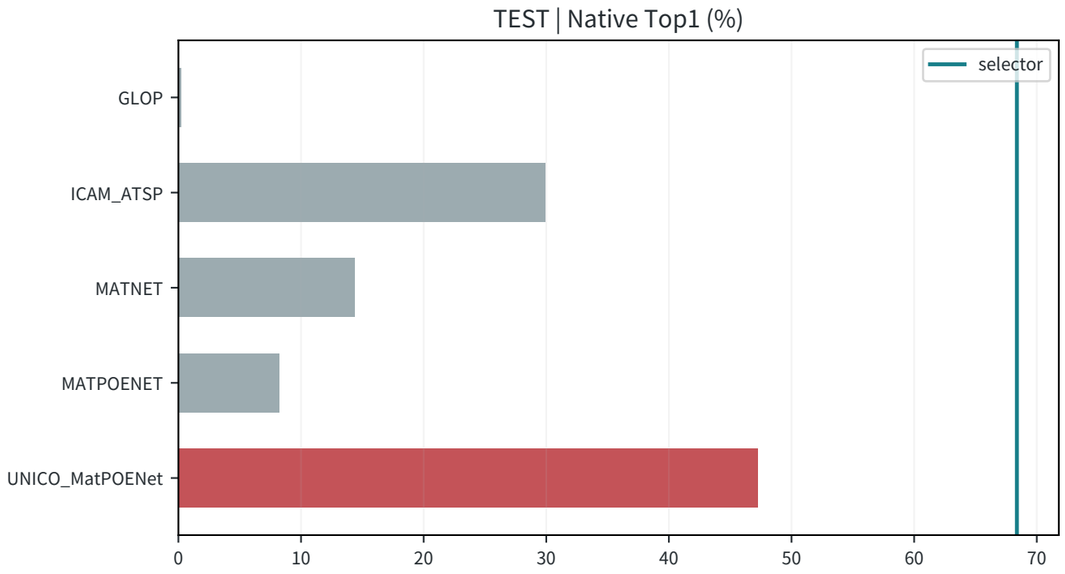


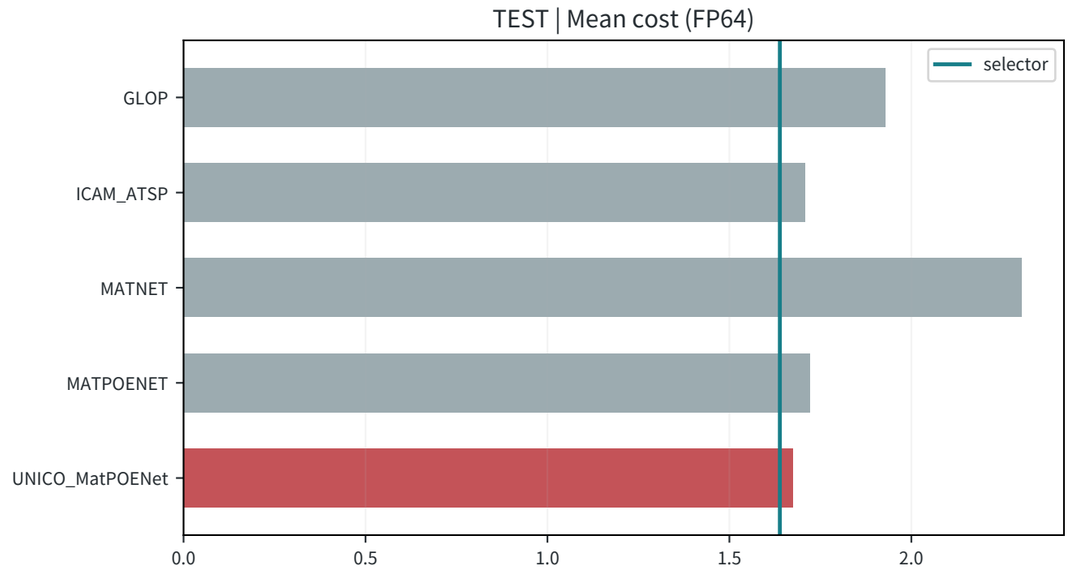



R92/D | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

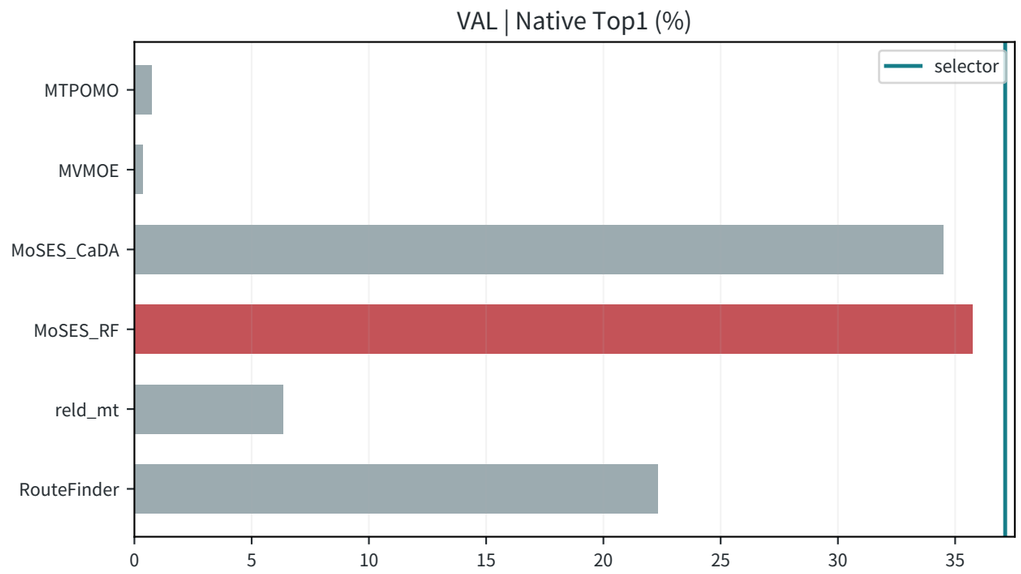

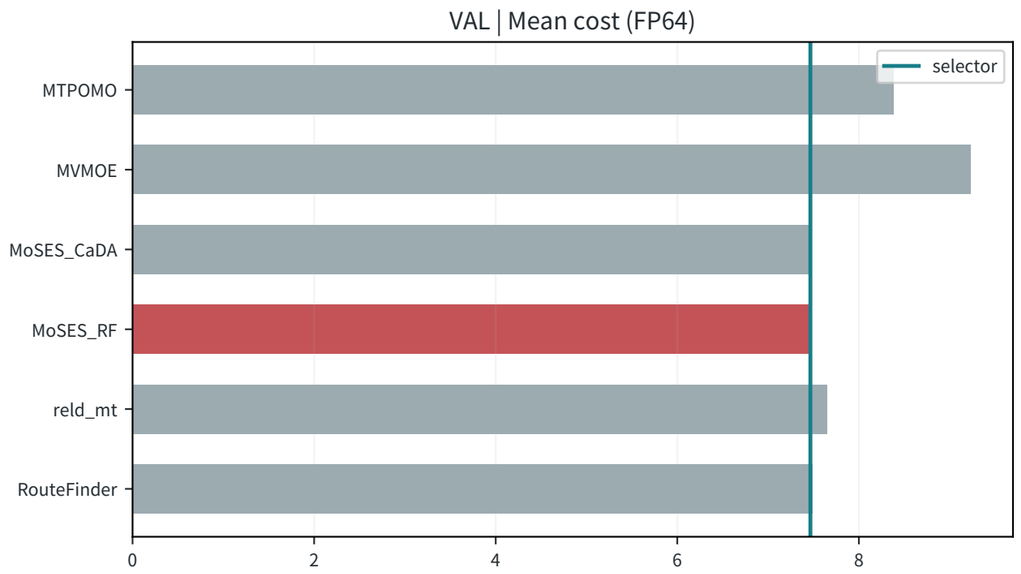


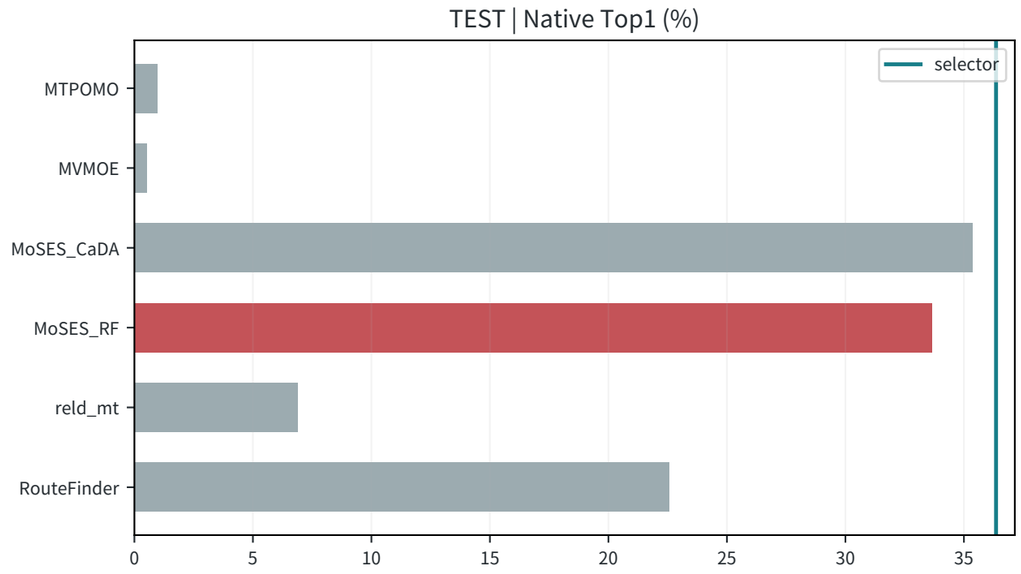


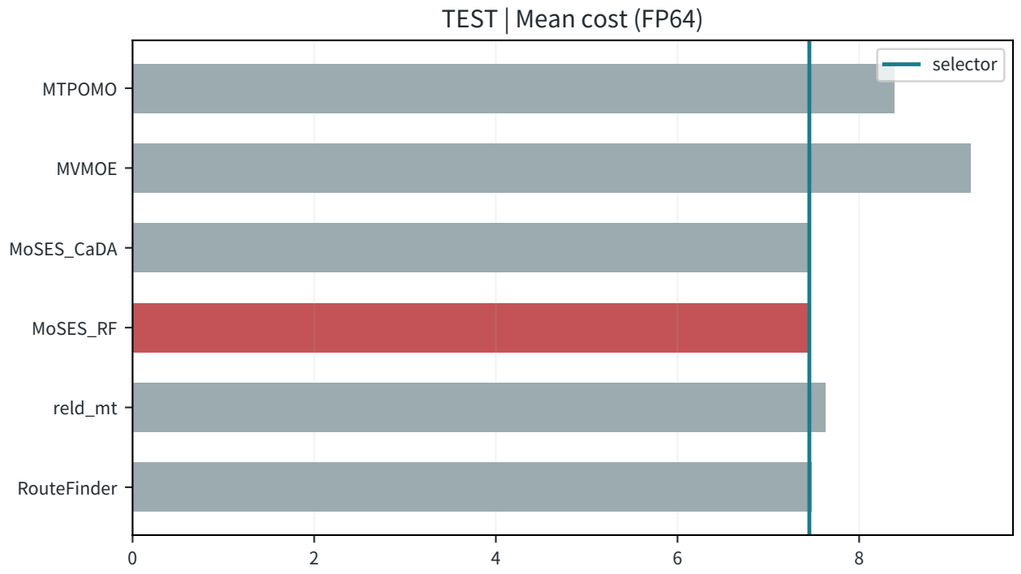



R92/D | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

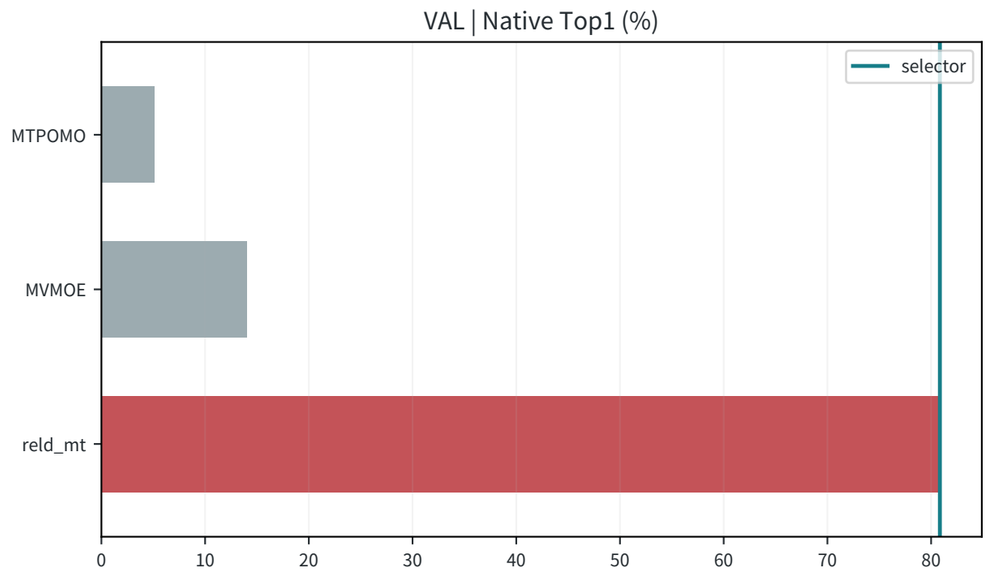

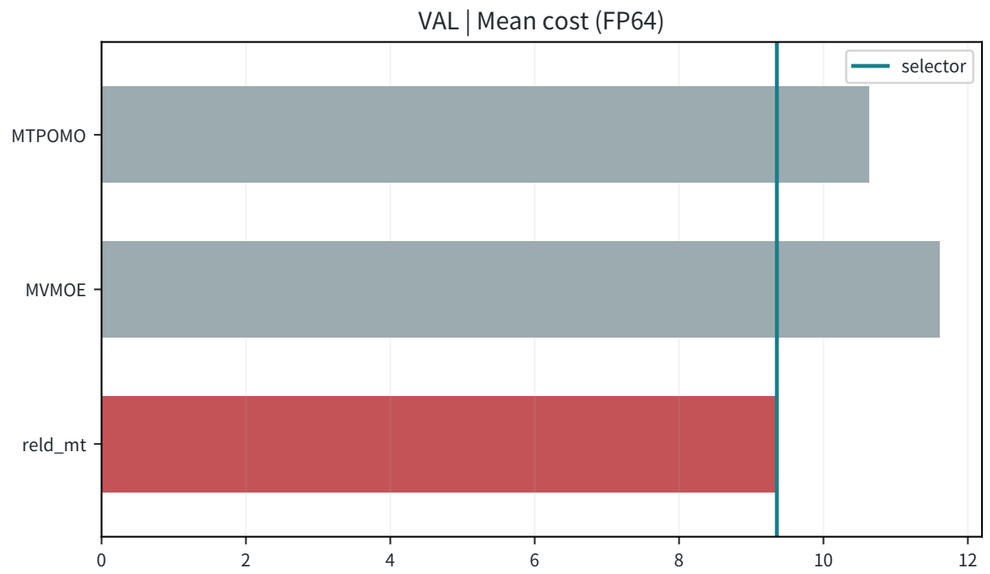


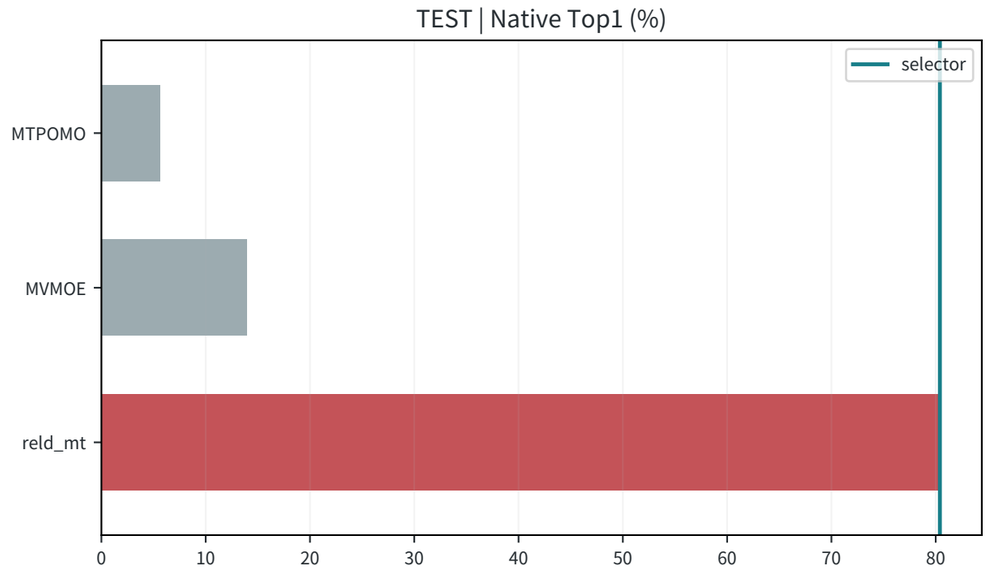


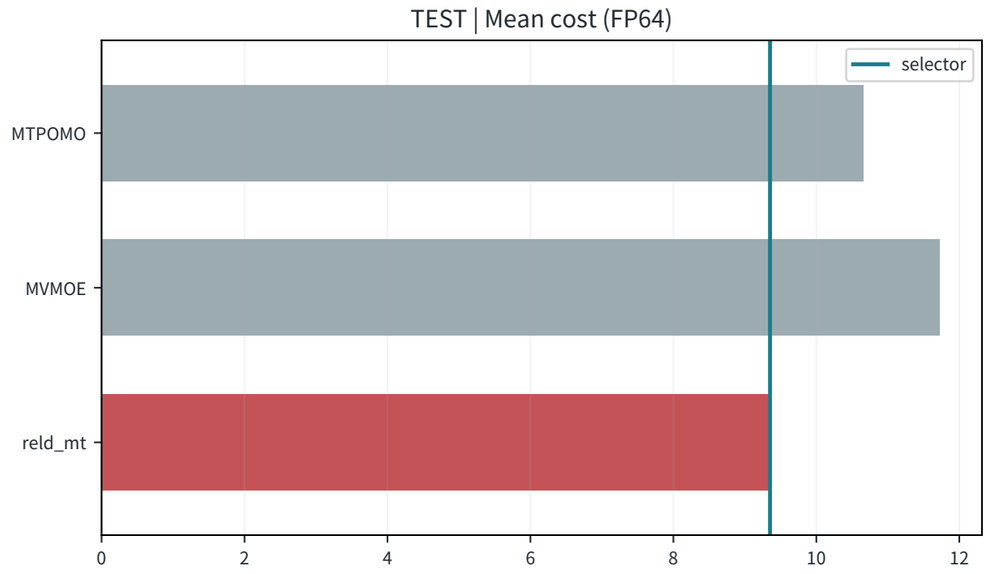



R92/D | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

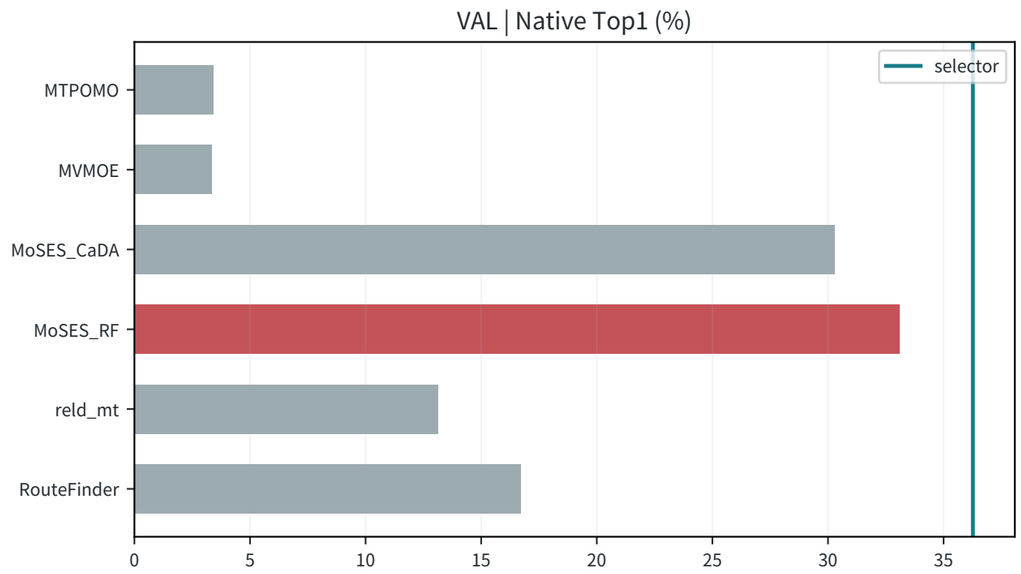

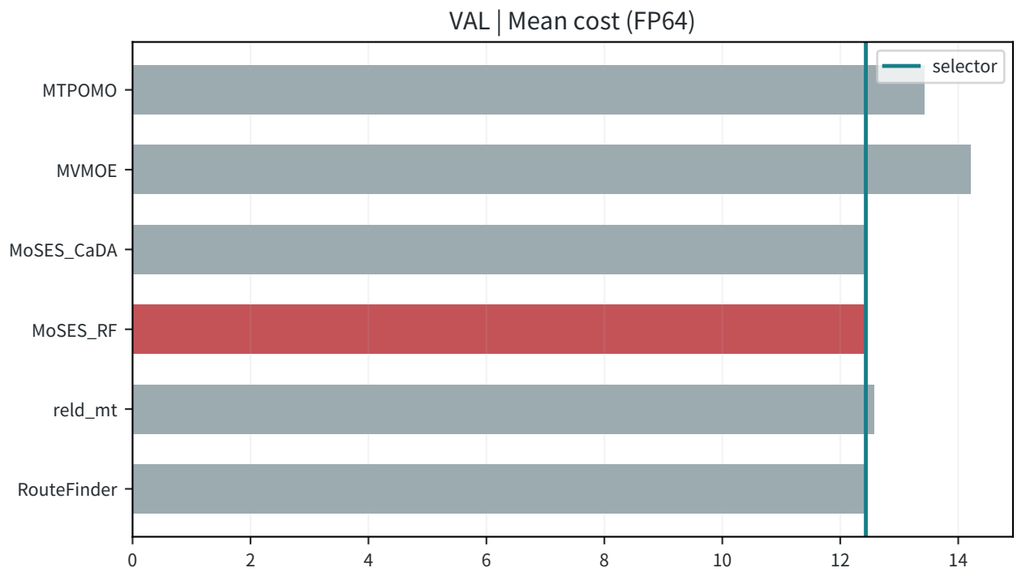


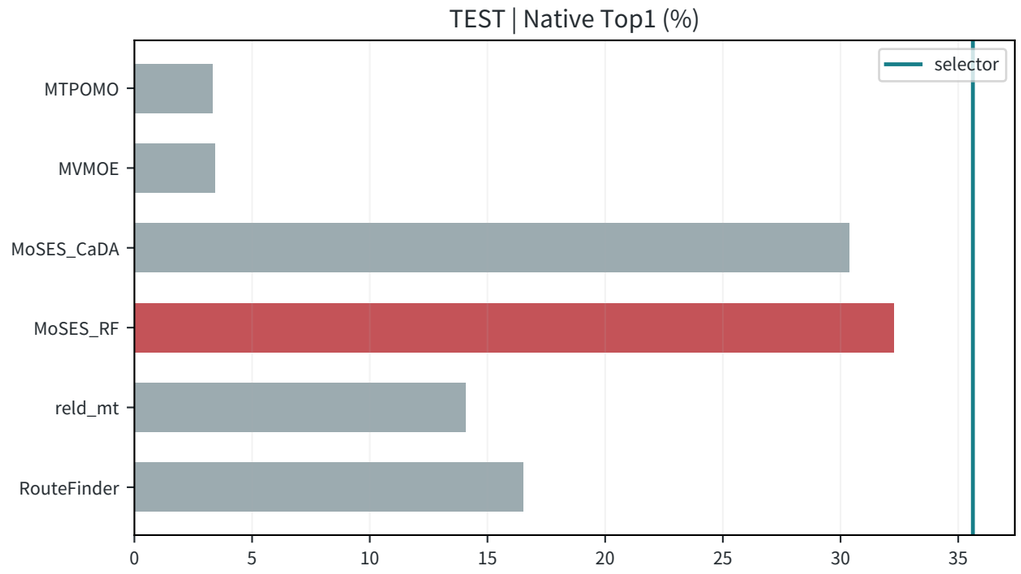


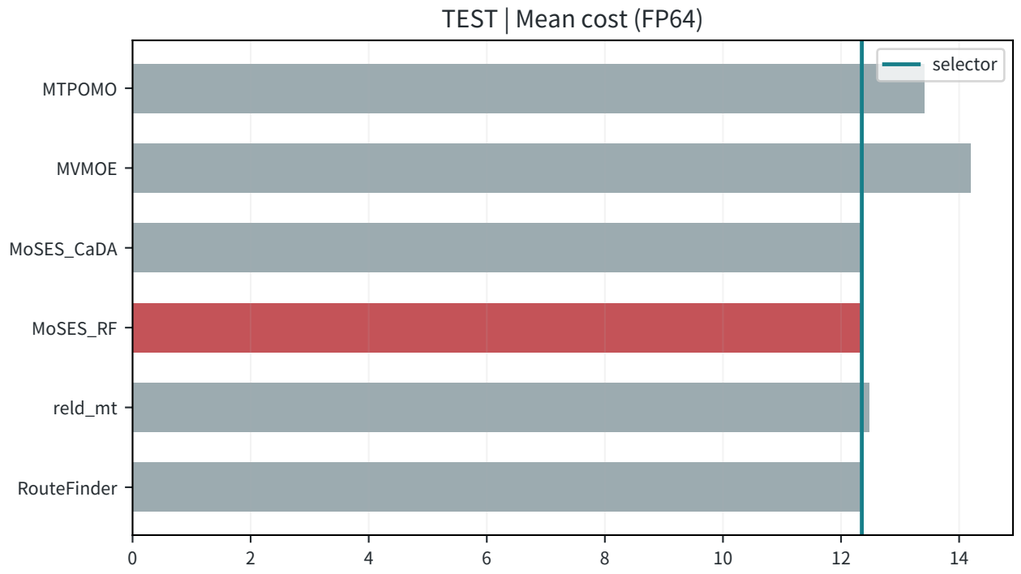



R92/D | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

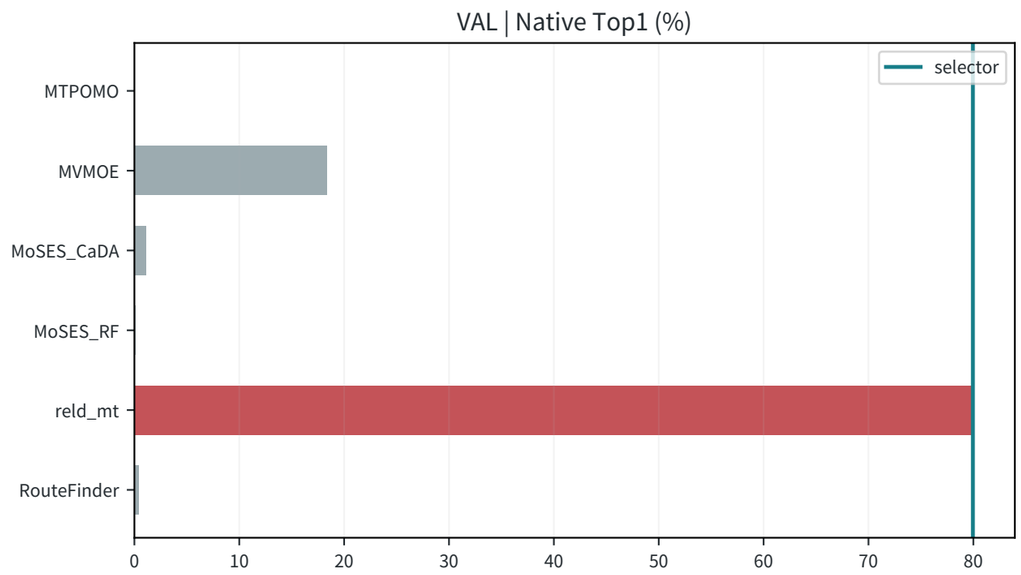

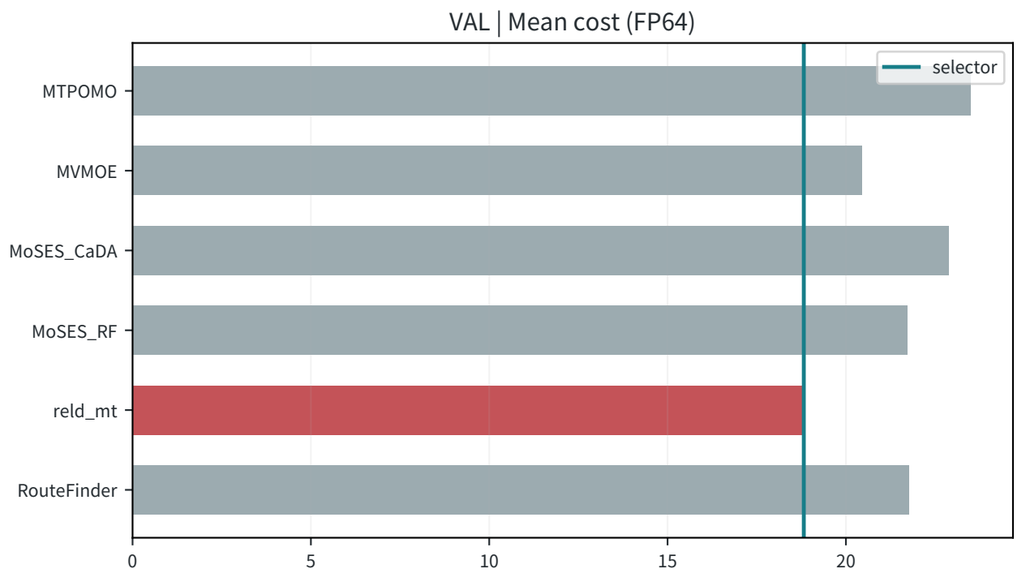


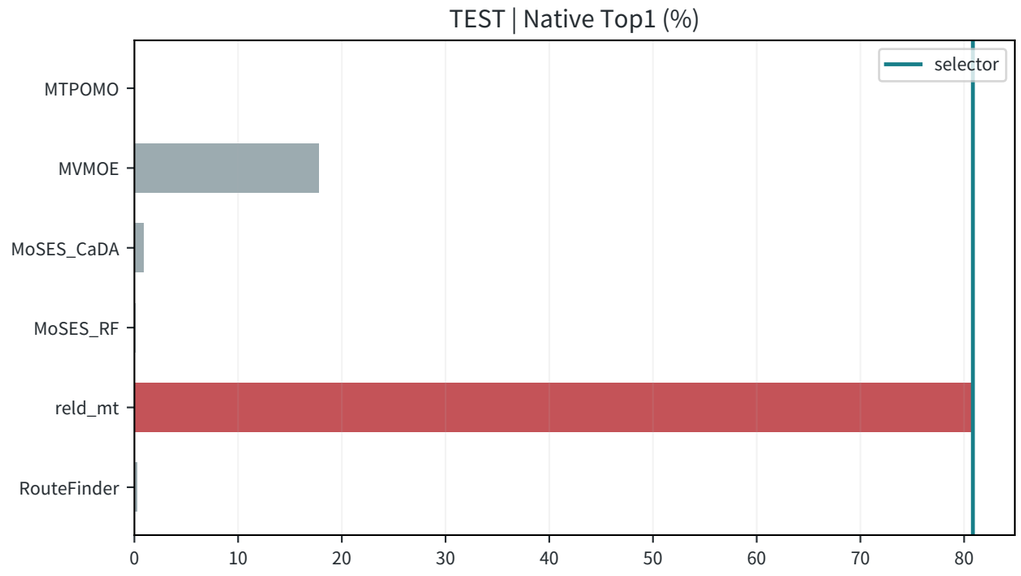


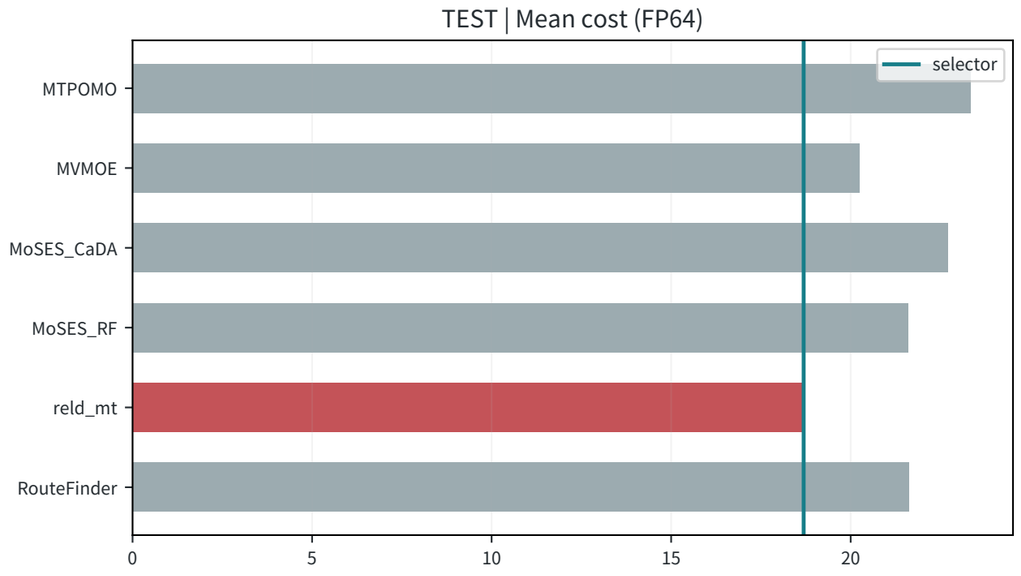



R92/D | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

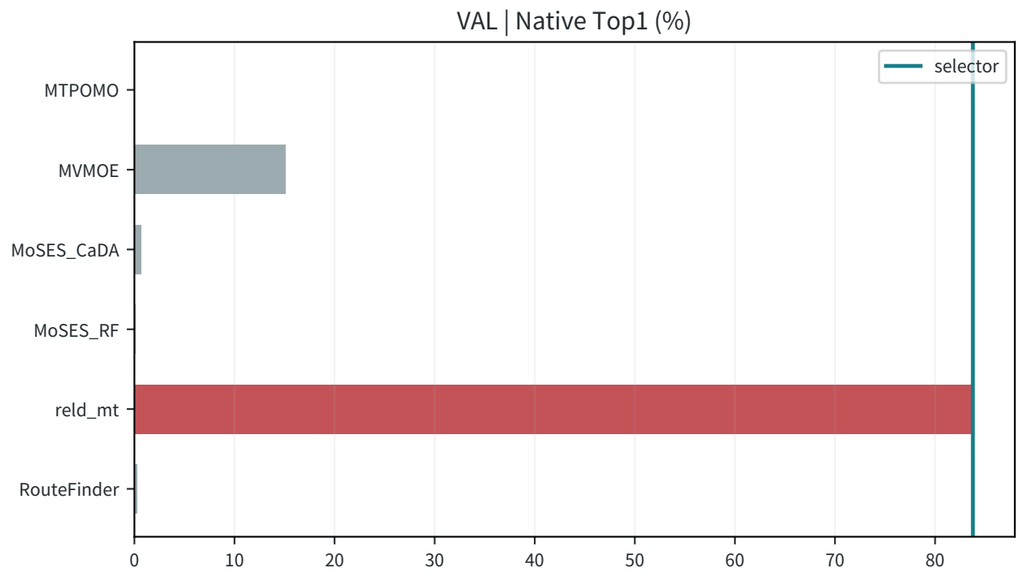

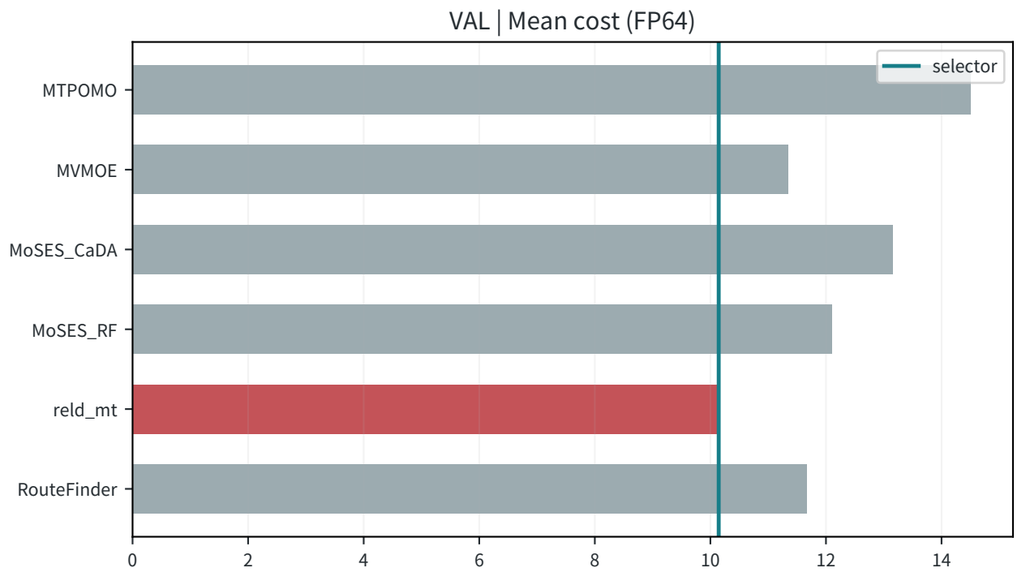


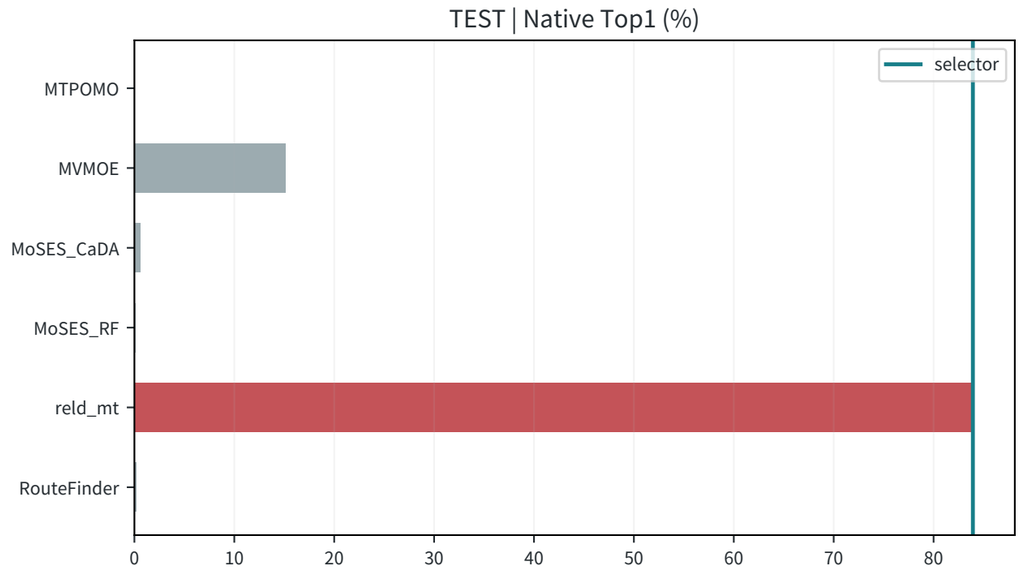


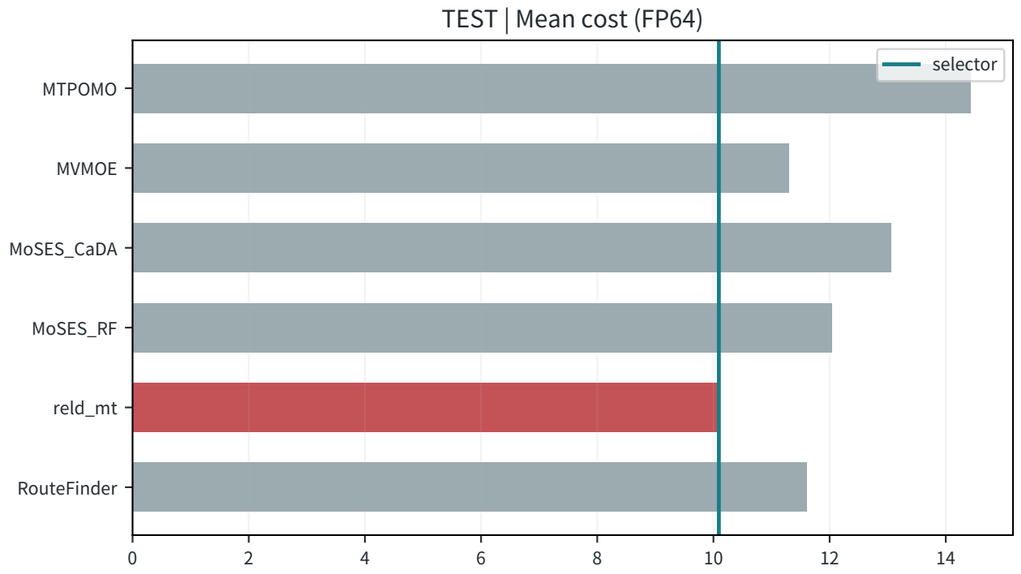



R92/D | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

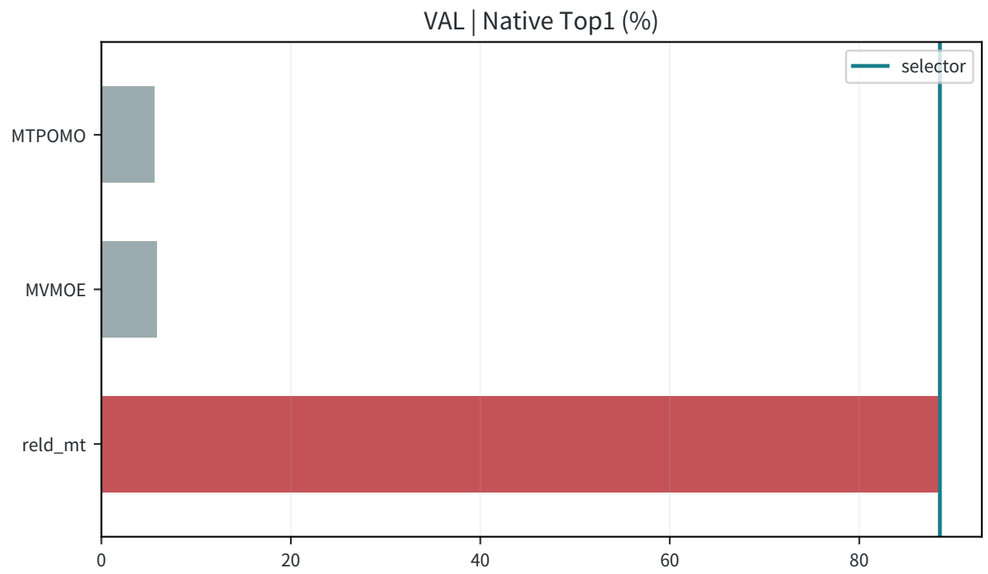

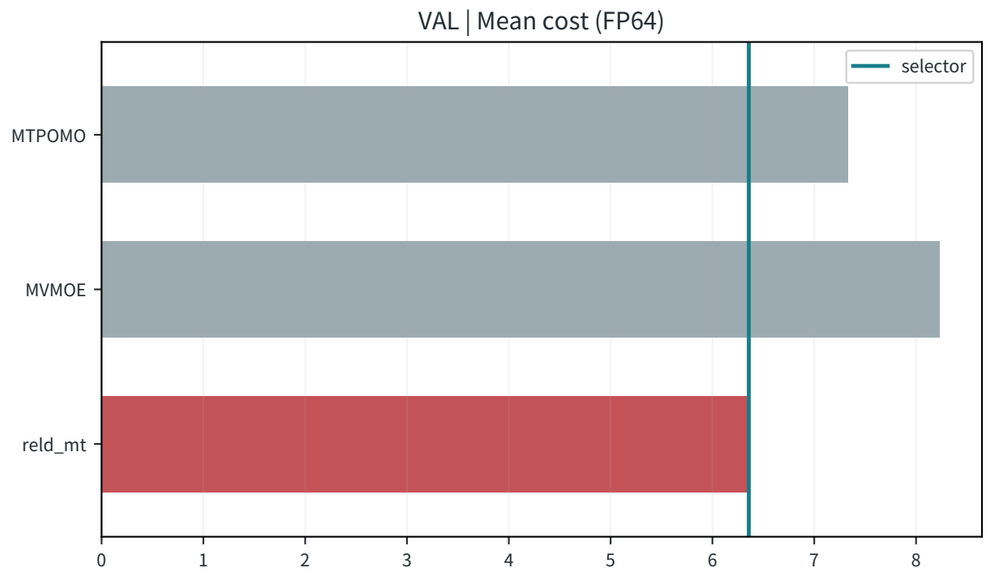


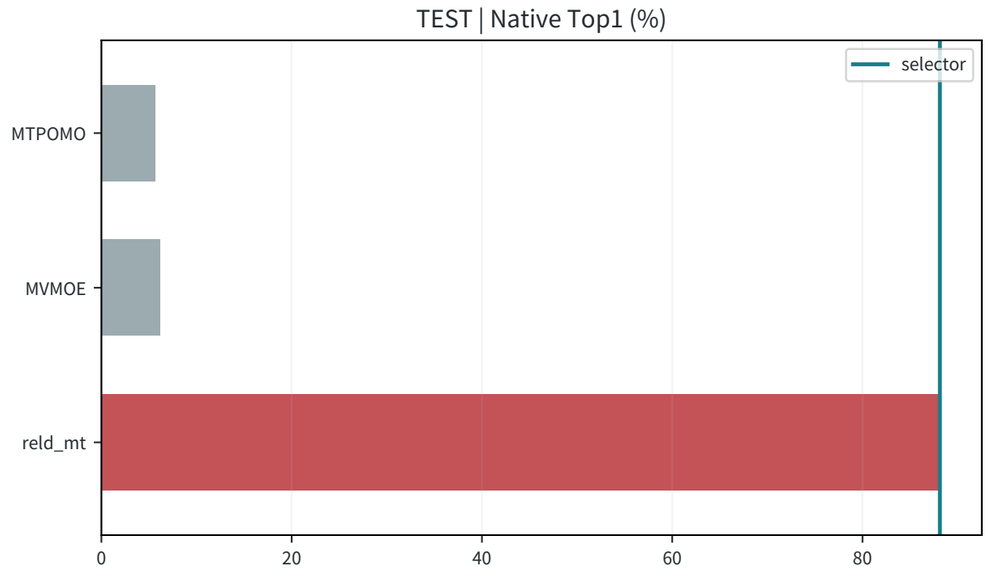


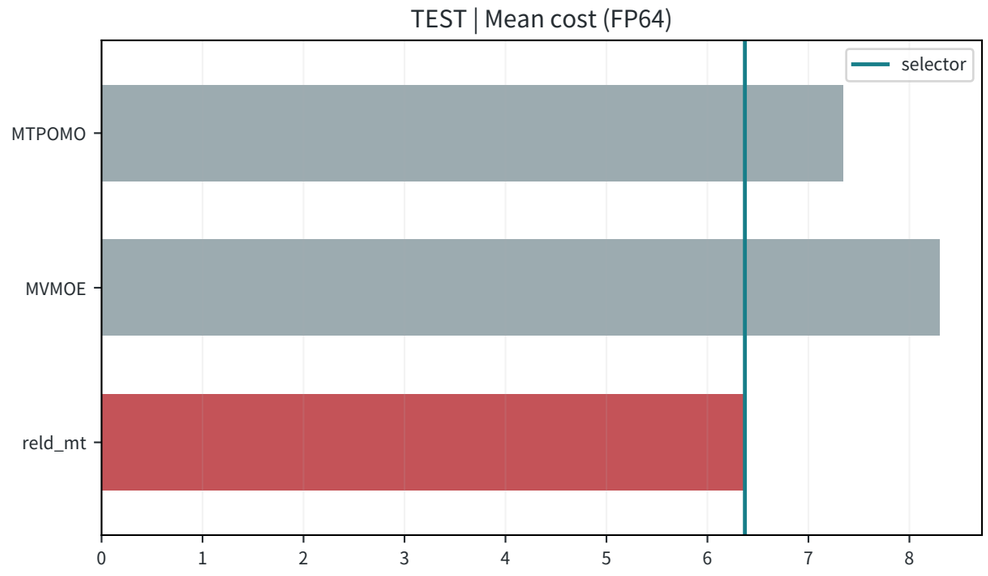



R92/D | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

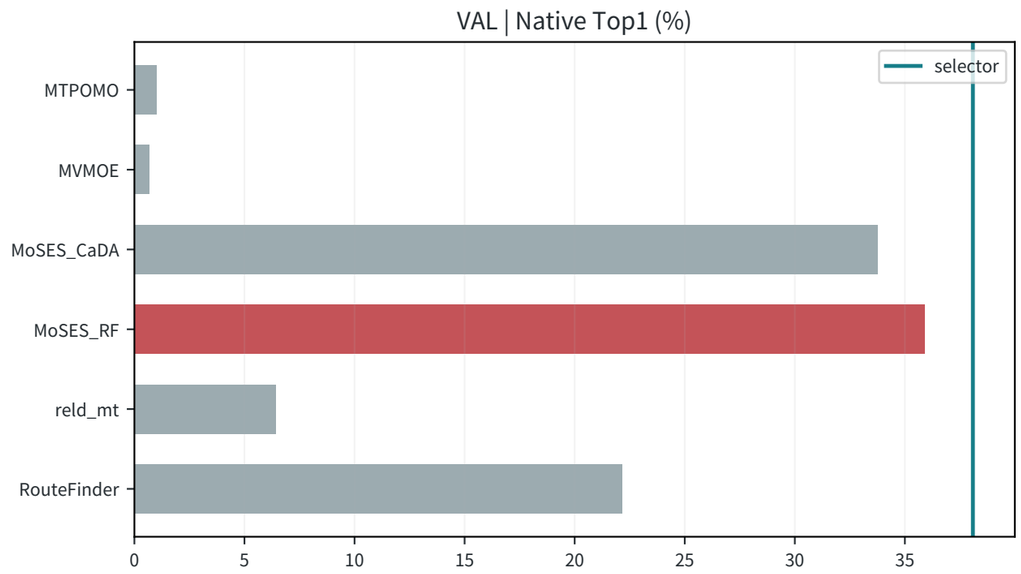

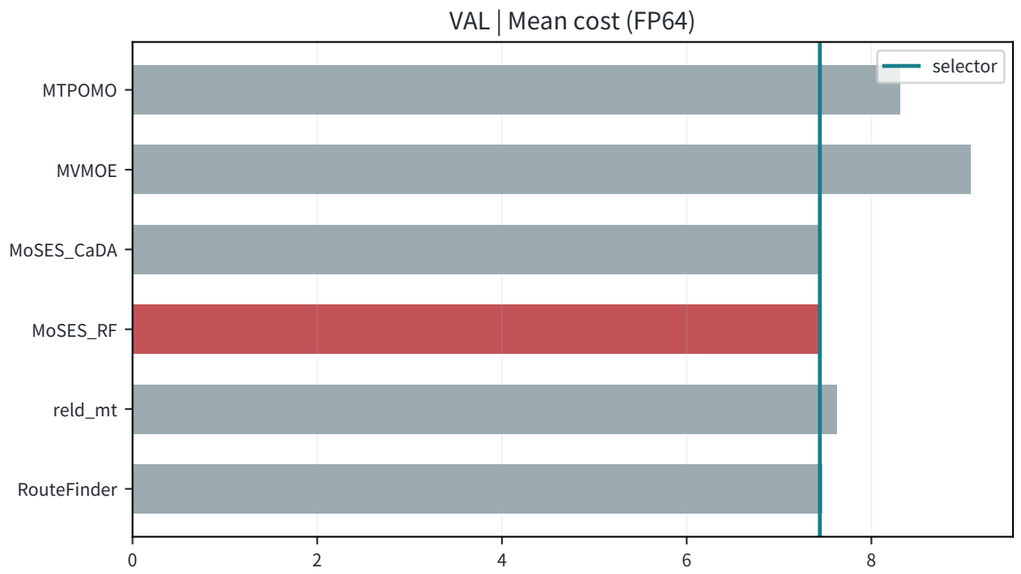


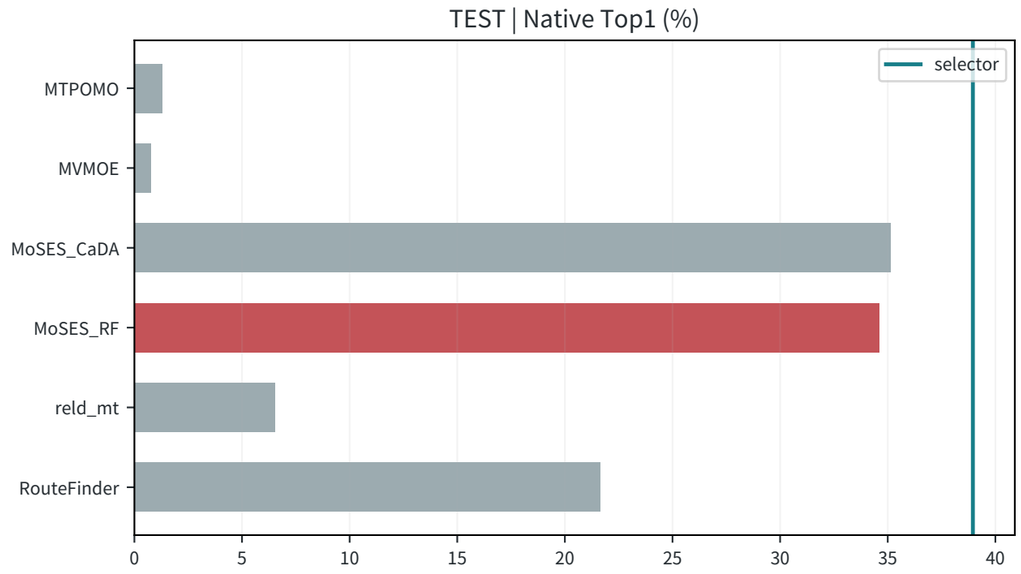


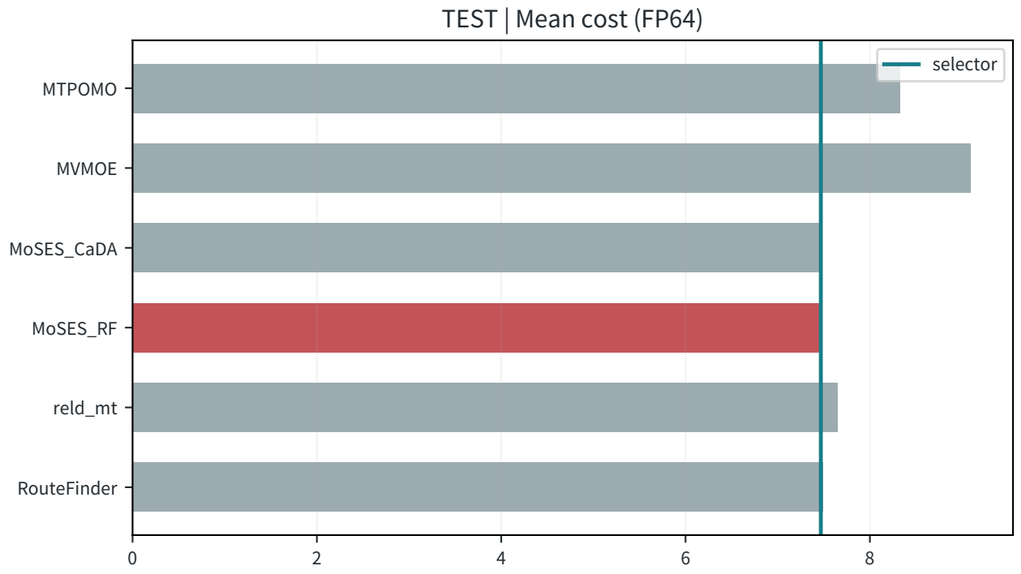



R92/D | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

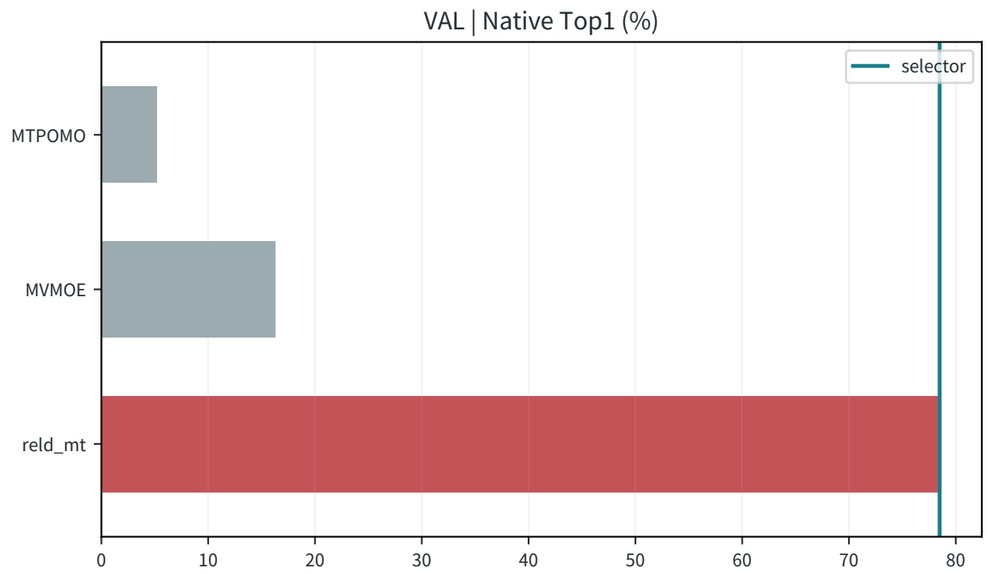

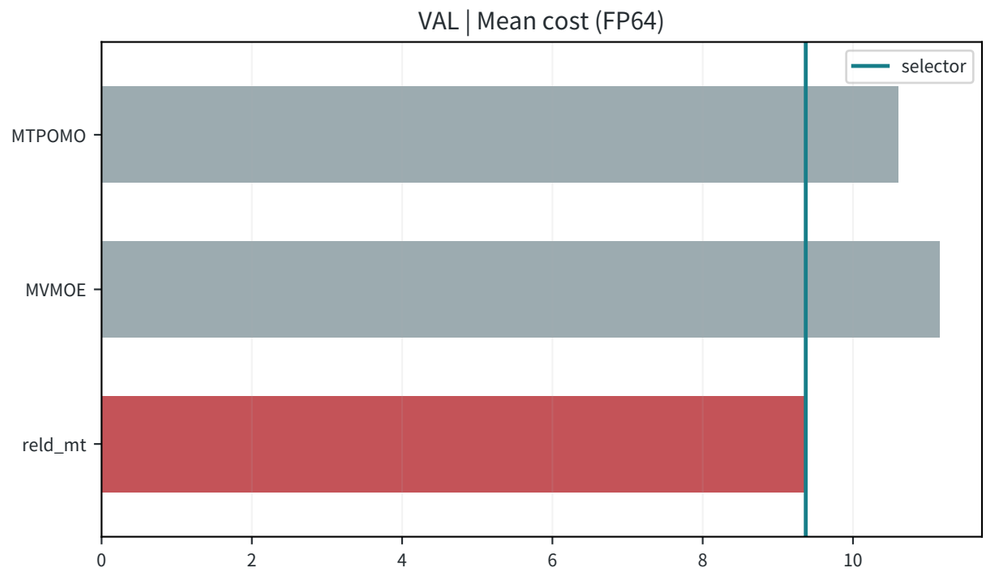


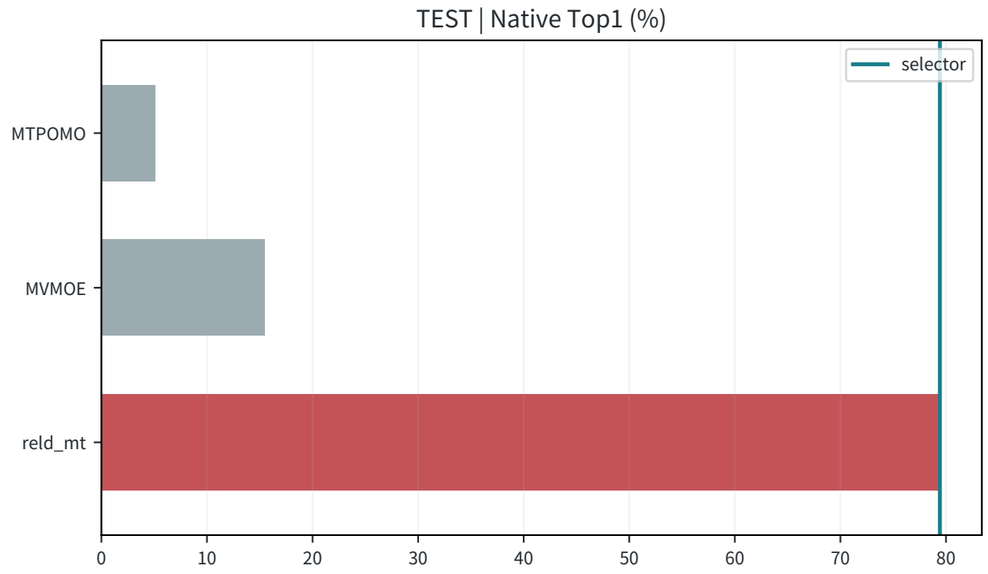


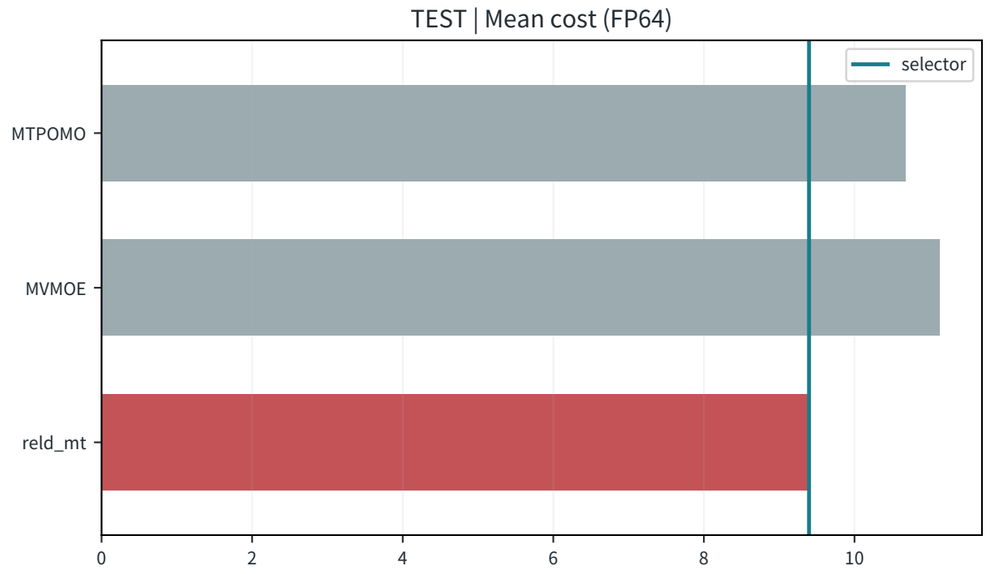



R92/D | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

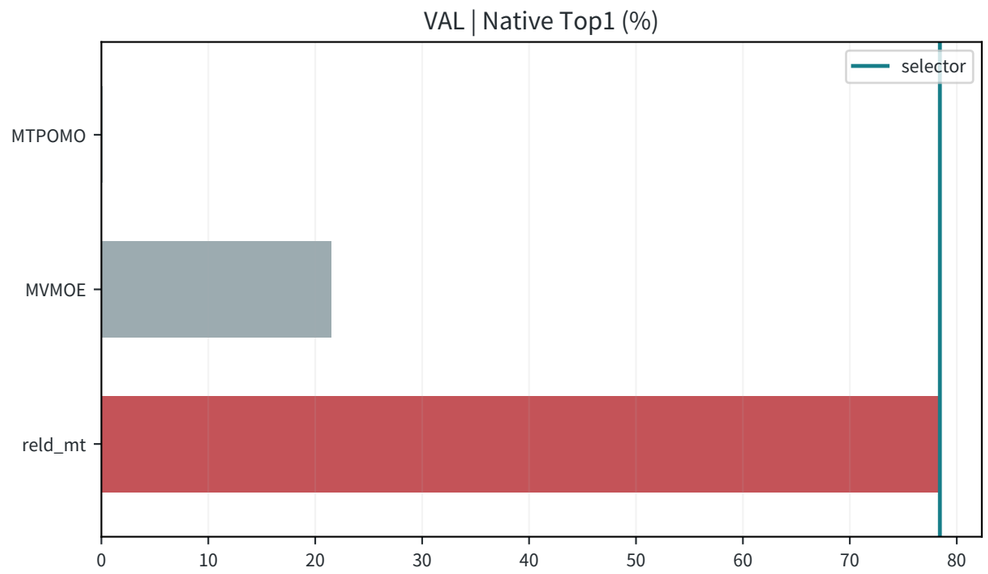

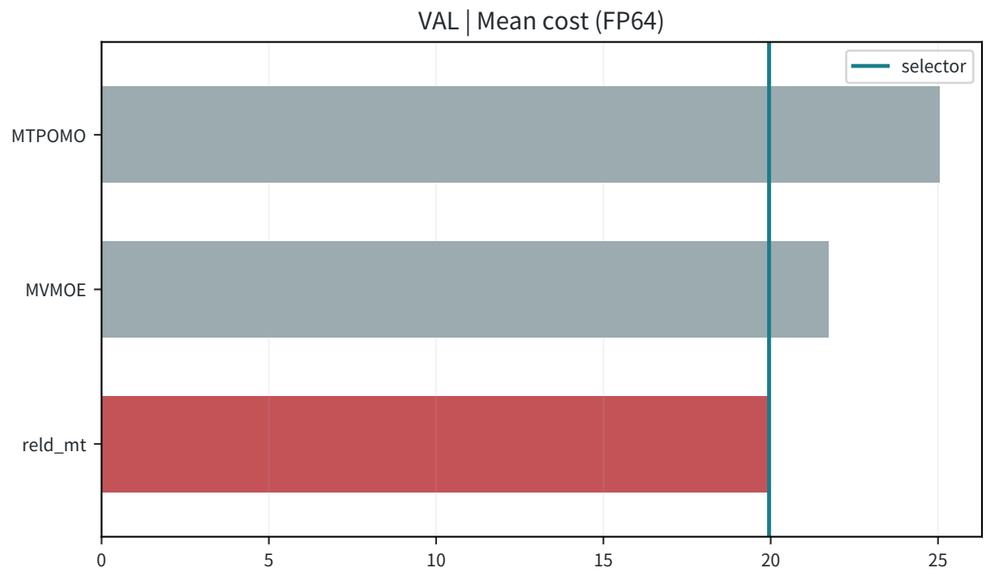


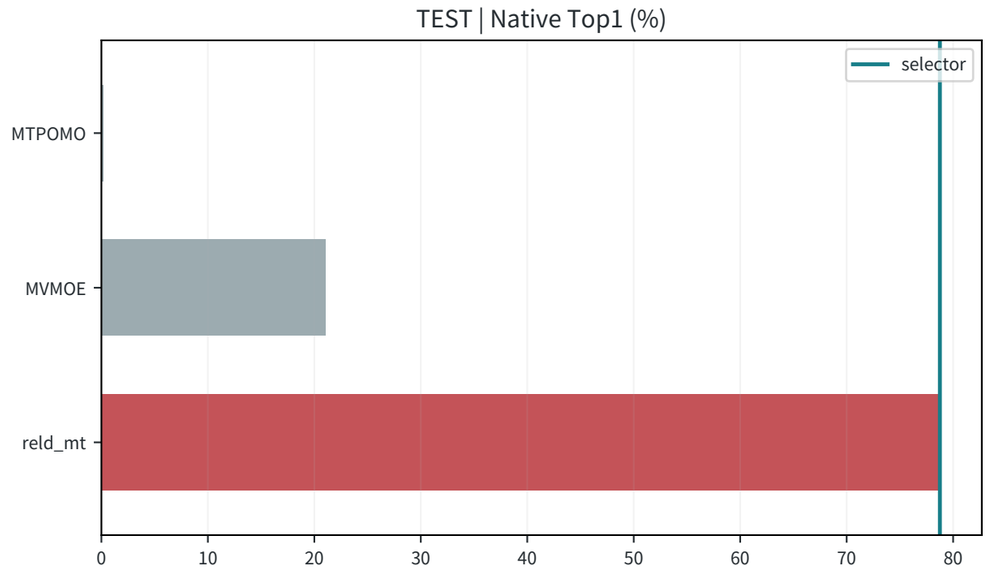


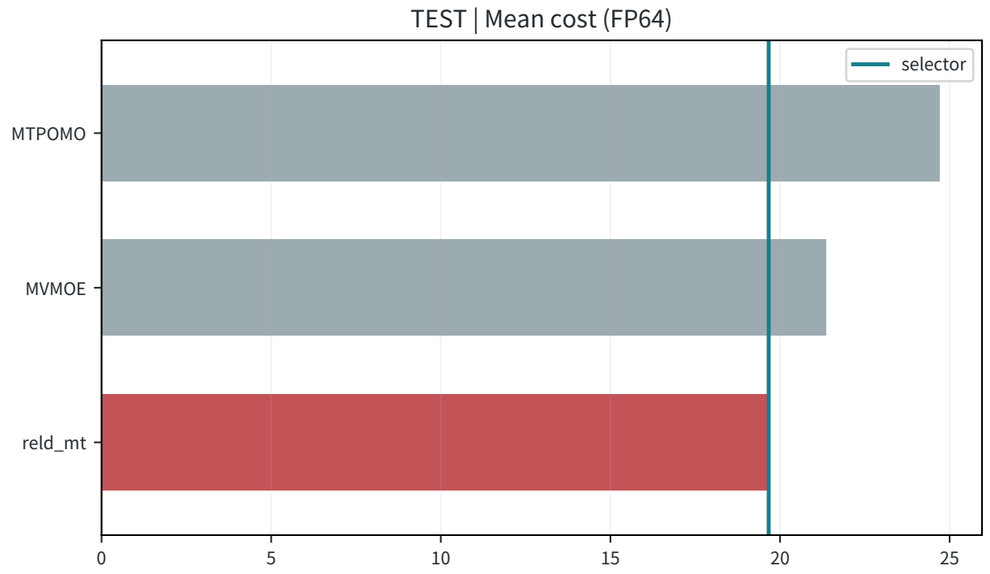


R92/D | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

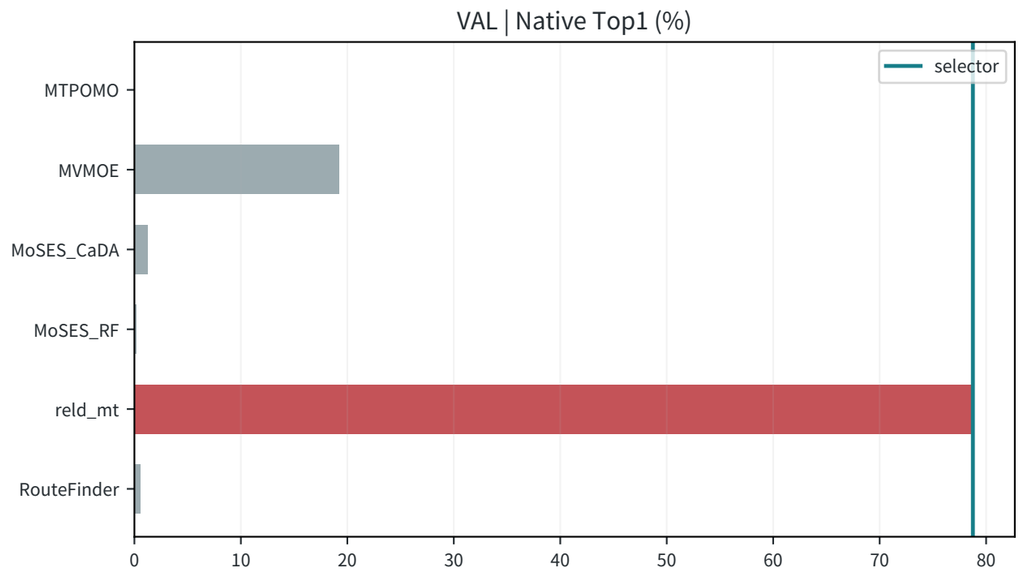

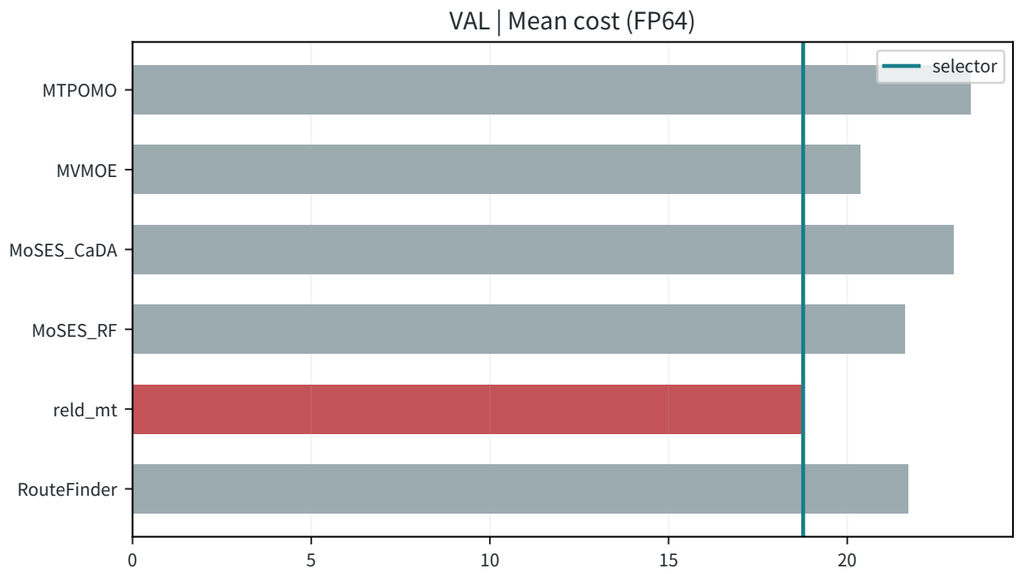


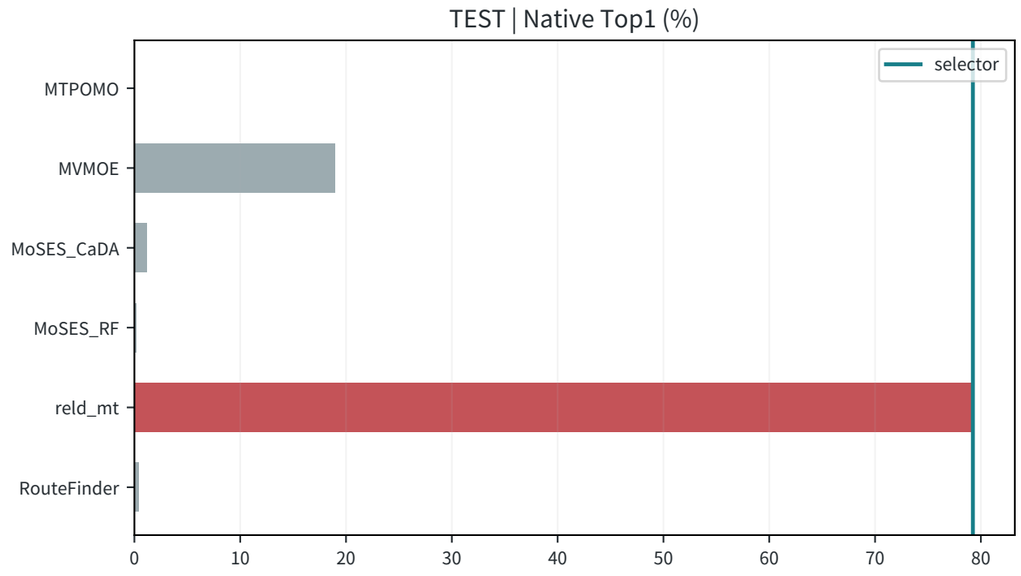






R92/D | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

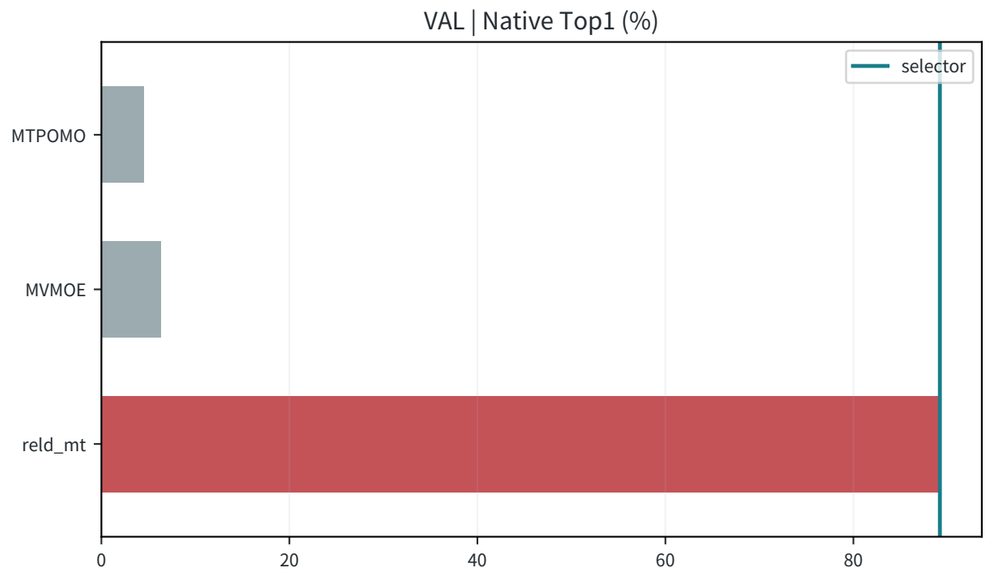

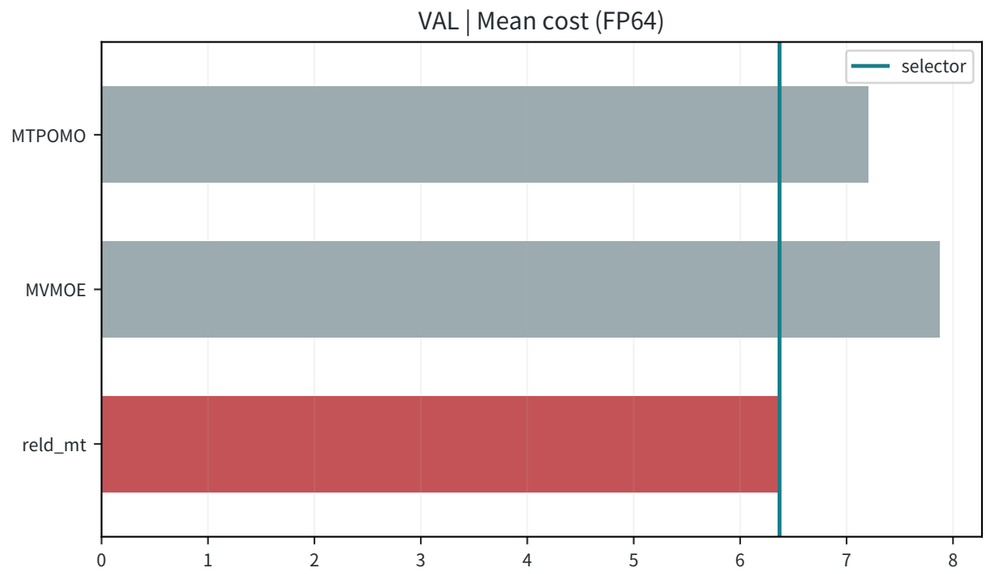


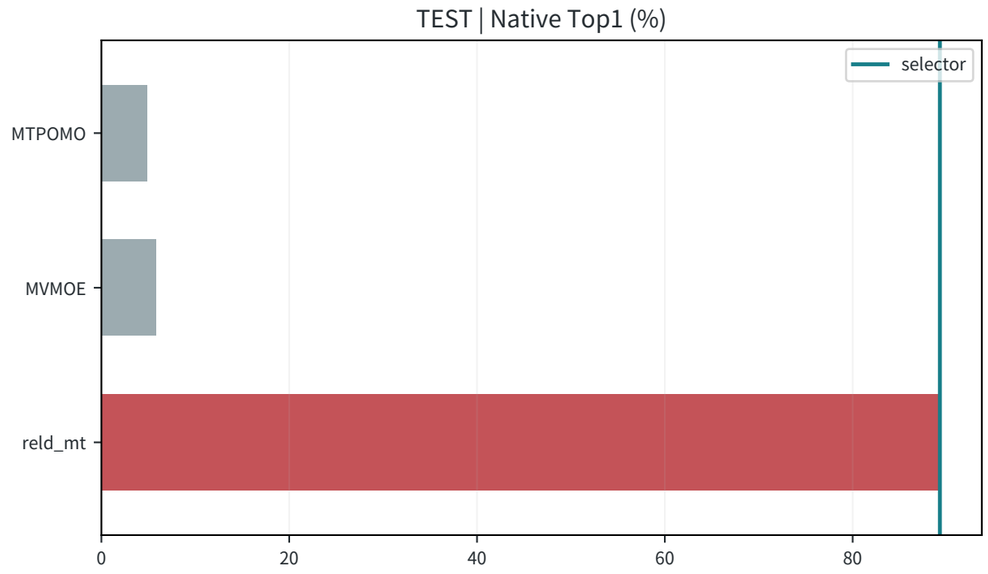


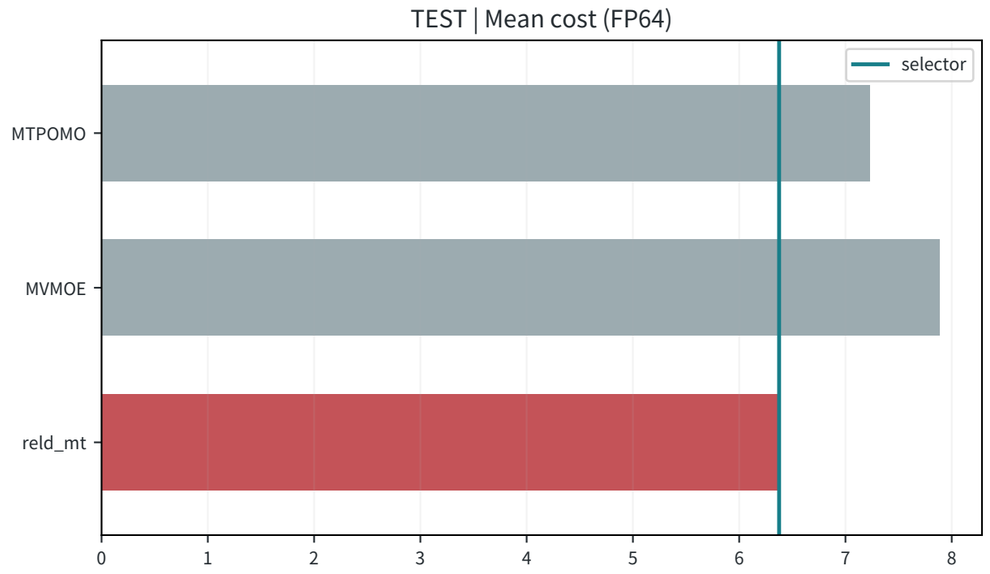



R92/D | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

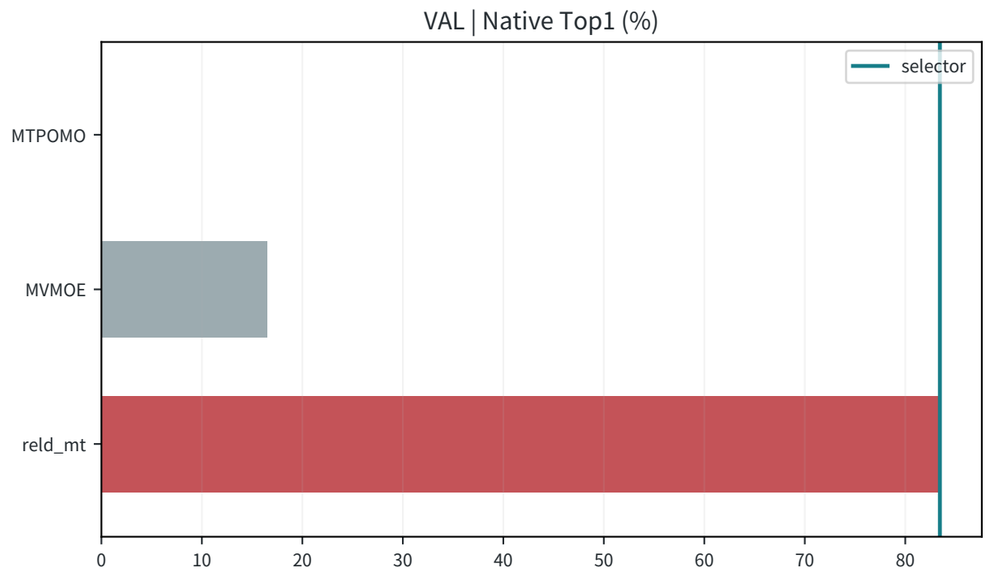

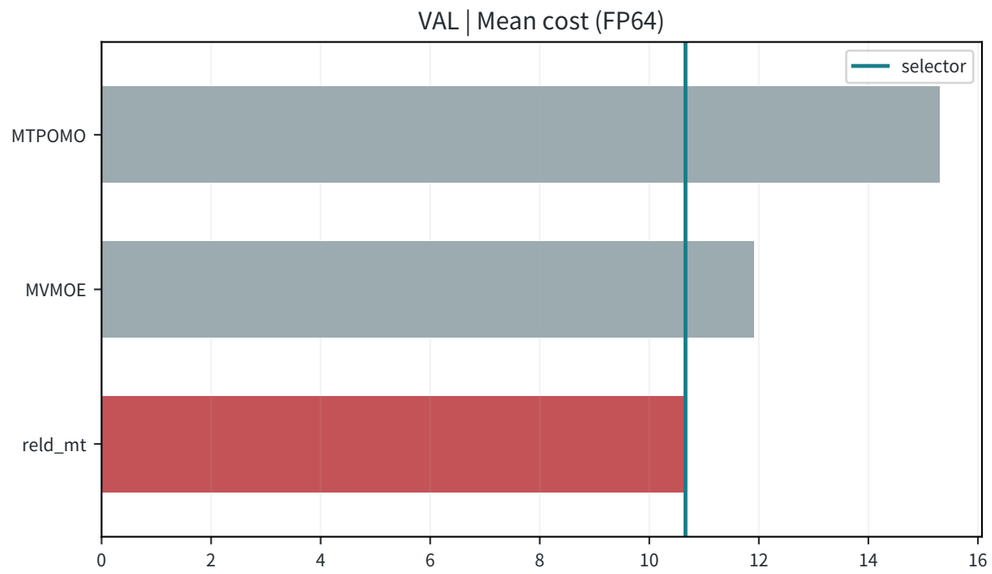


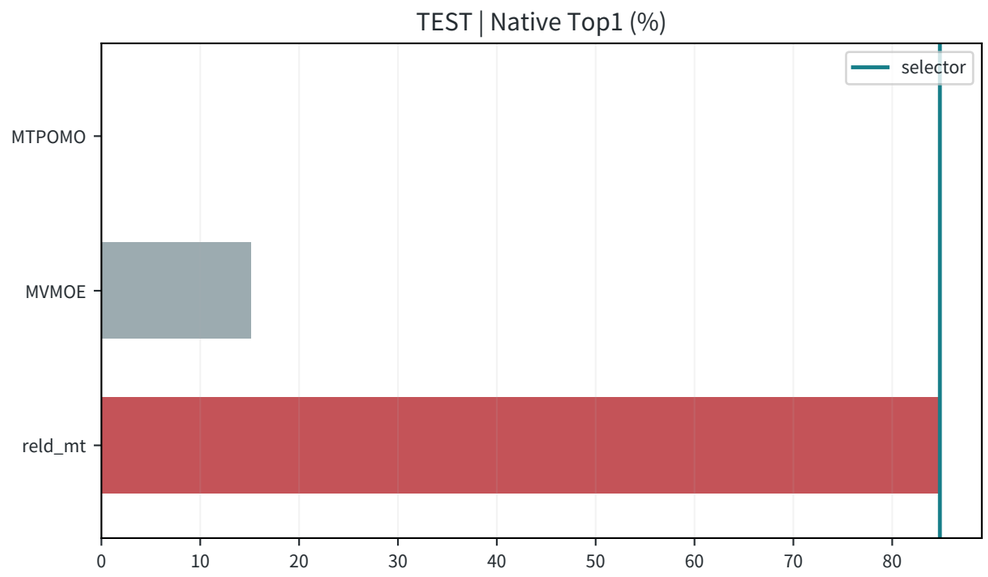


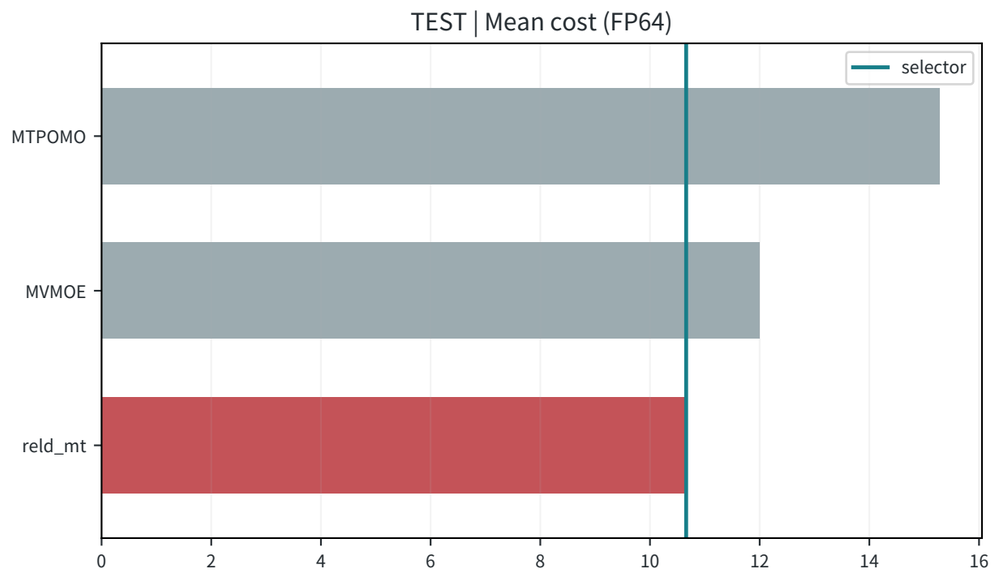



R92/D | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

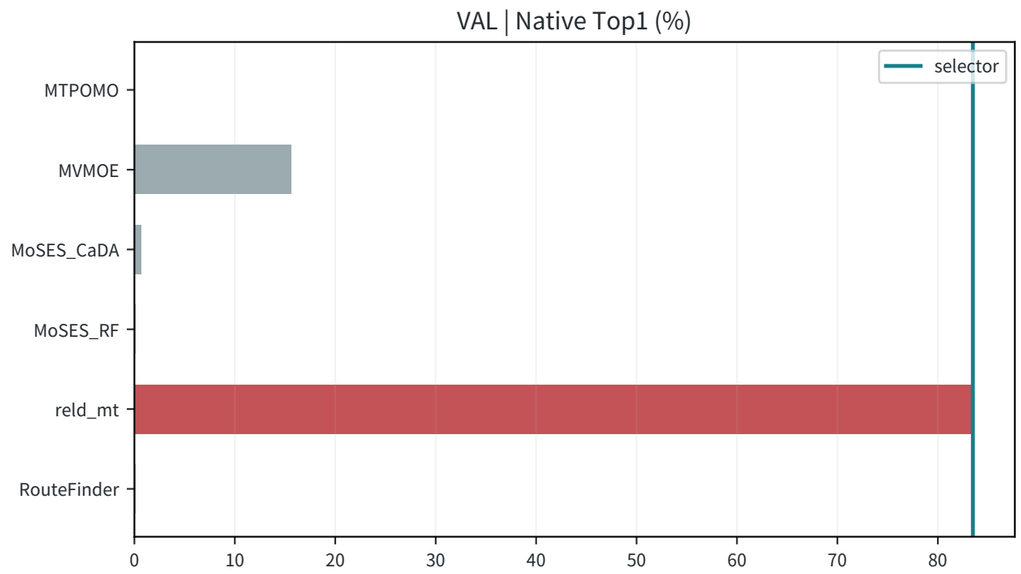

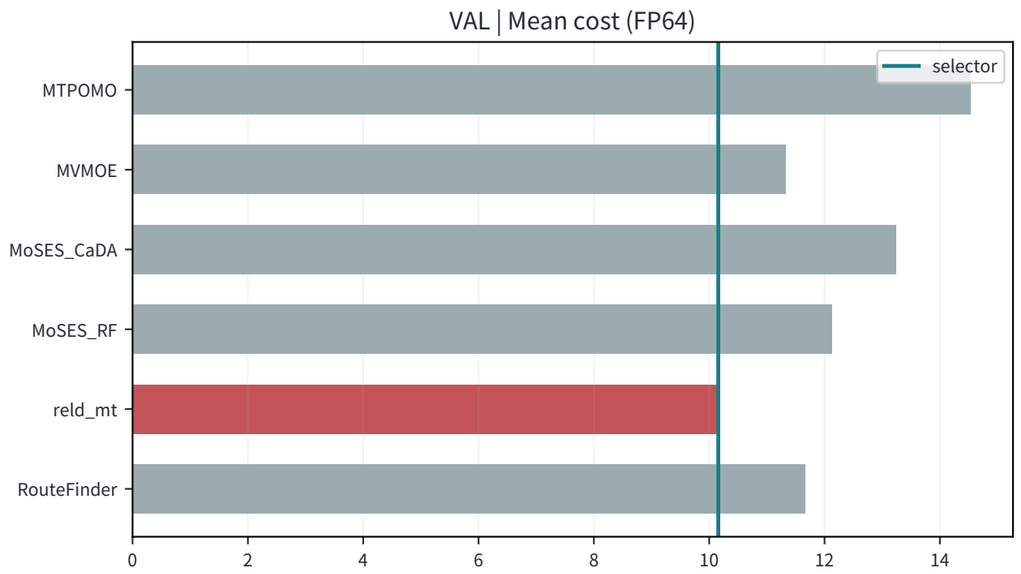


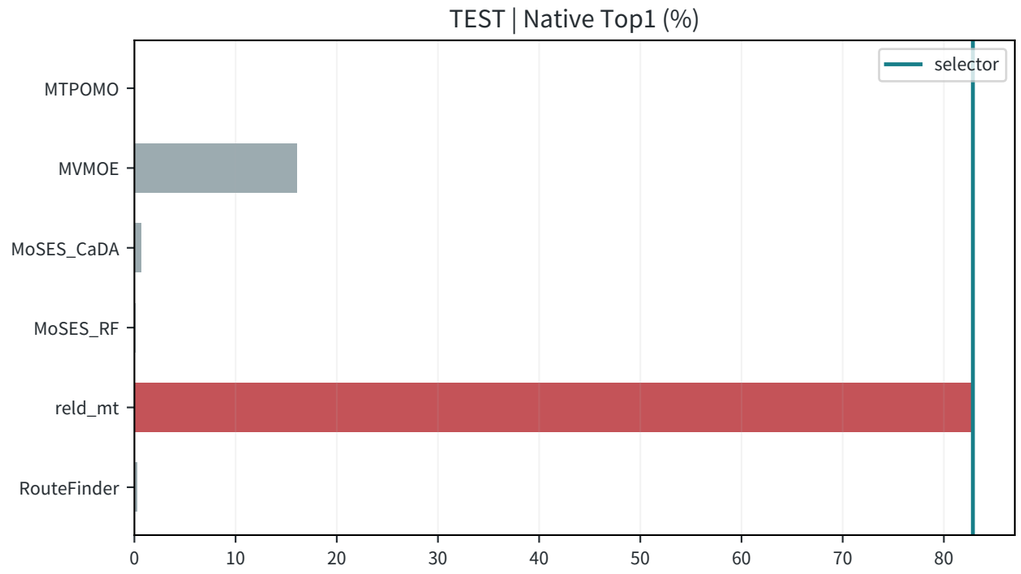


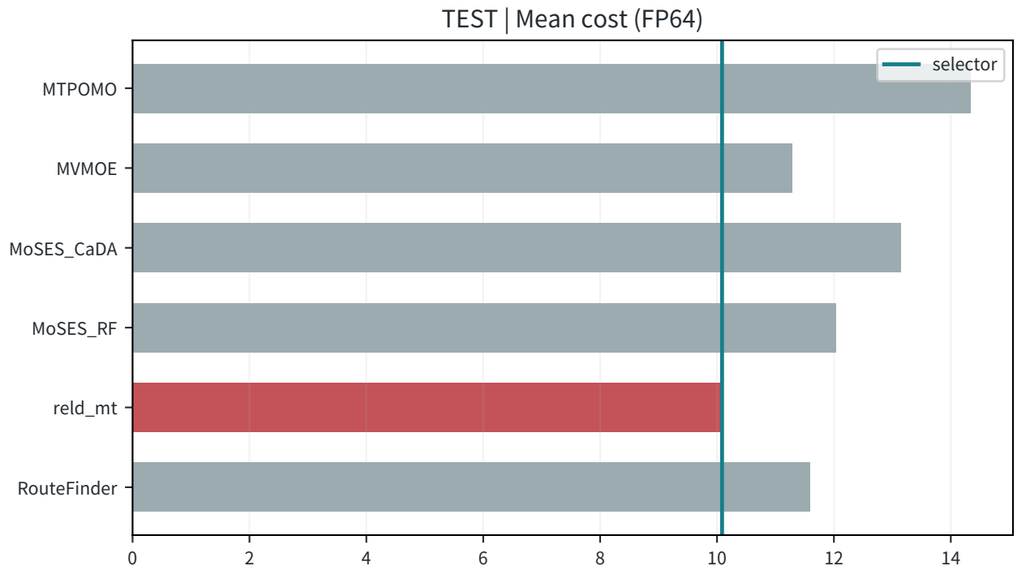



R92/D | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

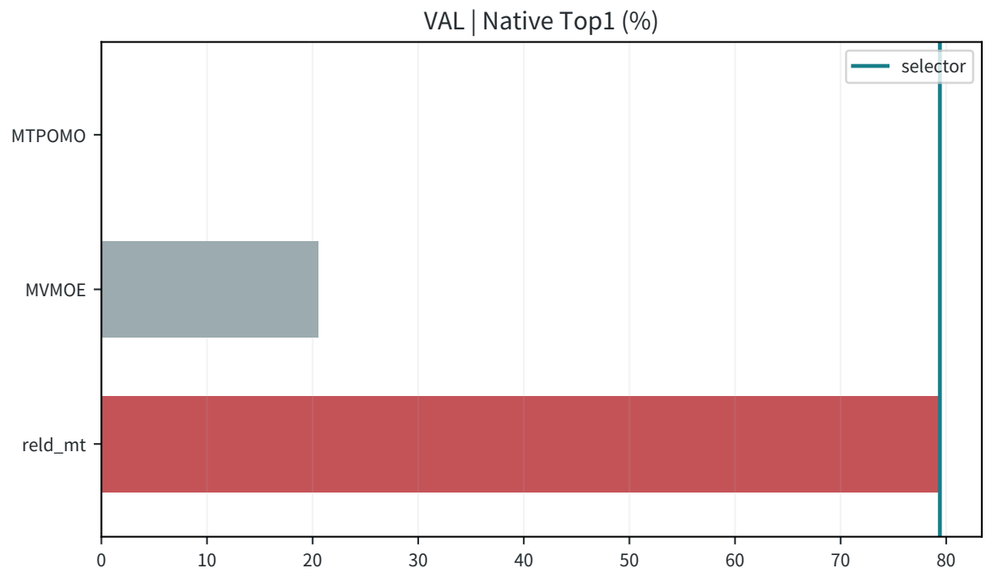

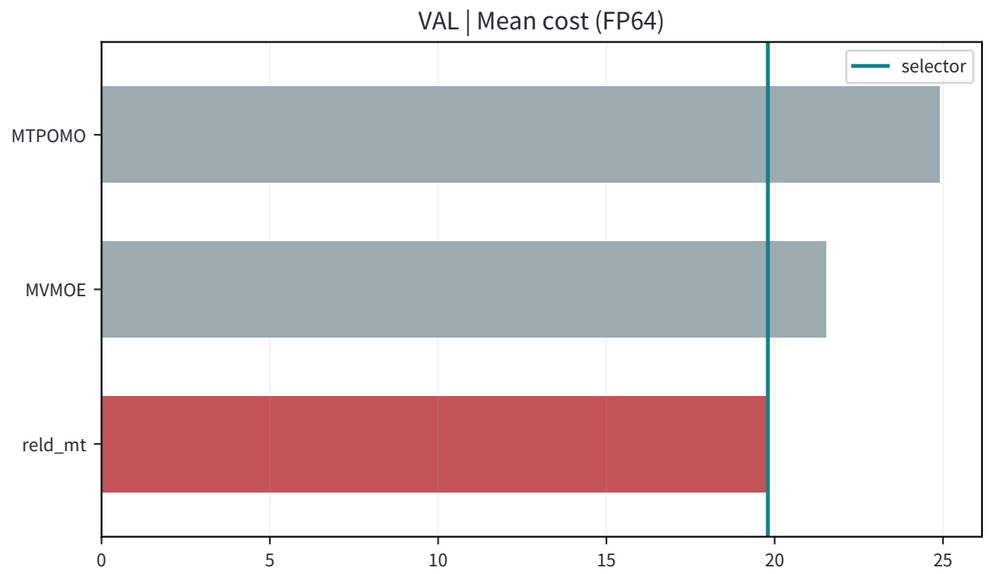

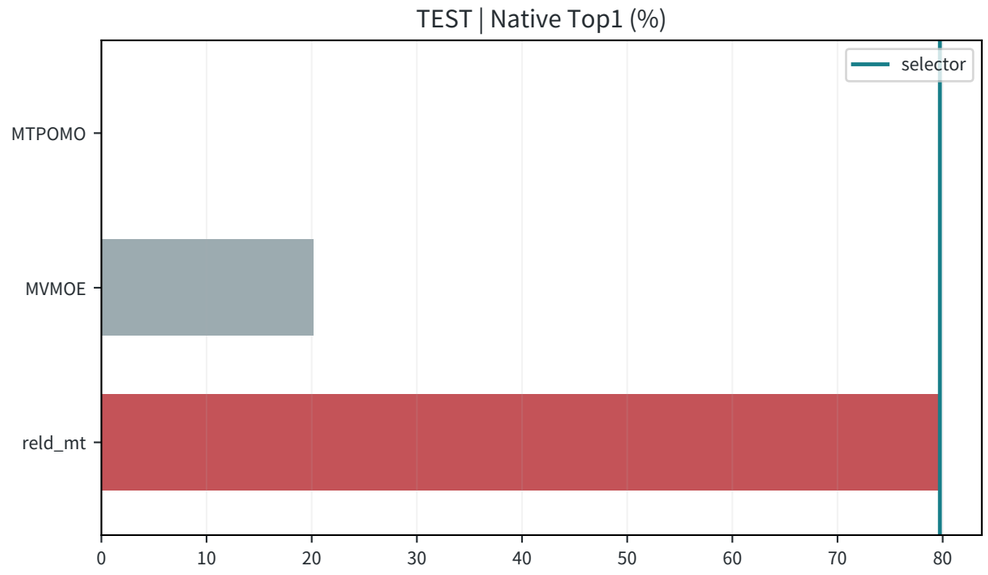

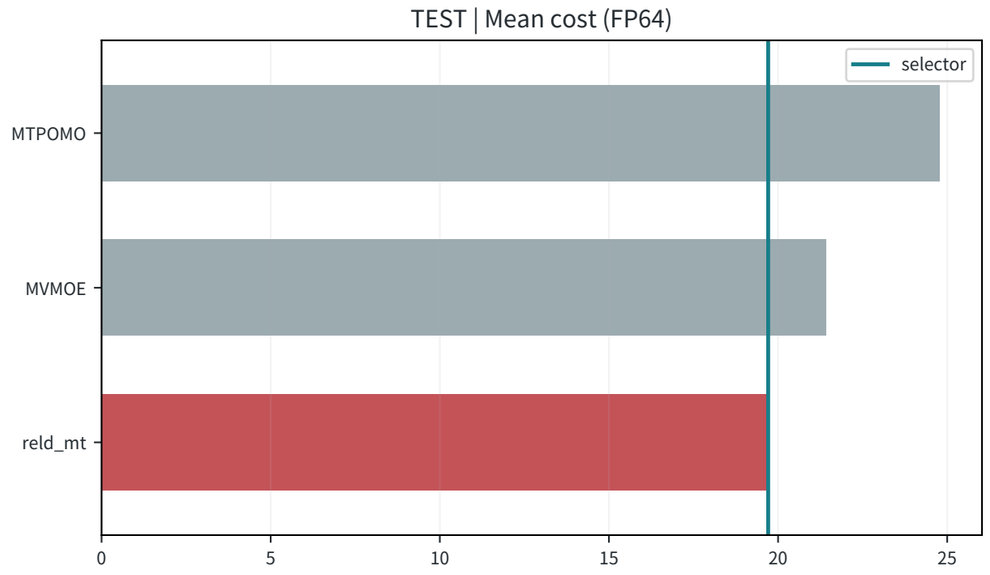

R92/D | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

