R109/B_private_late | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 26 | update 37440 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.1753	66.2037	11.417059	11.427978	11.371692	-0.1893	+0.3984	0.4084
TEST ALL	71.3605	66.1802	11.373875	11.385299	11.329932	-0.1970	+0.3862	0.3939

Dataset	n	NSS Top1 (%)	R109 Top1 (%)	NSS cost	R109 cost
TSP TEST	4500	45.888889	47.177778	7.970400719	7.971649346
CVRP TEST	4500	45.977778	48.933333	18.004802368	18.010665576
TSPLIB	49	20.408163	28.571429	8.217907074	8.205442872
CVRPLIB	100	70.000000	63.000000	67.101111717	67.227001467

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original R77 native CE

R109/B_private_late | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1753	66.2037	11.417059	11.427978	11.371692	-0.1893	+0.3984	0.4084	per-problem TRAIN SBS
TSP	46.3111	33.1111	8.026398	8.045354	7.990533	-0.2356	+0.4488	0.4413	T2T
CVRP	47.6667	18.7111	18.159821	18.269377	18.064087	-0.5997	+0.5300	0.7154	RELD_CVRP
ATSP	77.0889	47.4889	1.638718	1.676905	1.632471	-2.2772	+0.3827	0.3795	UNICO_MatPOENet
OVRP	41.4222	35.7556	7.462216	7.469579	7.415777	-0.0986	+0.6262	0.6371	MoSES_RF
VRPB	81.2000	80.8444	9.359528	9.354876	9.318750	+0.0497	+0.4376	0.4445	reld_mt
VRPL	37.1556	33.0889	12.431331	12.437959	12.383444	-0.0533	+0.3867	0.3938	MoSES_RF
VRPTW	80.2222	79.9556	18.819080	18.819431	18.766139	-0.0019	+0.2821	0.2965	reld_mt
OVRPTW	83.8444	83.7778	10.142398	10.143730	10.116859	-0.0131	+0.2524	0.2505	reld_mt
OVRPB	88.6889	88.5111	6.357272	6.357254	6.341078	+0.0003	+0.2554	0.2665	reld_mt
OVRPL	41.6889	35.9111	7.437835	7.445709	7.390416	-0.1058	+0.6416	0.6565	MoSES_RF
VRPBL	78.9111	78.5111	9.370501	9.371523	9.328366	-0.0109	+0.4517	0.4585	reld_mt
VRPBTW	78.6222	78.4222	19.949782	19.950430	19.851084	-0.0032	+0.4972	0.4713	reld_mt
VRPLTW	78.8667	78.7556	18.764009	18.765871	18.707843	-0.0099	+0.3002	0.3150	reld_mt
OVRPBL	89.2889	89.2000	6.369833	6.370093	6.352824	-0.0041	+0.2677	0.2765	reld_mt
OVRPBTW	83.5333	83.4444	10.660229	10.661098	10.623245	-0.0081	+0.3481	0.3208	reld_mt
OVRPLTW	83.5556	83.4889	10.156232	10.157423	10.129818	-0.0117	+0.2608	0.2601	reld_mt
VRPBLTW	79.8667	79.4000	19.791530	19.797044	19.706420	-0.0279	+0.4319	0.4199	reld_mt
OVRPBLTW	83.2222	83.2889	10.610345	10.609955	10.571302	+0.0037	+0.3693	0.3468	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R109/B_private_late | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.3605	66.1802	11.373875	11.385299	11.329932	-0.1970	+0.3862	0.3939	per-problem TRAIN SBS
TSP	47.1778	34.5333	7.971649	7.989621	7.937593	-0.2249	+0.4290	0.4235	T2T
CVRP	48.9333	17.9333	18.010666	18.124983	17.918509	-0.6307	+0.5143	0.6709	RELD_CVRP
ATSP	77.0667	47.2444	1.635253	1.674207	1.629441	-2.3268	+0.3566	0.3562	UNICO_MatPOENet
OVRP	40.6667	33.6444	7.446618	7.455750	7.400487	-0.1225	+0.6233	0.6318	MoSES_RF
VRPB	80.2889	80.4000	9.352512	9.351810	9.315298	+0.0075	+0.3995	0.4061	reld_mt
VRPL	37.0000	32.2667	12.349156	12.356138	12.300958	-0.0565	+0.3918	0.3983	MoSES_RF
VRPTW	81.0889	80.8444	18.688669	18.690545	18.637408	-0.0100	+0.2750	0.2875	reld_mt
OVRPTW	83.9111	83.9333	10.092896	10.093063	10.068135	-0.0017	+0.2459	0.2375	reld_mt
OVRPB	88.2000	88.1333	6.370334	6.370826	6.352225	-0.0077	+0.2851	0.2916	reld_mt
OVRPL	42.2222	34.6000	7.462759	7.472542	7.418033	-0.1309	+0.6029	0.6100	MoSES_RF
VRPBL	79.2889	79.4222	9.395735	9.396379	9.355967	-0.0068	+0.4251	0.4241	reld_mt
VRPBTW	78.8889	78.7556	19.662278	19.665725	19.577666	-0.0175	+0.4322	0.4265	reld_mt
VRPLTW	79.2667	79.2444	18.804042	18.803136	18.745143	+0.0048	+0.3142	0.3302	reld_mt
OVRPBL	89.3111	89.2889	6.375261	6.375741	6.359310	-0.0075	+0.2508	0.2622	reld_mt
OVRPBTW	84.8000	84.8222	10.660829	10.659591	10.624748	+0.0116	+0.3396	0.3119	reld_mt
OVRPLTW	82.8889	82.8667	10.085653	10.086112	10.059001	-0.0045	+0.2650	0.2649	reld_mt
VRPBLTW	79.8222	79.7333	19.703723	19.707068	19.613284	-0.0170	+0.4611	0.4413	reld_mt
OVRPBLTW	83.6667	83.5778	10.661721	10.662149	10.625574	-0.0040	+0.3402	0.3158	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R109/B_private_late | LIB and locked provenance

Current R109 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	28.5714	10.2041	8.205443	8.240435	8.142167	-0.4246	+0.7771	0.8316
CVRPLIB	63.0000	45.0000	67.227001	67.245364	66.945093	-0.0273	+0.4211	0.5251

SHA256: 93821e6c6dd794f5db08d32cc1defe7c4a2006365e6f864d36fe21f607bd0c84

Unique selection: strict minimum whole18 VAL macro_vs_sbs_pct; first exact tie; common full-TRAIN SBS

Inference: original score MLP utility differences and maximin; no calibration or solver quotas


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R109/B_private_late | TSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

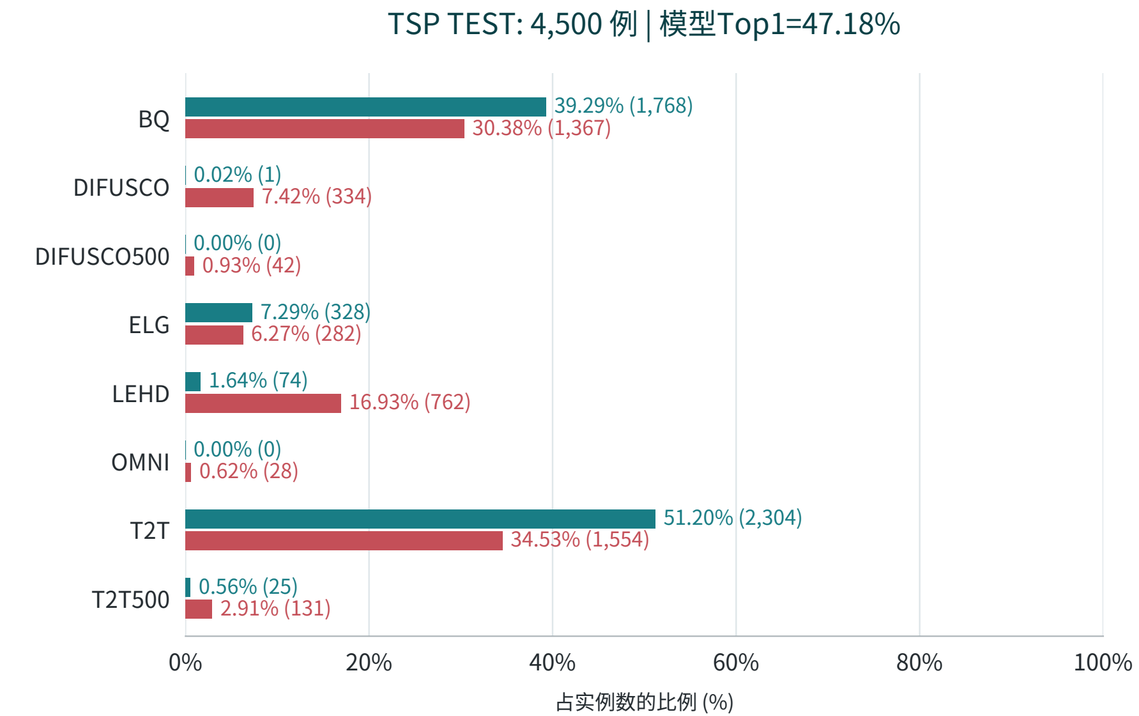

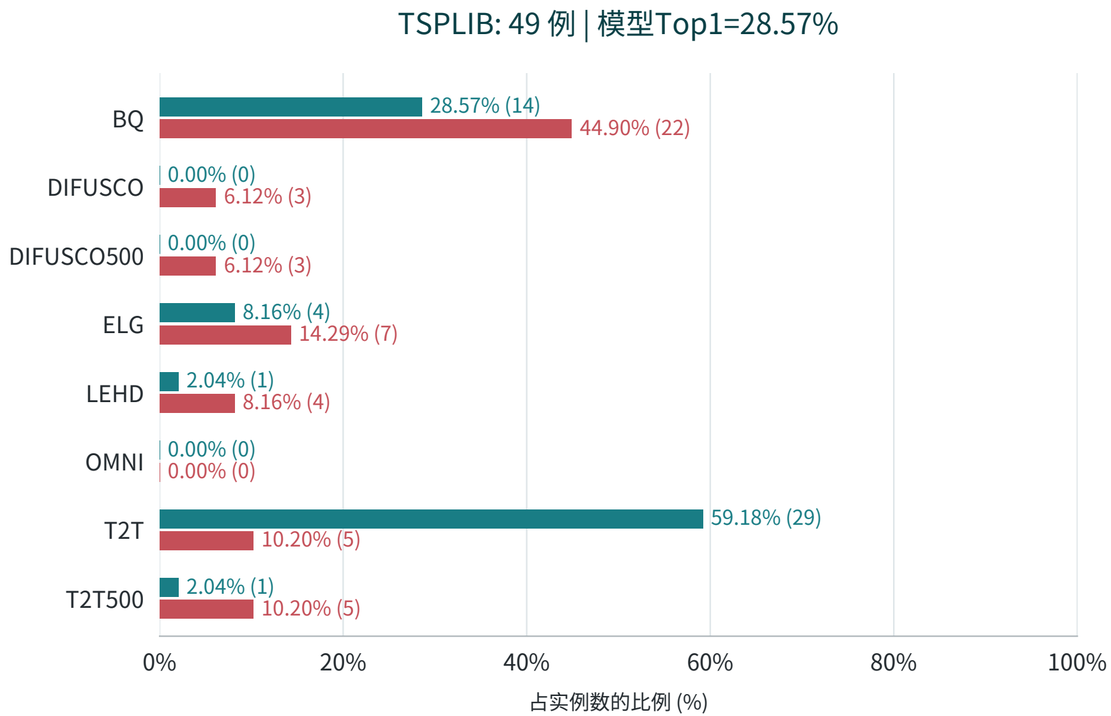

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.


R109/B_private_late | CVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

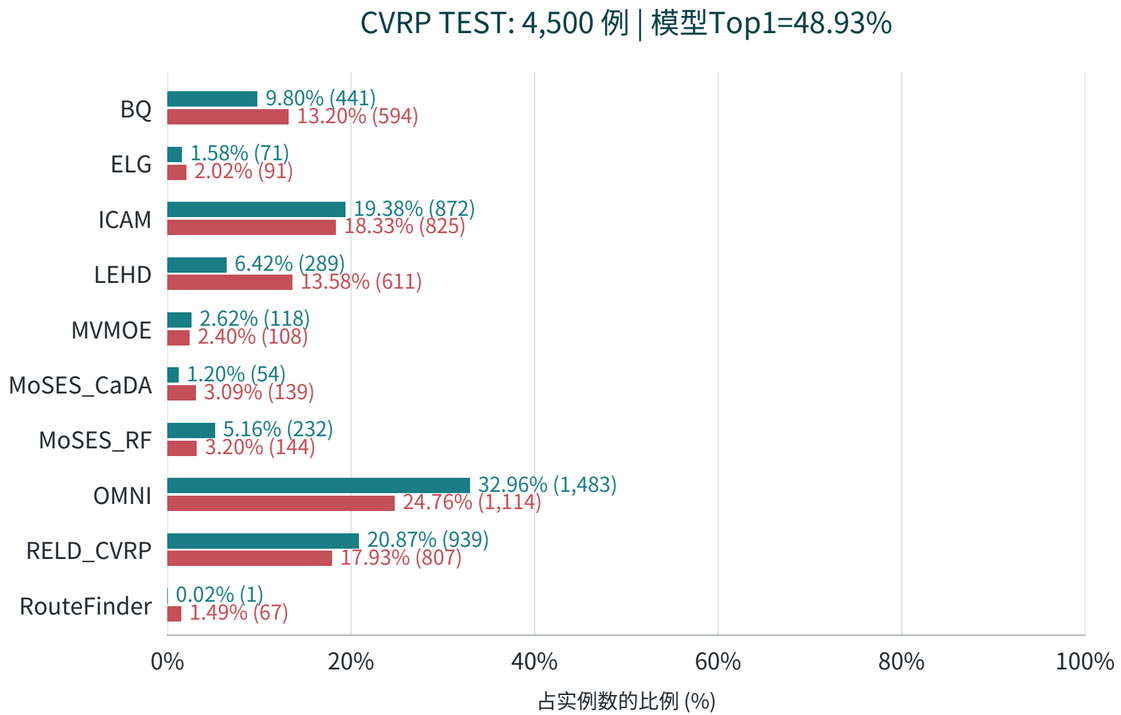

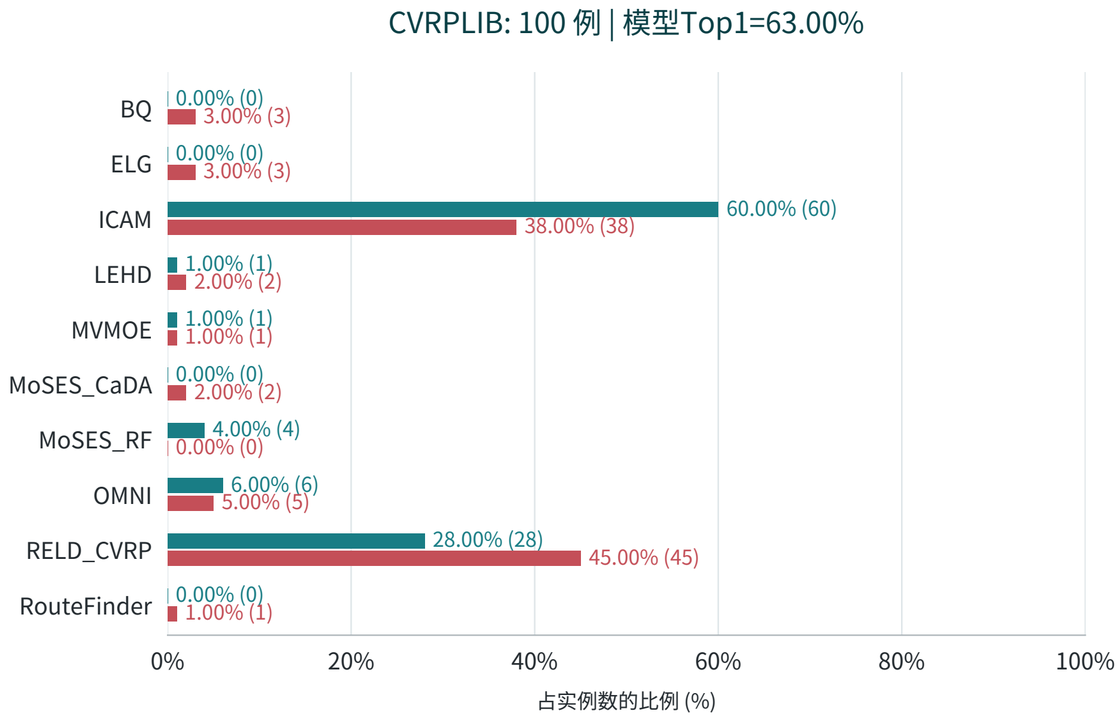

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | ATSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

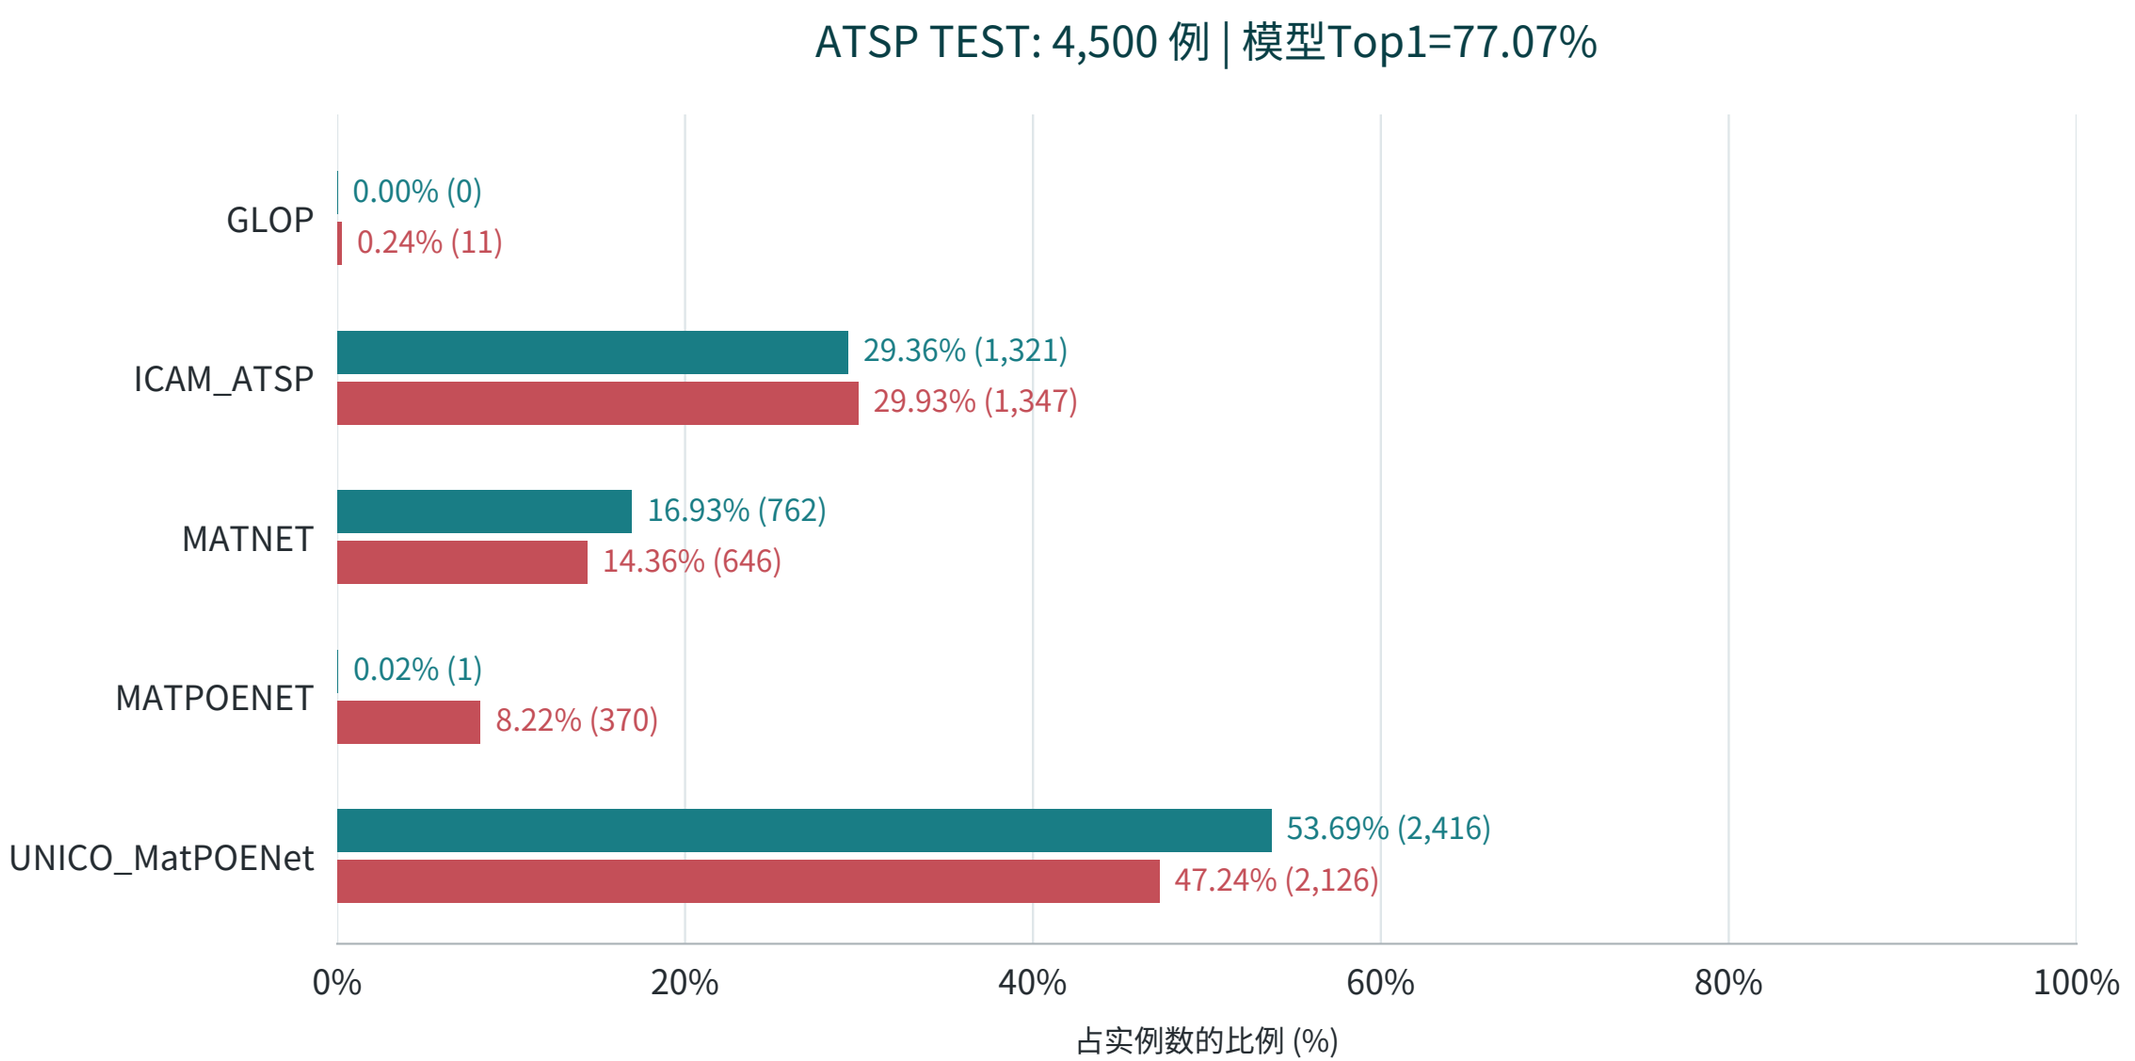

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

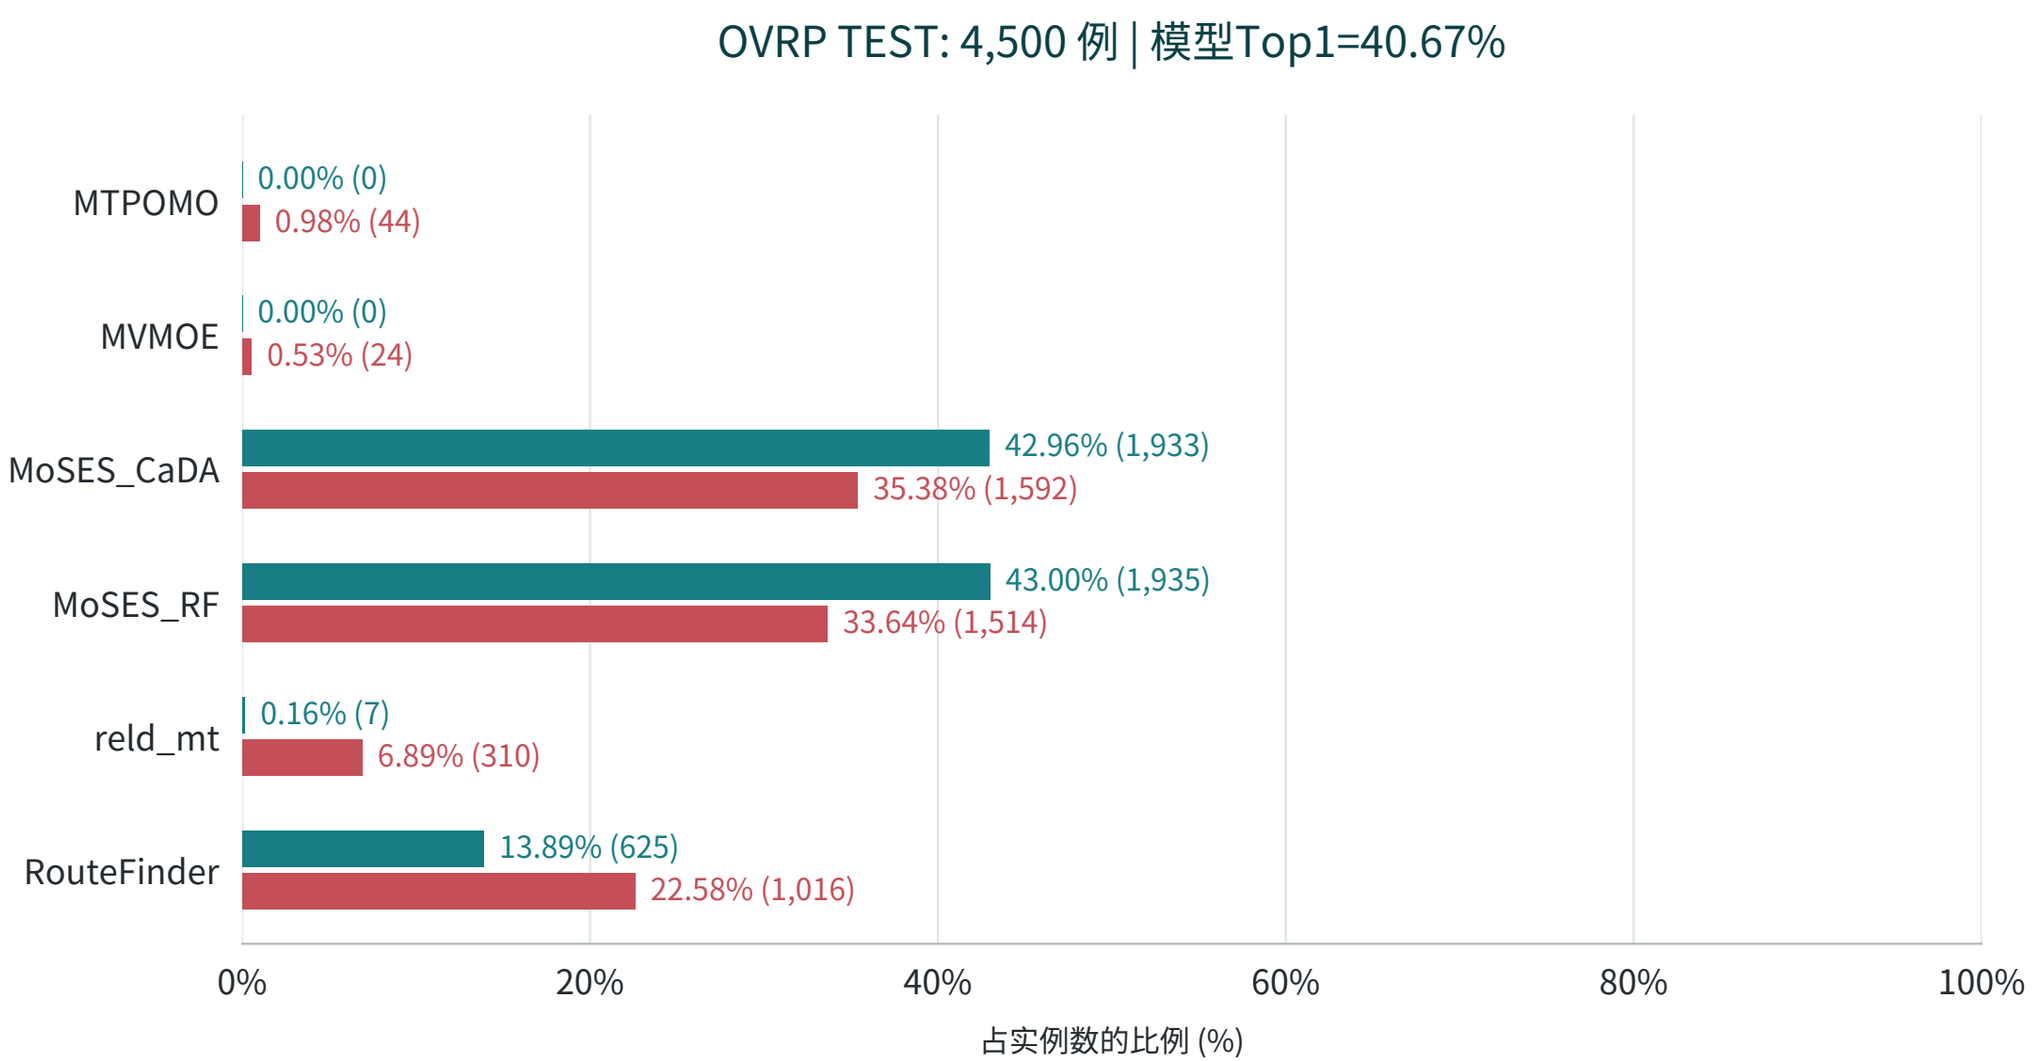

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

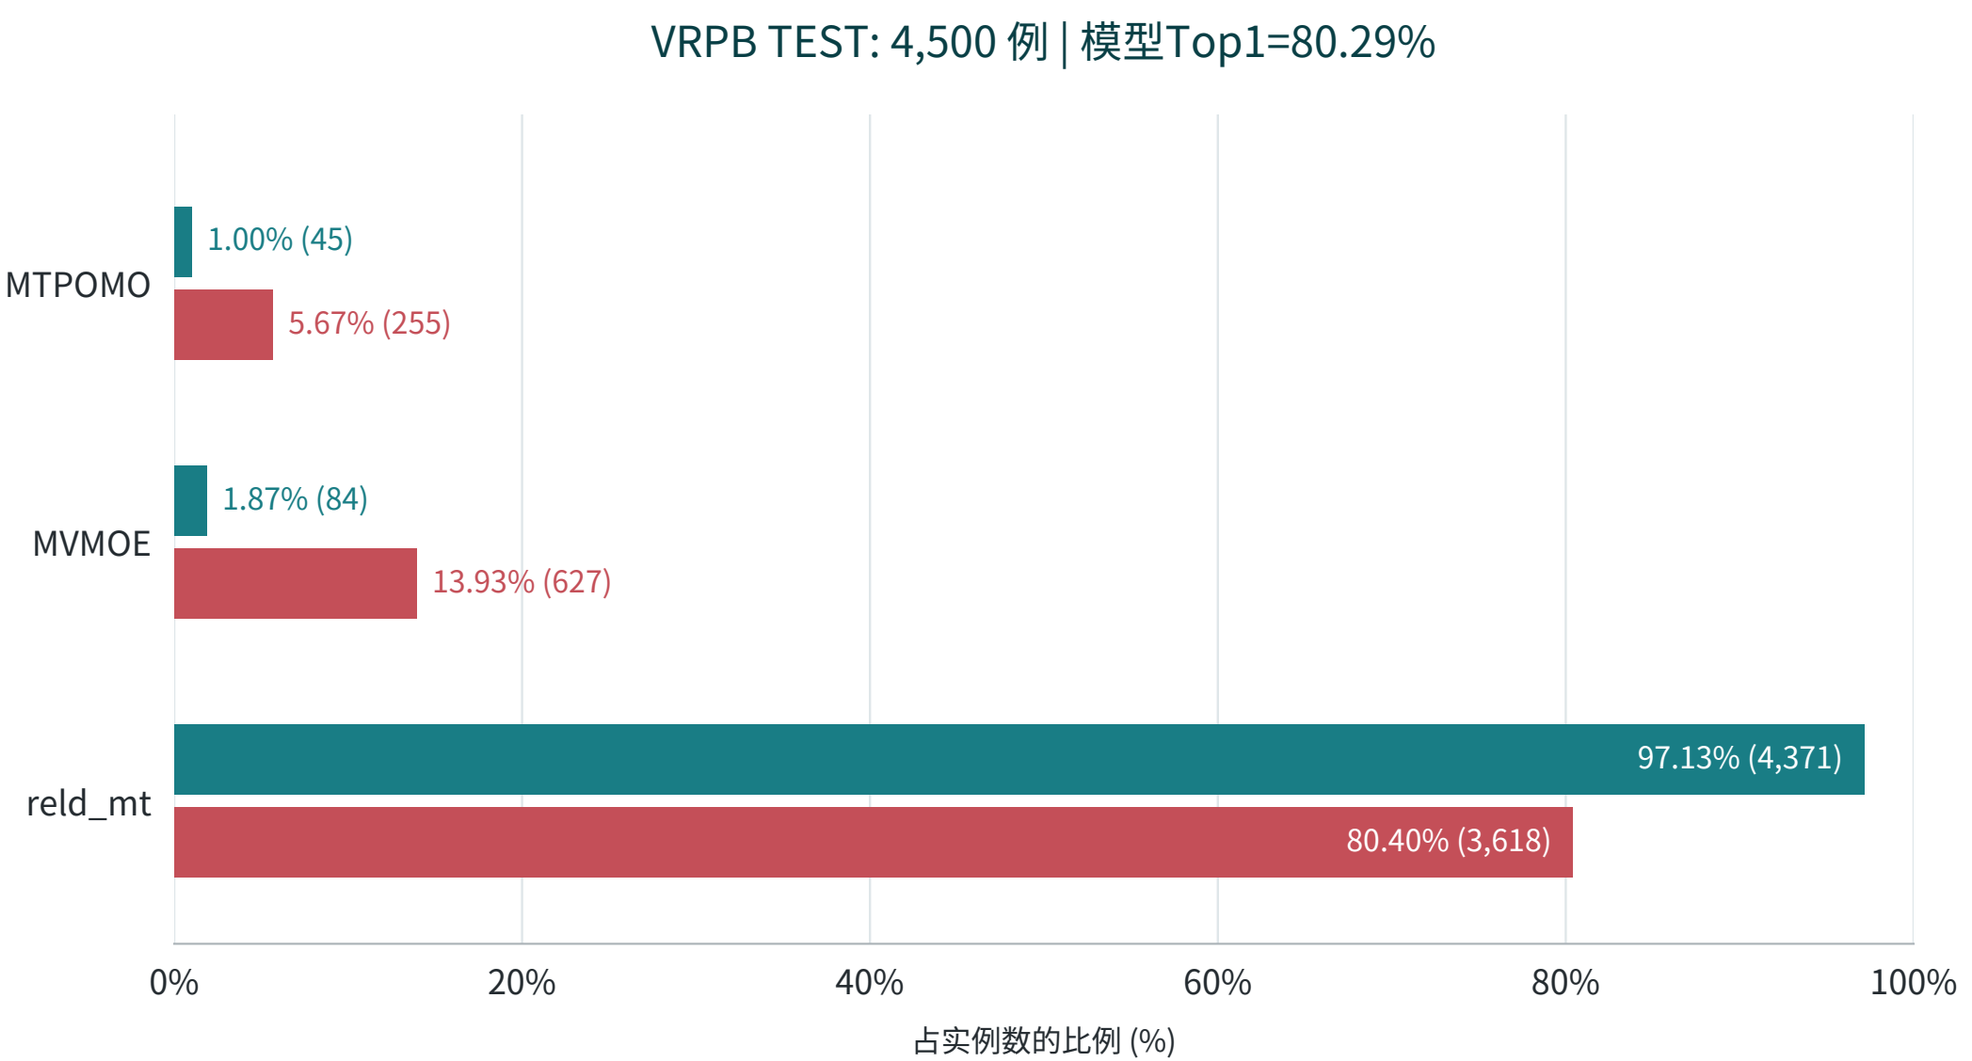

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

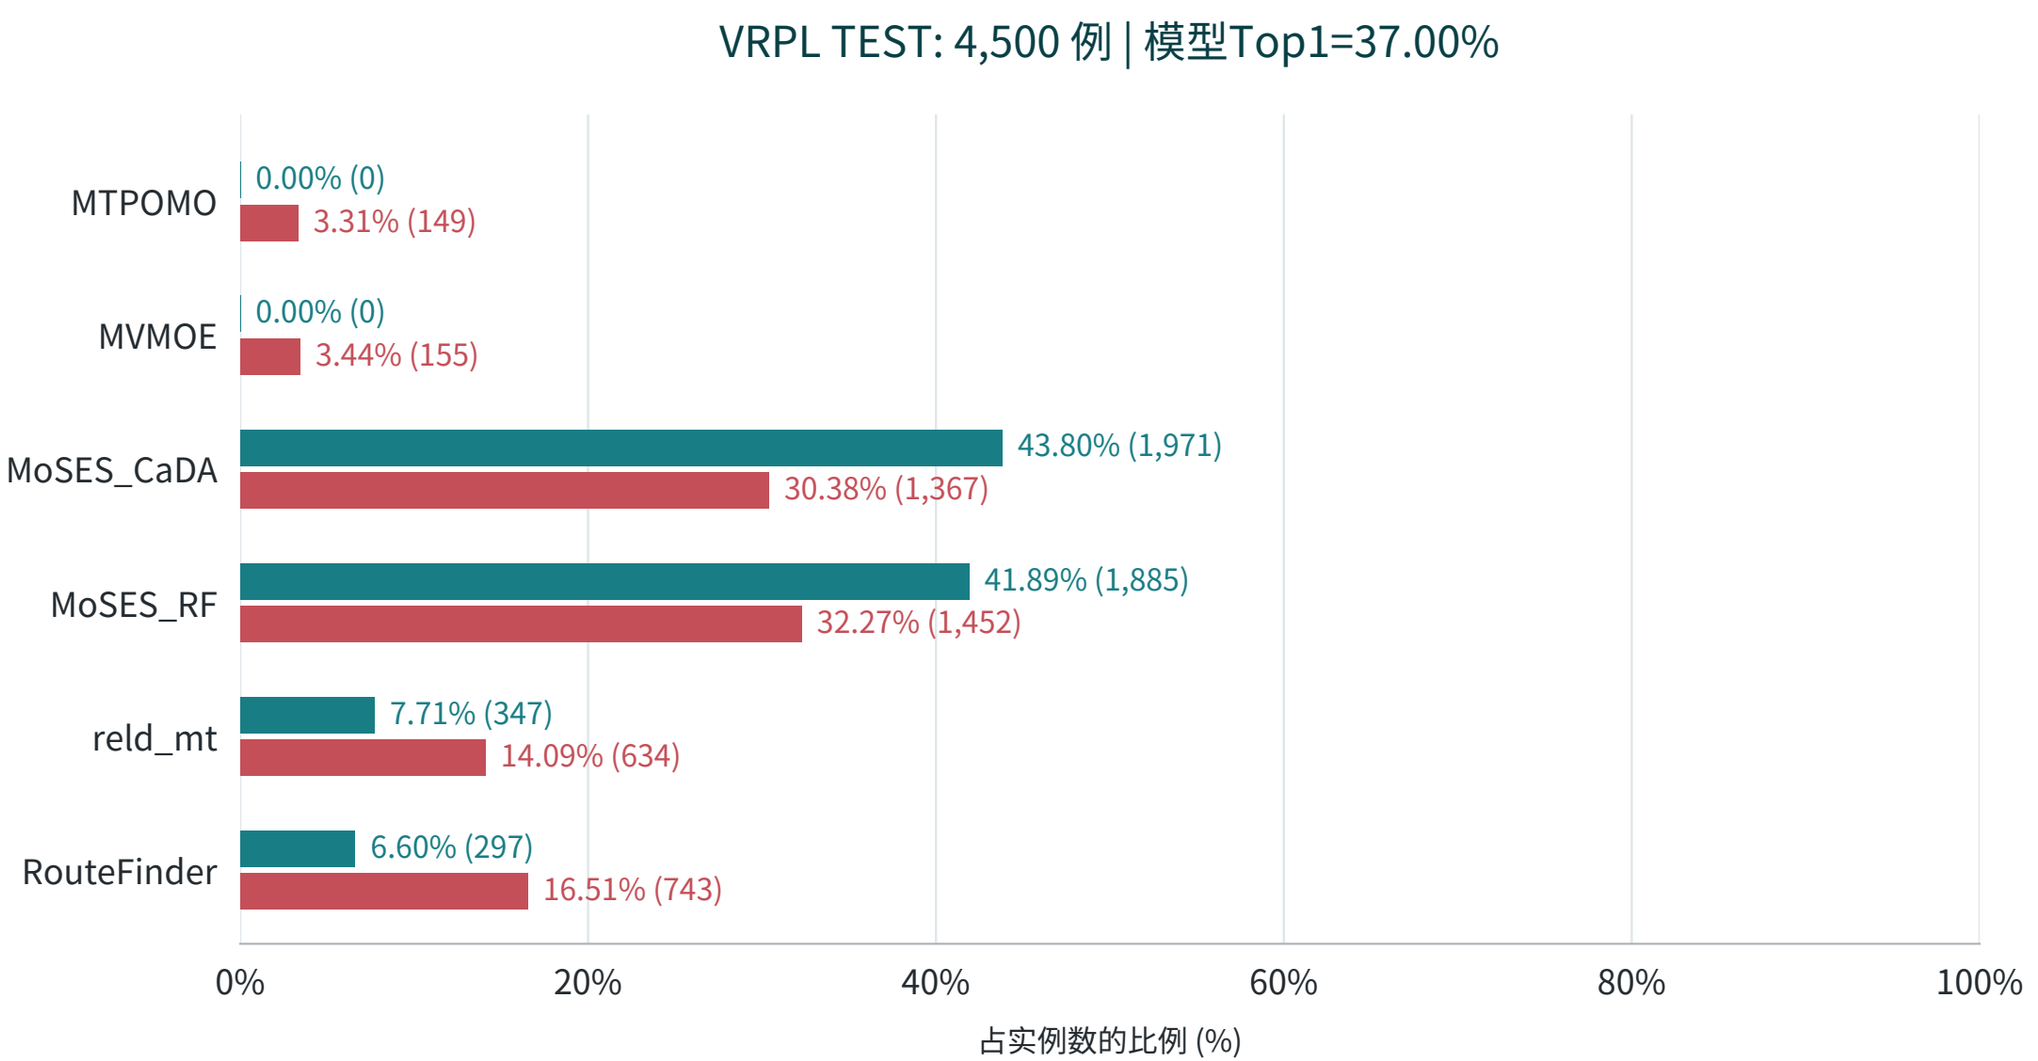

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

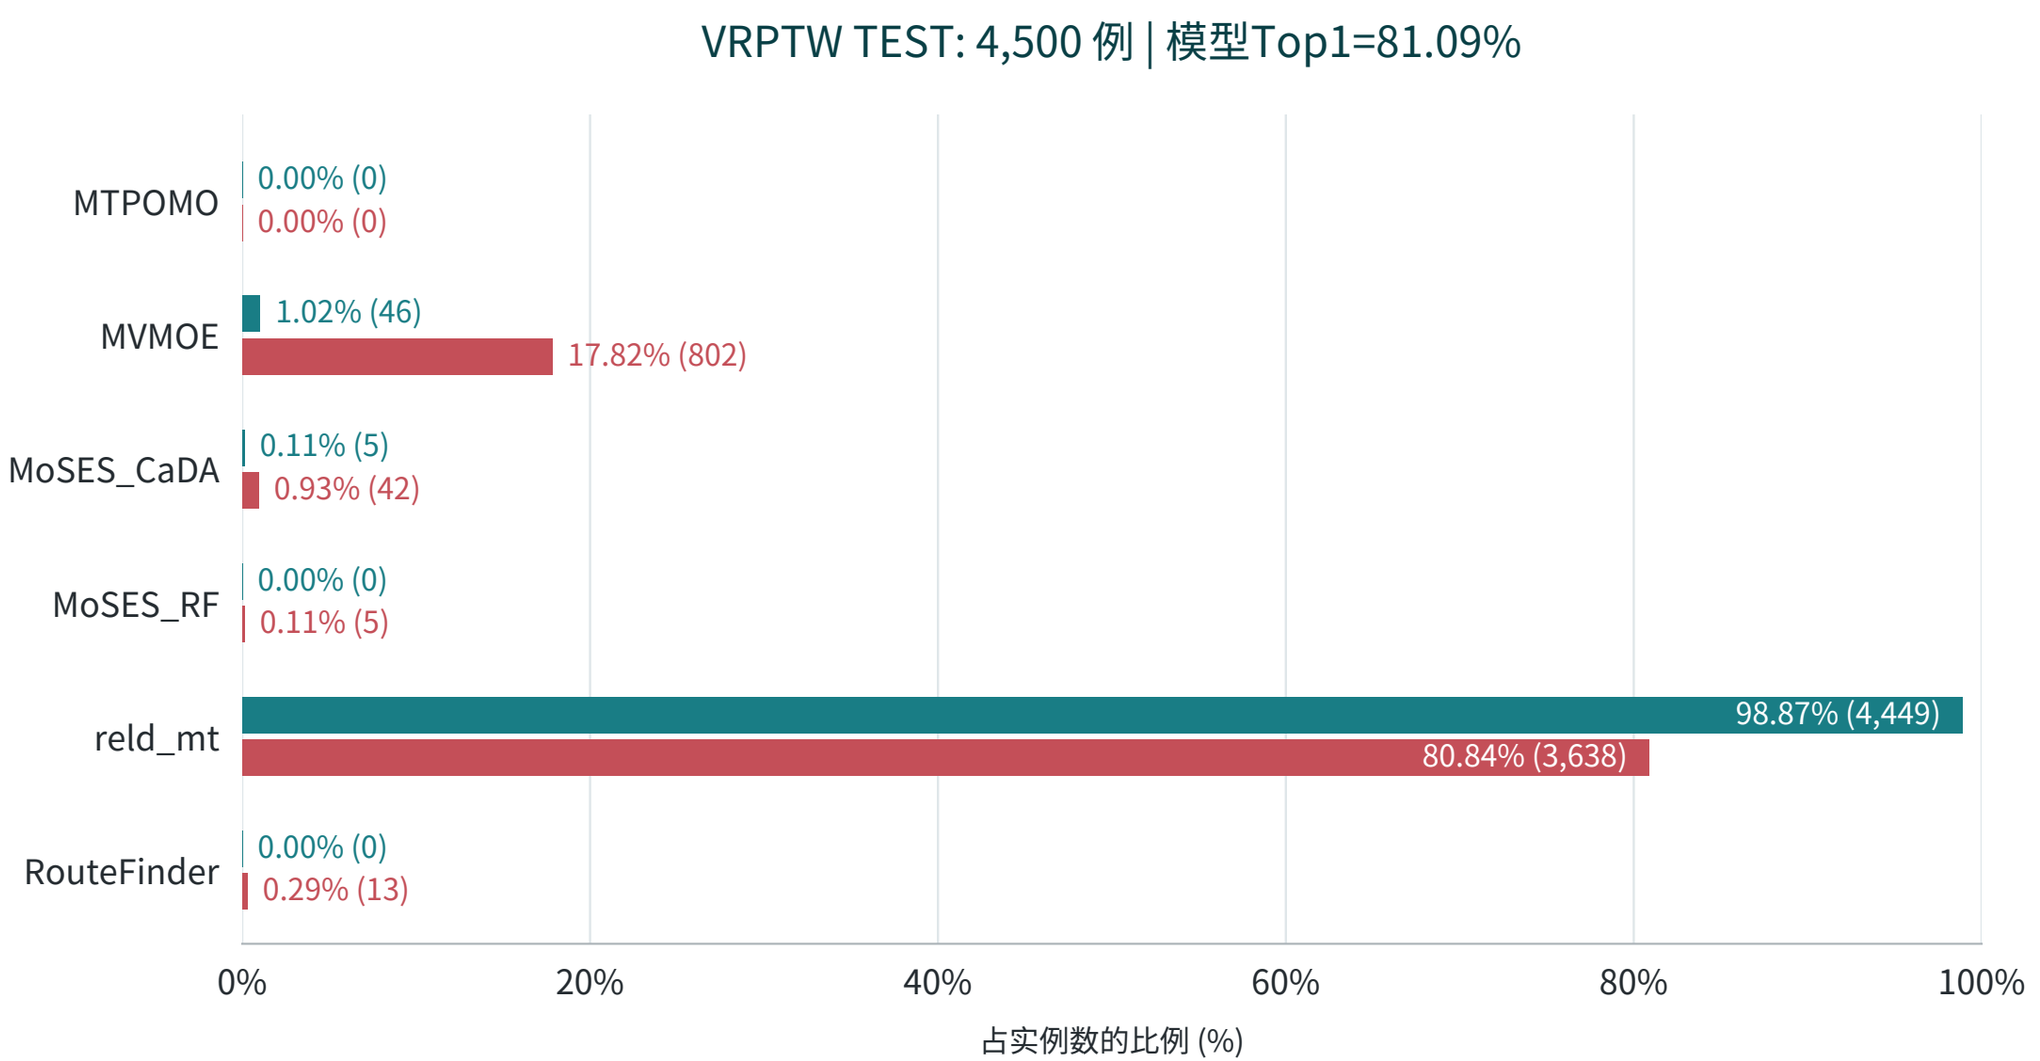

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

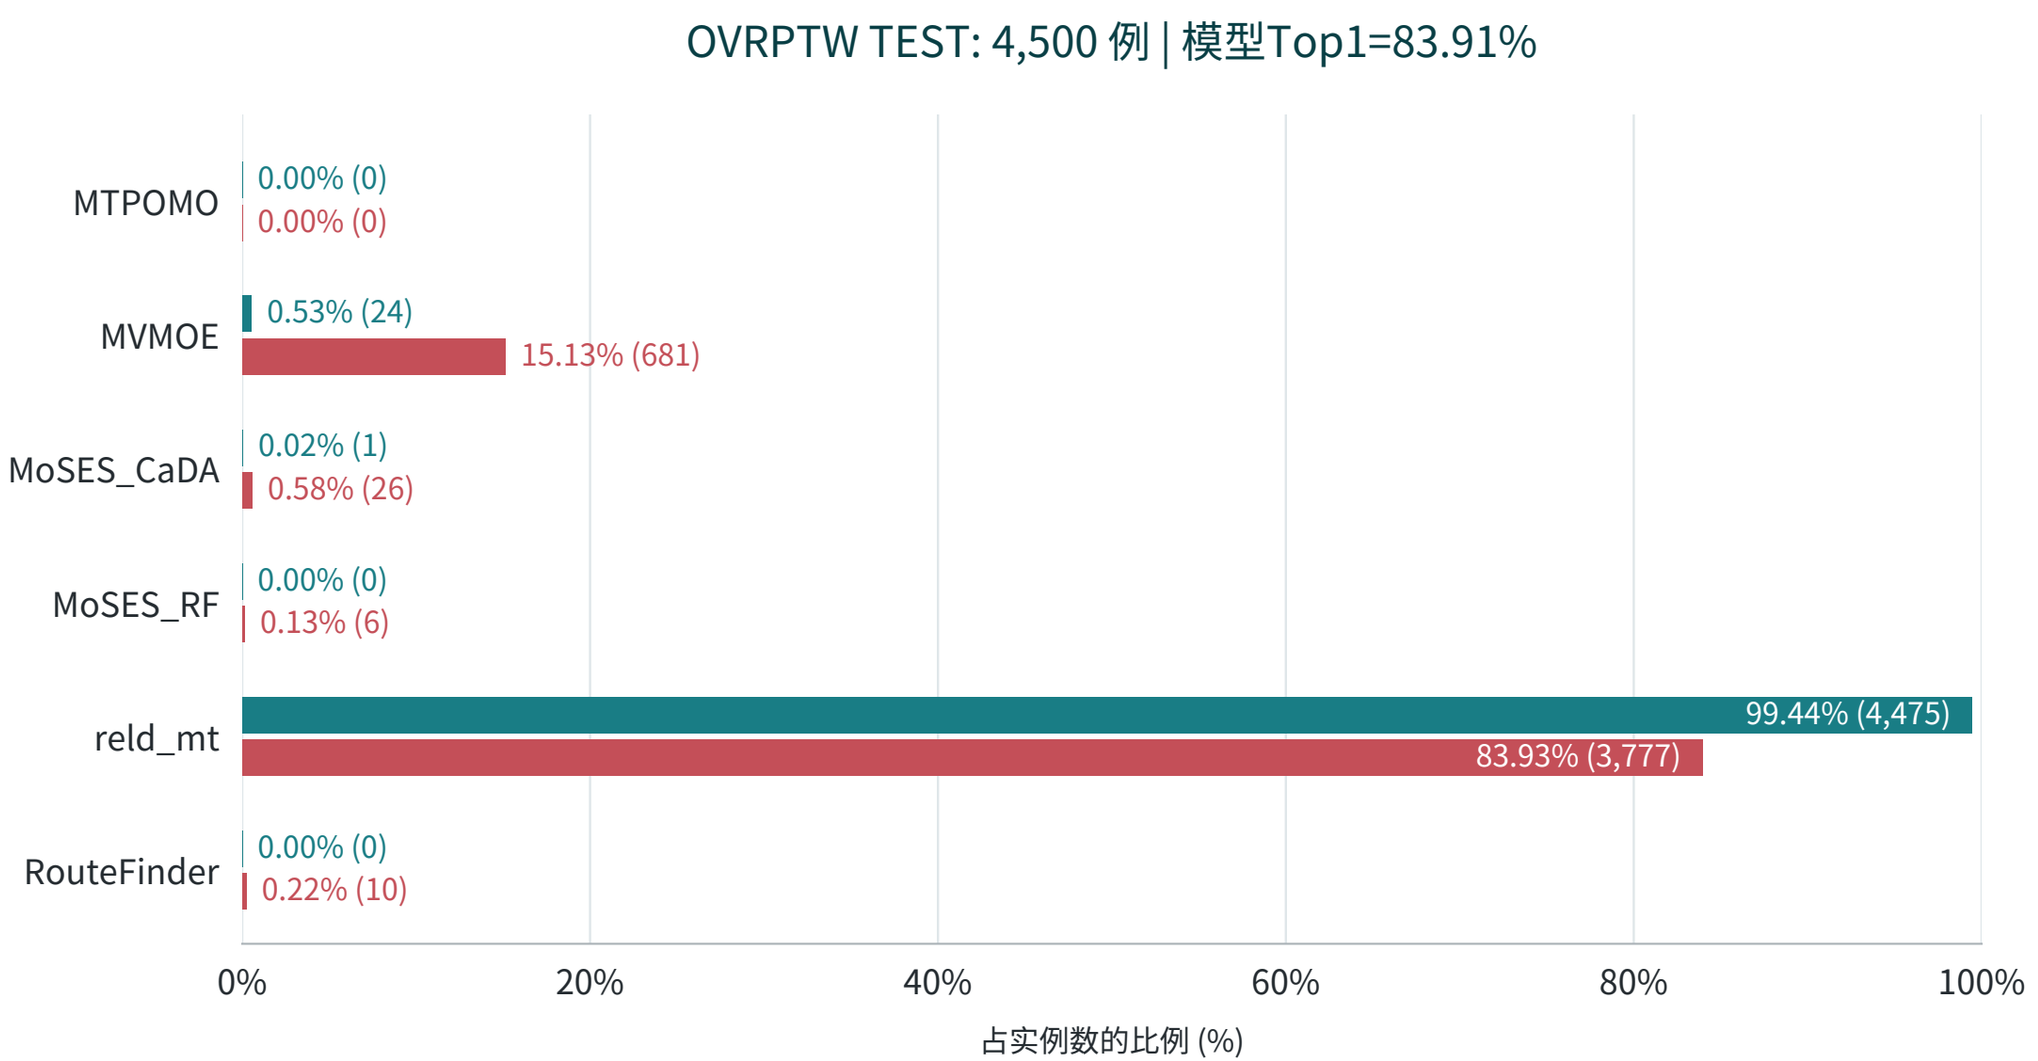

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

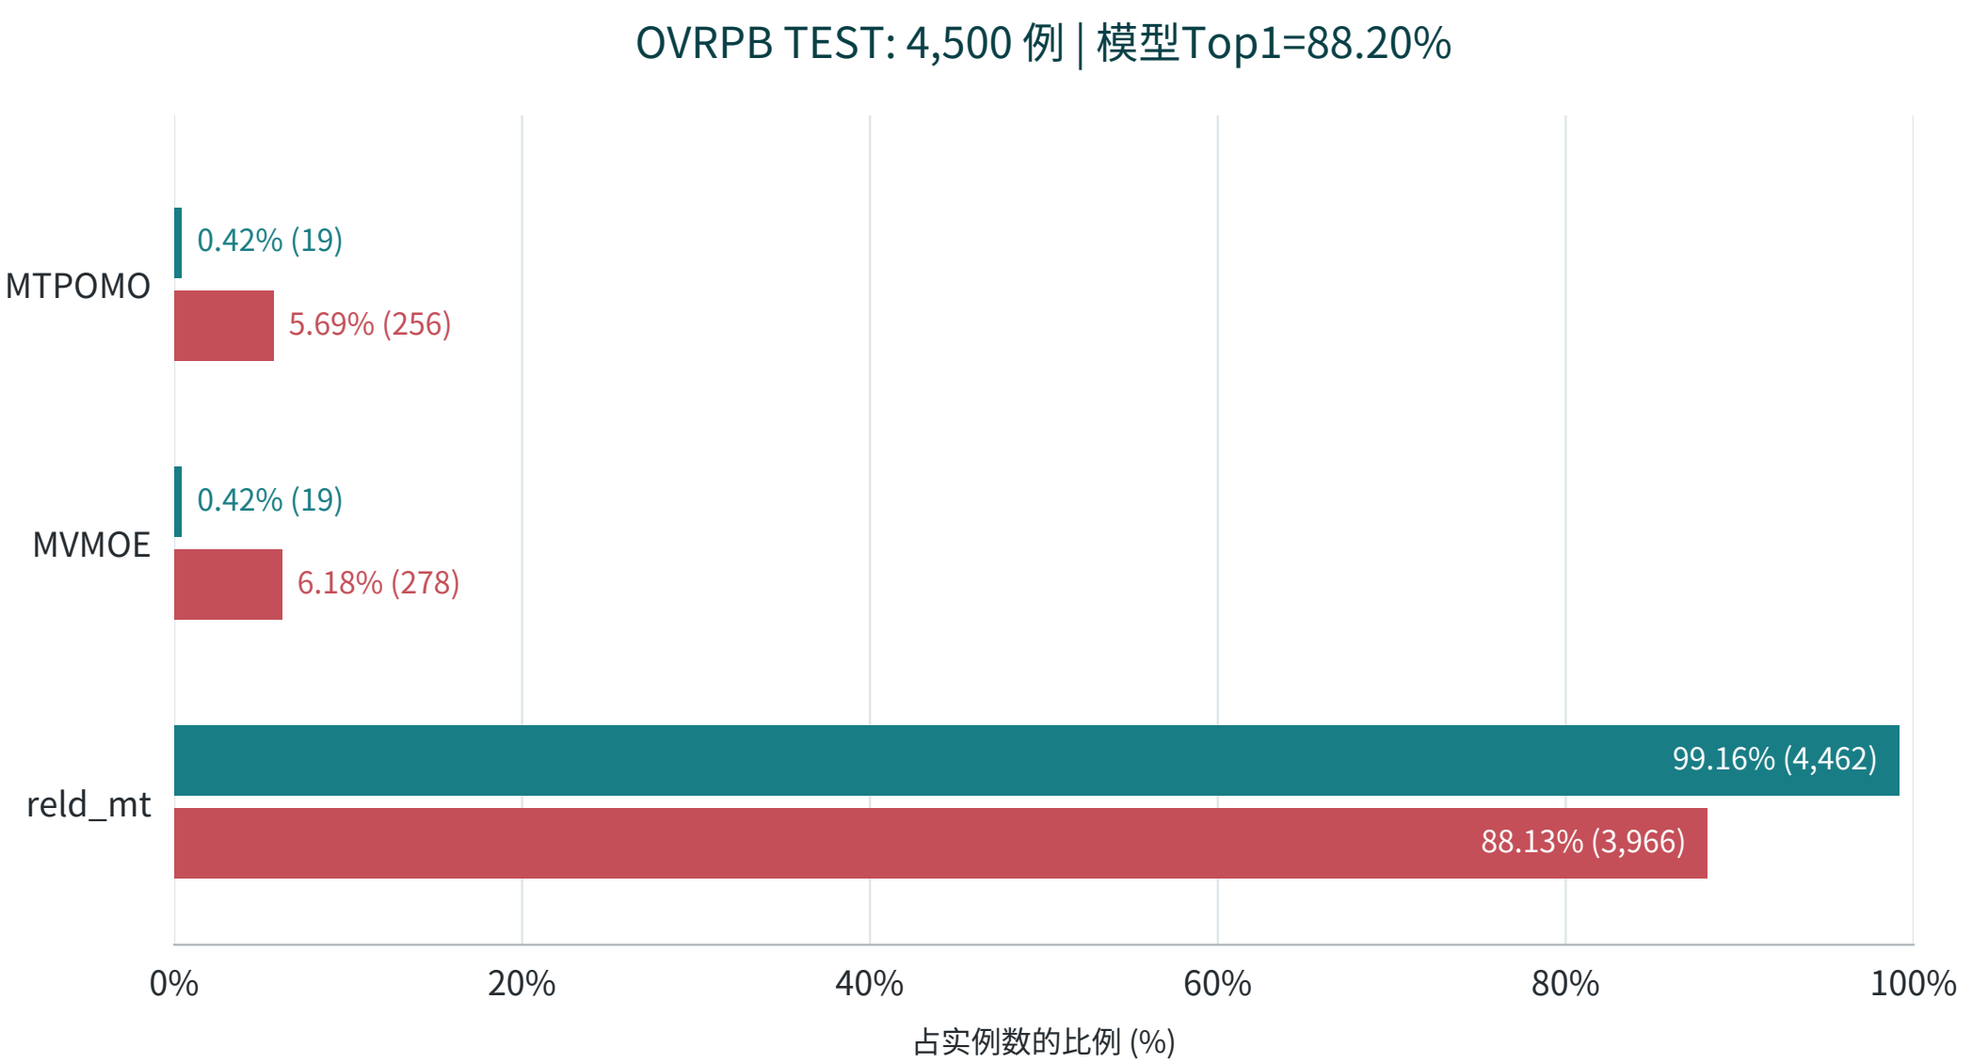

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

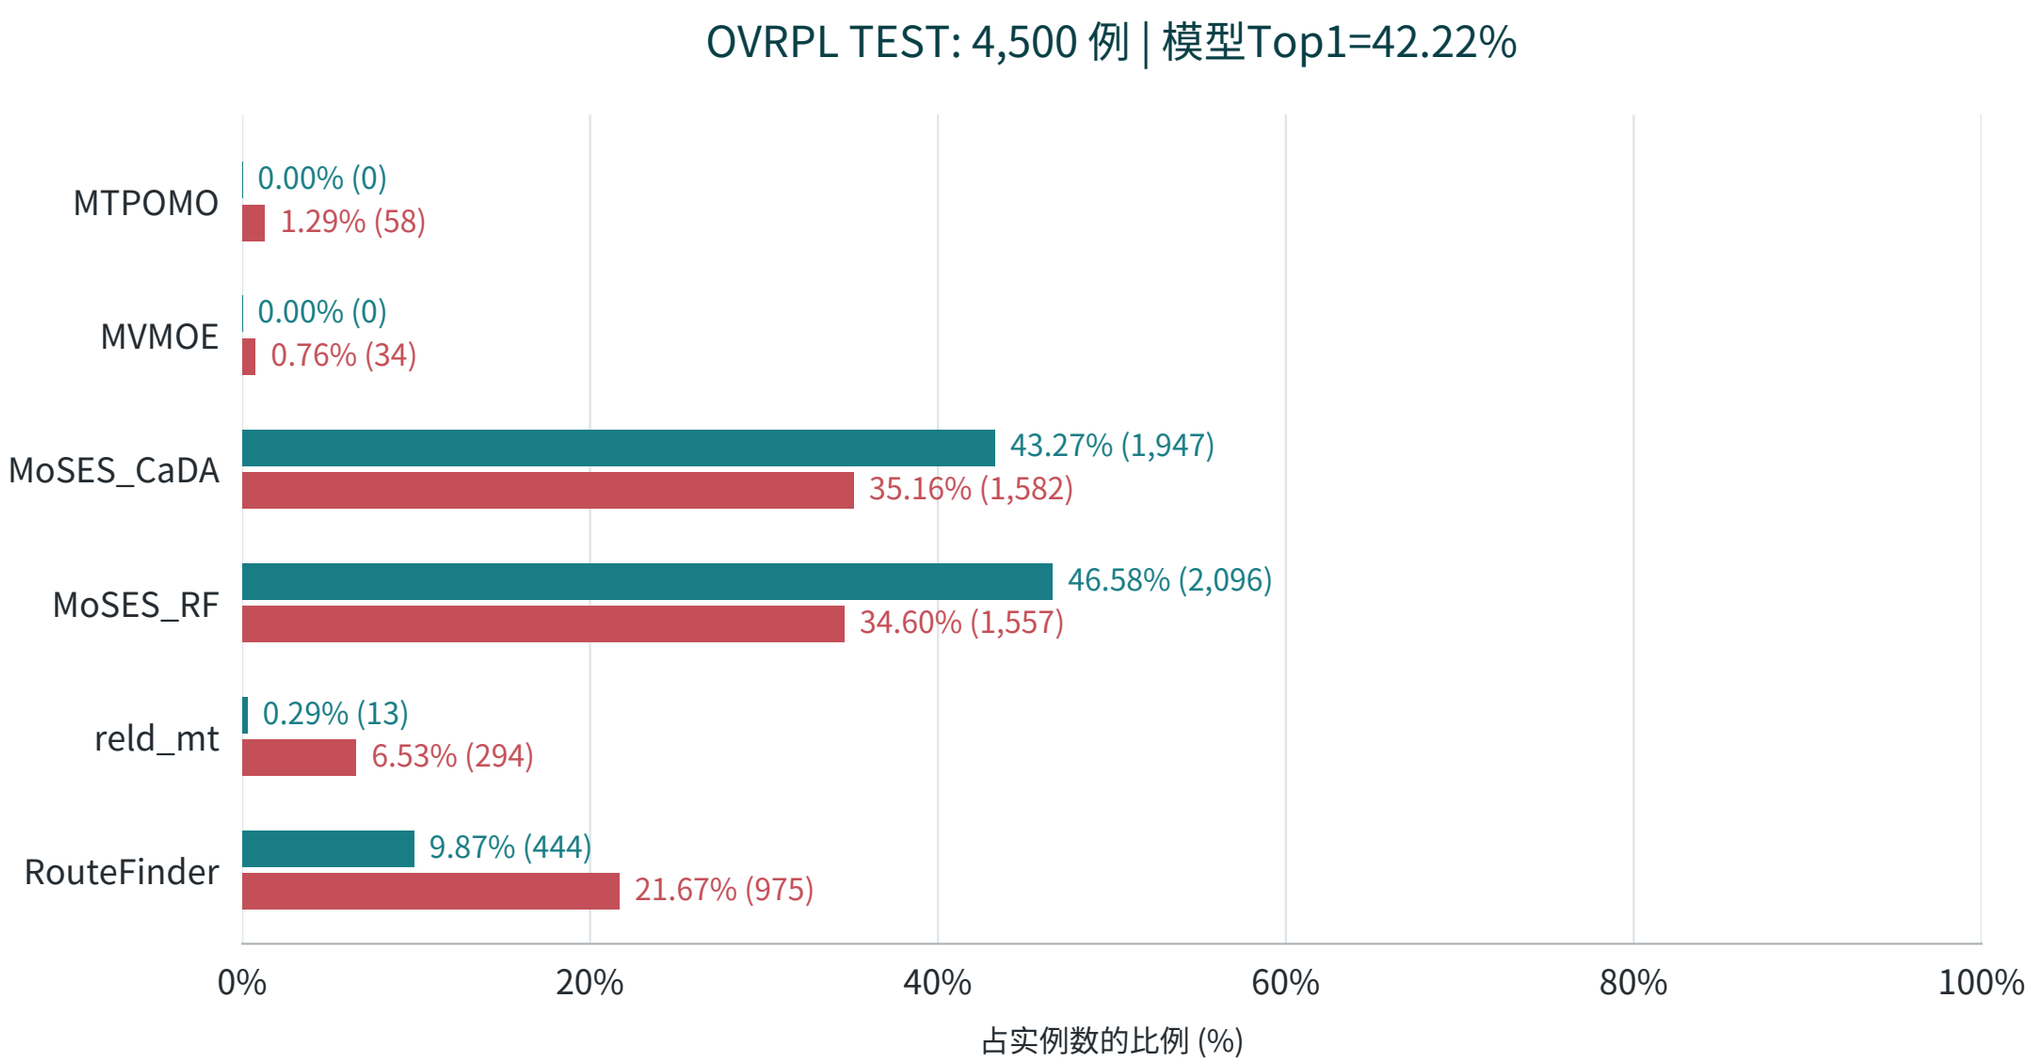

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

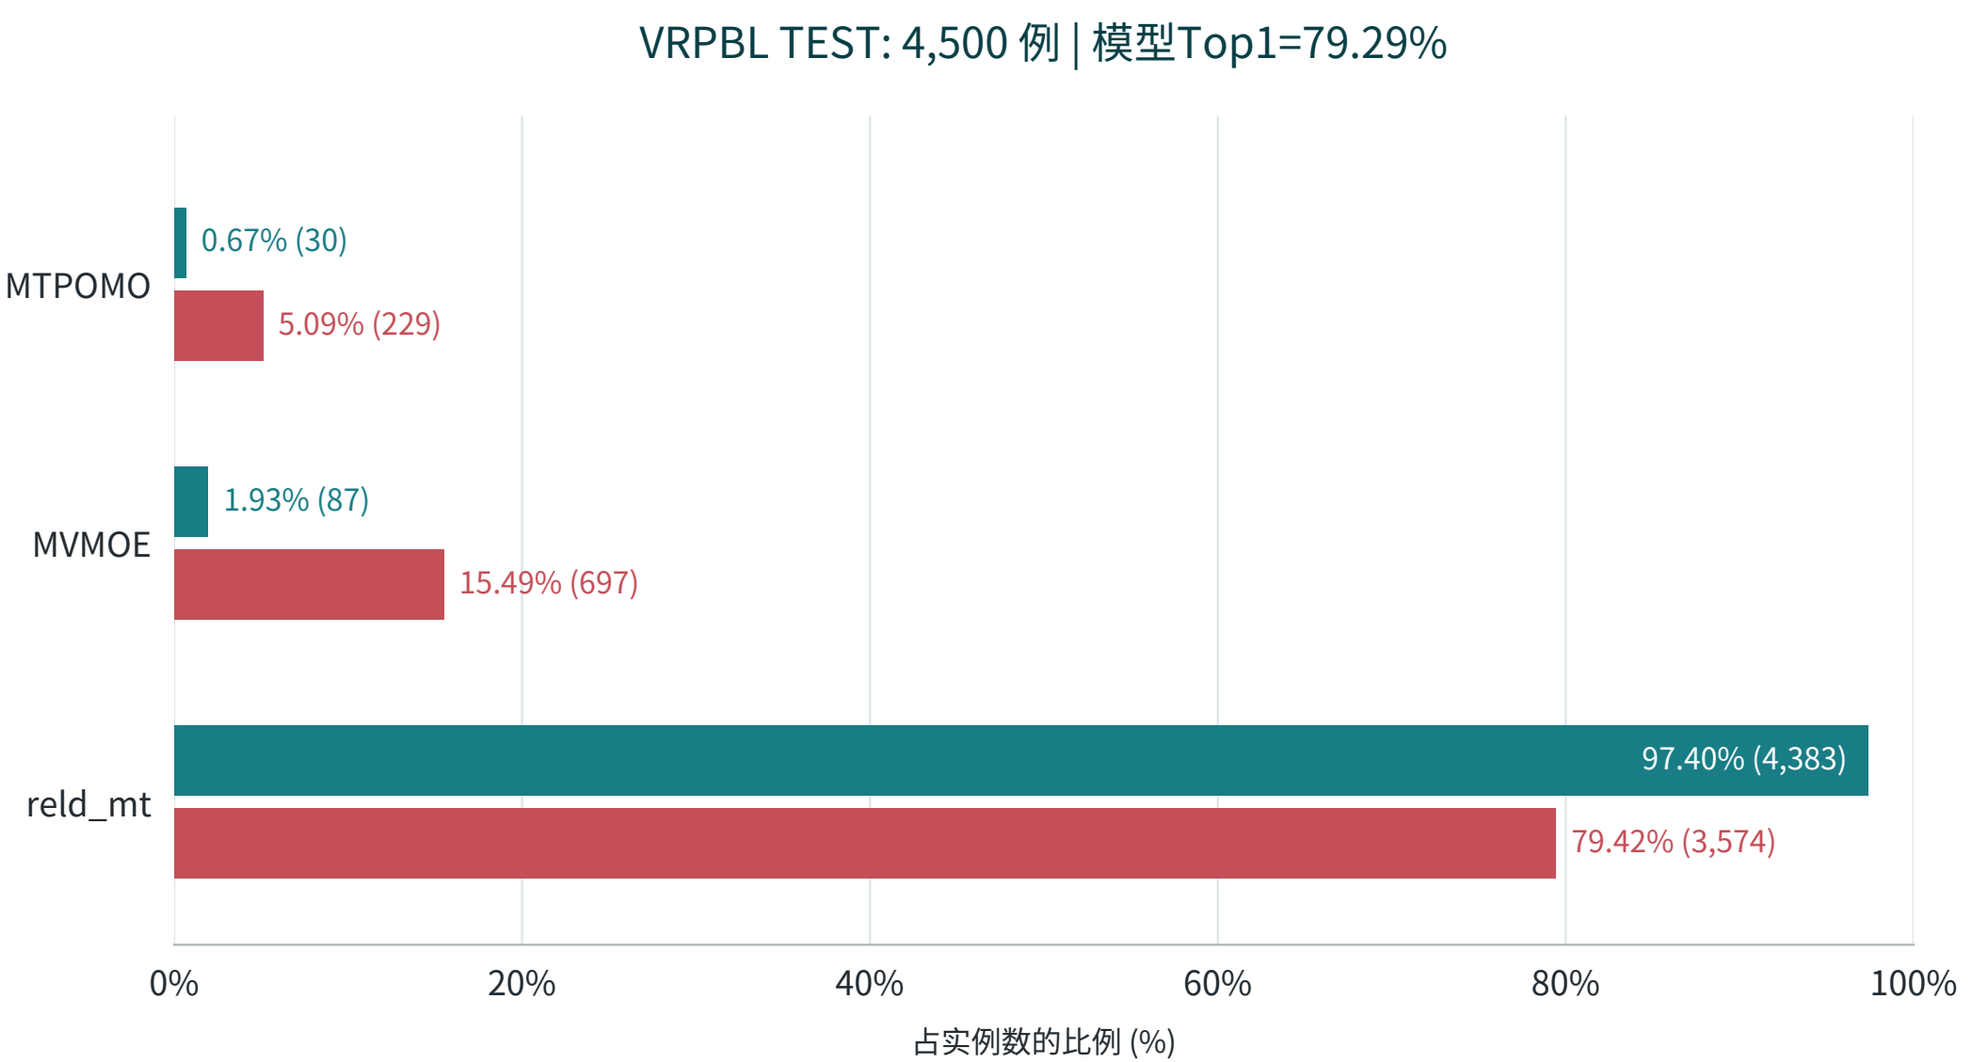

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

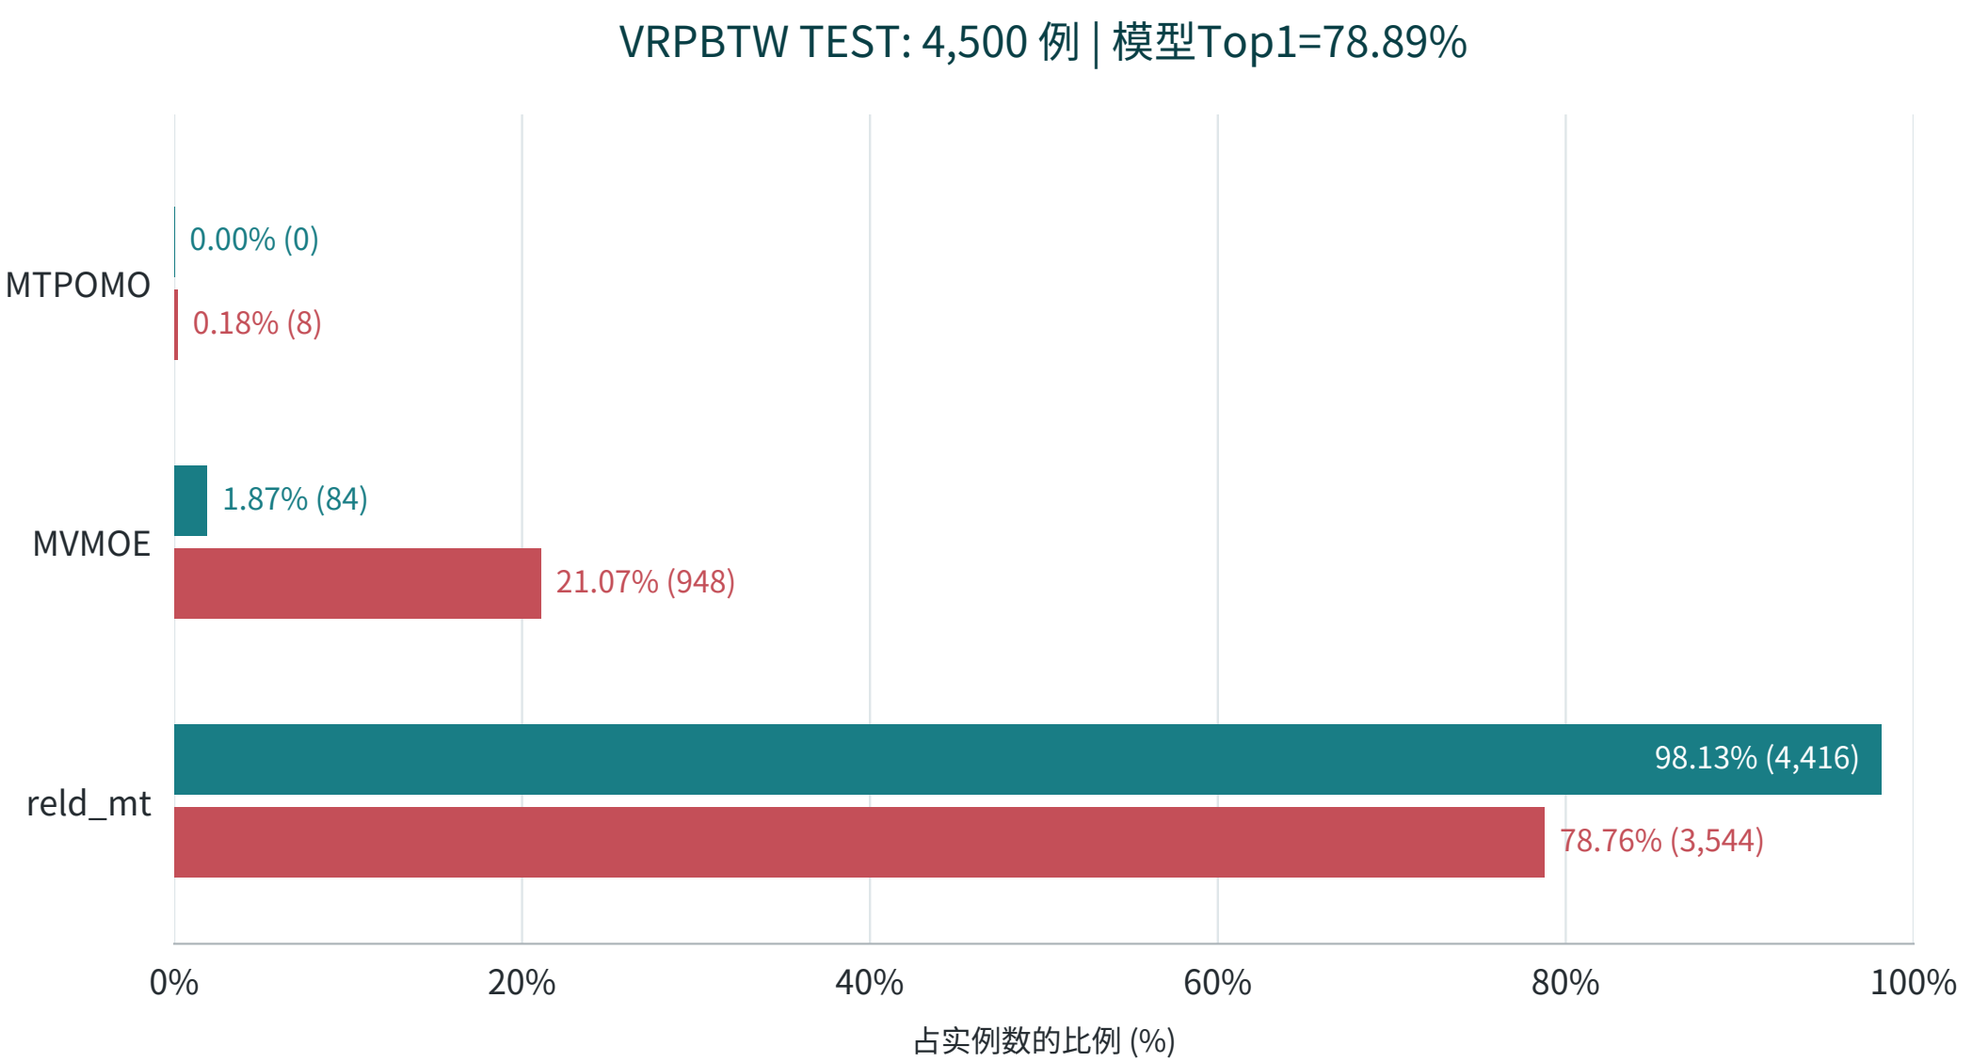

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

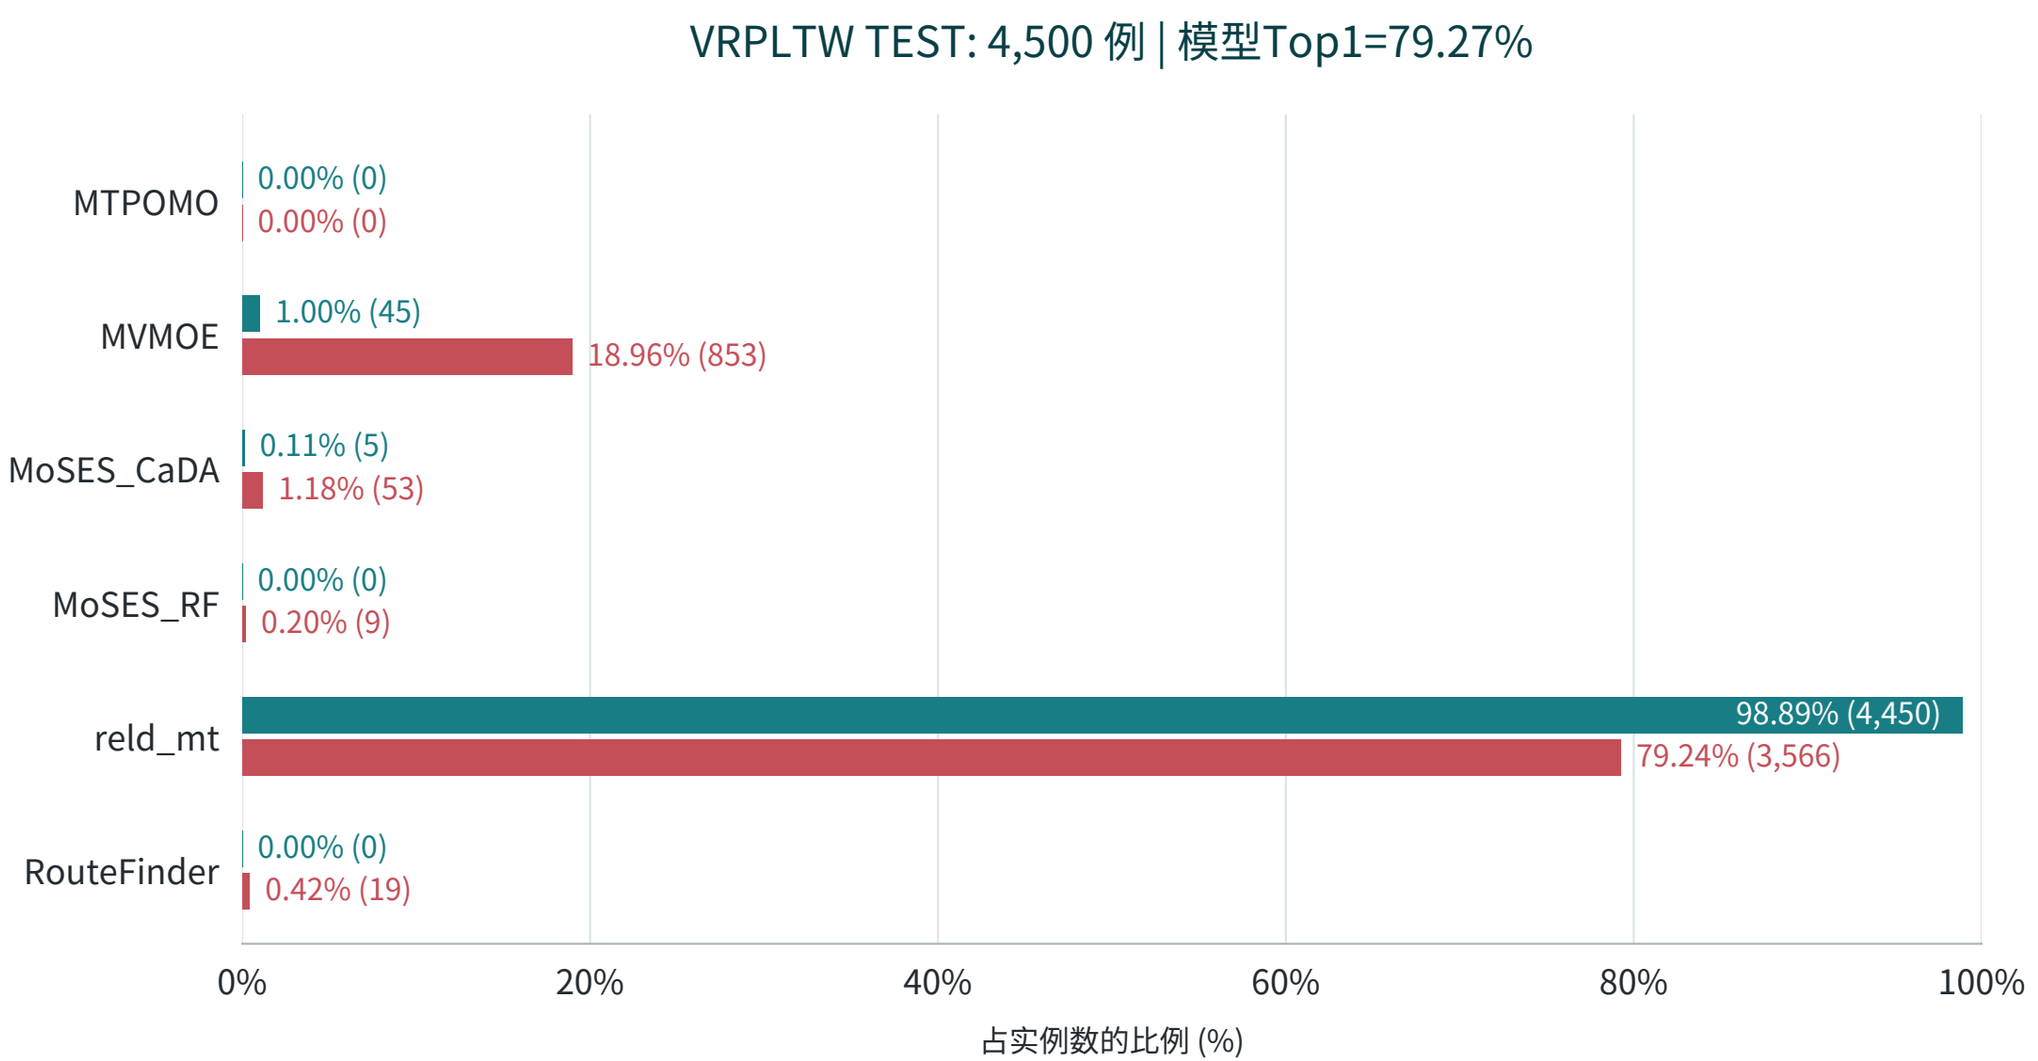

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

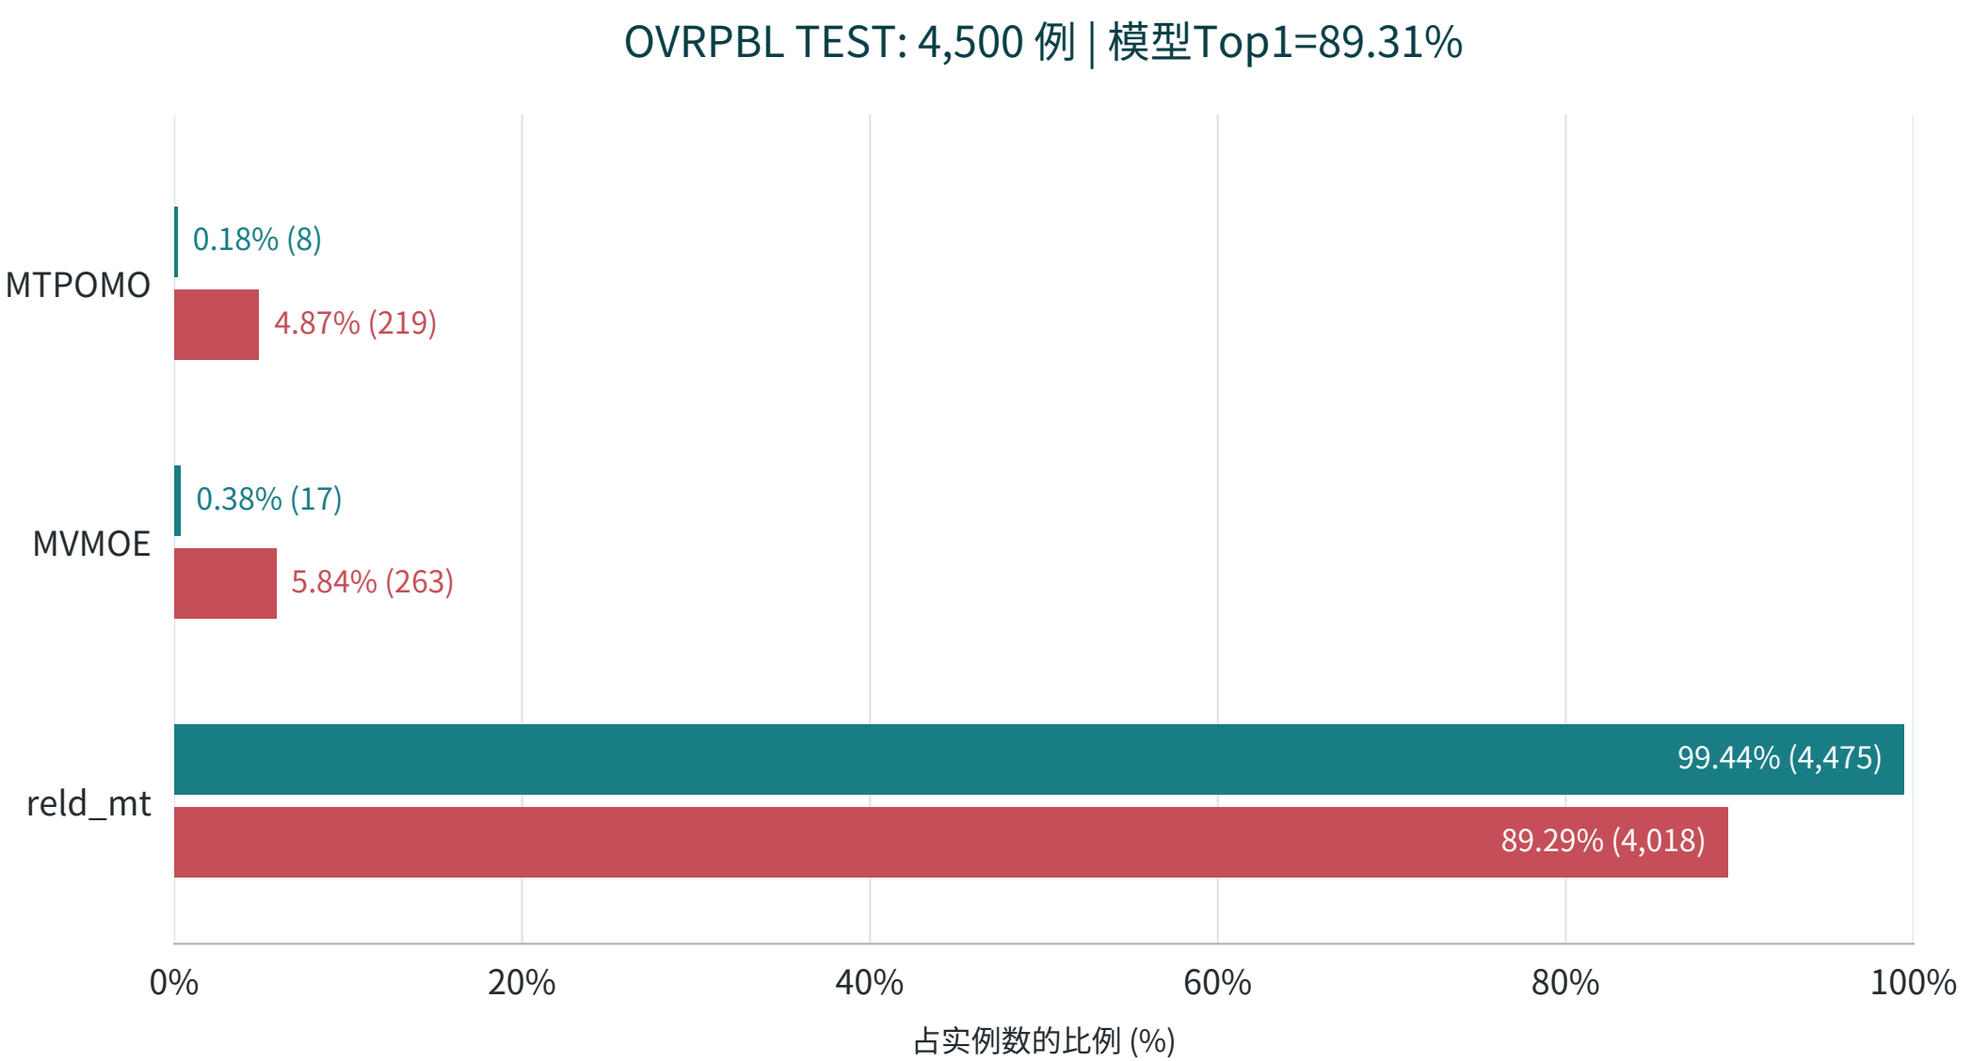

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

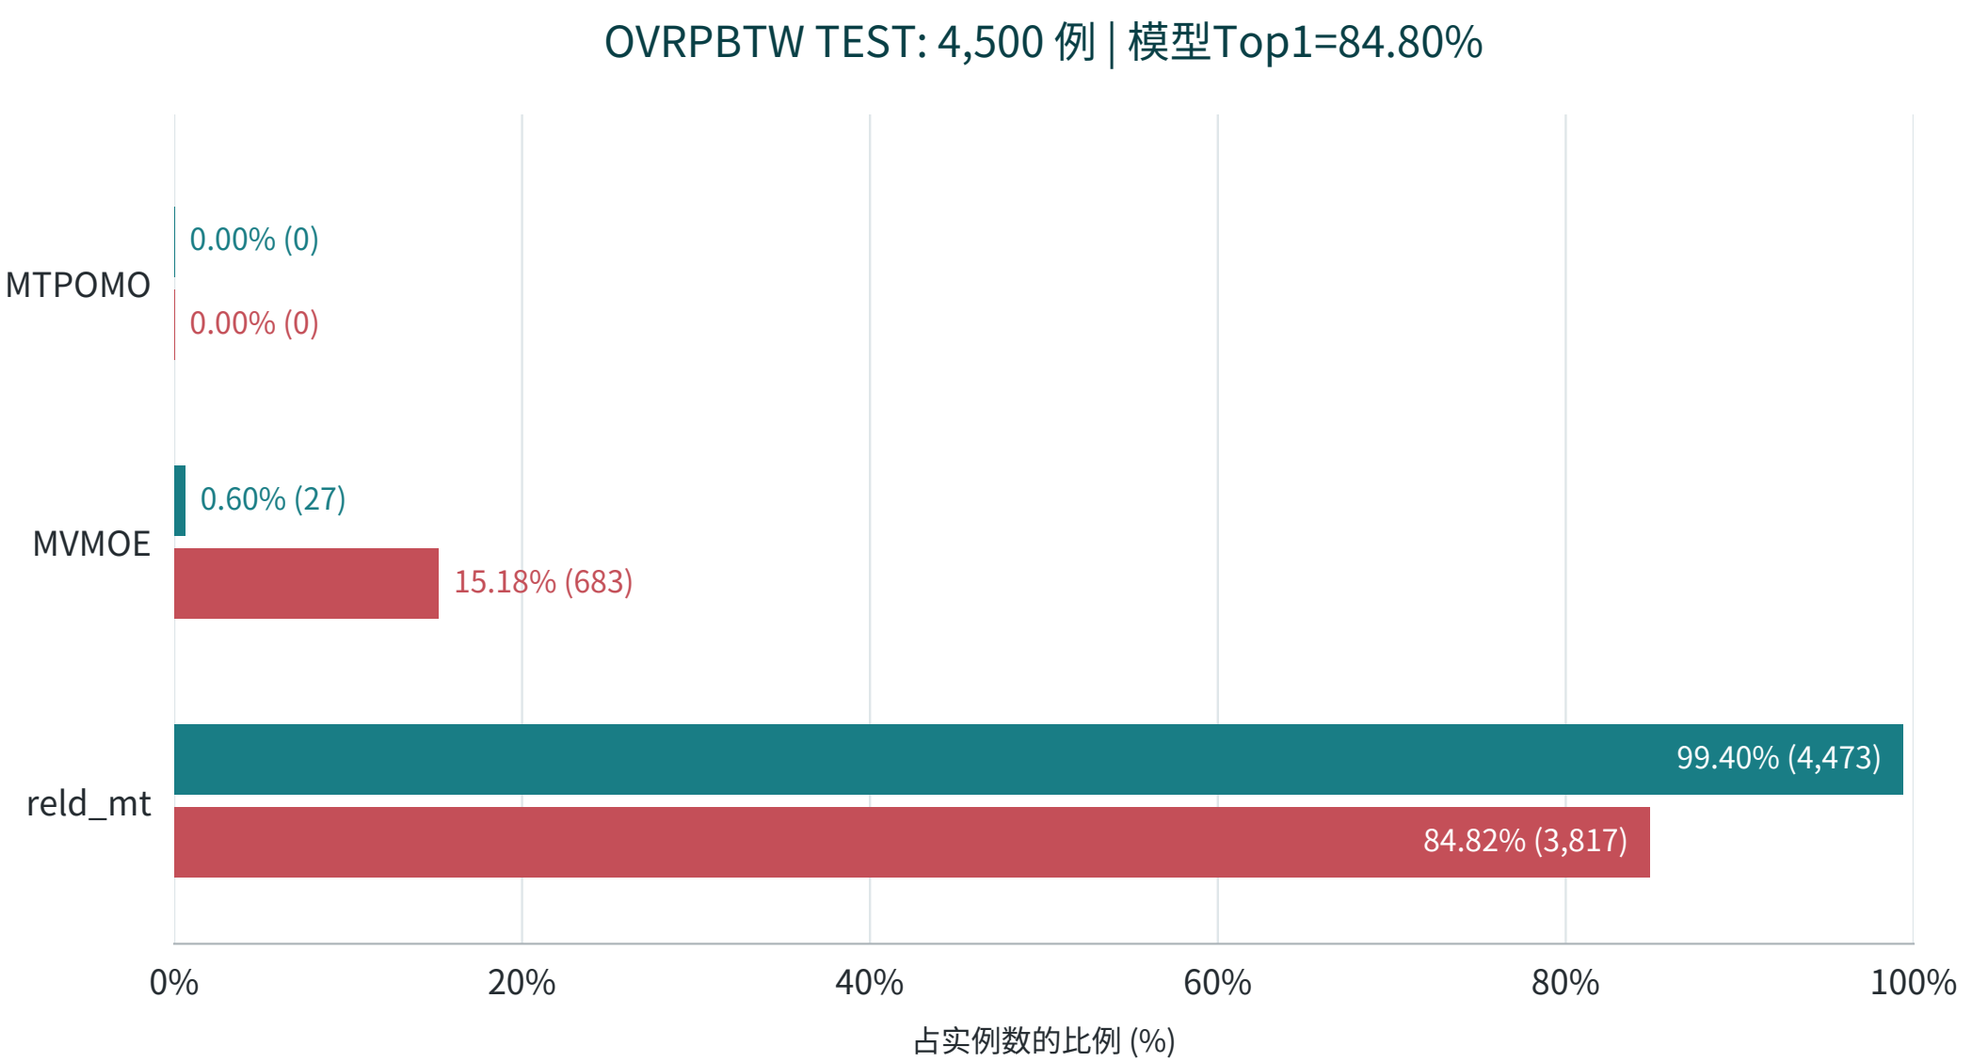

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

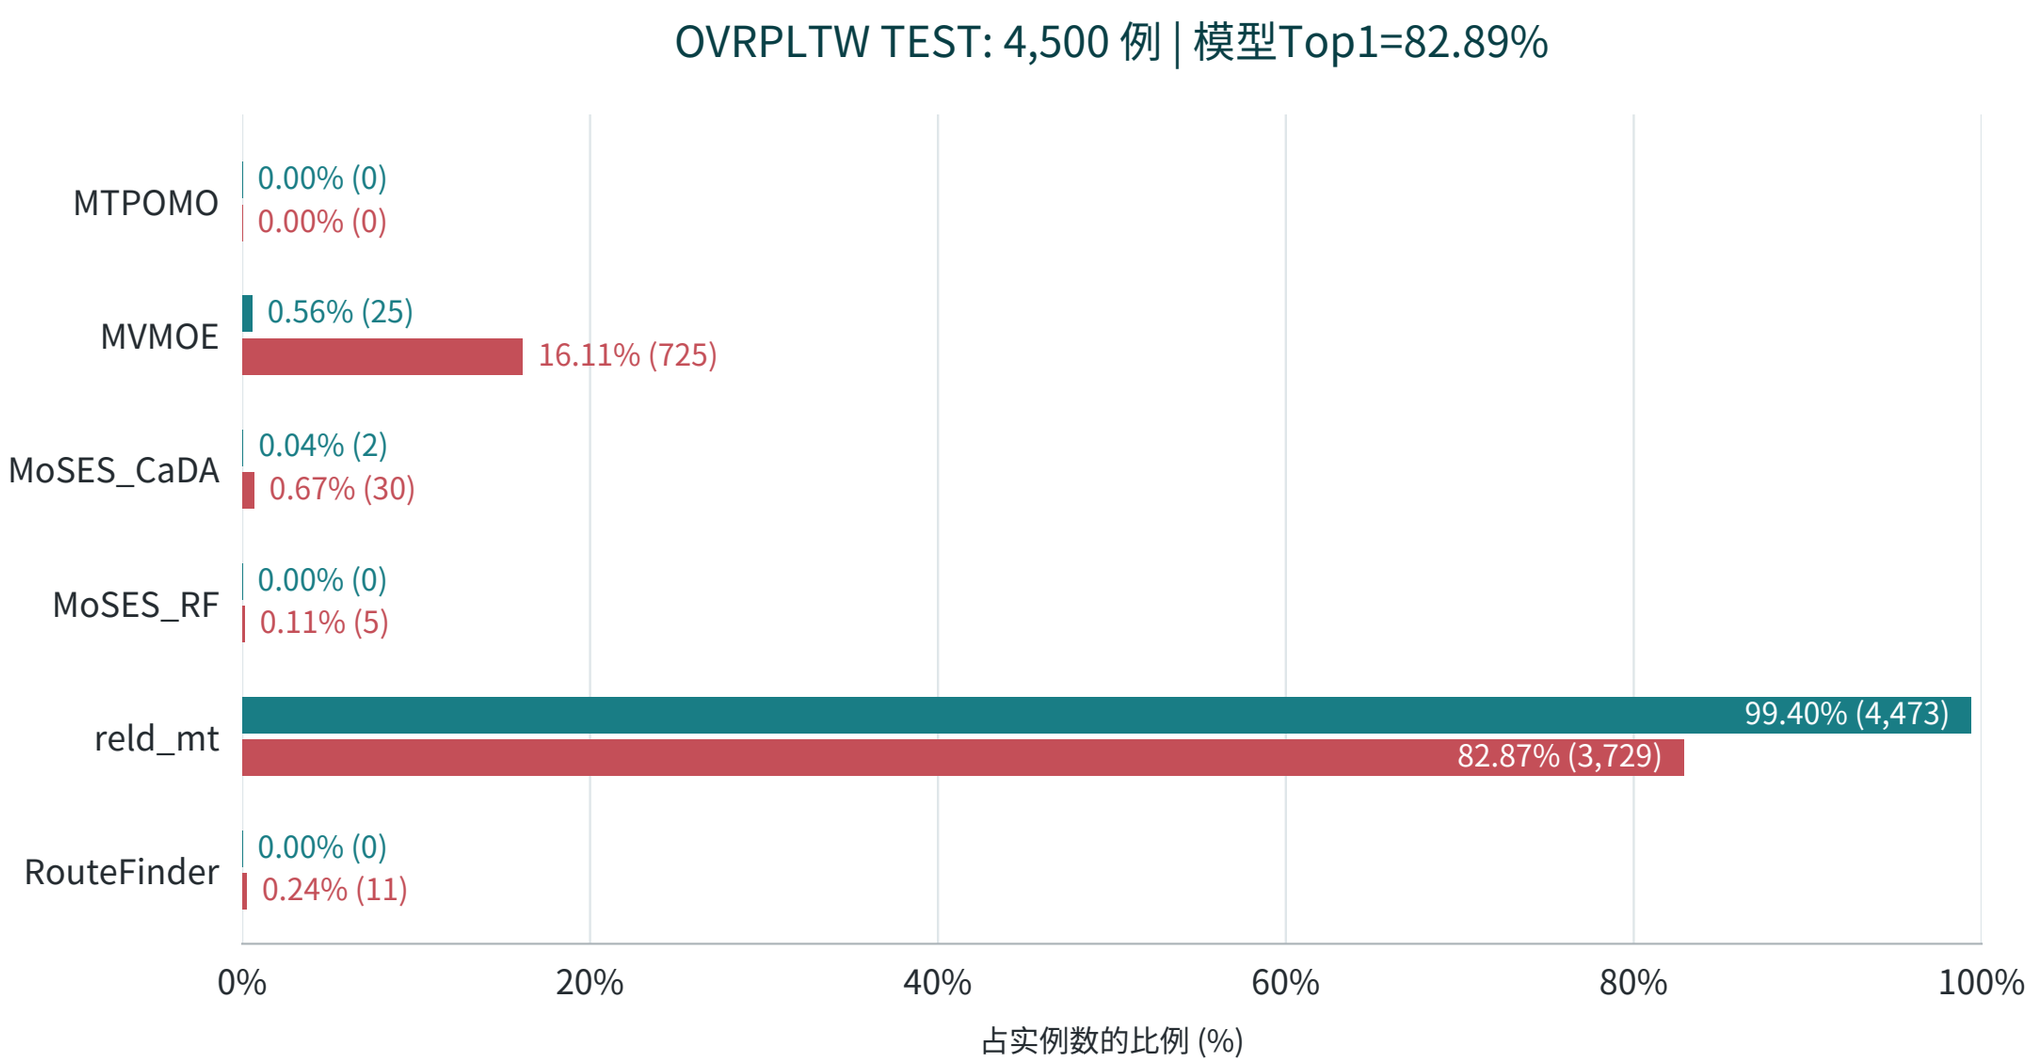

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

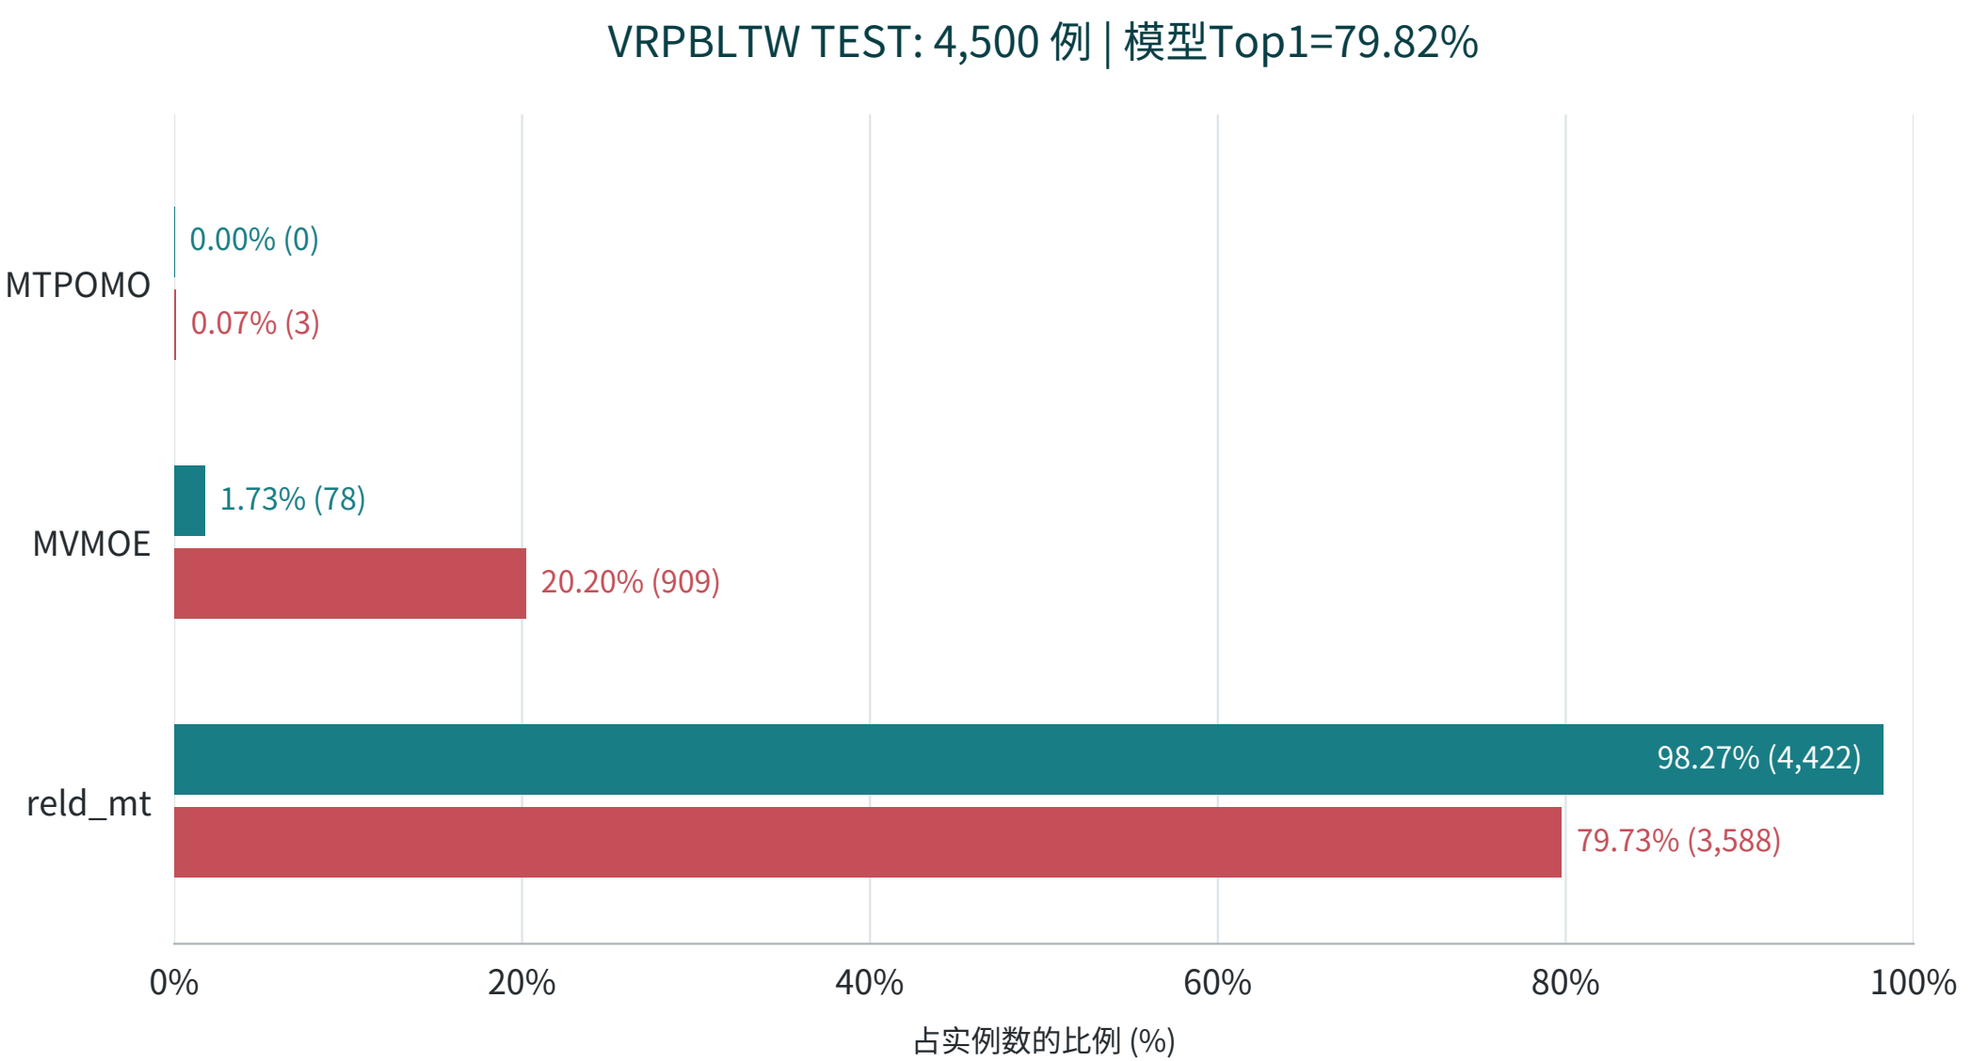

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.

R109/B_private_late | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 93821e6c6dd794f5

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

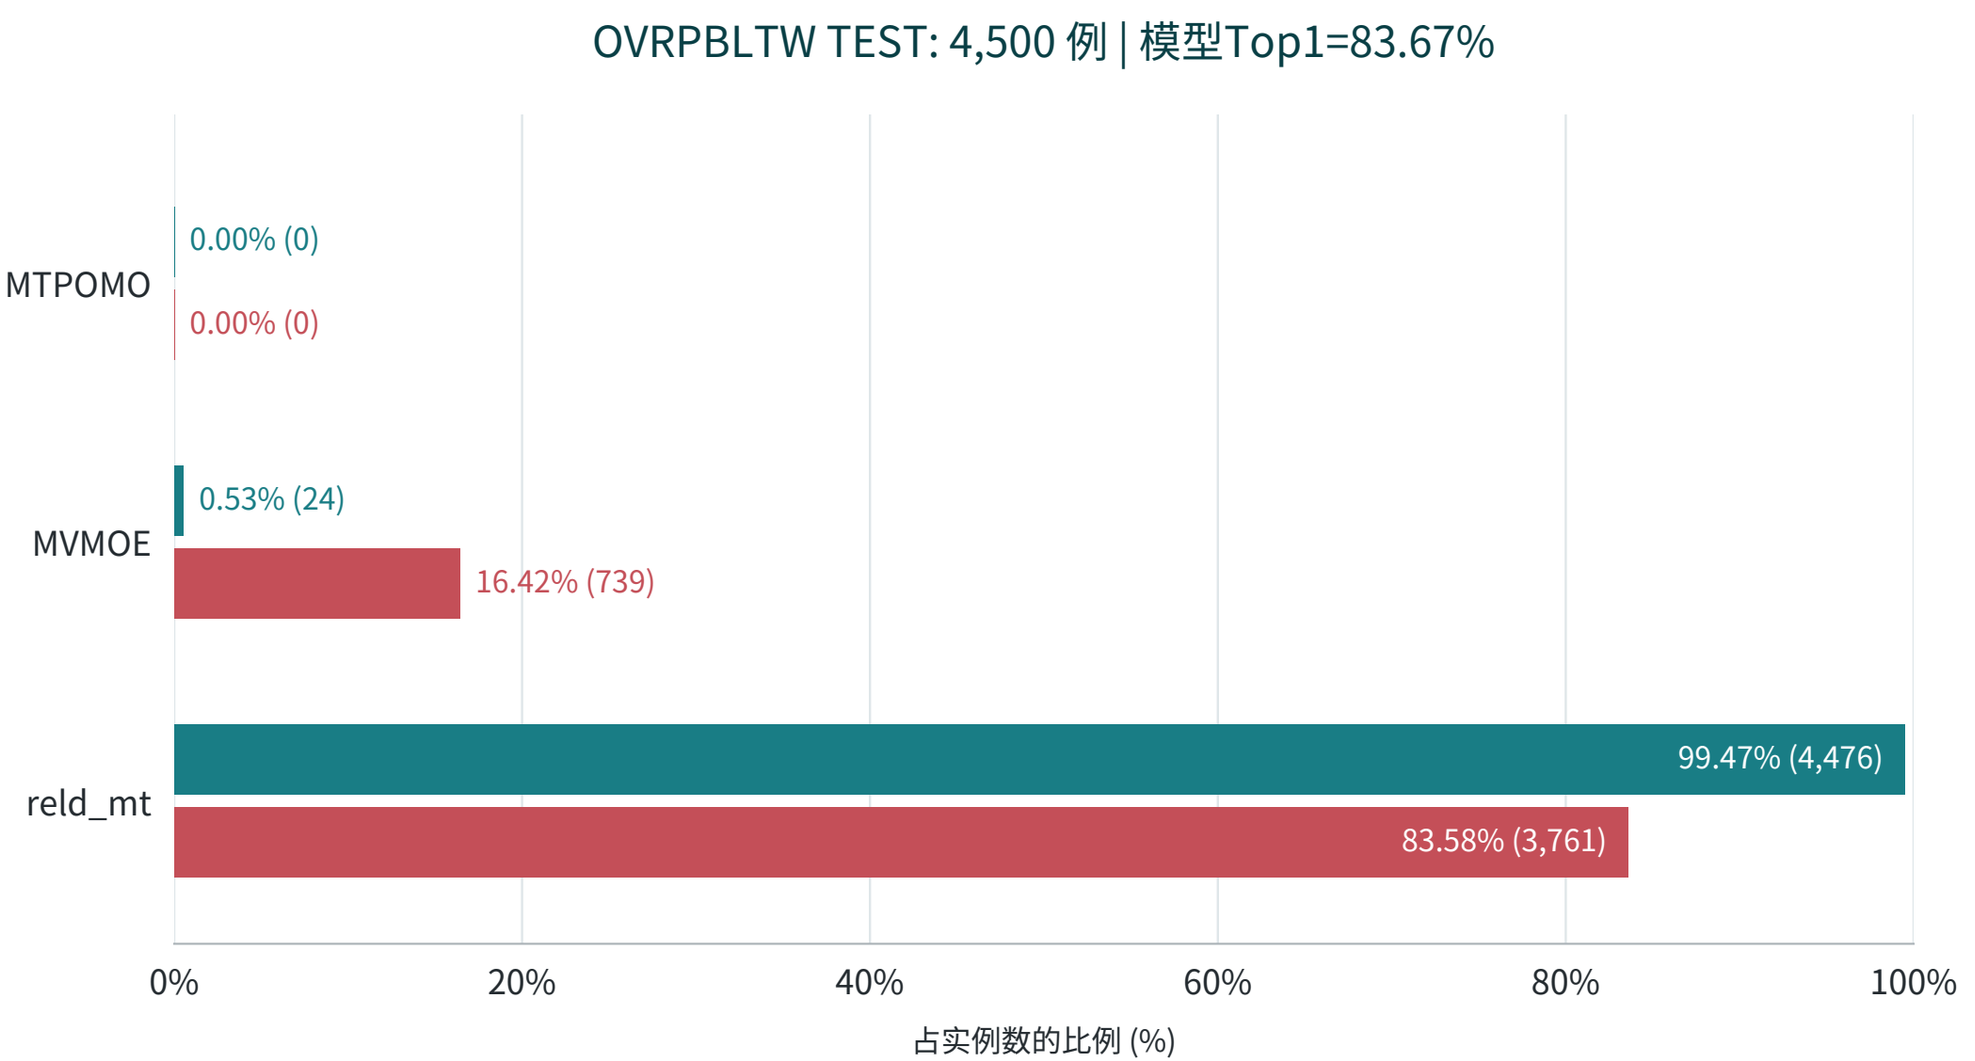

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R109/B_private_late: stable global solver-ID score ties. Same R109 lock; LIB inference only; no training/reselection/Rxx mixing.