R81B_cross_instance_rank_seed2 | Locked Full-Model Statistics

Requested_R80B_cross_instance_auc; native FP64 labels; no TEST/LIB checkpoint or inference reselection.

Seed2 scratch | update 34776 | SHA256 daacf8b70210c3ddcc8aea7c5fb5def675aac5bb0c20abdc6ed346253c846833

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.8558	66.1147	11.395752	11.406477	11.350910	-0.1891	+0.3942	0.4047
TEST ALL	71.1510	66.1746	11.345798	11.356886	11.302177	-0.1947	+0.3850	0.3940

Dataset	n	NSS Top1 (%)	R81B Top1 (%)	NSS mean_cost	R81B mean_cost
TSP TEST	3895	44.3389	44.7240	7.63439063	7.63566804
CVRP TEST	3895	46.2131	47.3427	17.89581829	17.90296733
TSPLIB	49	20.4082	16.3265	8.21790707	8.22156317
CVRPLIB	100	70.0000	60.0000	67.10111172	67.28600242

Historical R77B reference only. Matched R81A not run; no strict A/B causal conclusion.

Frozen R77B VAL zero support: 2648; near-zero <=0.1%; diagnostics only.

SBS identities: FULL TRAIN fit. Oracle: per-instance legal-pool minimum. ALL: equal-problem means.

vs_SBS/vs_Oracle are ratios of means; actual regret is the mean per-instance relative regret.

Earlier TEST results informed multi-round R&D. This is not an untouched blind evaluation.

Missing NSS remains missing; no retraining, no per-dataset Rxx or checkpoint mixing.

R81B_cross_instance_rank_seed2 | VAL: ALL + 18 Problems

selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
ALL	70.8558	66.1147	11.395752	11.406477	11.350910	-0.1891	+0.3942	0.4047
TSP	45.6996	32.5289	7.674592	7.691719	7.642213	-0.2227	+0.4237	0.4131
CVRP	45.9564	18.6393	18.127905	18.235344	18.033230	-0.5892	+0.5250	0.6901
ATSP	77.2529	47.3427	1.639545	1.678143	1.633464	-2.3000	+0.3723	0.3693
OVRP	41.2067	35.6611	7.456791	7.463758	7.410647	-0.0933	+0.6227	0.6358
VRPB	80.9243	80.6932	9.350715	9.350167	9.314024	+0.0059	+0.3939	0.3972
VRPL	37.6123	32.8113	12.424102	12.430138	12.375775	-0.0486	+0.3905	0.3983
VRPTW	80.0257	80.0513	18.844466	18.844840	18.791002	-0.0020	+0.2845	0.3042
OVRPTW	83.6714	83.6457	10.168224	10.168648	10.142136	-0.0042	+0.2572	0.2536
OVRPB	88.2927	88.3184	6.359759	6.359253	6.343047	+0.0080	+0.2635	0.2733
OVRPL	39.7433	36.0976	7.430880	7.437230	7.382246	-0.0854	+0.6588	0.6778
VRPBL	78.8960	78.6393	9.376667	9.379846	9.336336	-0.0339	+0.4320	0.4340
VRPBTW	78.8960	78.6136	19.899471	19.904962	19.806866	-0.0276	+0.4675	0.4504
VRPLTW	78.5366	78.4596	18.788026	18.789198	18.731398	-0.0062	+0.3023	0.3209
OVRPBL	89.3196	89.2169	6.370652	6.371327	6.354706	-0.0106	+0.2509	0.2614
OVRPBTW	83.6457	83.6200	10.667903	10.666245	10.629124	+0.0155	+0.3648	0.3448
OVRPLTW	83.1579	83.0809	10.158003	10.158206	10.129911	-0.0020	+0.2773	0.2814
VRPBLTW	79.3325	79.3582	19.780739	19.782852	19.694102	-0.0107	+0.4399	0.4337
OVRPBLTW	83.2349	83.2863	10.605091	10.604709	10.566155	+0.0036	+0.3685	0.3446

ALL uses equal problem weights; raw cross-problem mean costs are descriptive only.

R81B_cross_instance_rank_seed2 | TEST: ALL + 18 Problems

selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
ALL	71.1510	66.1746	11.345798	11.356886	11.302177	-0.1947	+0.3850	0.3940
TSP	44.7240	34.0693	7.635668	7.648986	7.602818	-0.1741	+0.4321	0.4223
CVRP	47.3427	18.1001	17.902967	18.013673	17.810107	-0.6146	+0.5214	0.6841
ATSP	77.1245	47.2914	1.634204	1.673244	1.628462	-2.3332	+0.3526	0.3533
OVRP	40.8216	33.2221	7.444772	7.455280	7.399322	-0.1410	+0.6142	0.6254
VRPB	80.1540	80.1027	9.349660	9.350709	9.313495	-0.0112	+0.3883	0.3904
VRPL	37.2529	32.0154	12.357236	12.362834	12.307678	-0.0453	+0.4027	0.4112
VRPTW	81.0526	80.8472	18.678465	18.679226	18.626242	-0.0041	+0.2804	0.2920
OVRPTW	84.1335	84.0308	10.097876	10.098565	10.073411	-0.0068	+0.2429	0.2328
OVRPB	88.0359	88.0873	6.371305	6.371519	6.352881	-0.0034	+0.2900	0.2979
OVRPL	40.8986	34.7368	7.465681	7.473924	7.419485	-0.1103	+0.6226	0.6335
VRPBL	79.7689	79.6662	9.391632	9.392364	9.351966	-0.0078	+0.4241	0.4249
VRPBTW	78.8703	78.7933	19.657455	19.660290	19.572604	-0.0144	+0.4335	0.4330
VRPLTW	79.6919	79.6149	18.765759	18.766509	18.711715	-0.0040	+0.2888	0.3074
OVRPBL	89.5250	89.5507	6.372746	6.372881	6.356685	-0.0021	+0.2527	0.2637
OVRPBTW	84.9551	84.8267	10.655819	10.656749	10.622470	-0.0087	+0.3139	0.2859
OVRPLTW	83.2092	83.1065	10.083530	10.084034	10.056522	-0.0050	+0.2686	0.2704
VRPBLTW	79.7689	79.6149	19.709872	19.713491	19.619916	-0.0184	+0.4585	0.4454
OVRPBLTW	83.3890	83.4660	10.649712	10.649666	10.613413	+0.0004	+0.3420	0.3178

ALL uses equal problem weights; raw cross-problem mean costs are descriptive only.

R81B_cross_instance_rank_seed2 | Same Checkpoint On Native LIB

R81 checkpoint factory restores all TRAIN geometry/ID/feature buffers. No historical LIB-score substitution.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB n=49	16.3265	10.2041	8.221563	8.240435	8.142167	-0.2290	+0.9751	0.9682
CVRPLIB n=100	60.0000	45.0000	67.286002	67.245364	66.945093	+0.0604	+0.5092	0.6315

eval mode, original R77 maximin scores, stable ascending-global-solver-ID tie break

Primary: native/FP64 ind. FP32 argmin is compatibility-only.

Candidate names/IDs and instance identities are checked before reusing predictions.

Method AUC: unique FP64-min P vs strict-loser N; exact ties receive half credit.

TPR@FPR<=1%,5% uses whole tied-score groups, without interpolation or threshold fitting.

Utility diagnostics do not change maximin inference. Zero/near-zero sets never influence training.


Historical R77B reference only. Matched R81A not run; no strict A/B causal conclusion.


R81B_cross_instance_rank_seed2 | TSP | 方法分布


同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/TSPLIB (original native LIB / historical NSS comparison)

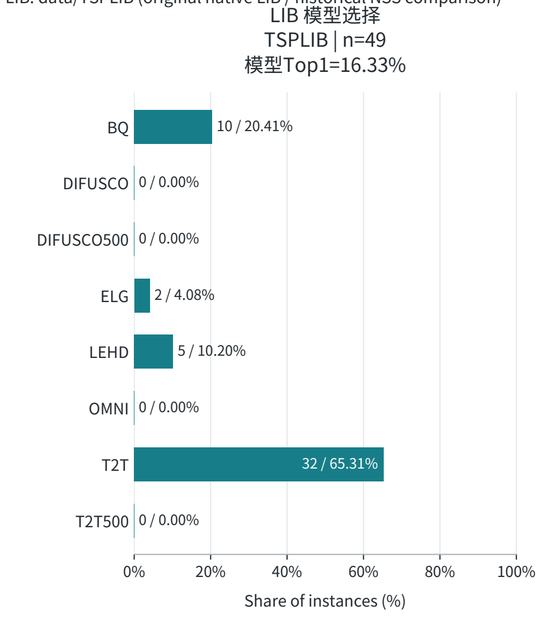

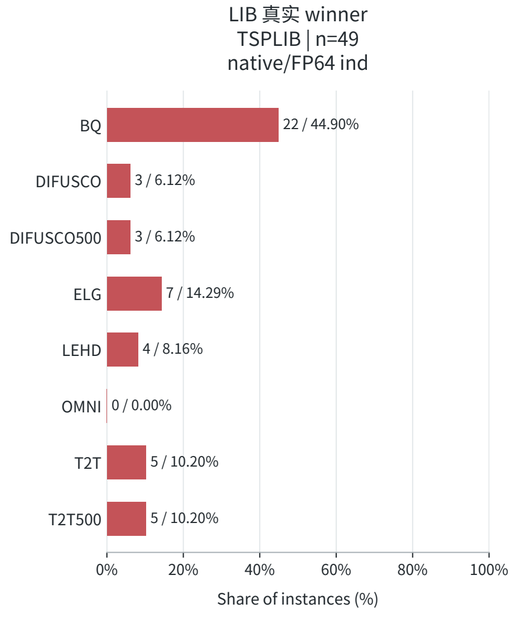

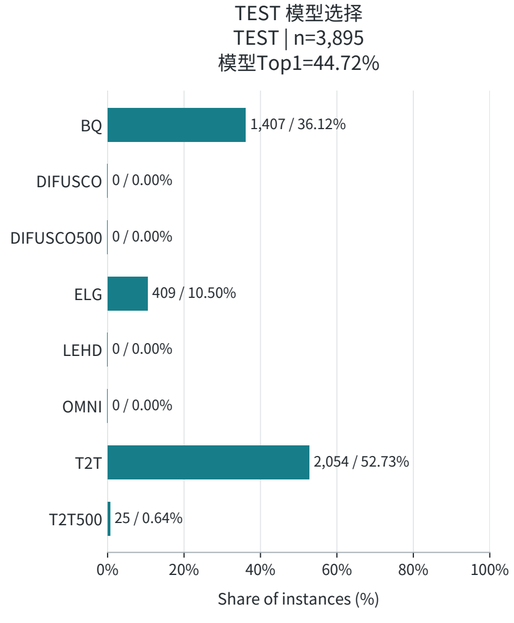

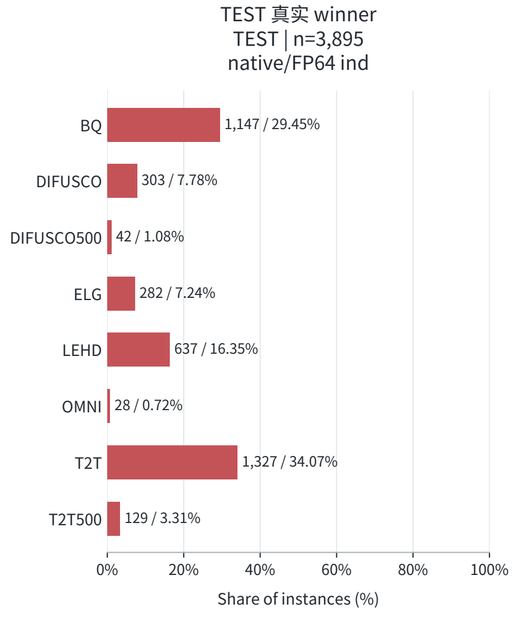

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | CVRP | 方法分布


同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/CVRPLIB (original native LIB / historical NSS comparison)

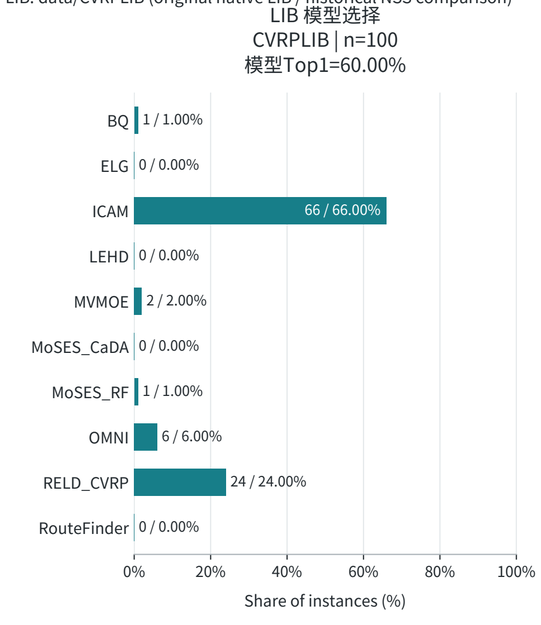

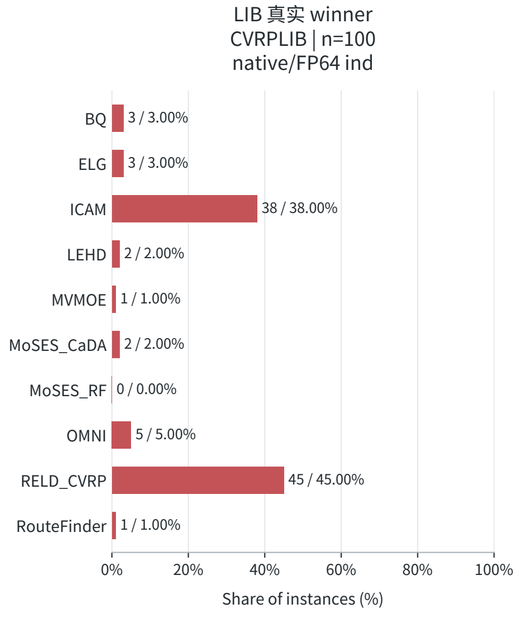

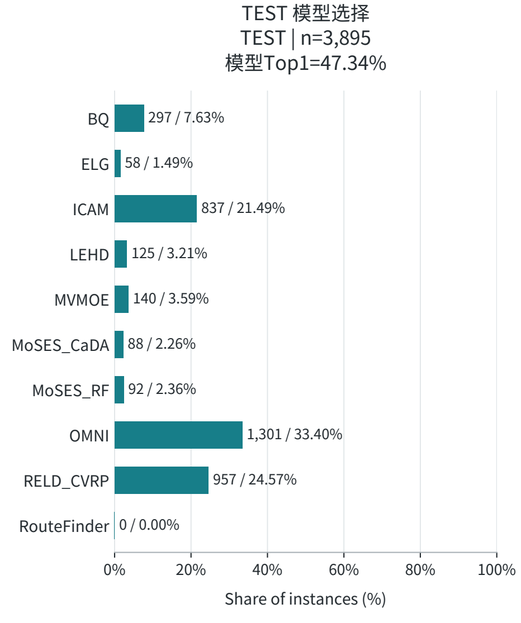

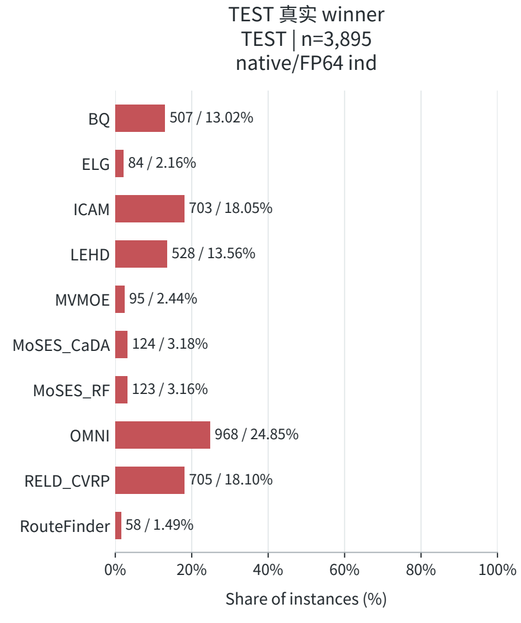

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | ATSP | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

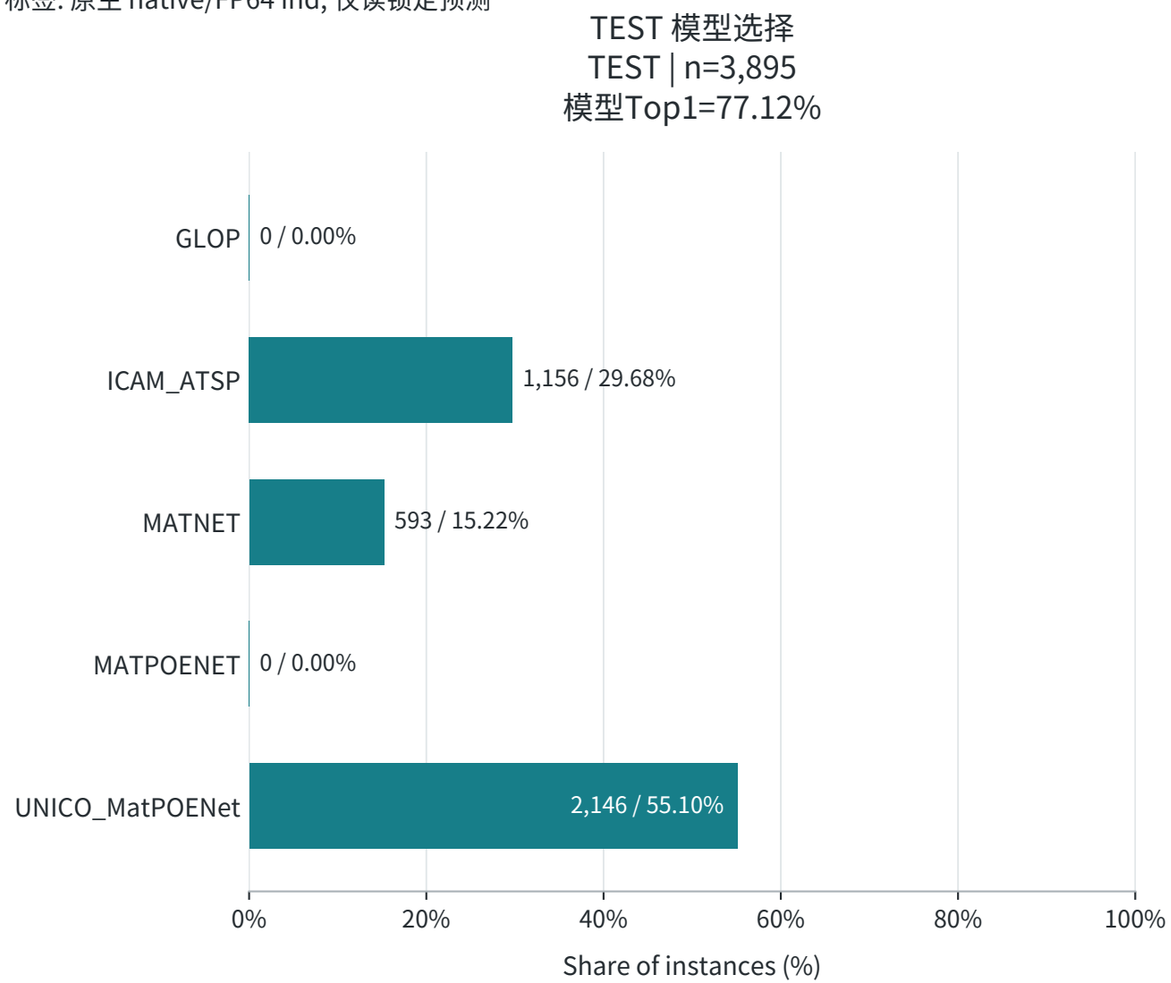

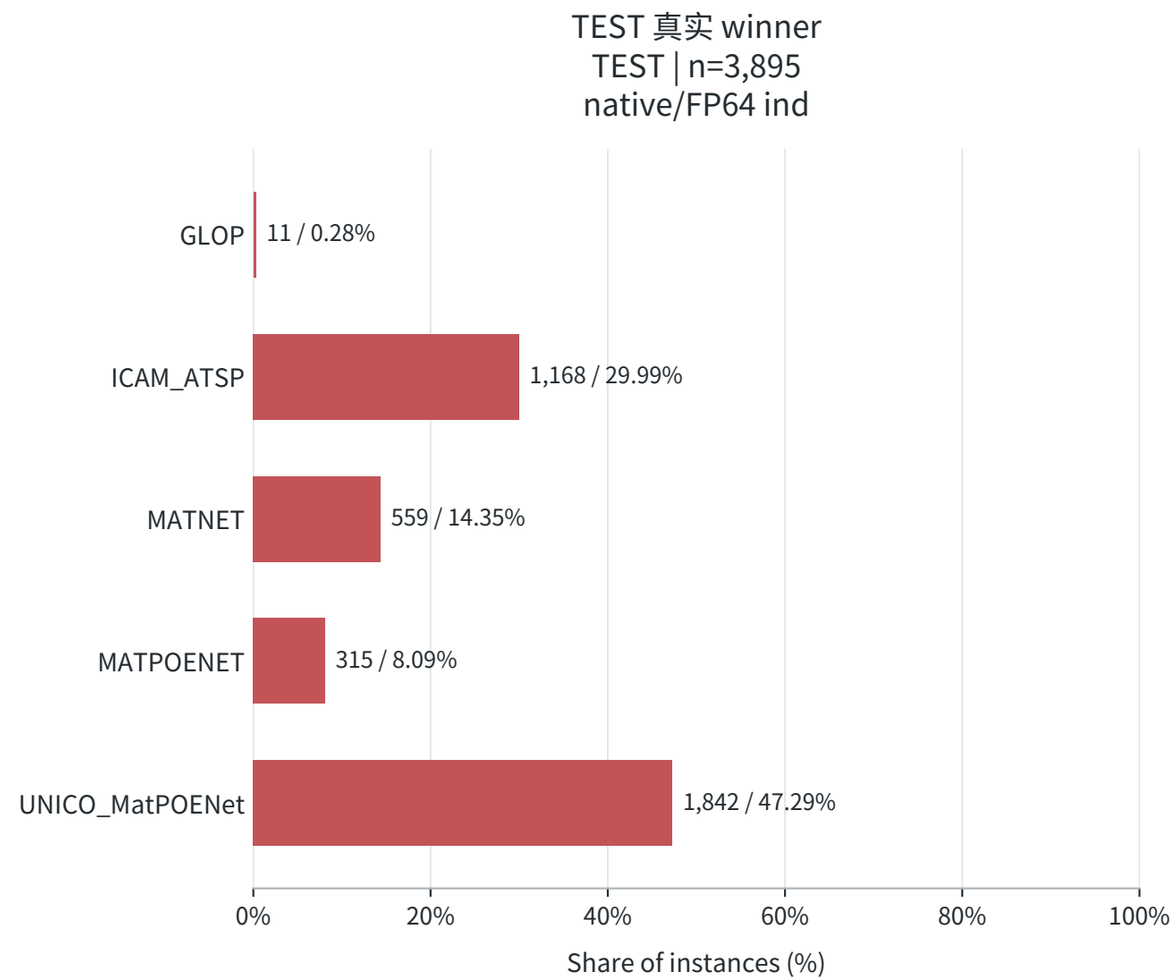

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRP | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

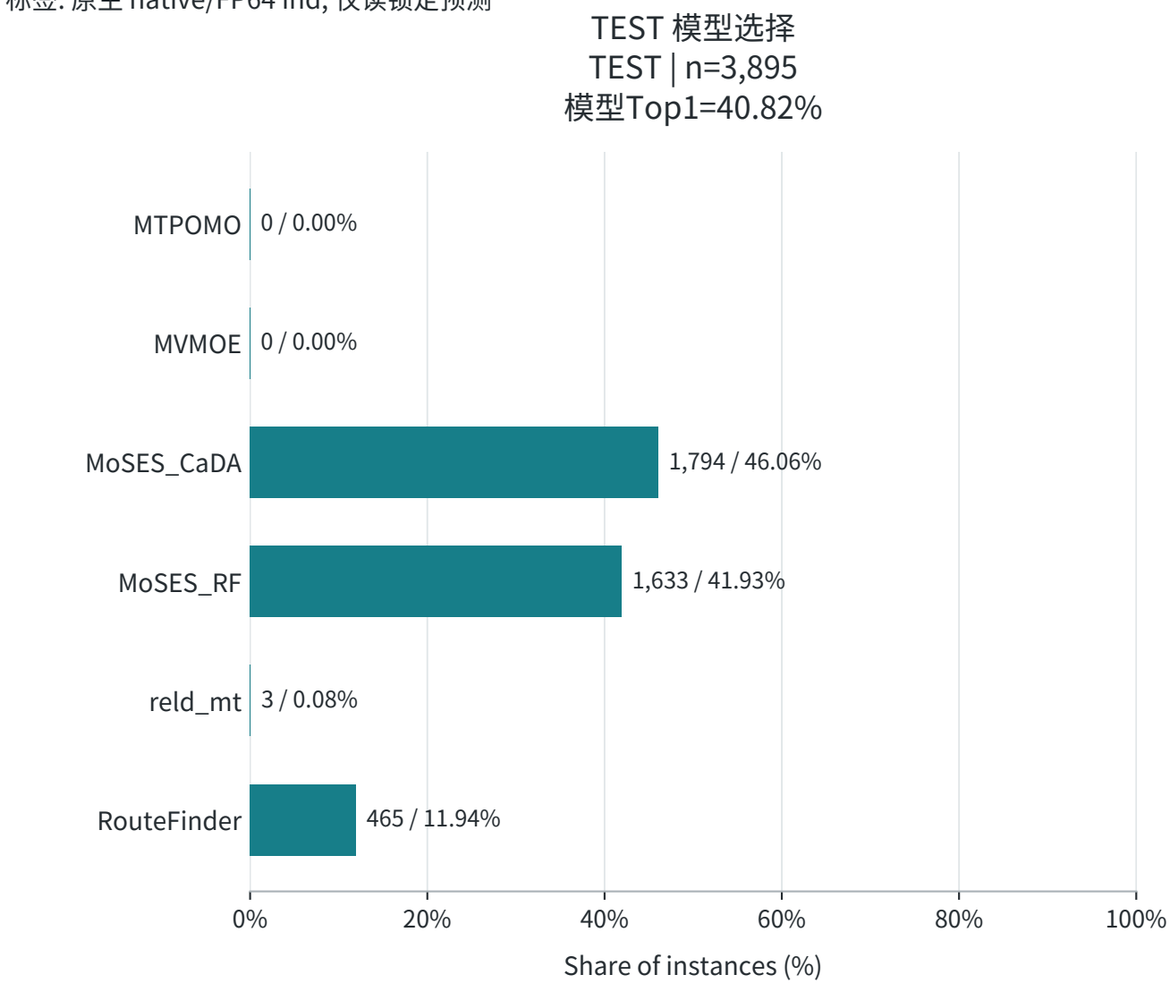

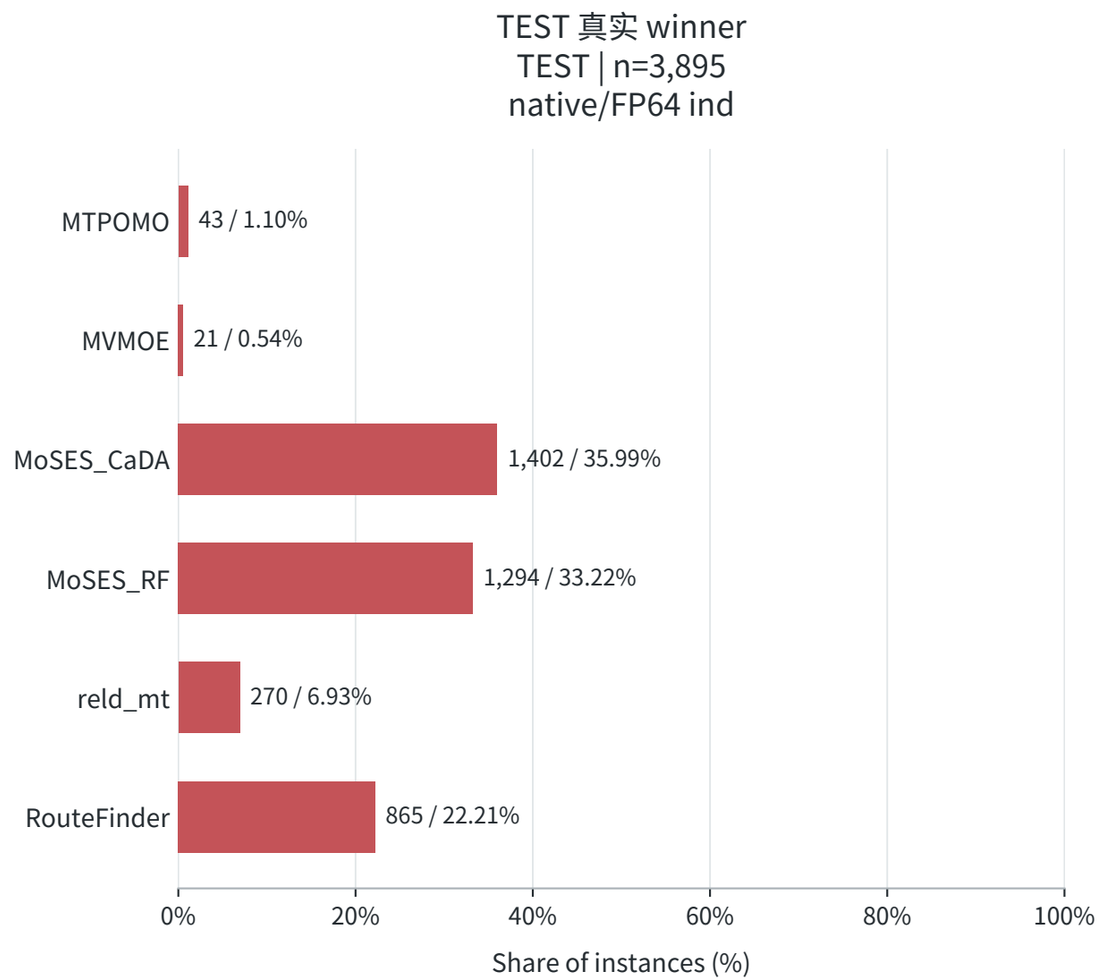

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPB | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

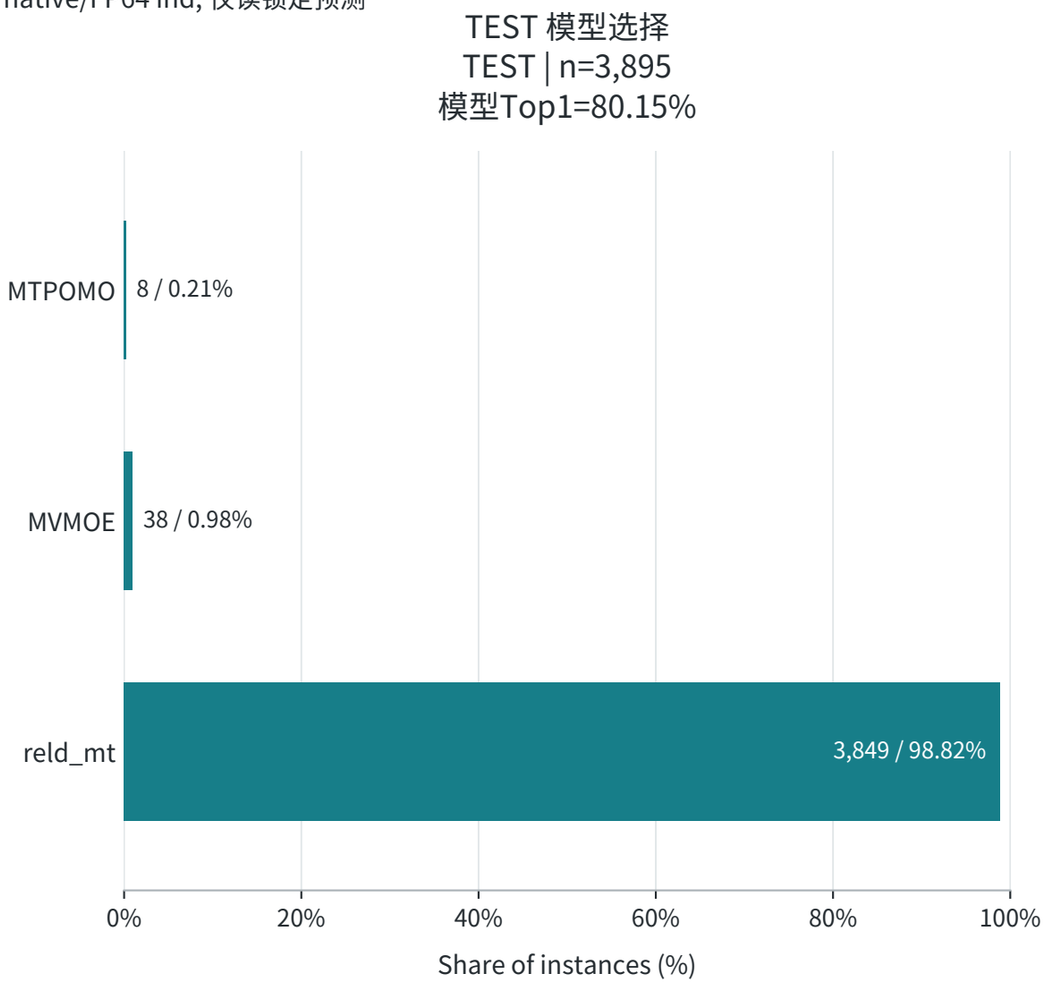

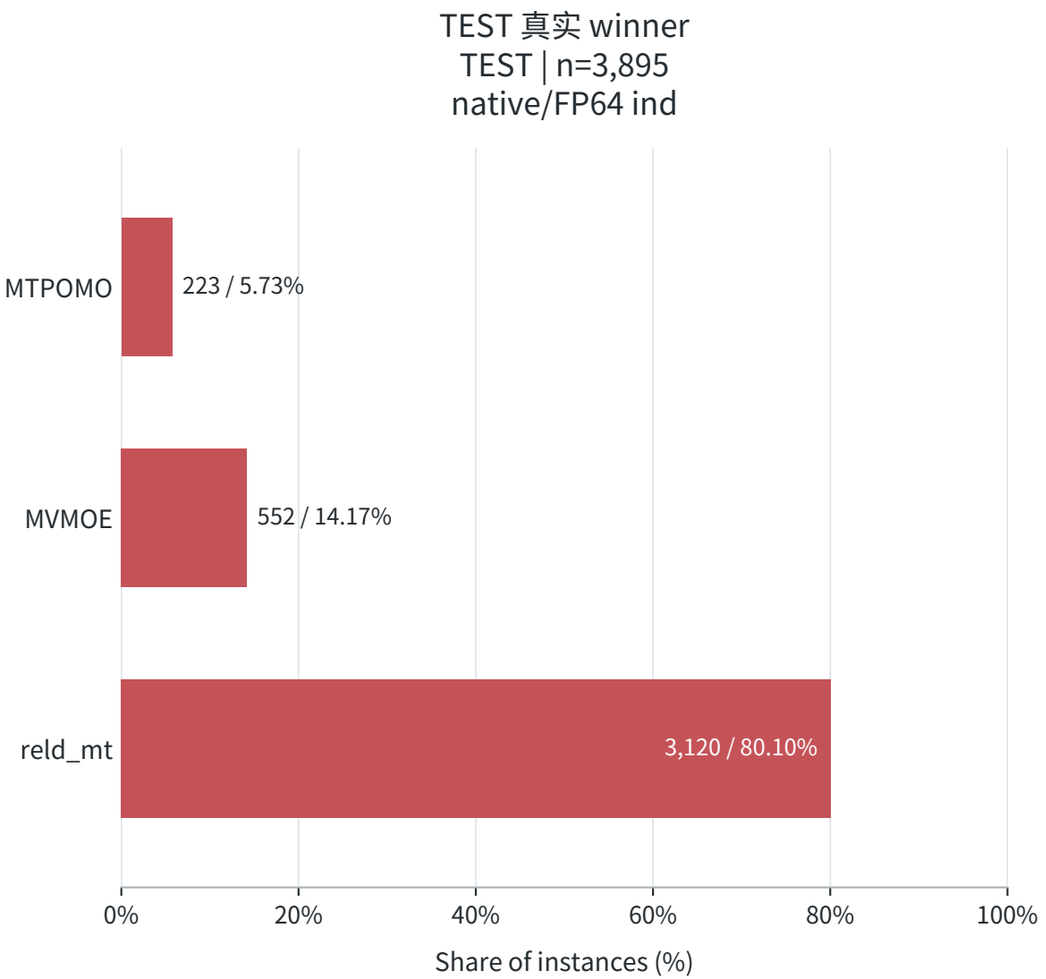

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

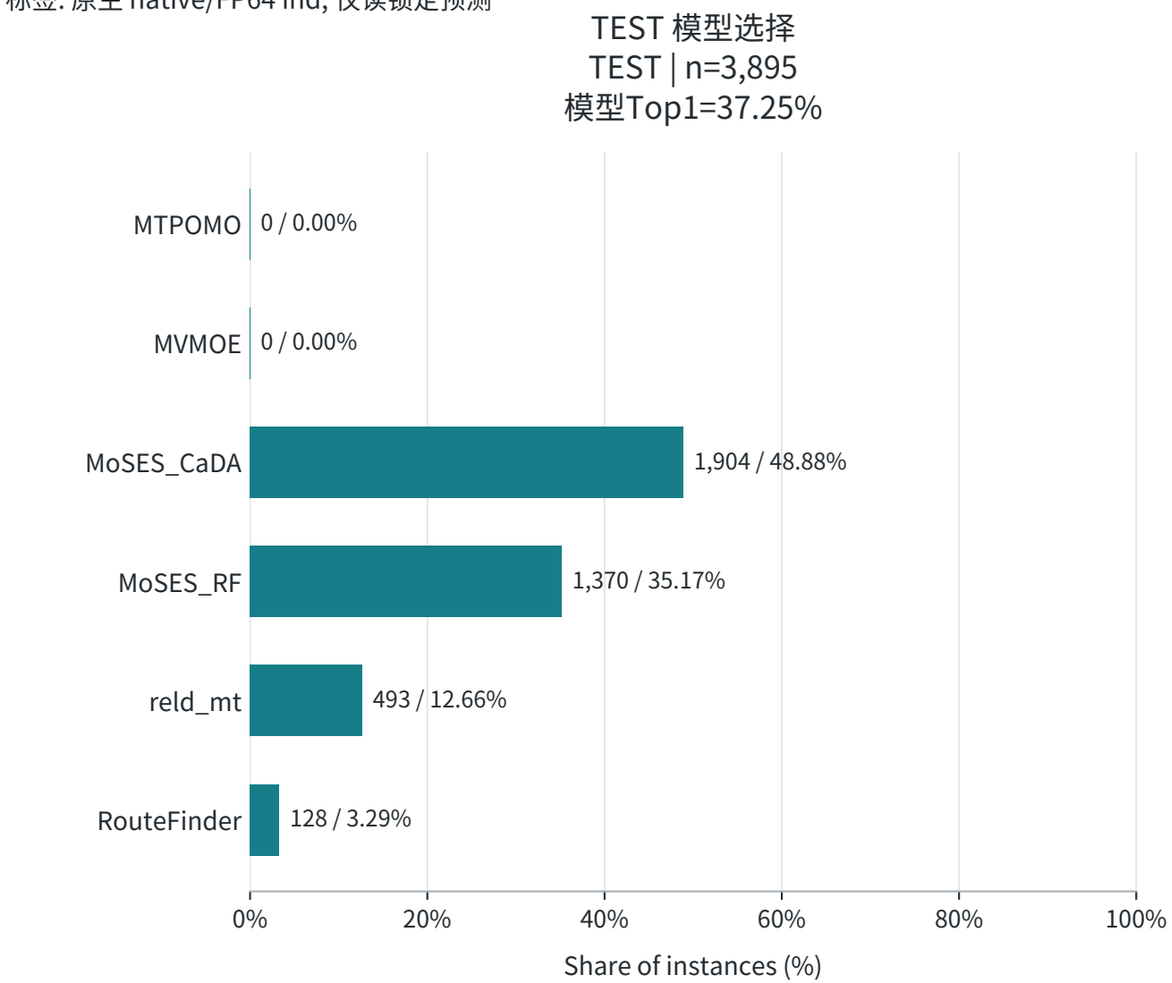

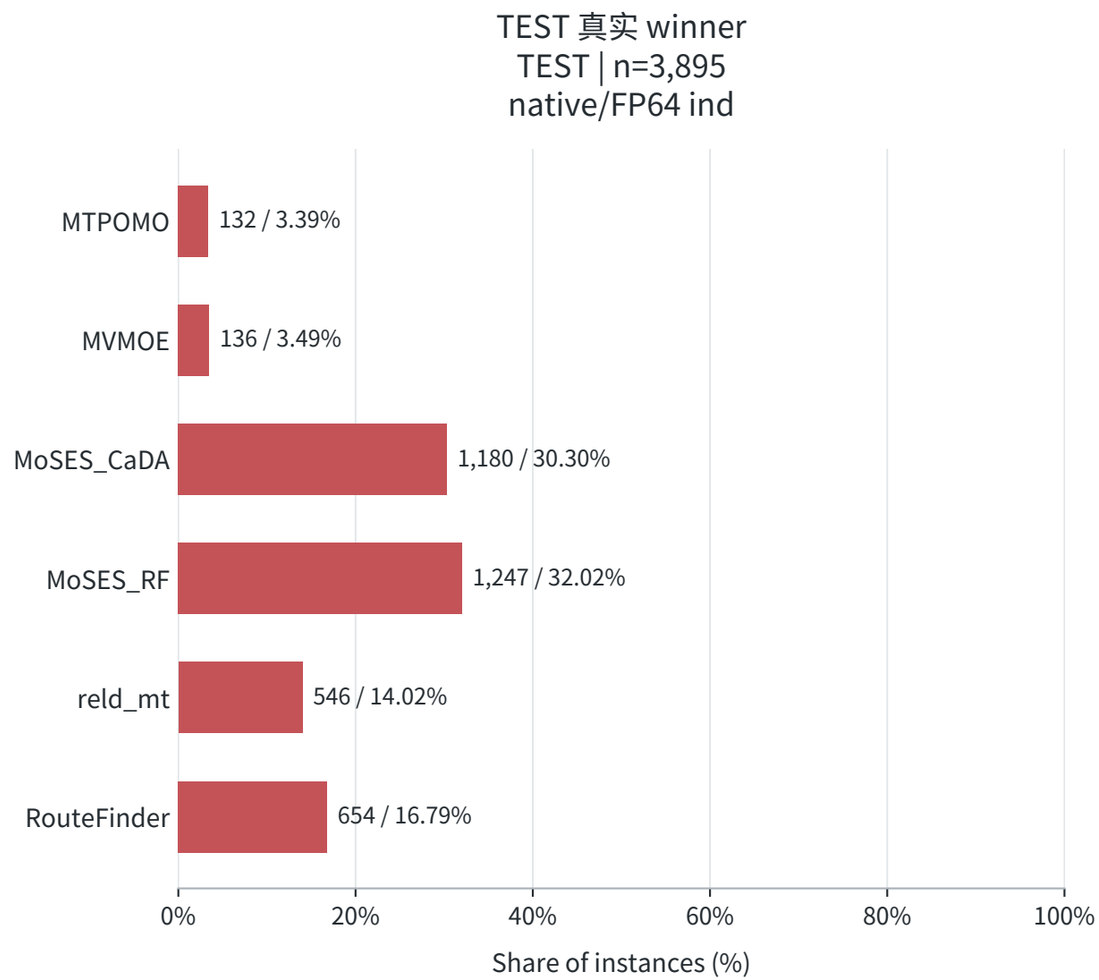

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

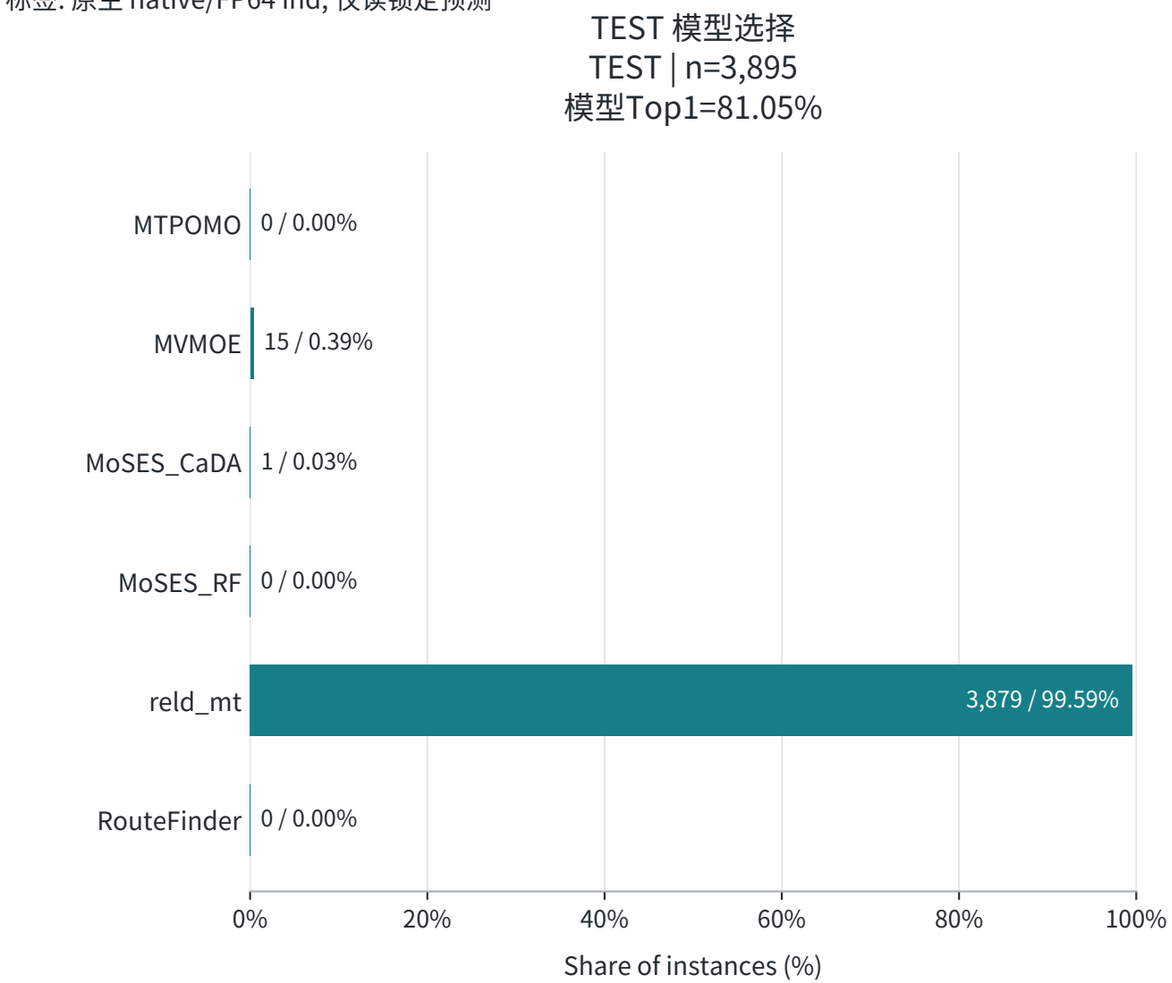

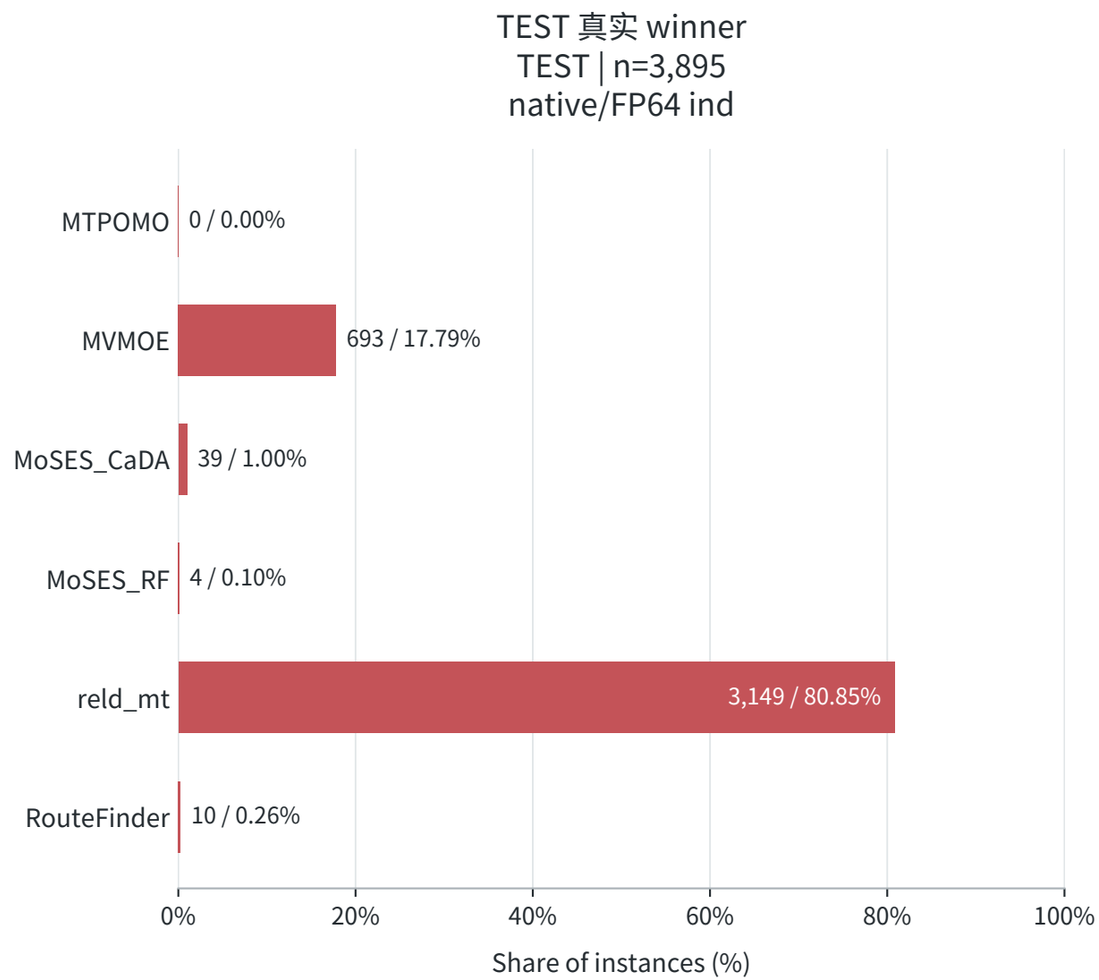

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

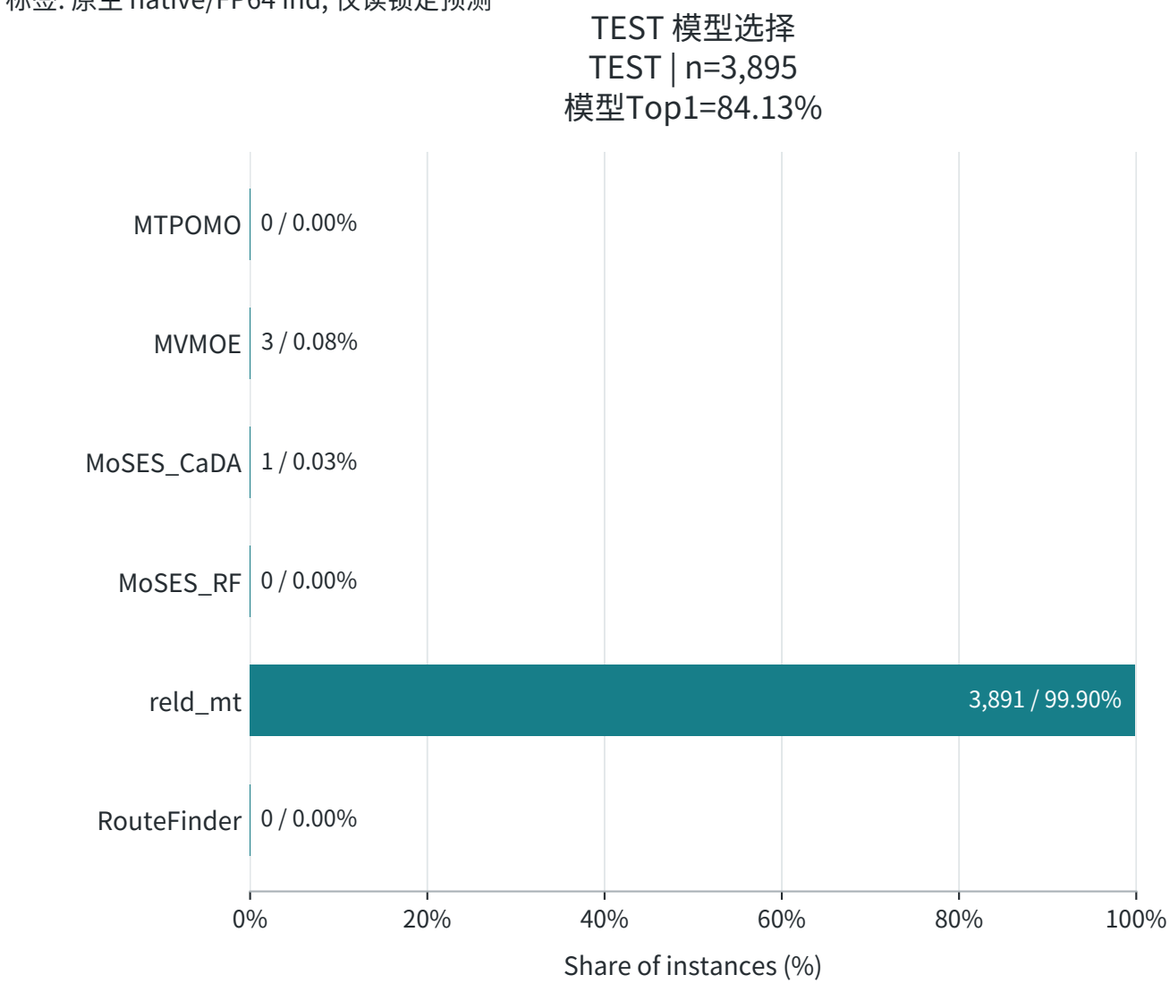

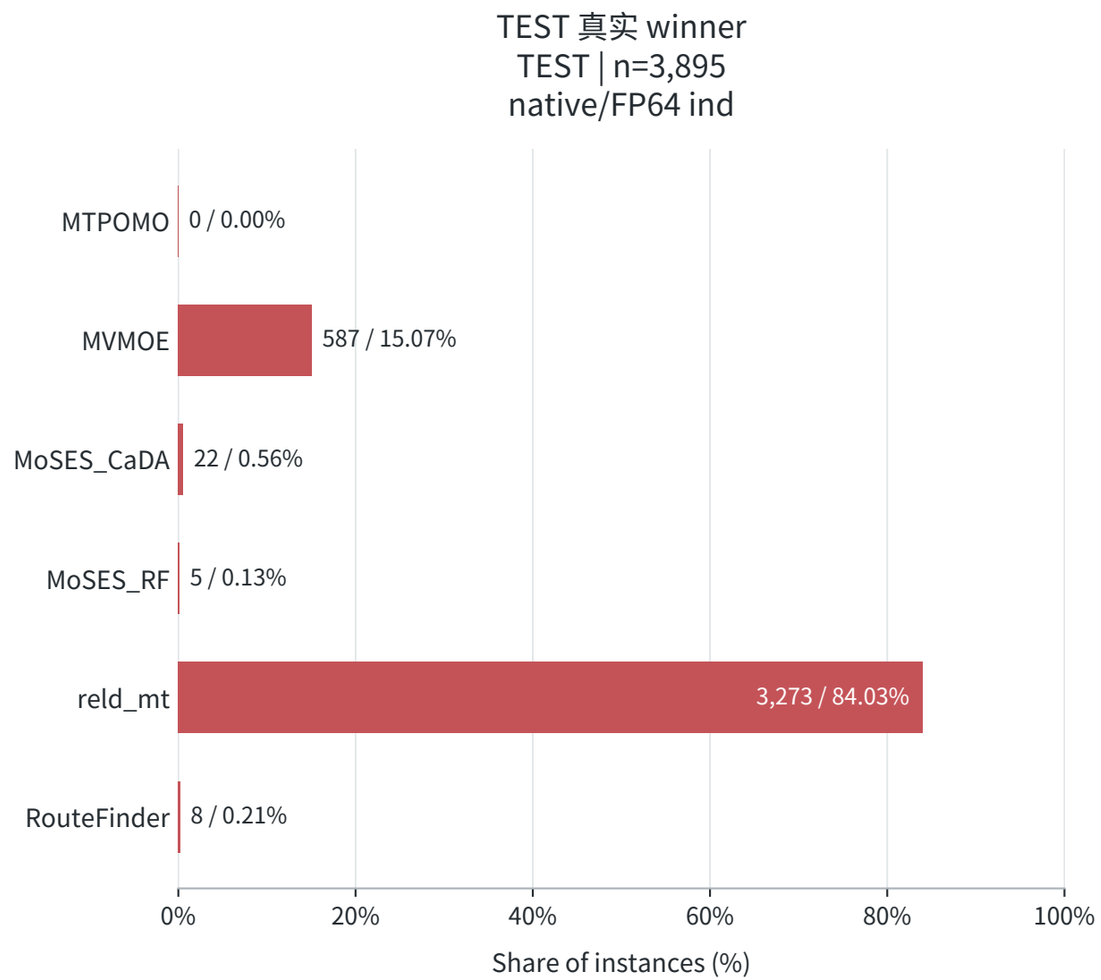

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPB | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

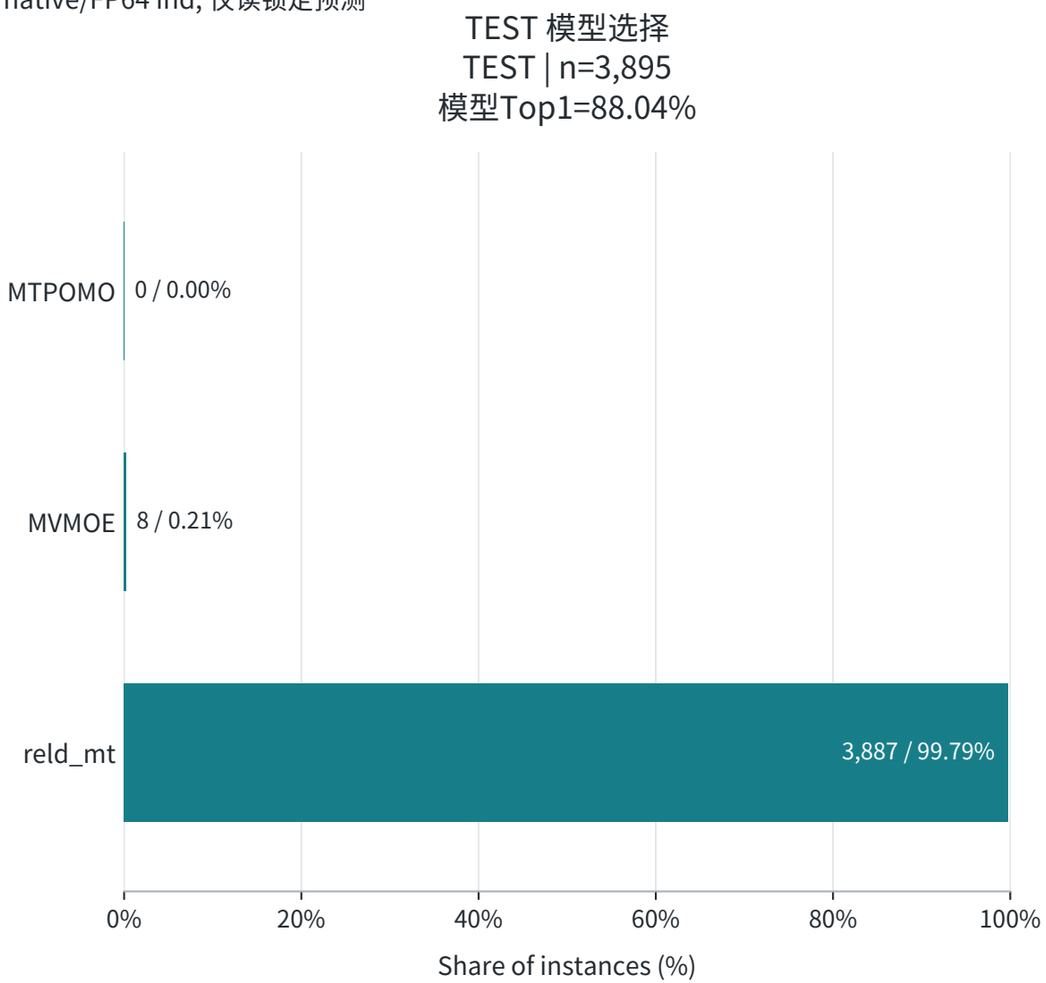

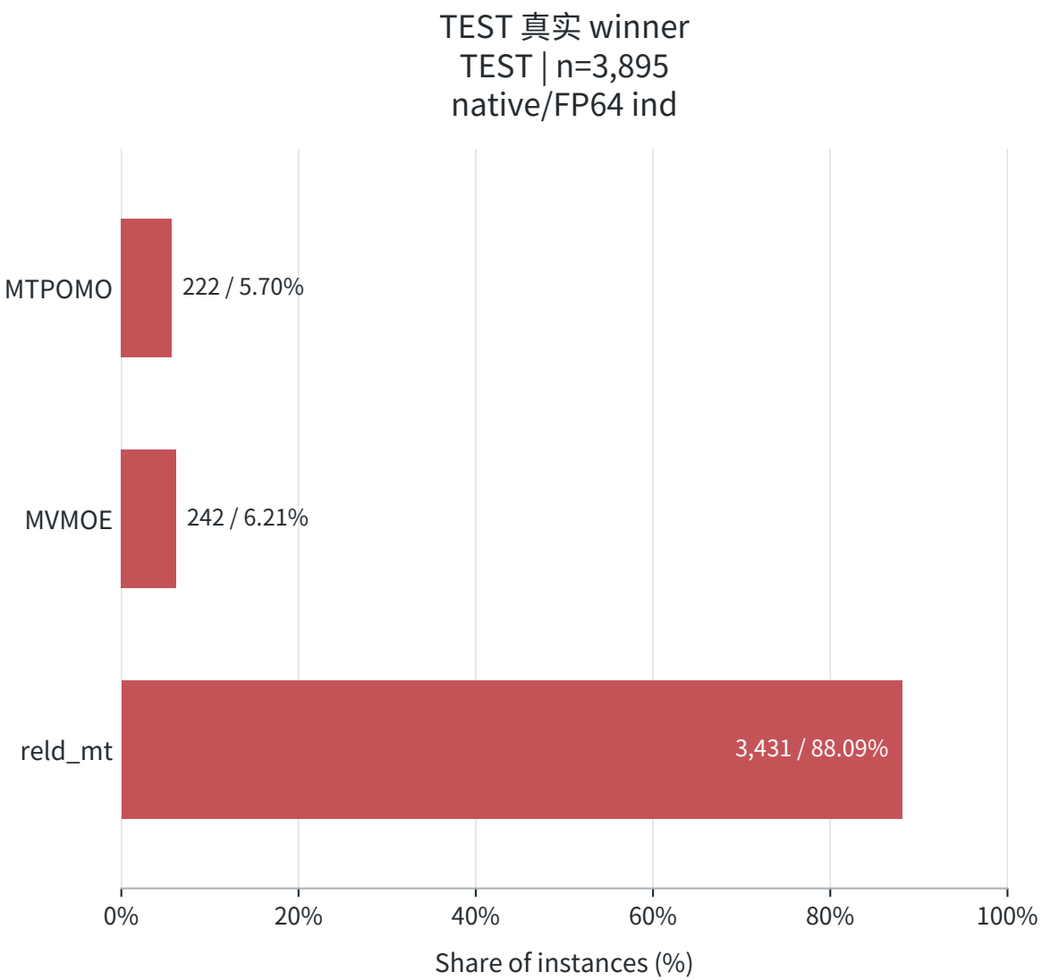

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

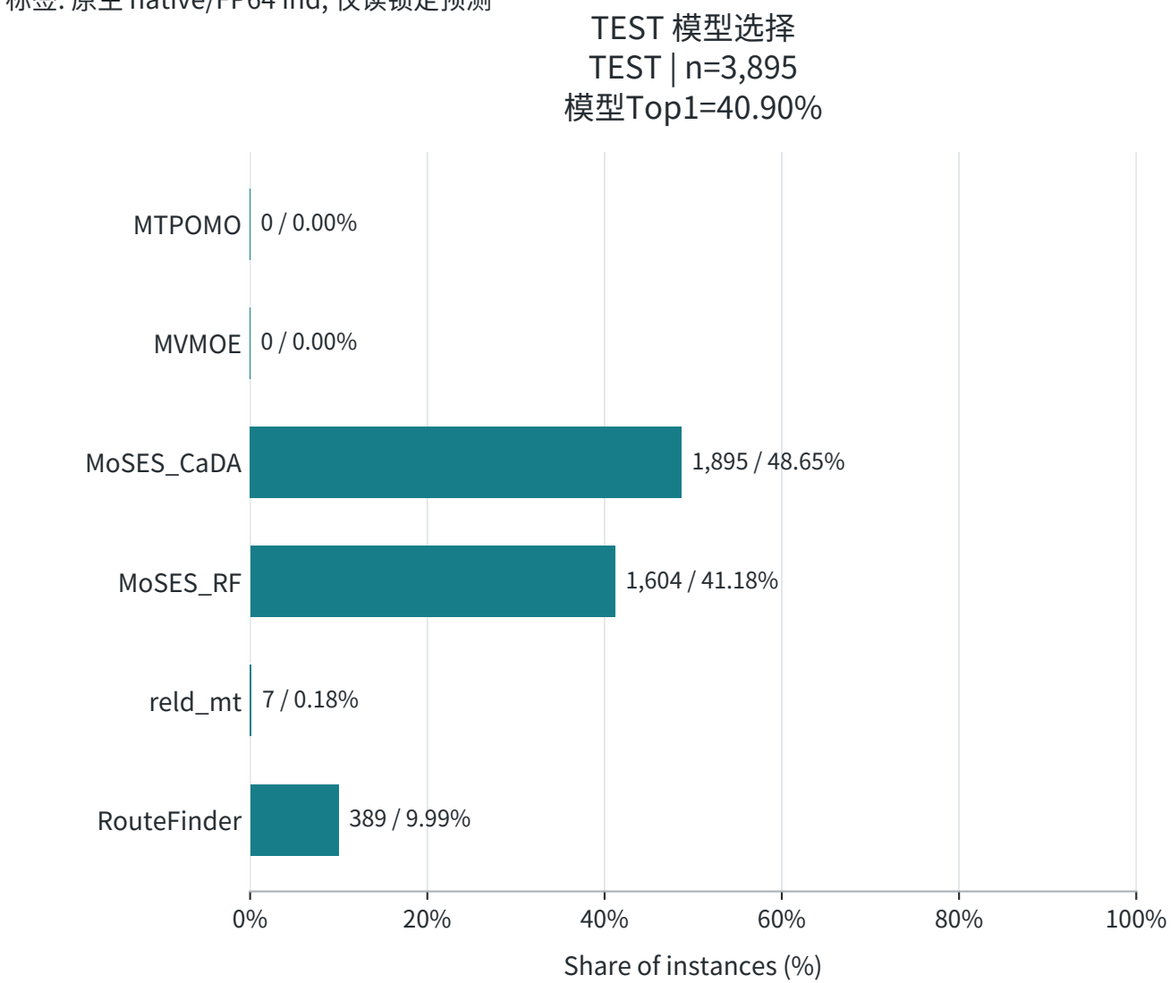

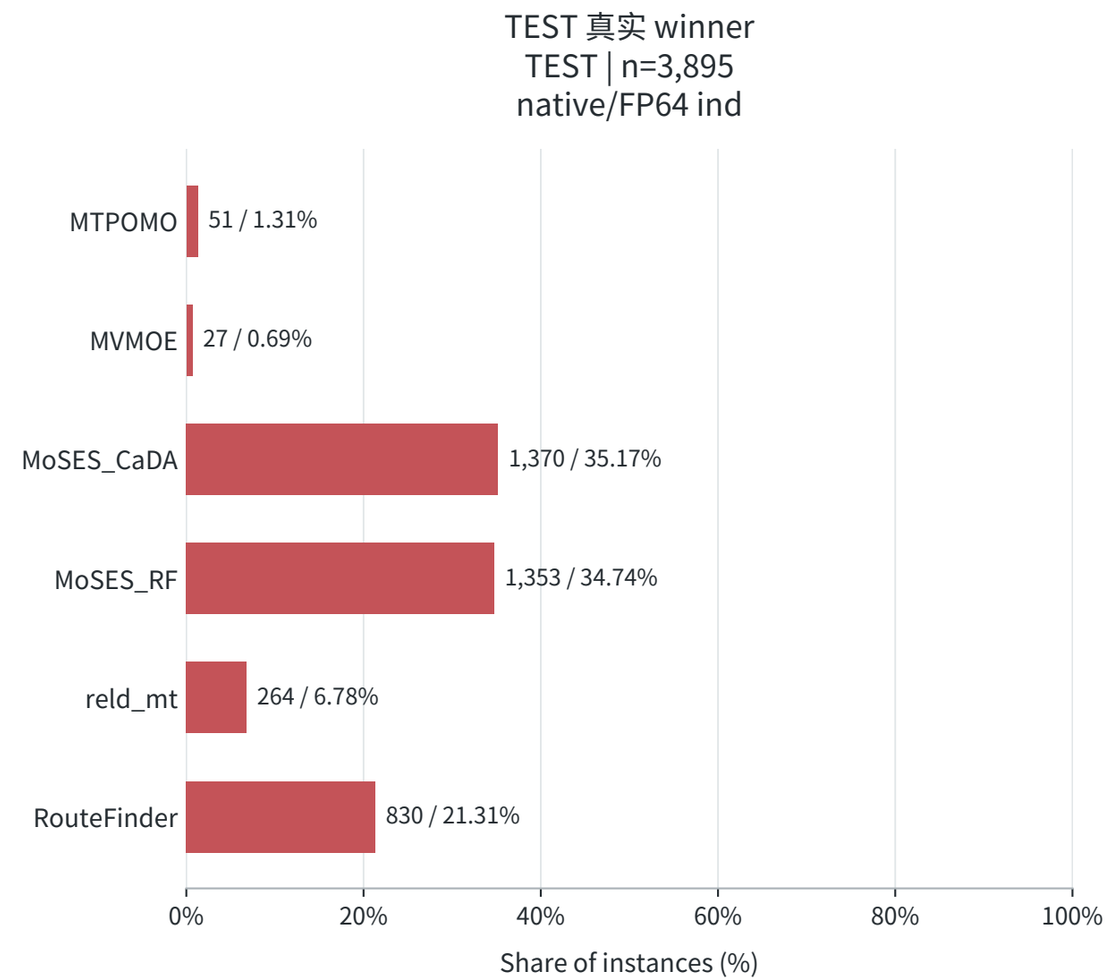

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

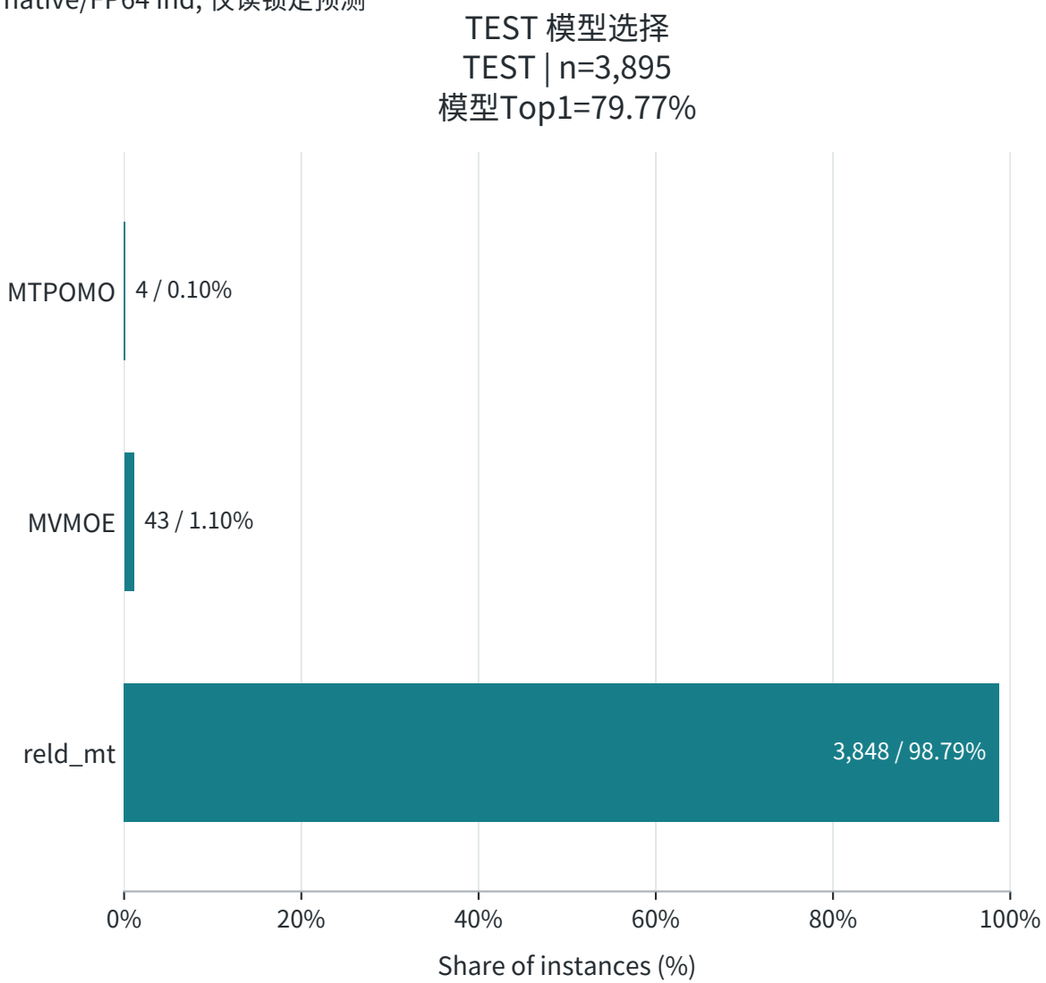

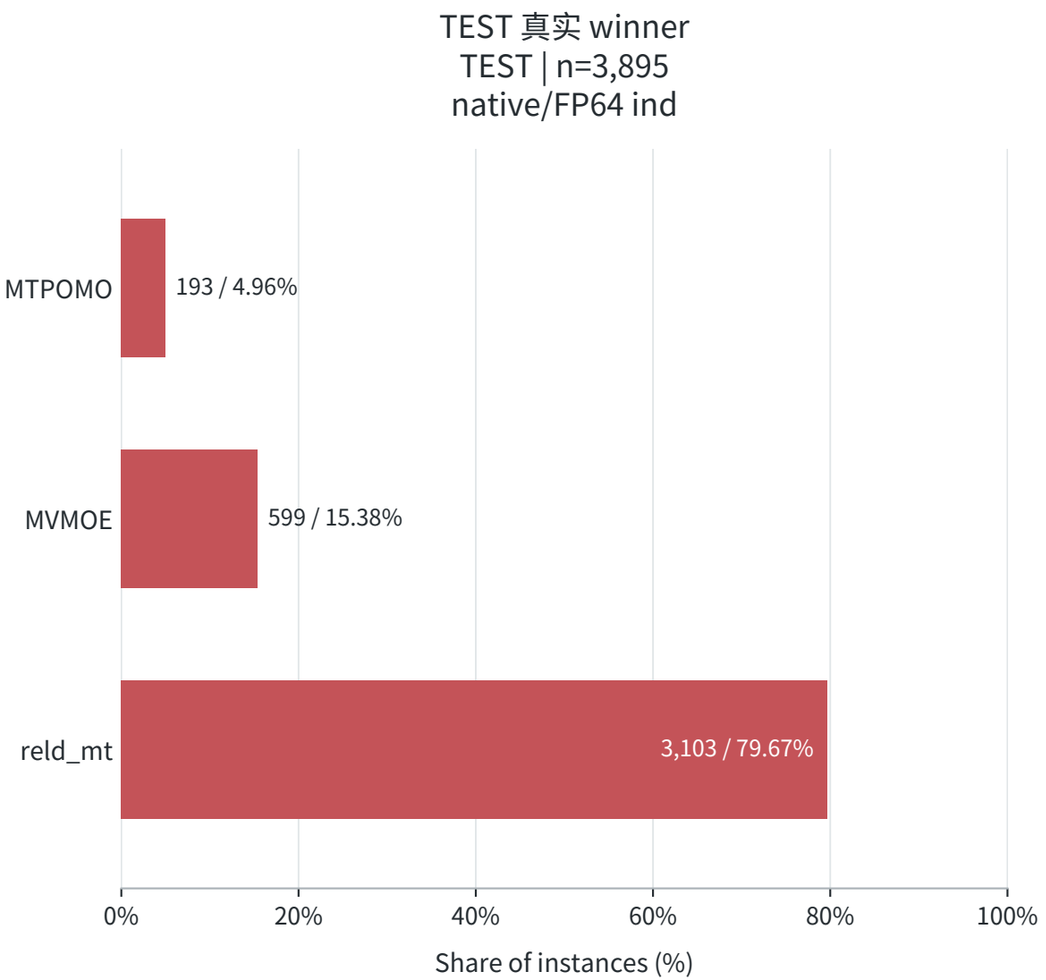

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

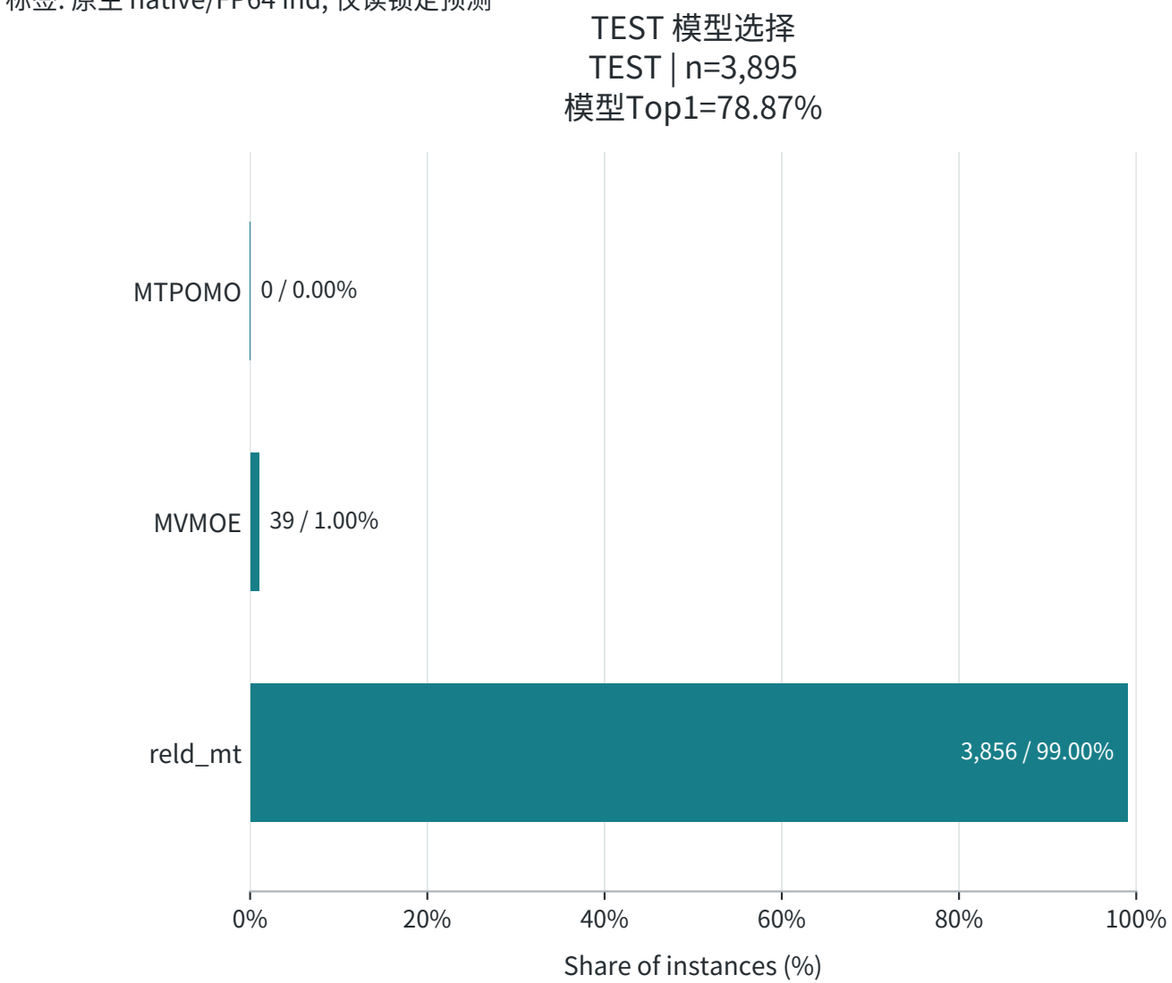

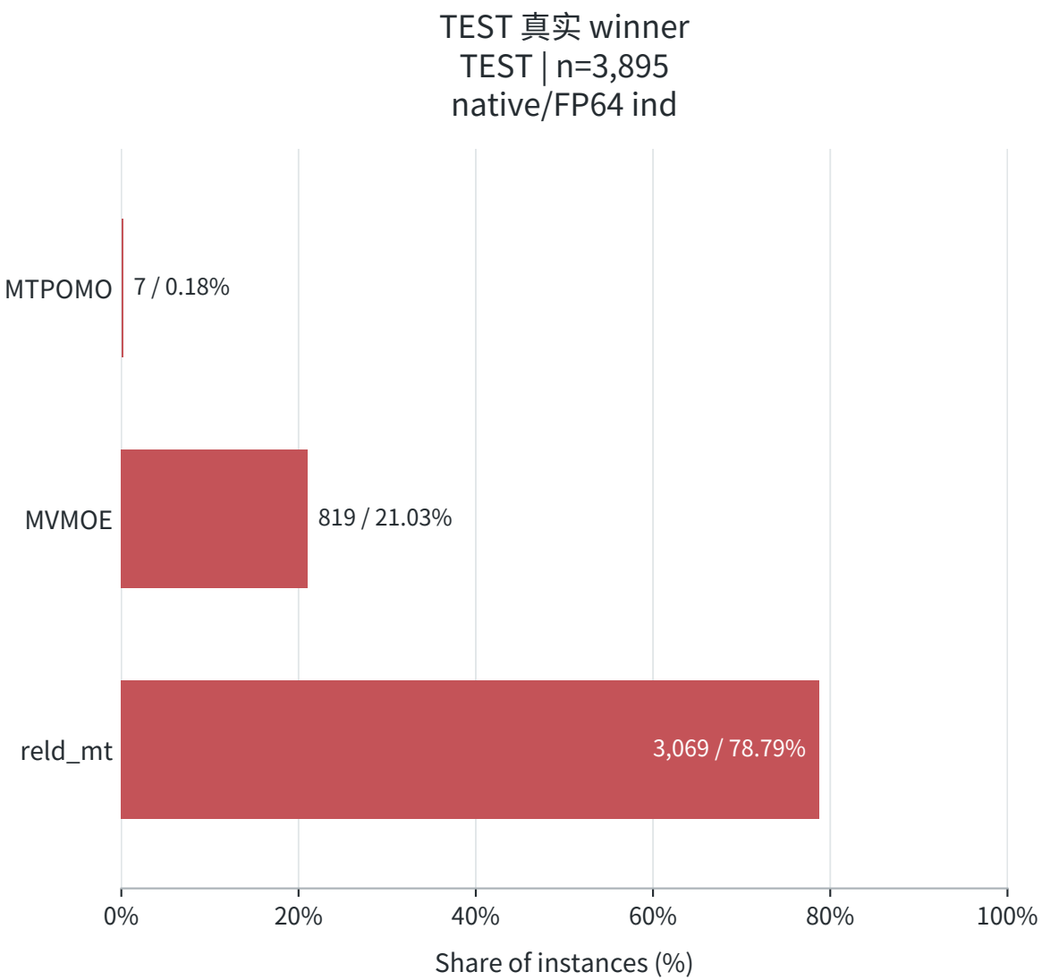

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

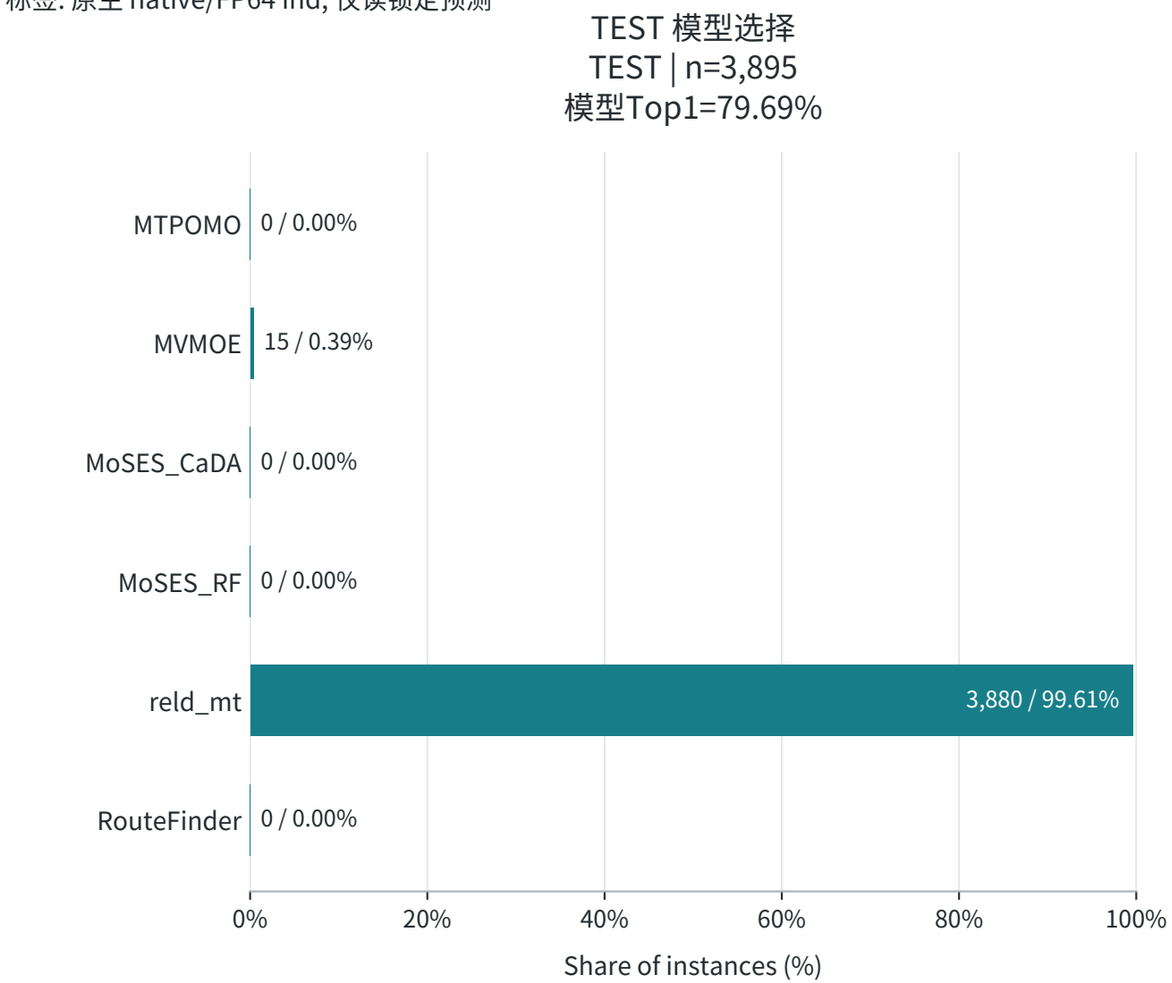

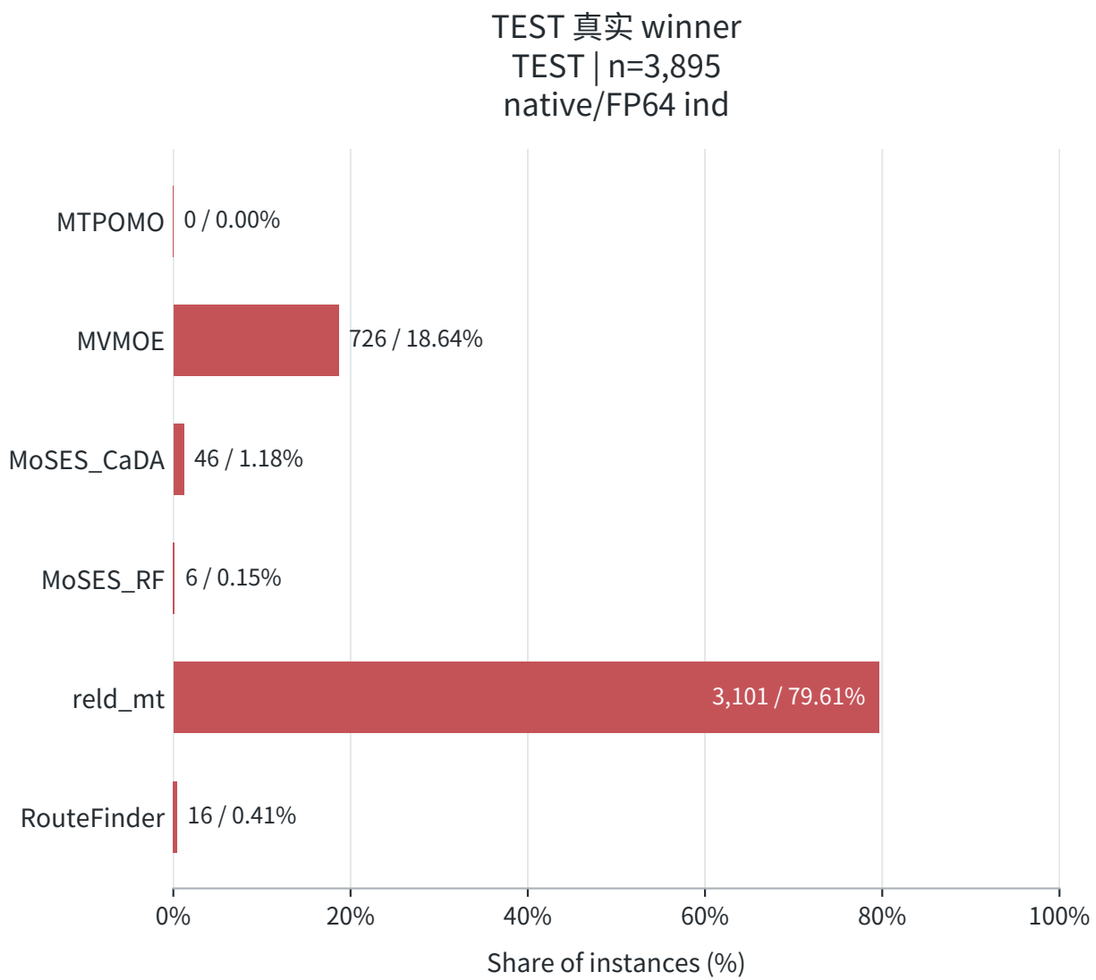

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

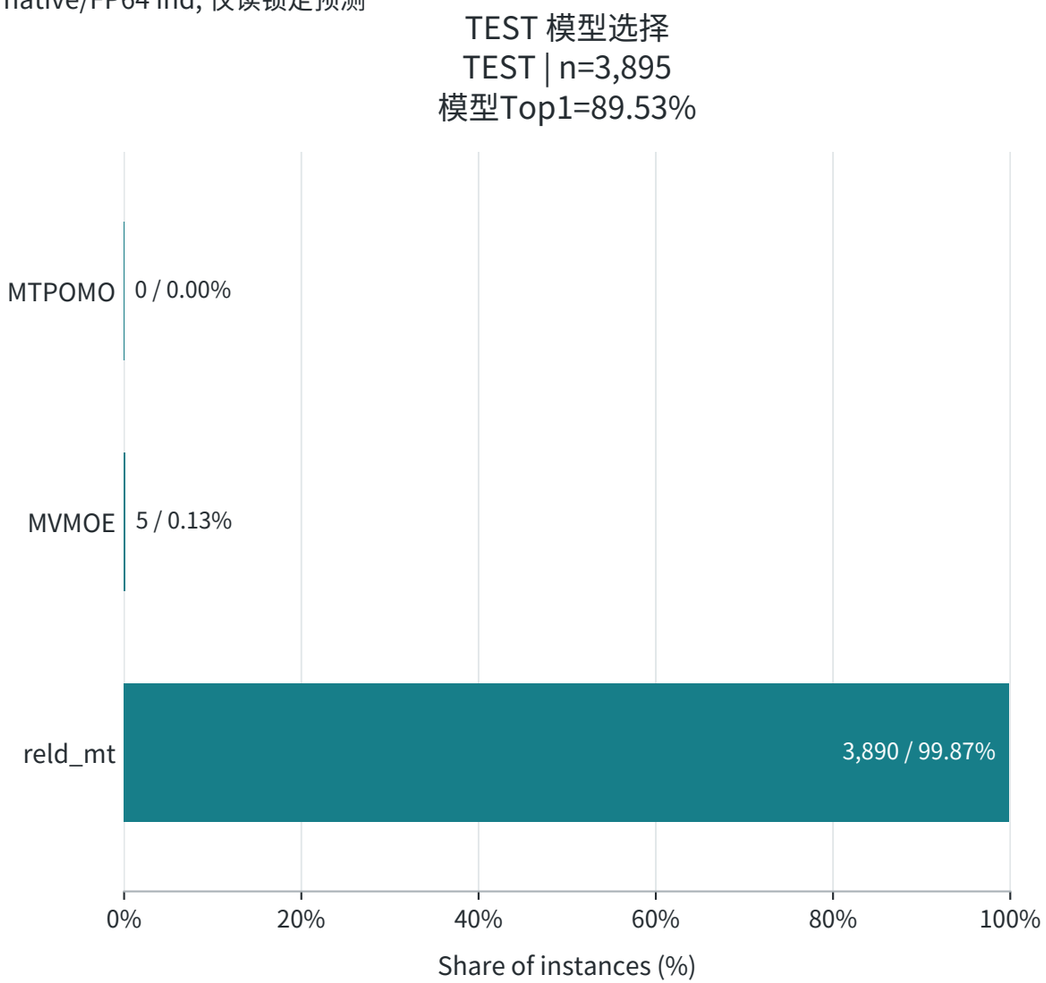

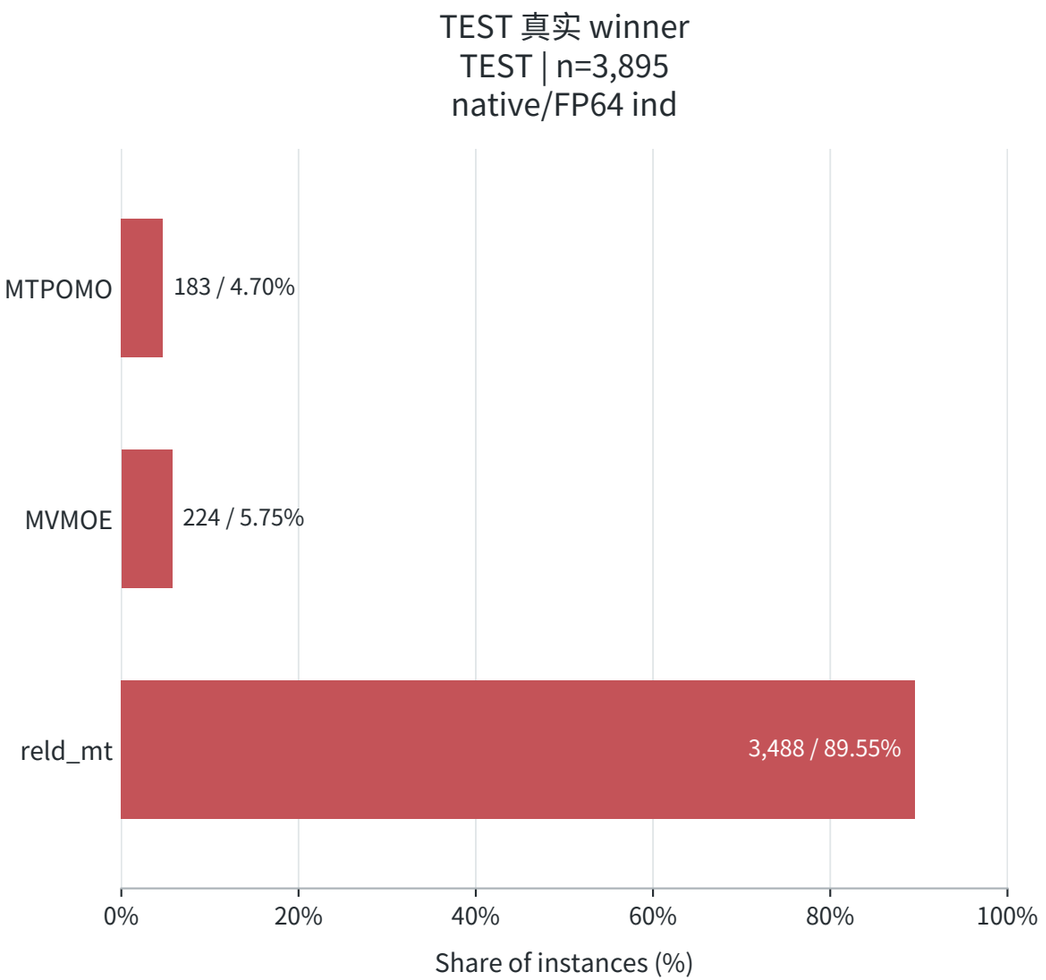

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

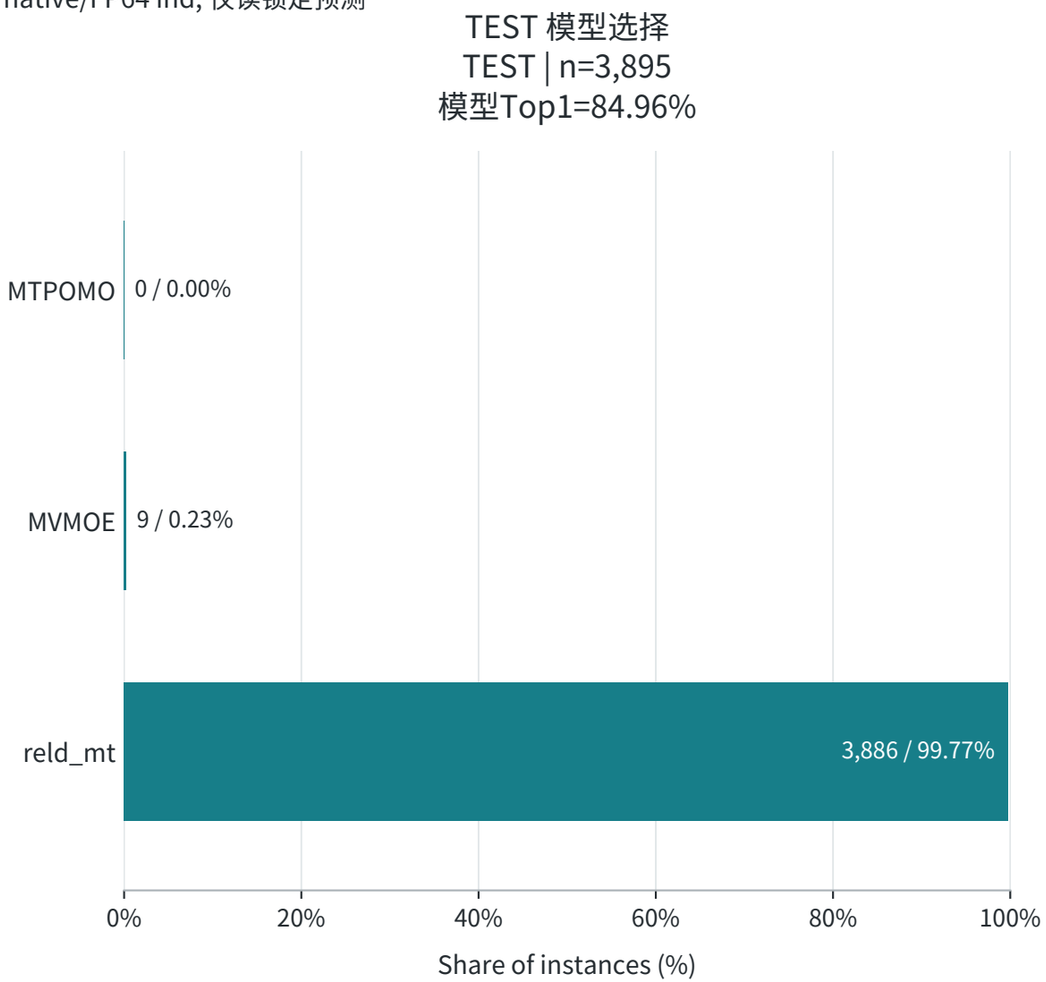

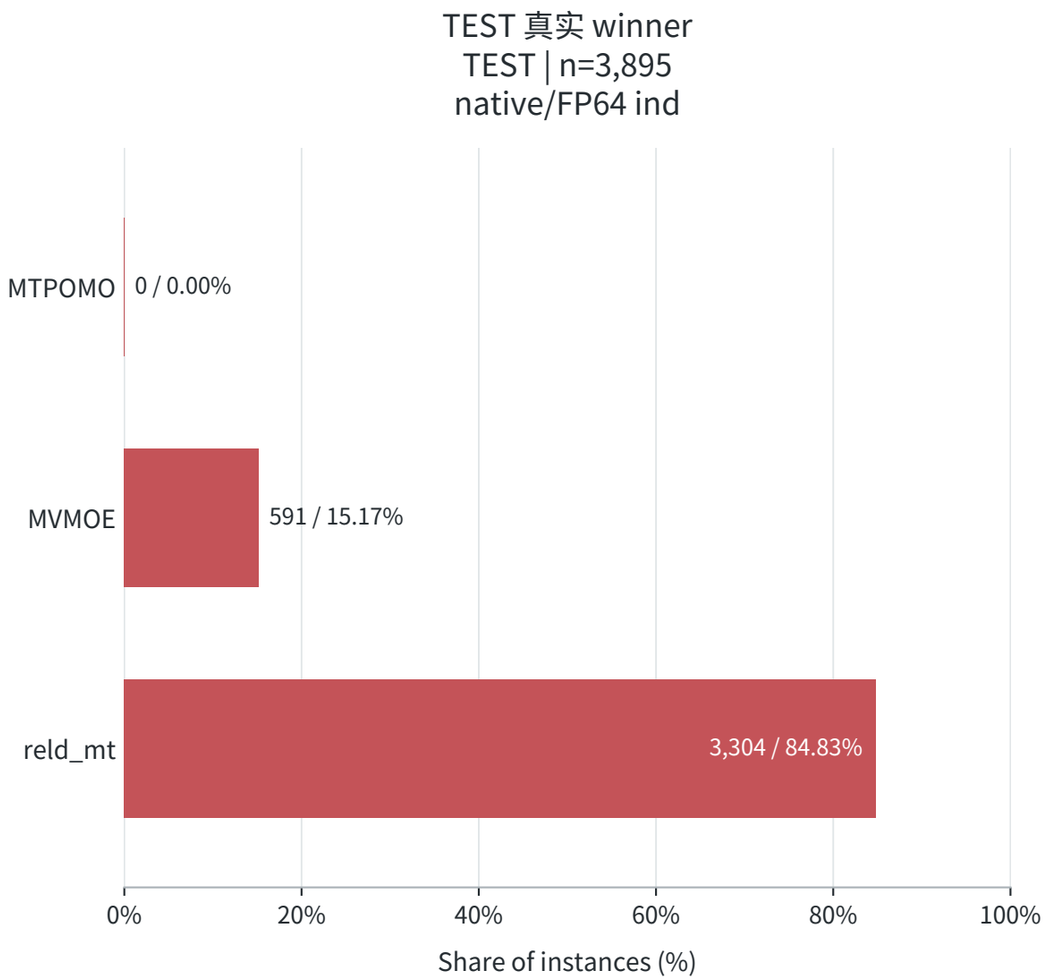

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

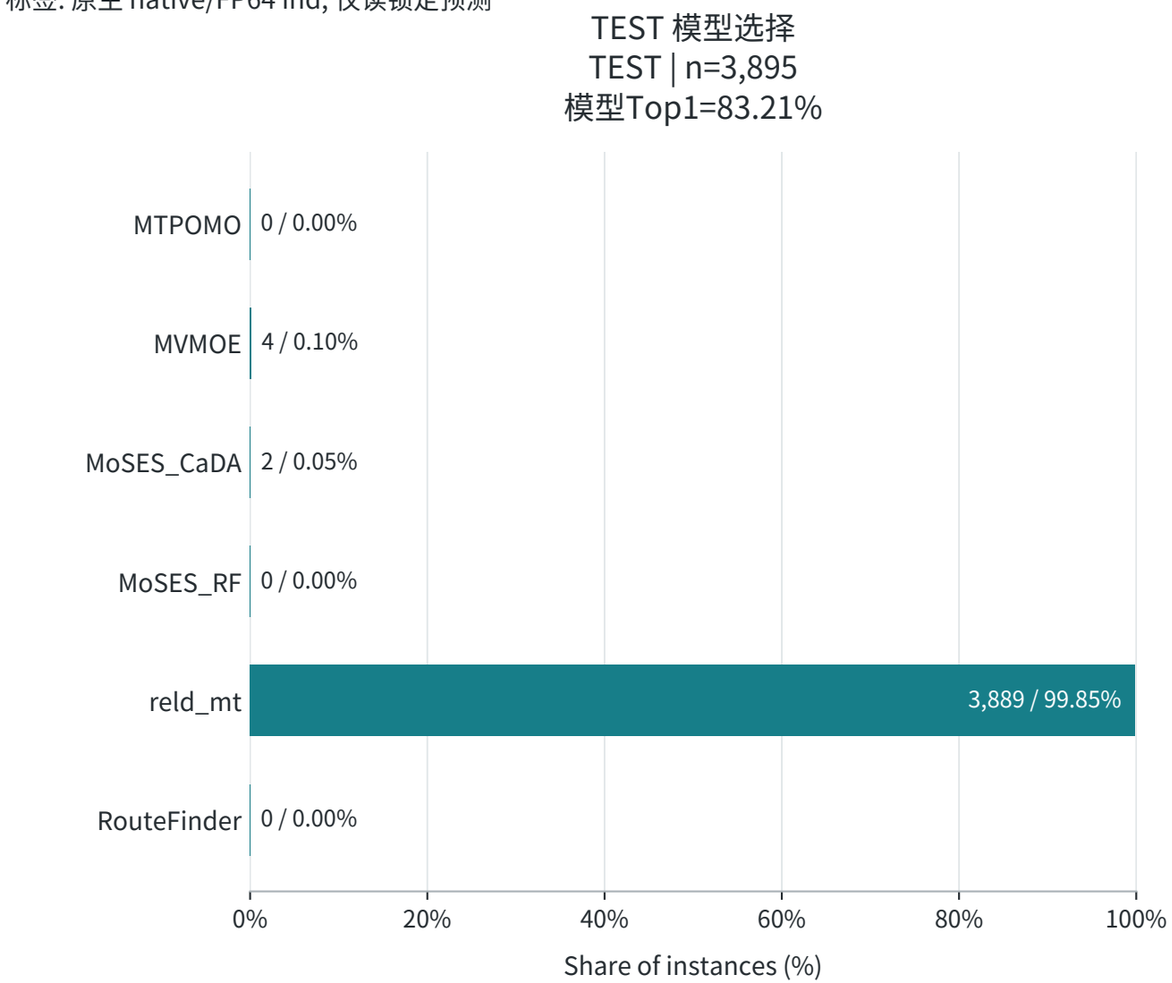

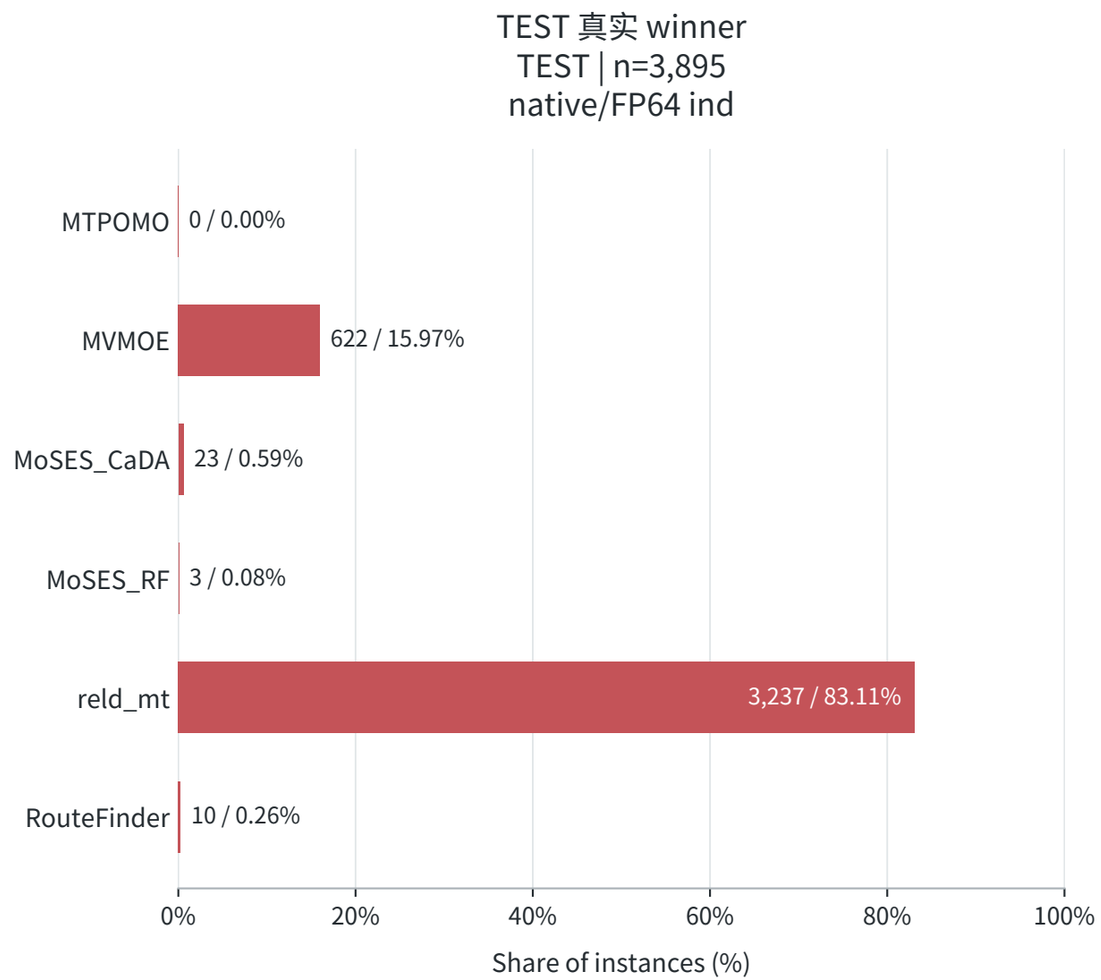

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

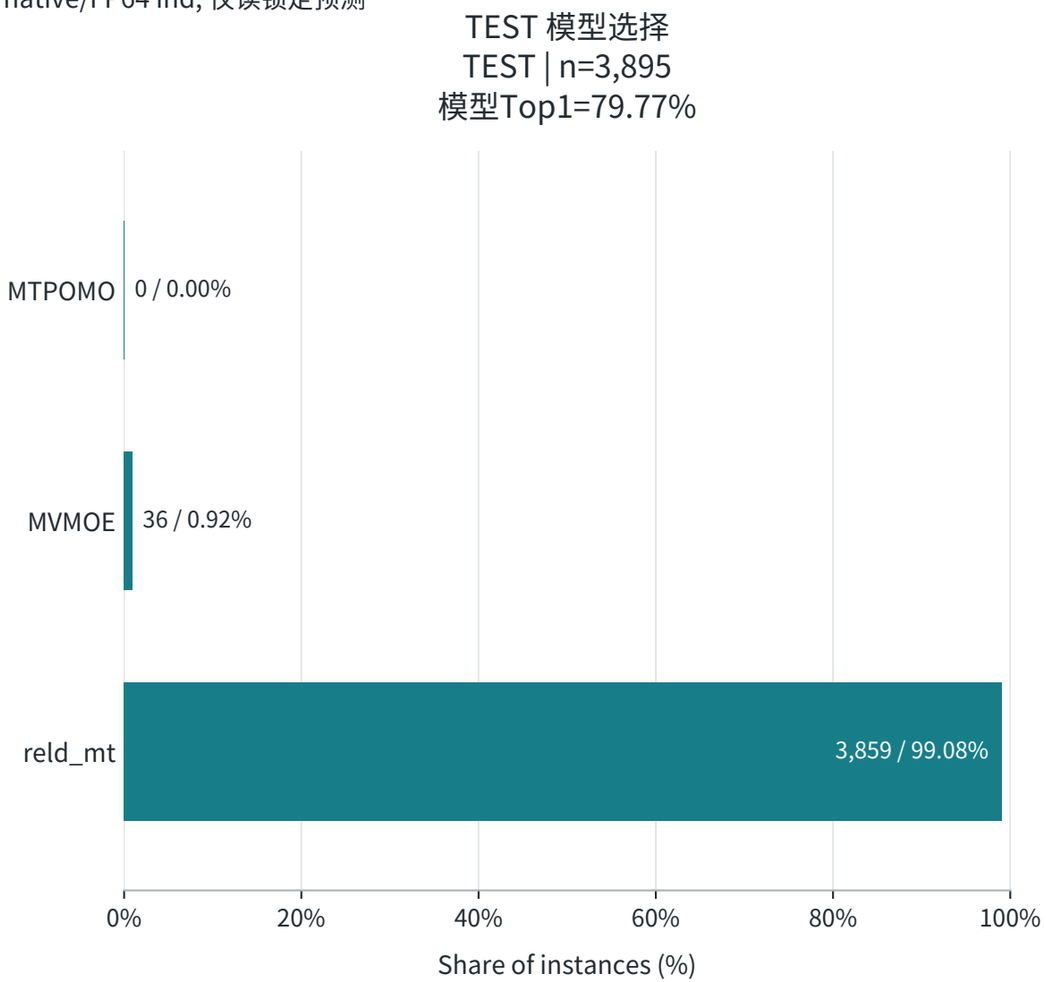

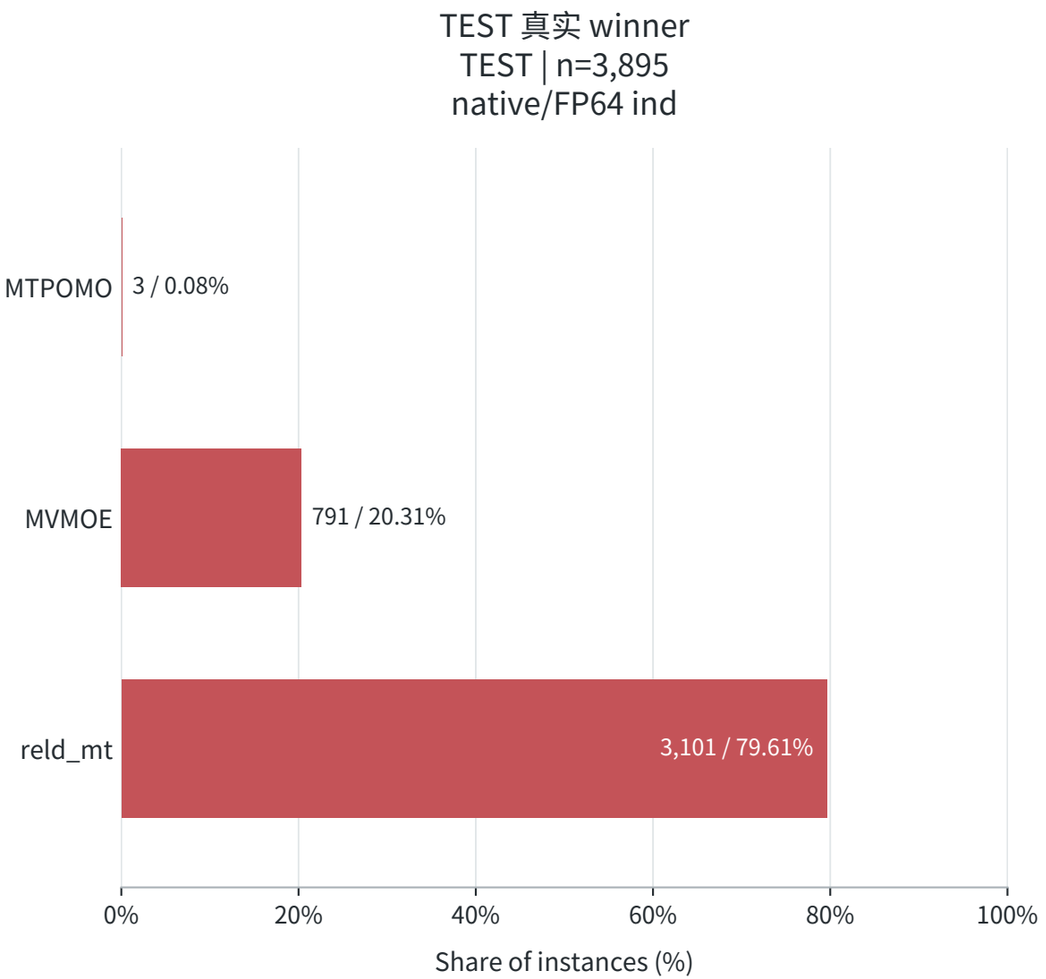

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

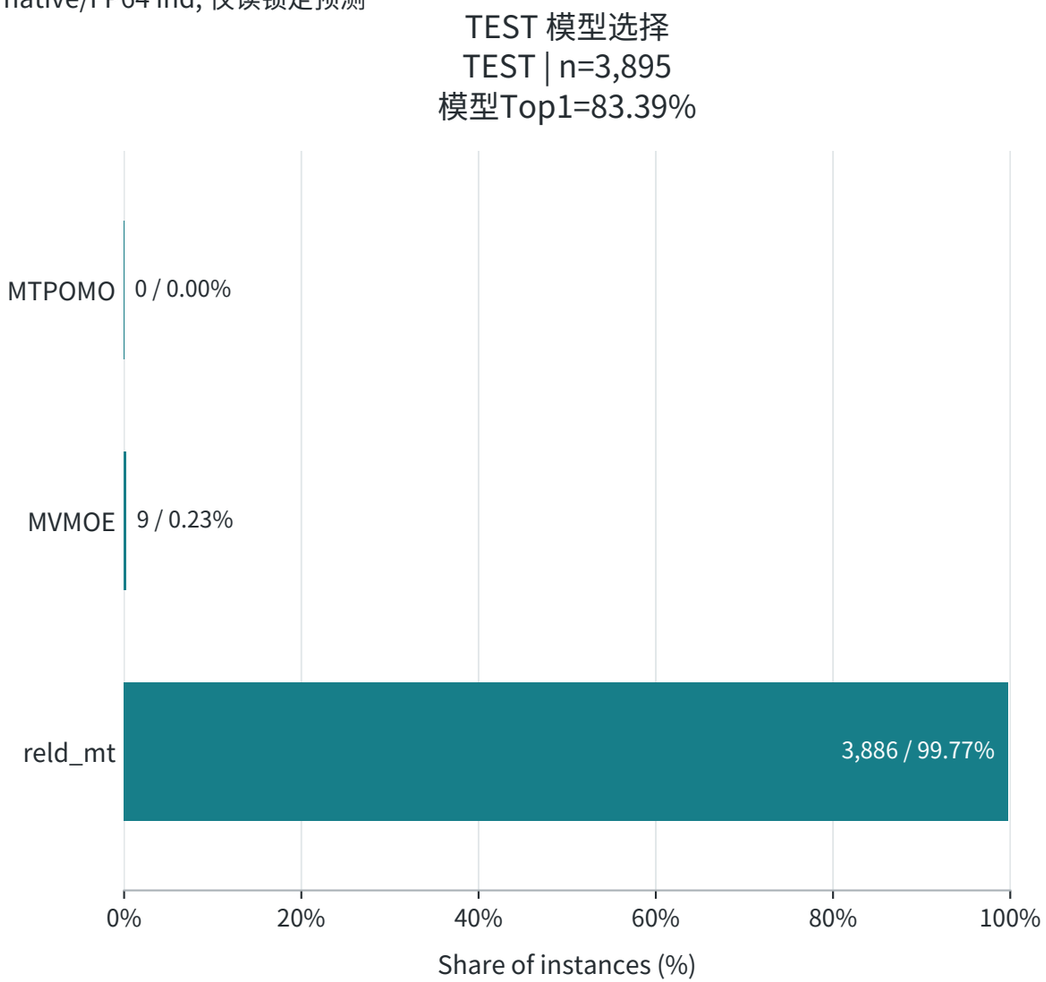

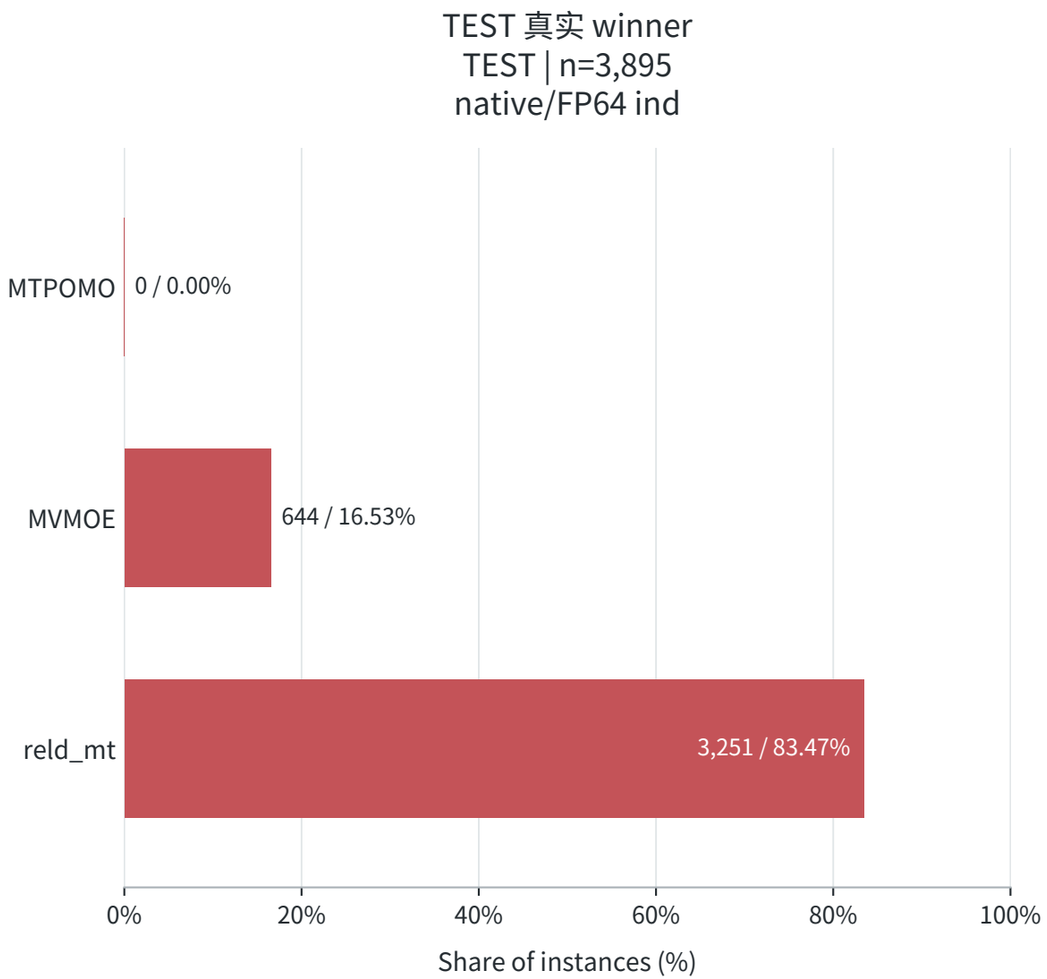

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.