

R81B_cross_instance_rank_seed2 | TSP | 方法分布


同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/TSPLIB (original native LIB / historical NSS comparison)

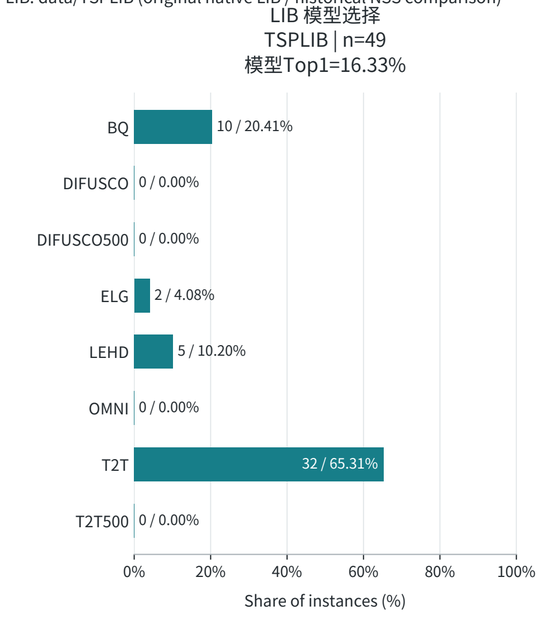

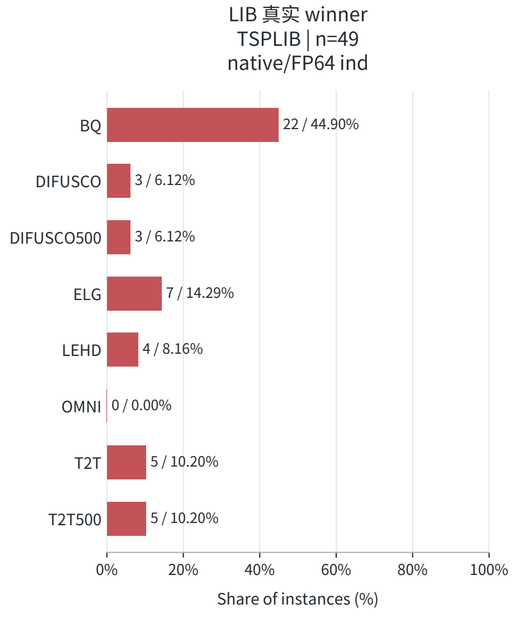

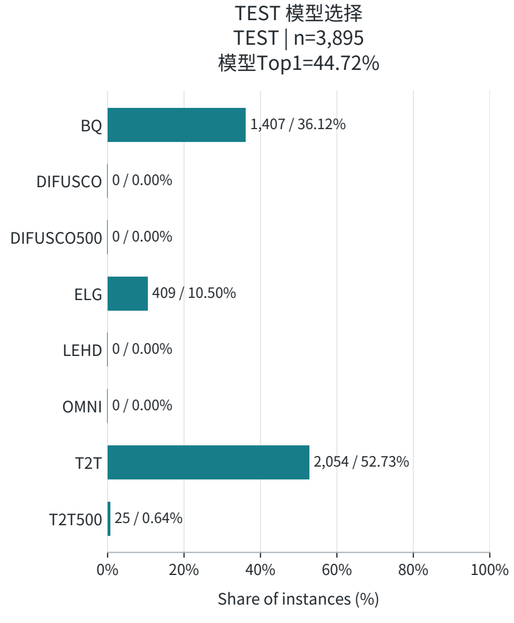

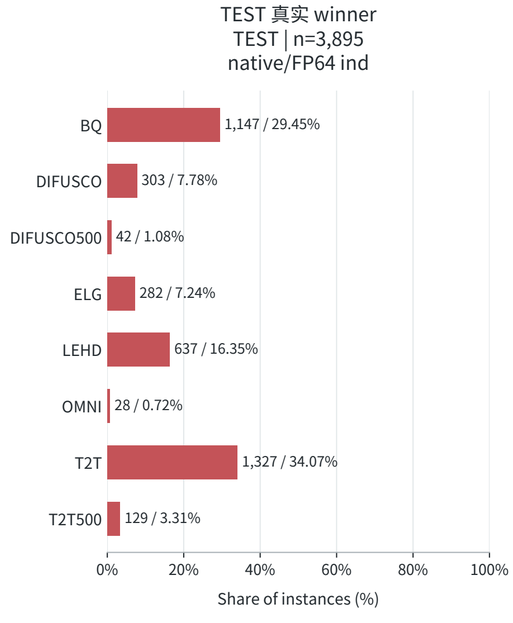

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | CVRP | 方法分布


同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/CVRPLIB (original native LIB / historical NSS comparison)

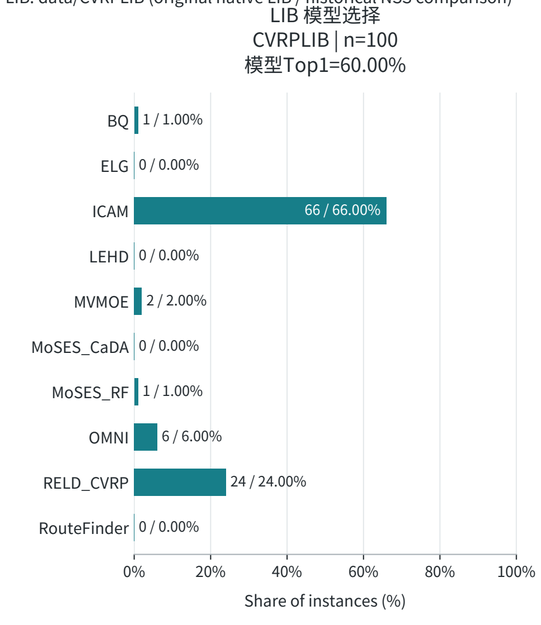

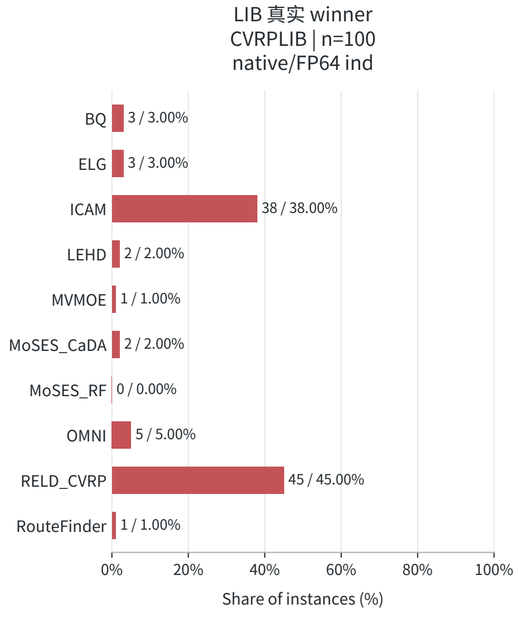

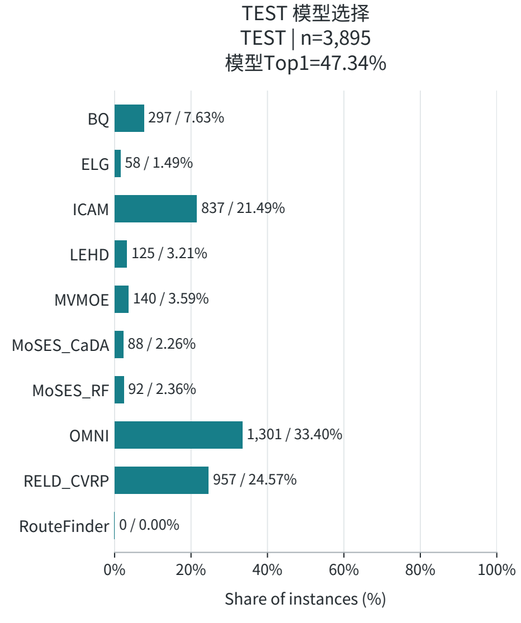

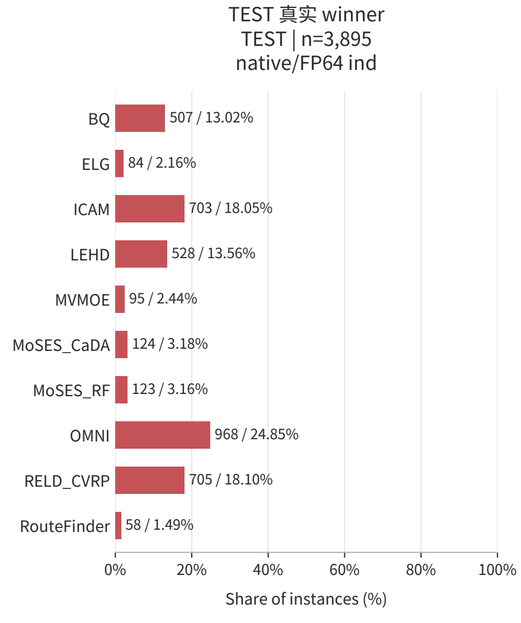

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | ATSP | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

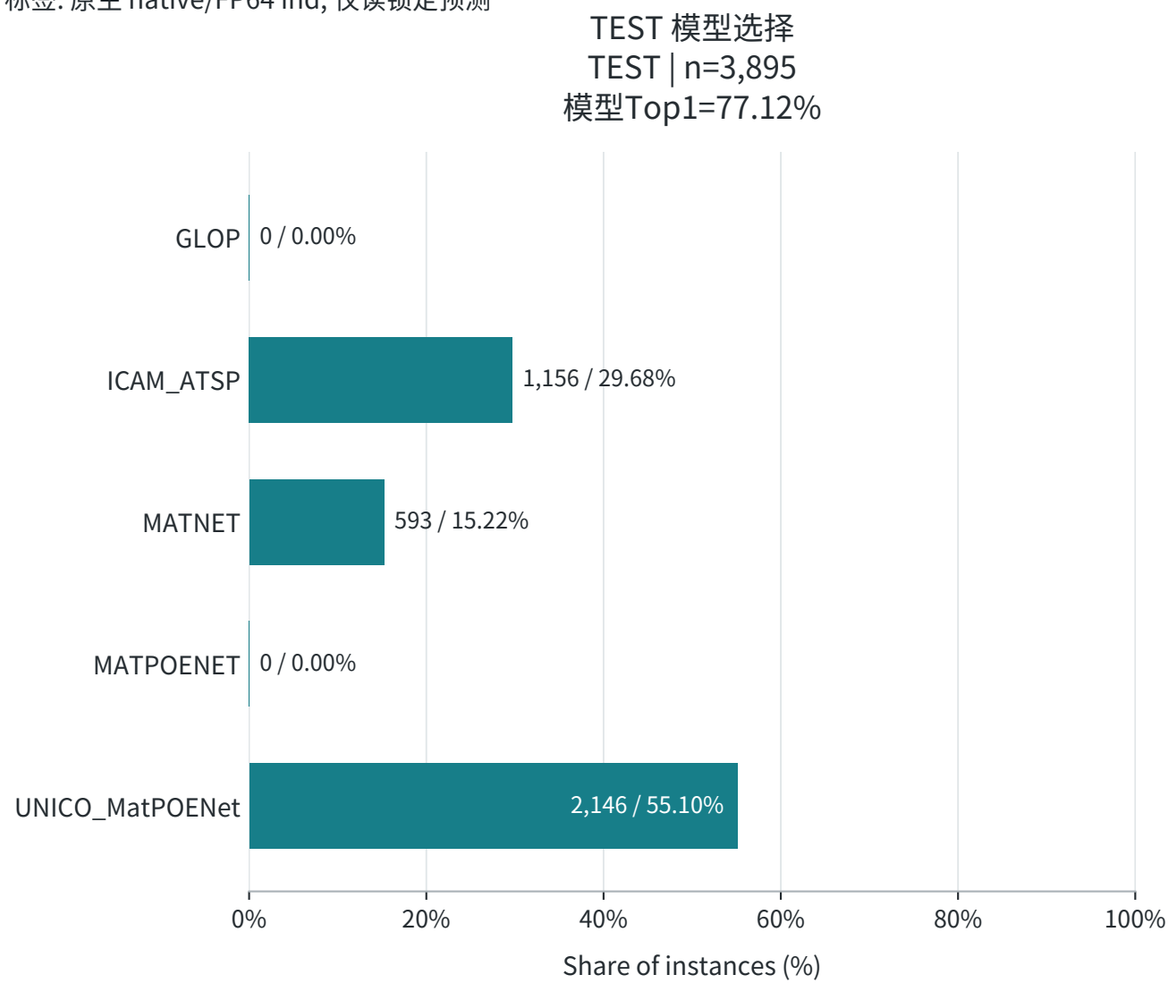

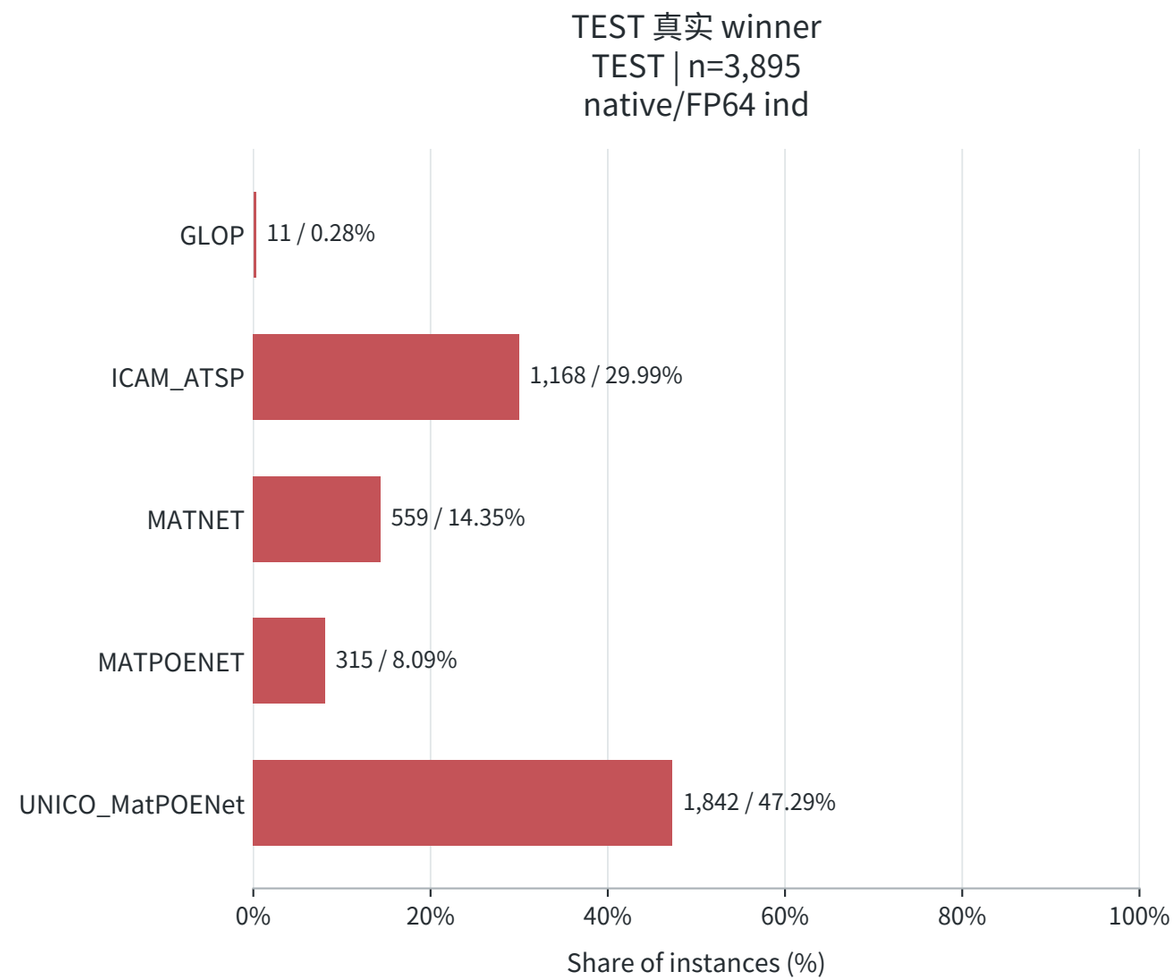

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRP | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

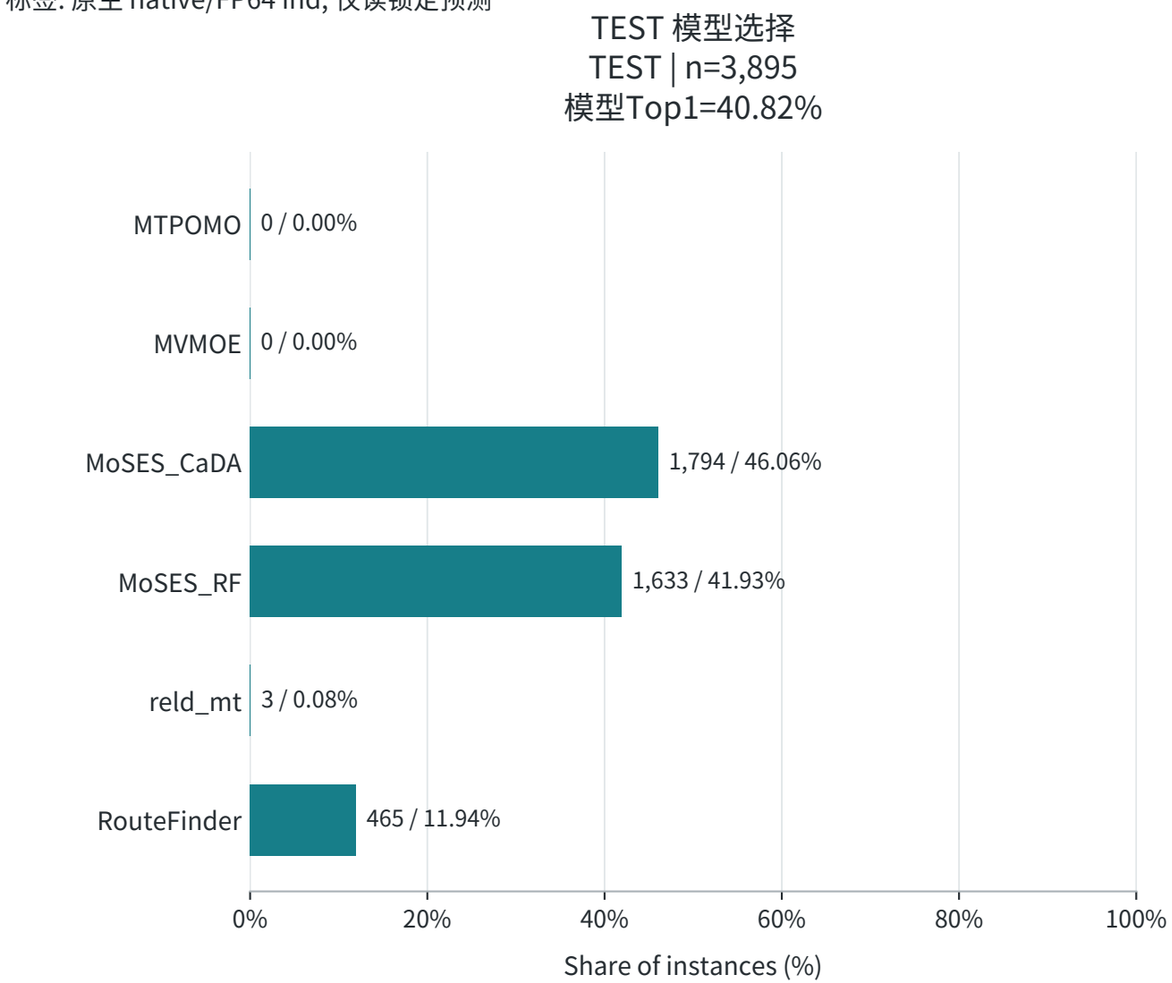

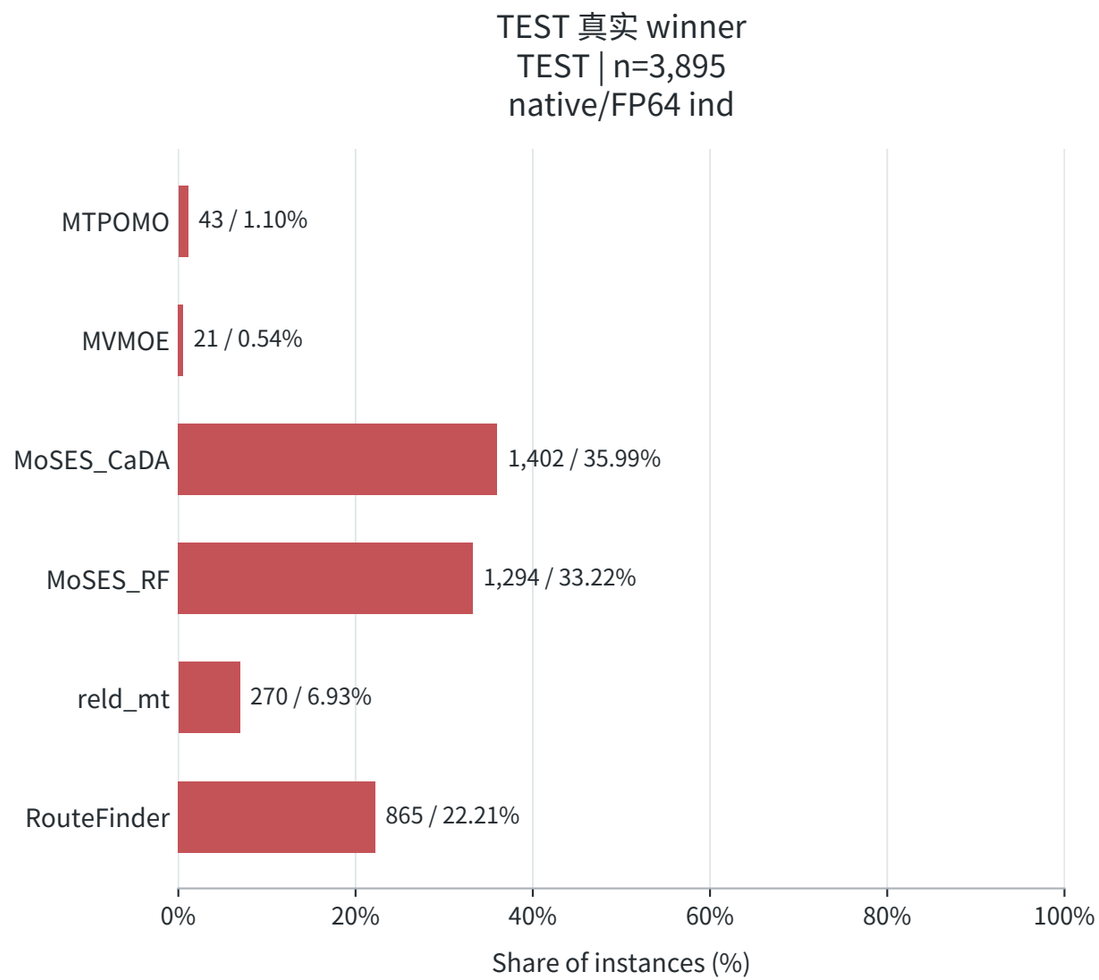

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPB | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

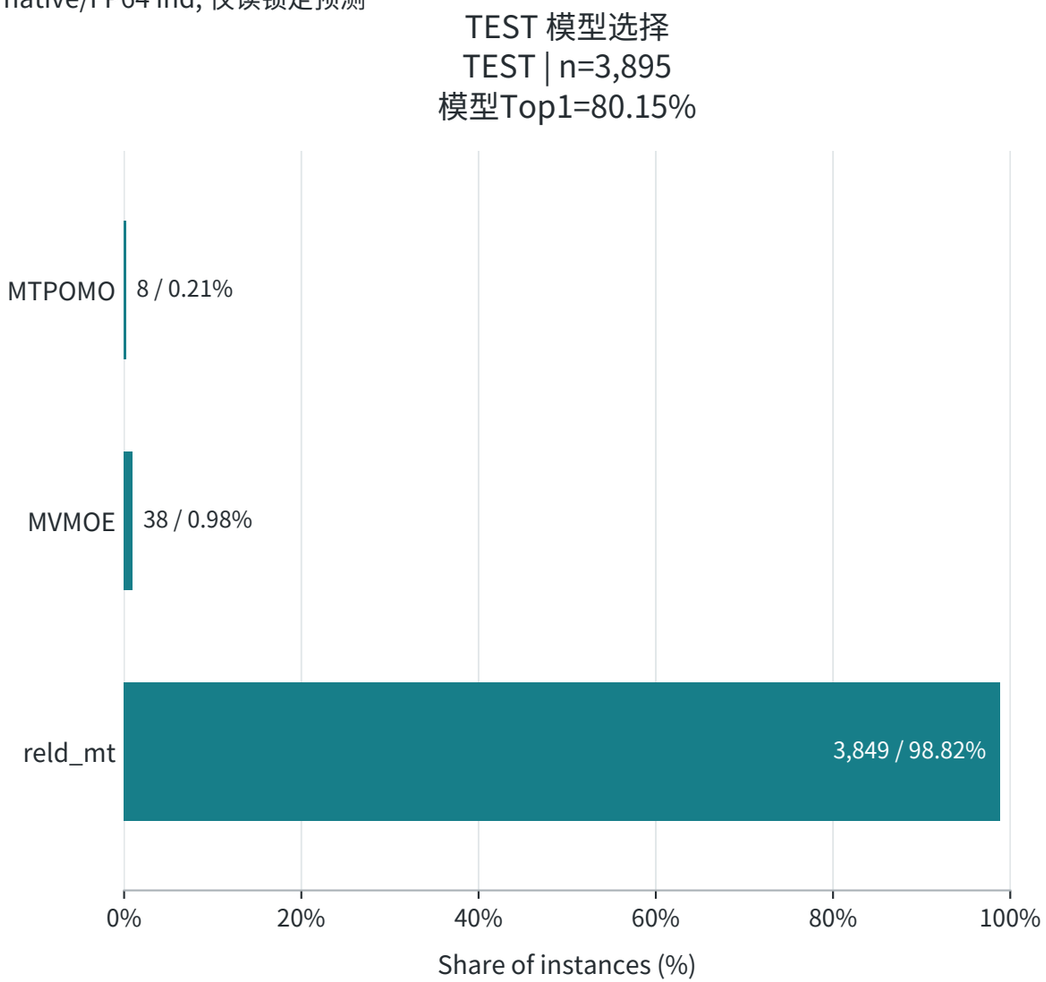

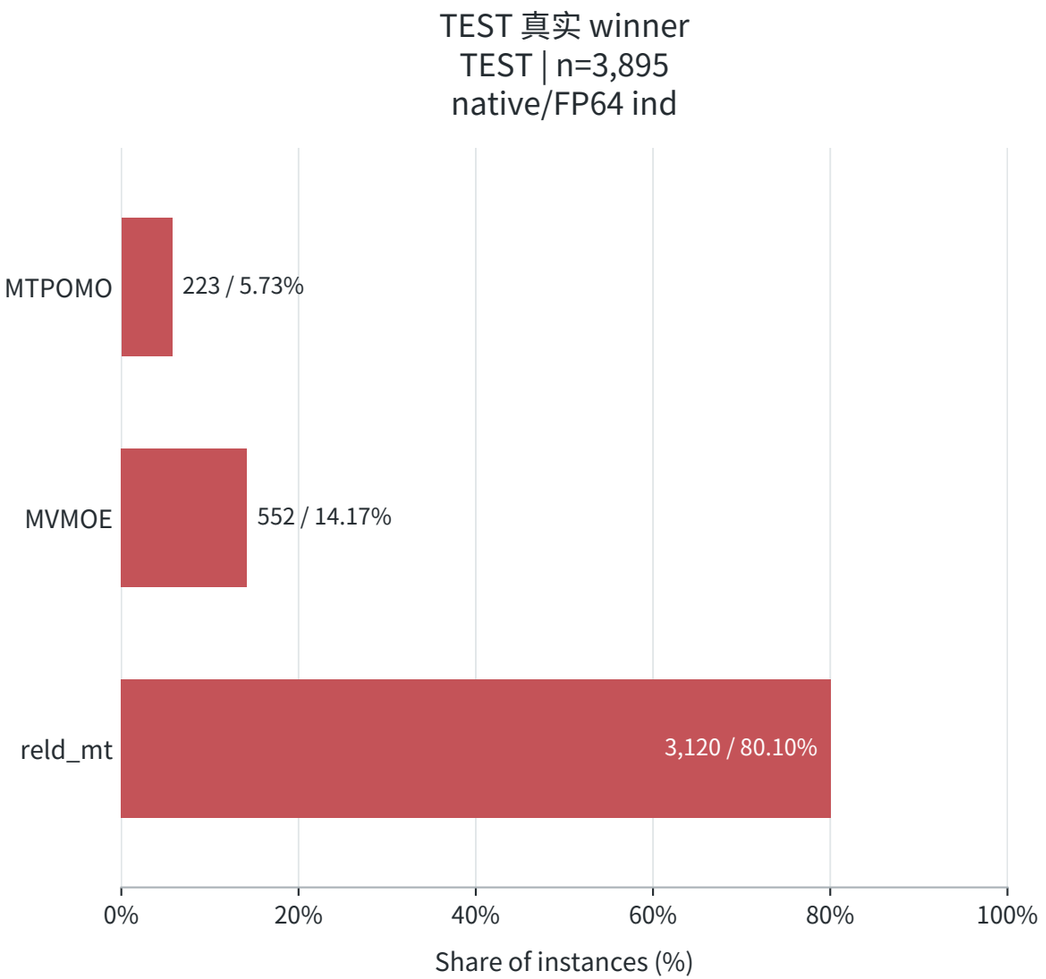

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

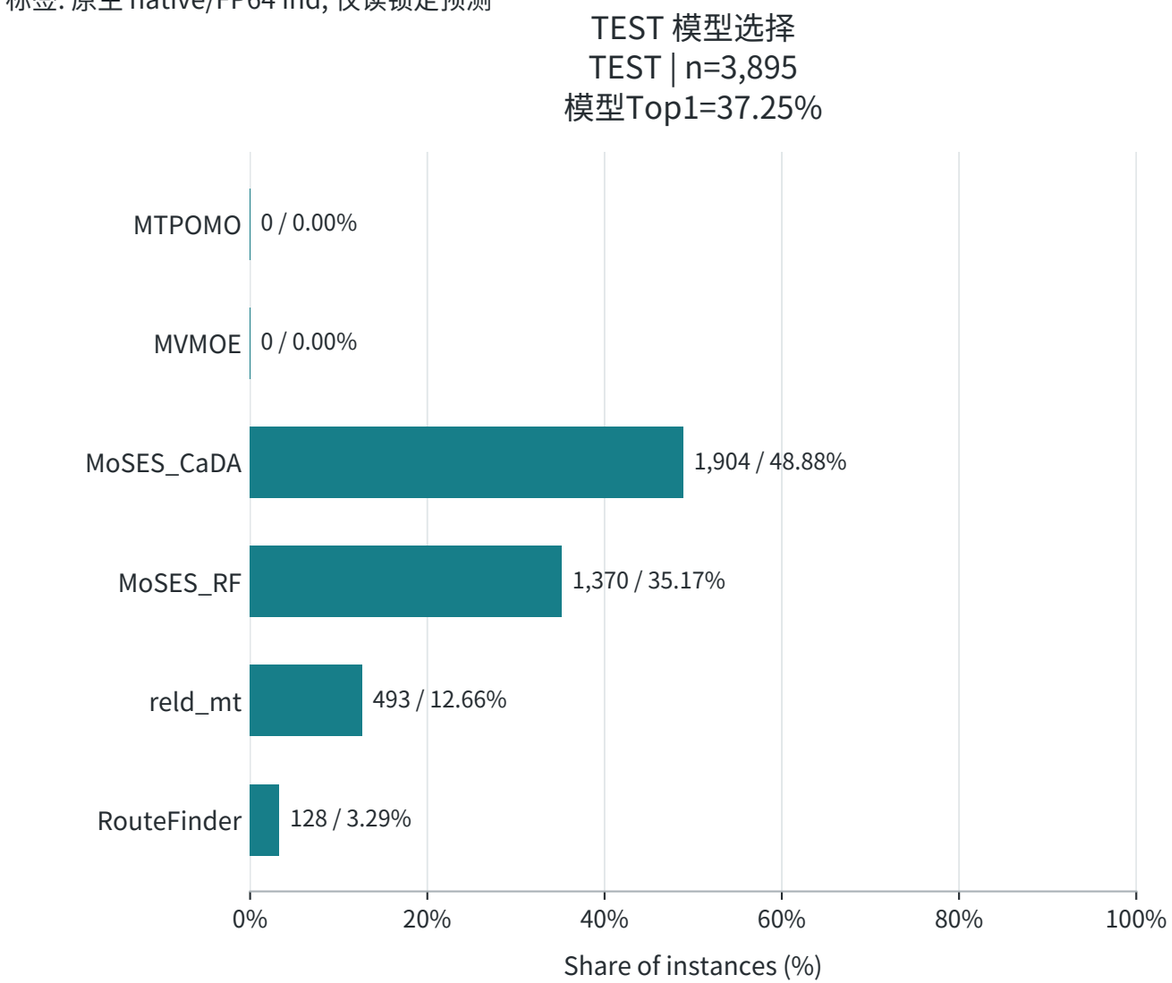

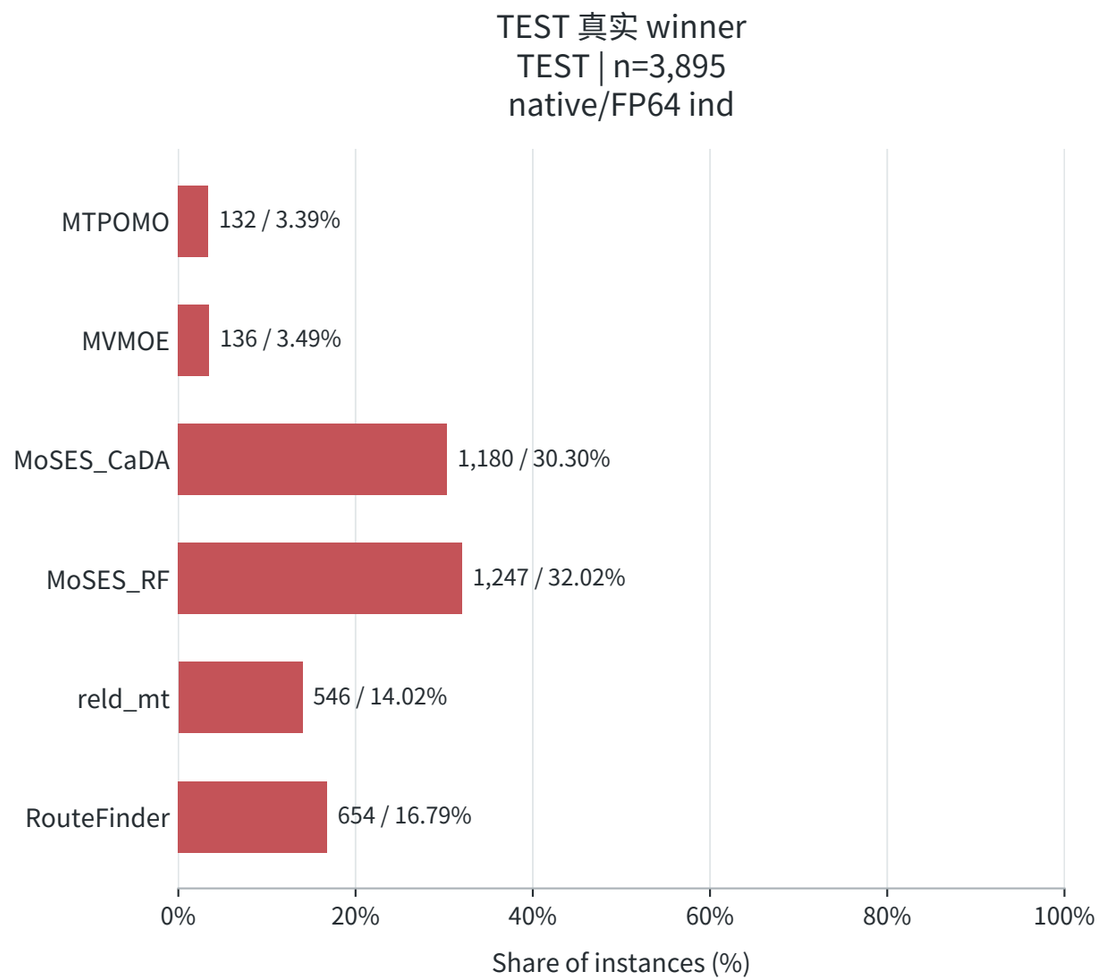

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

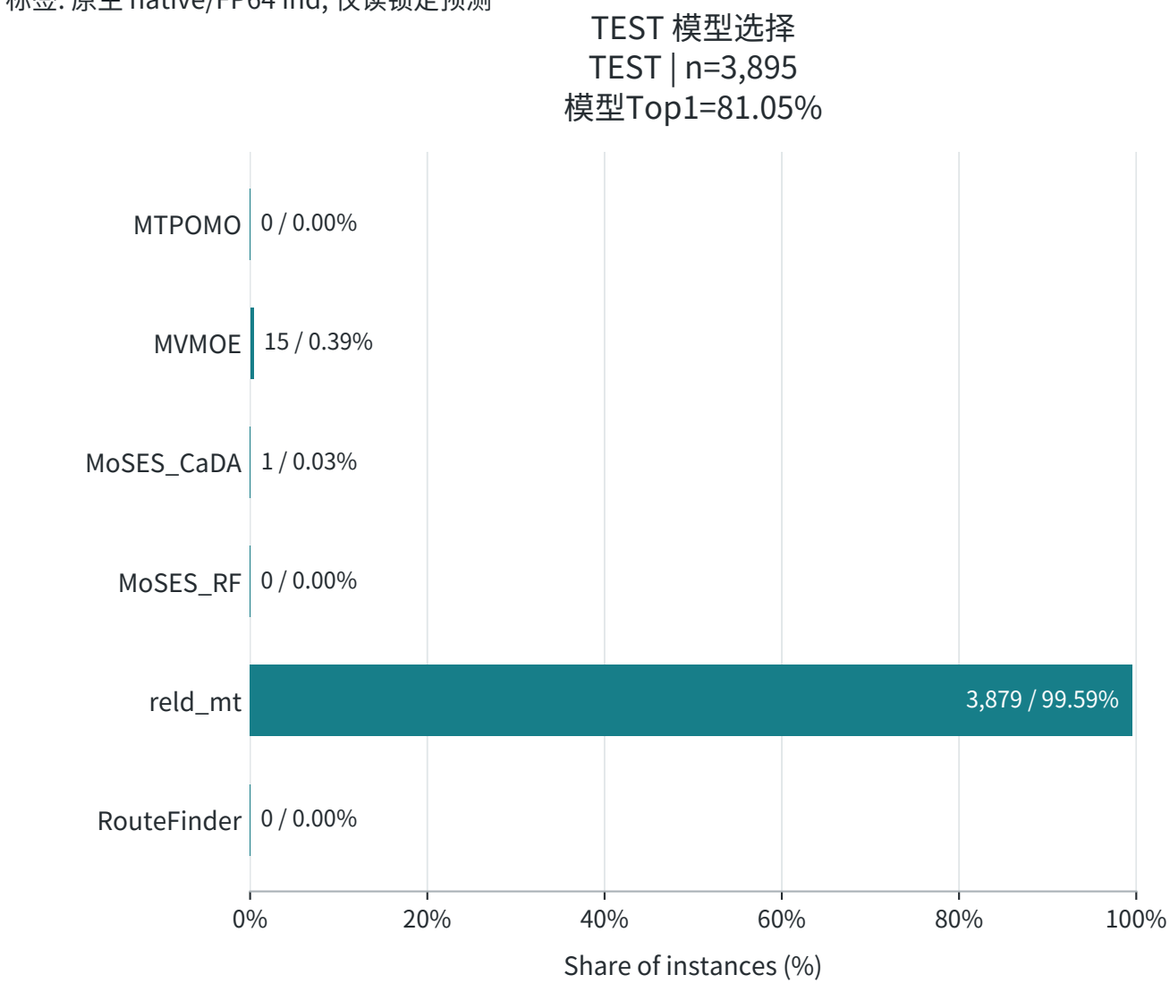

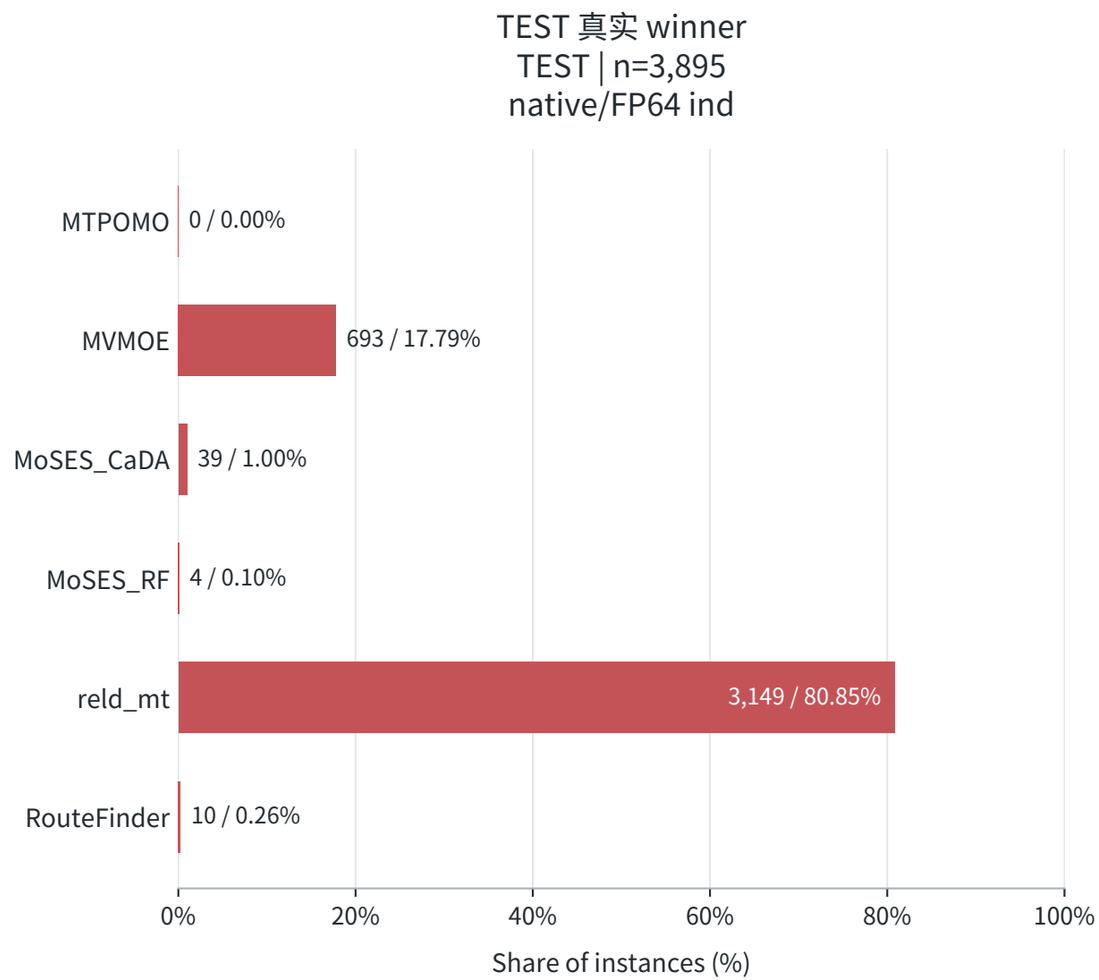

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

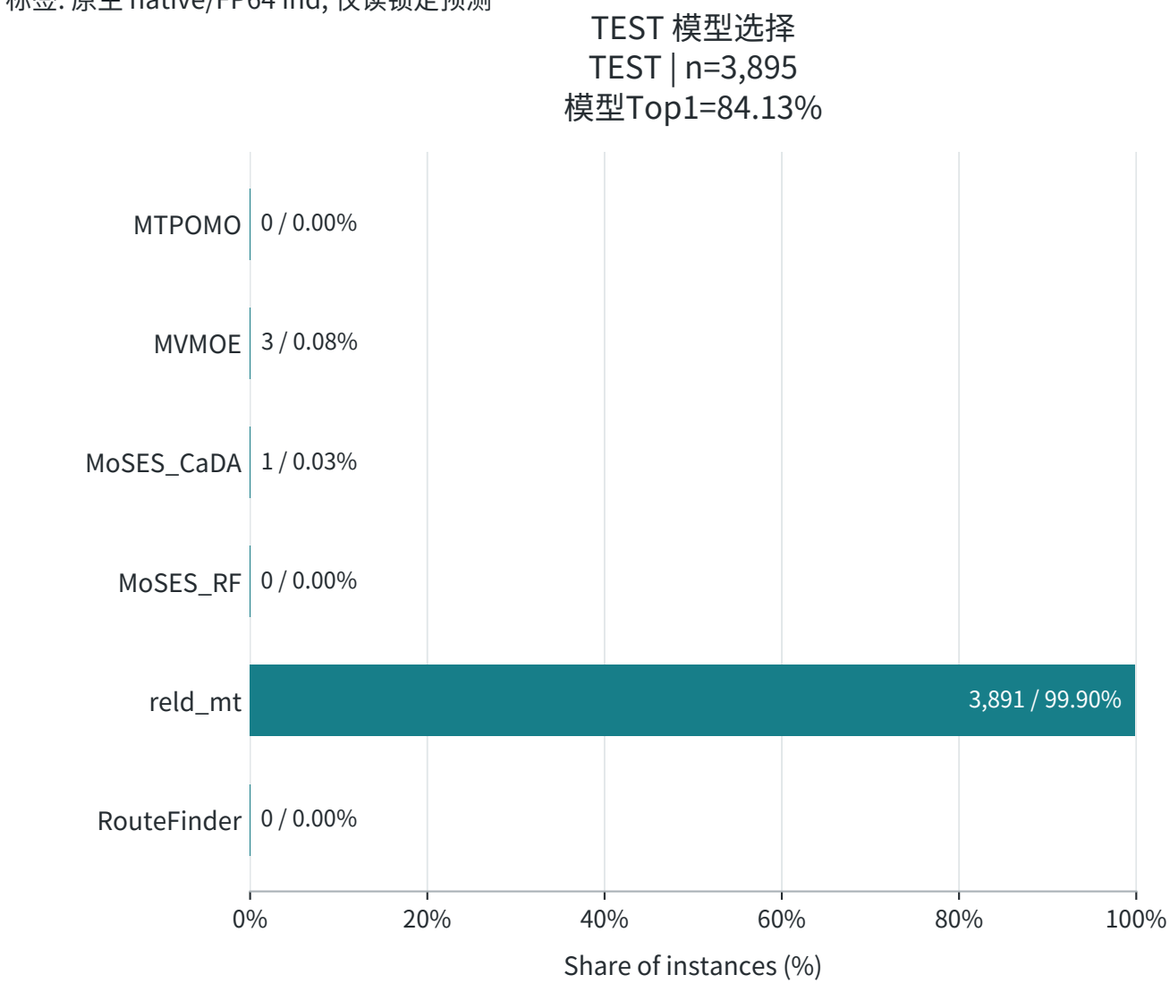

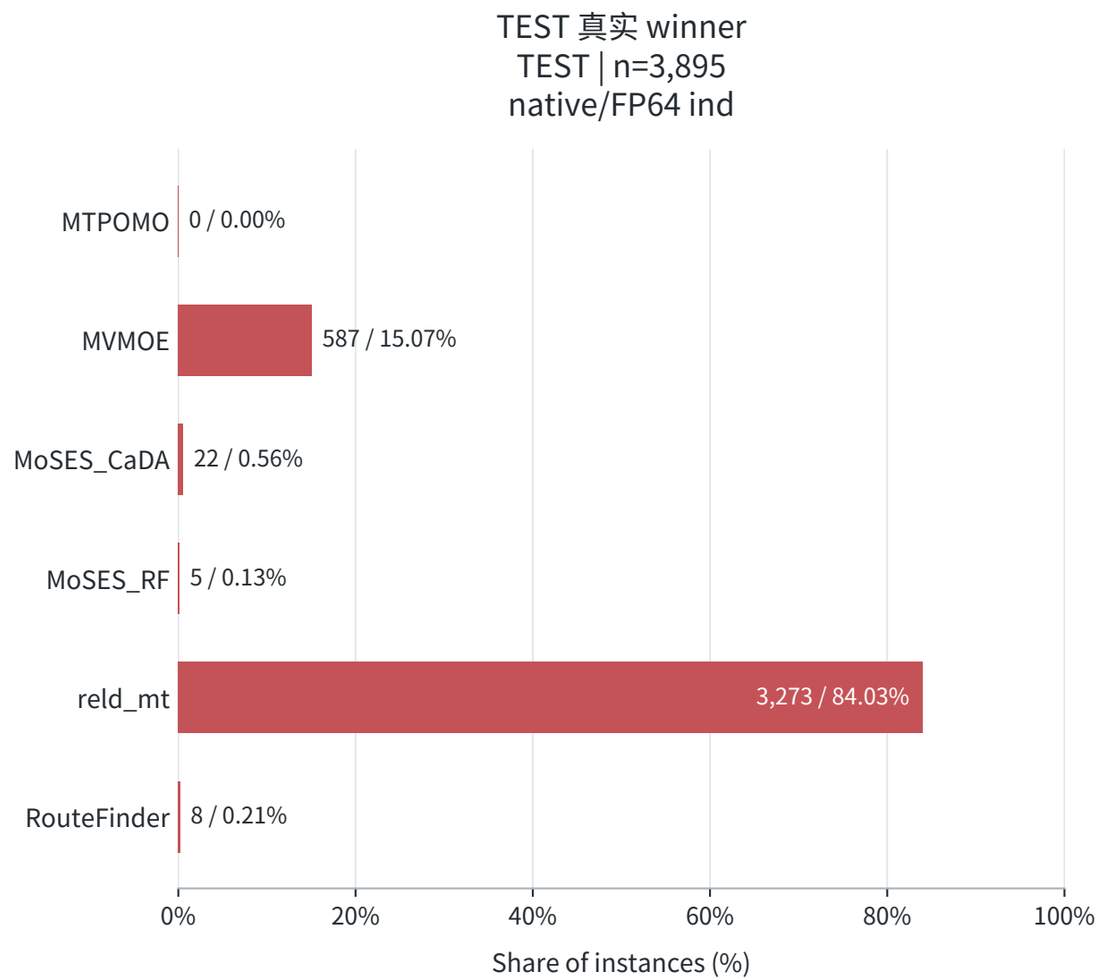

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPB | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

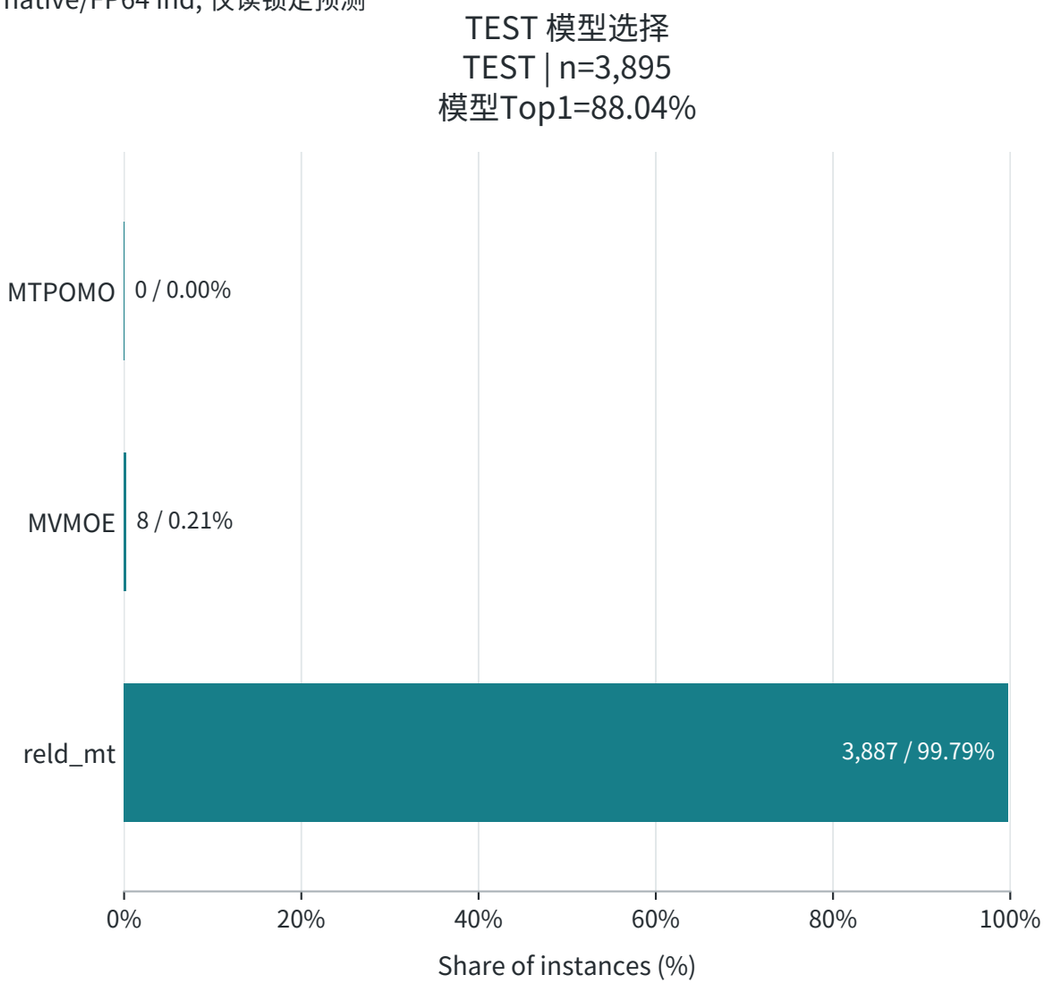

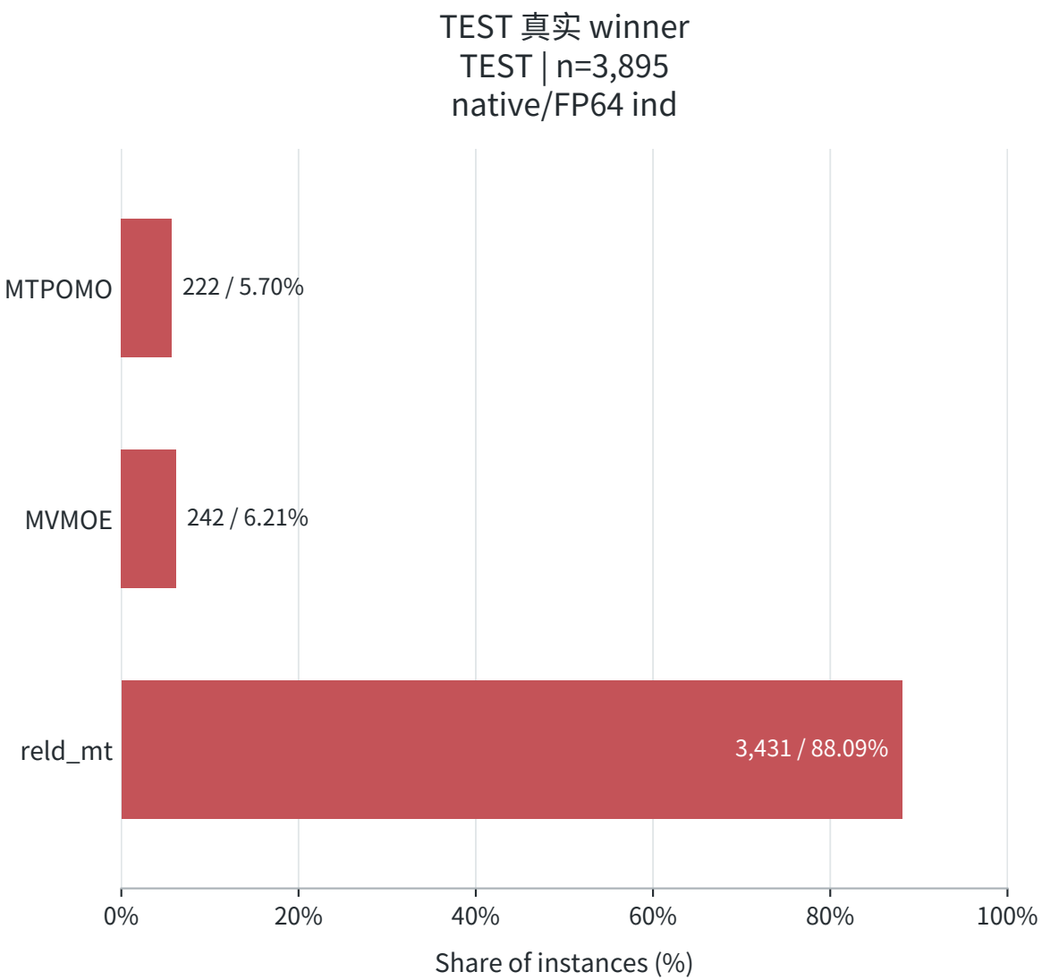

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

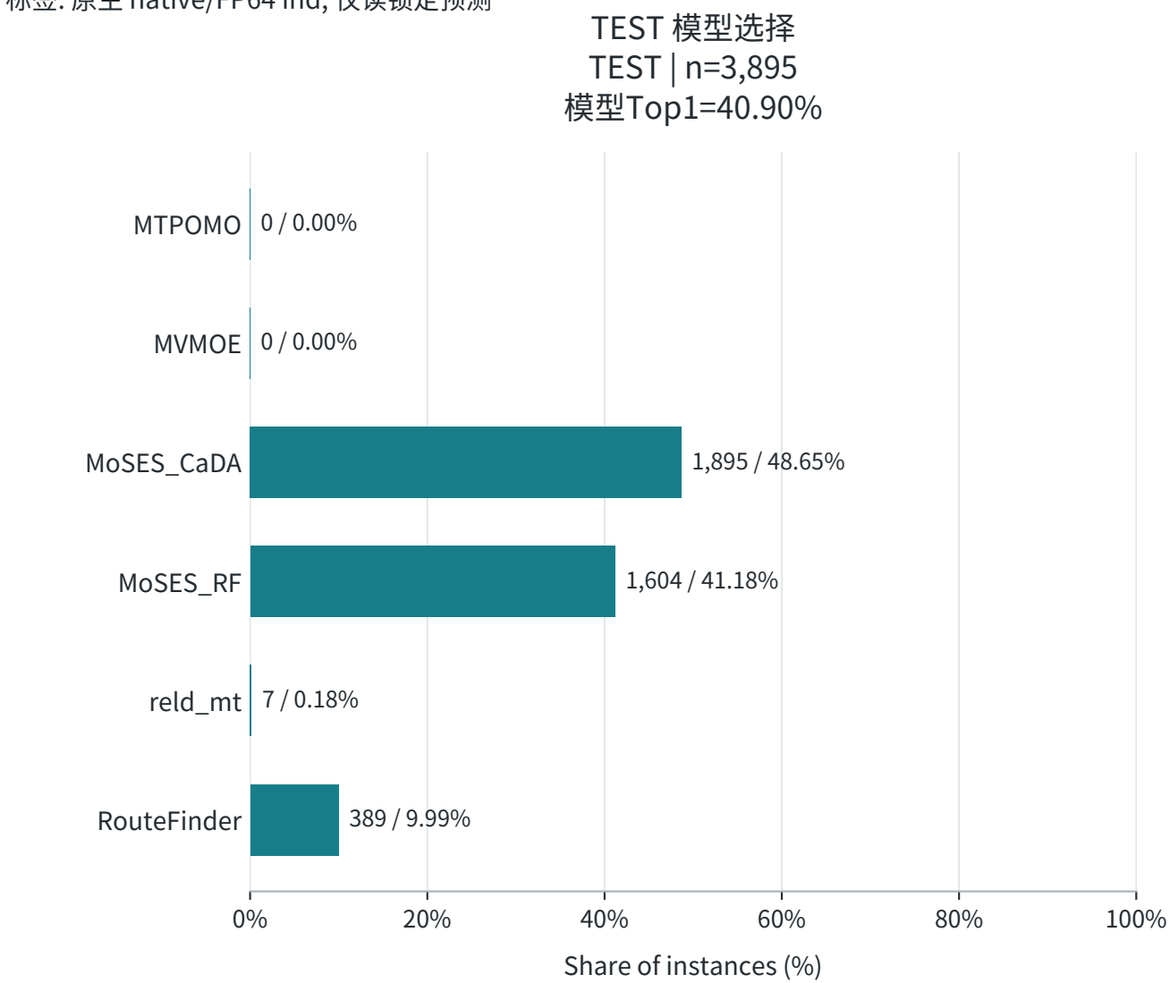

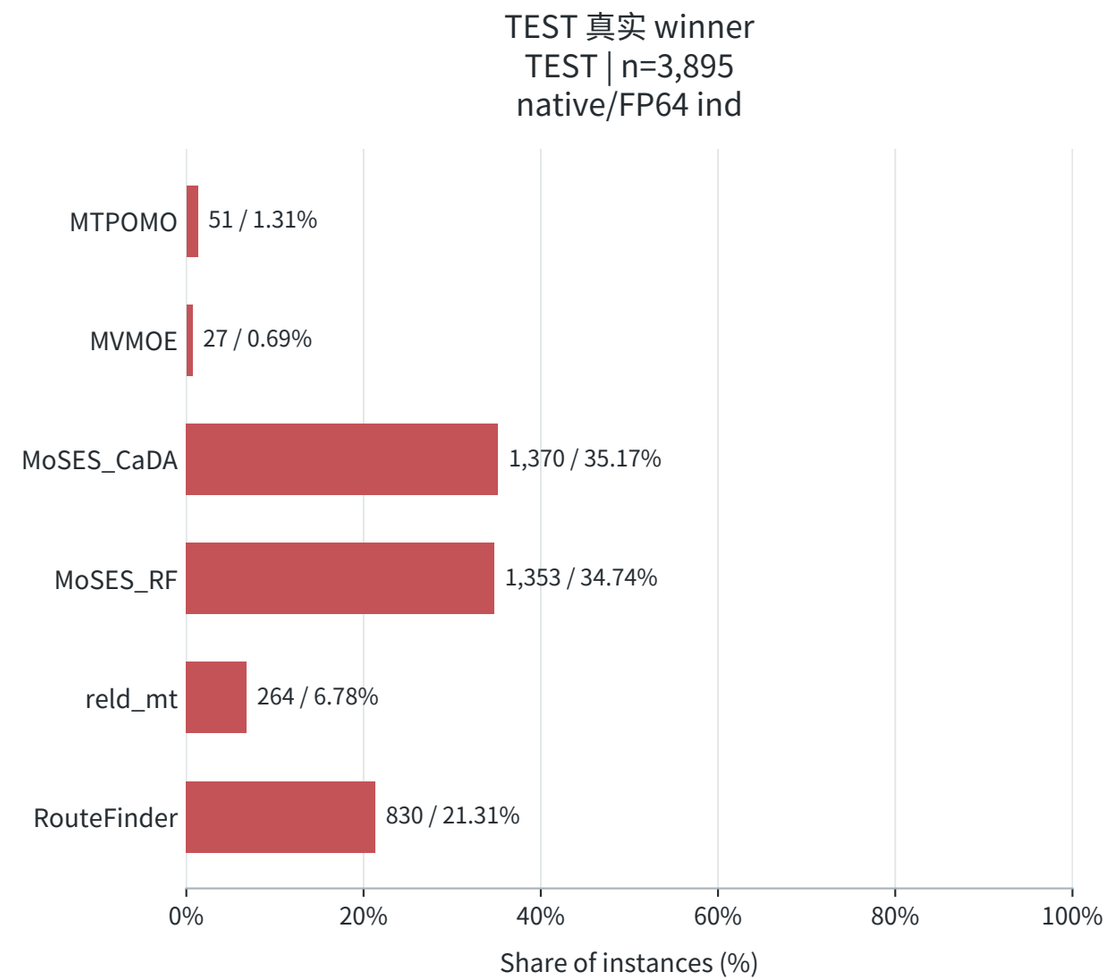

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

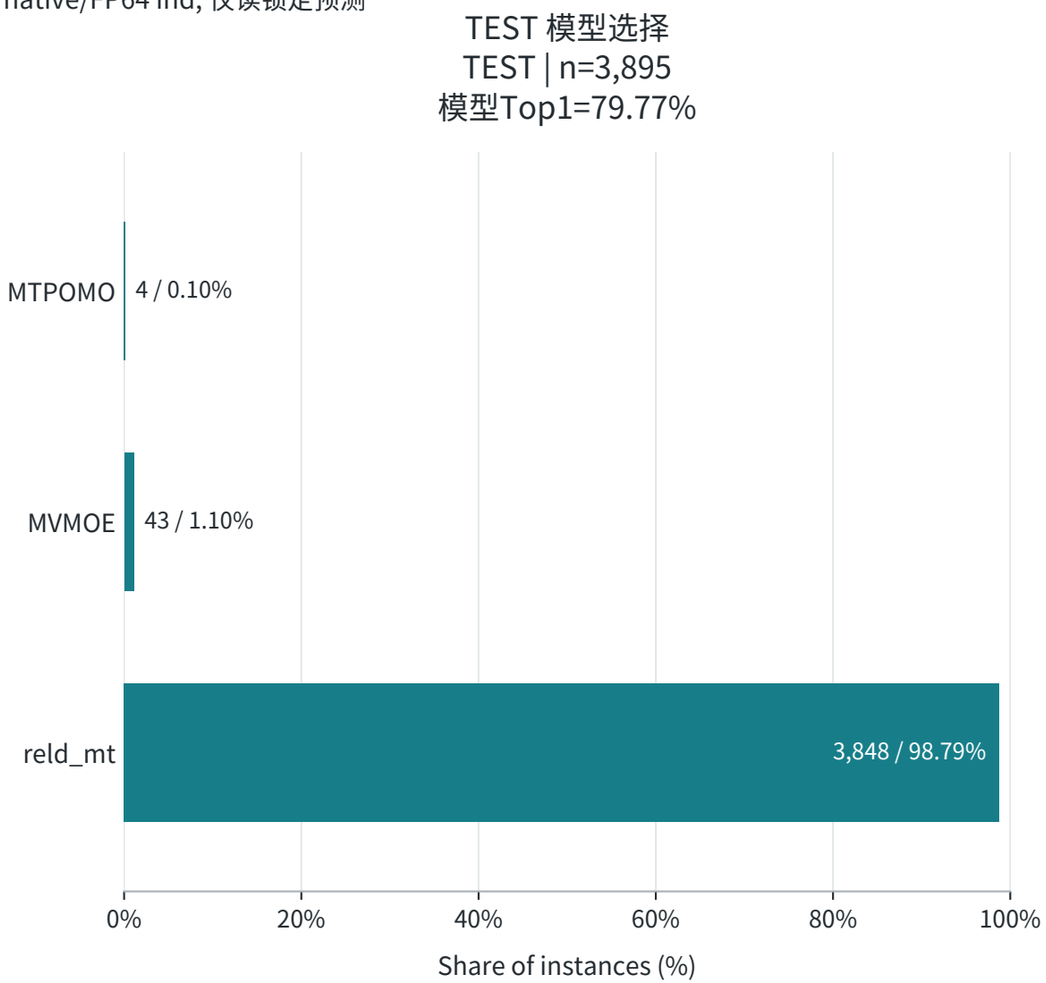

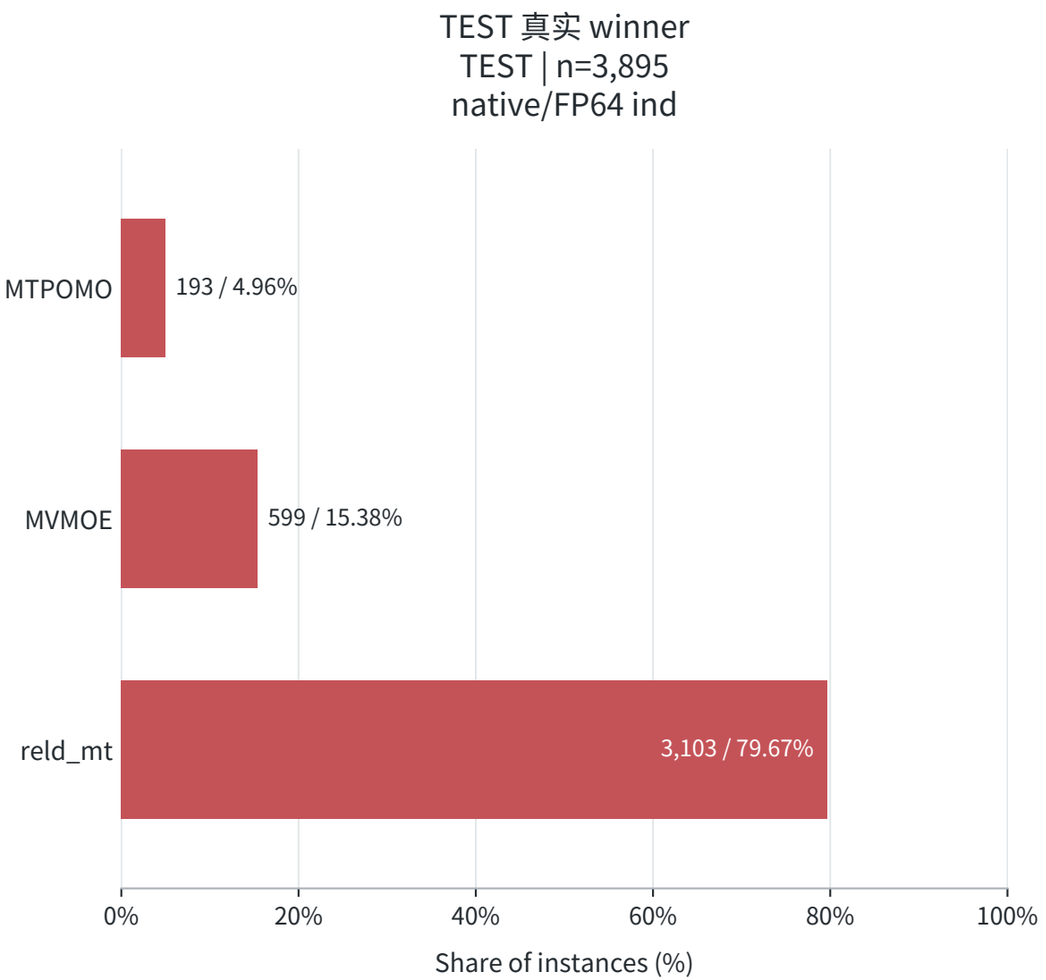

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

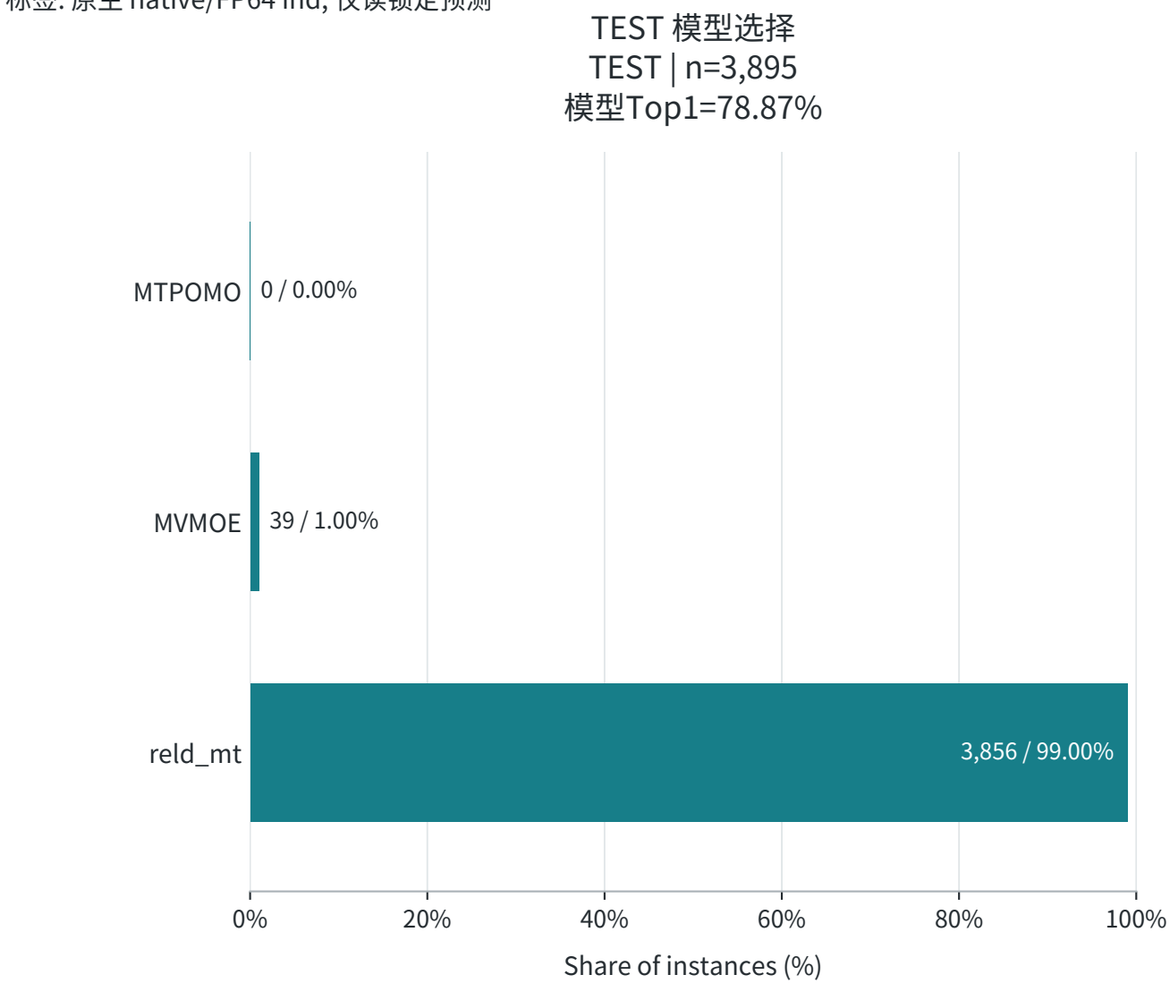

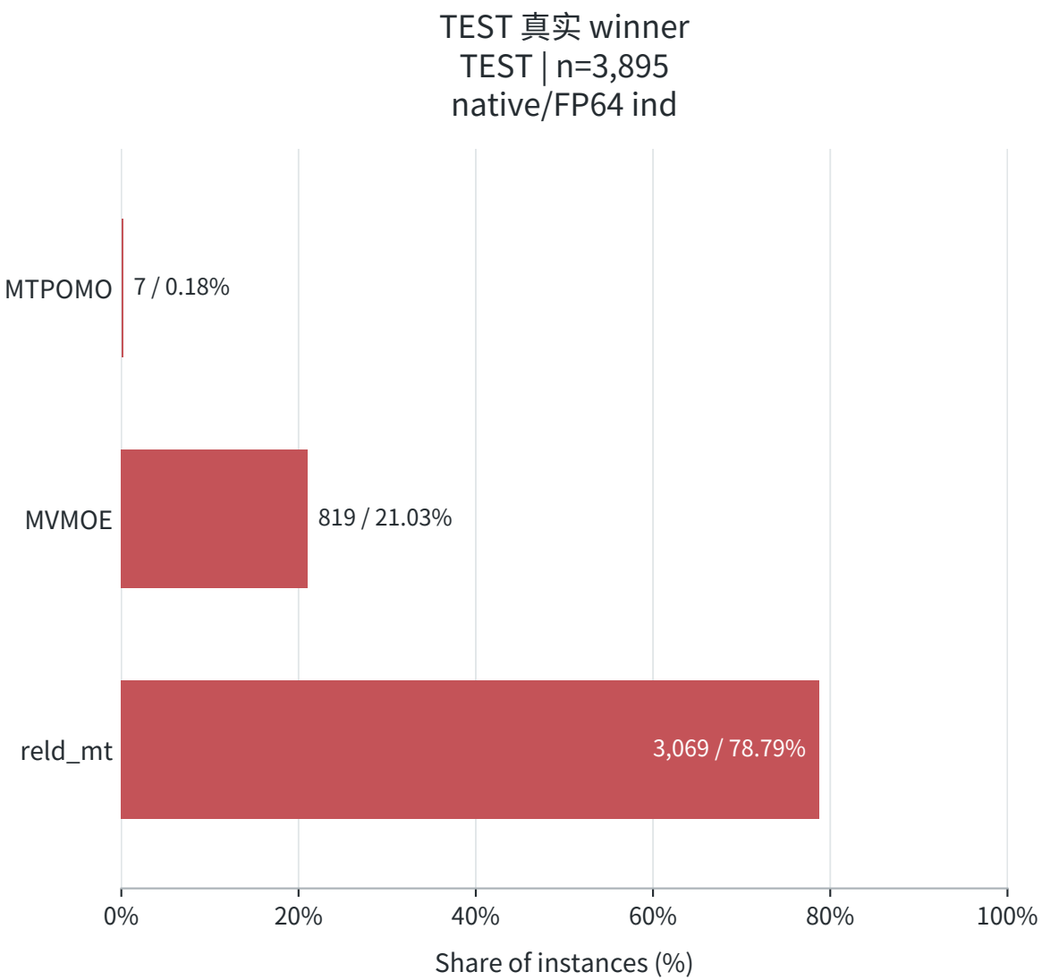

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

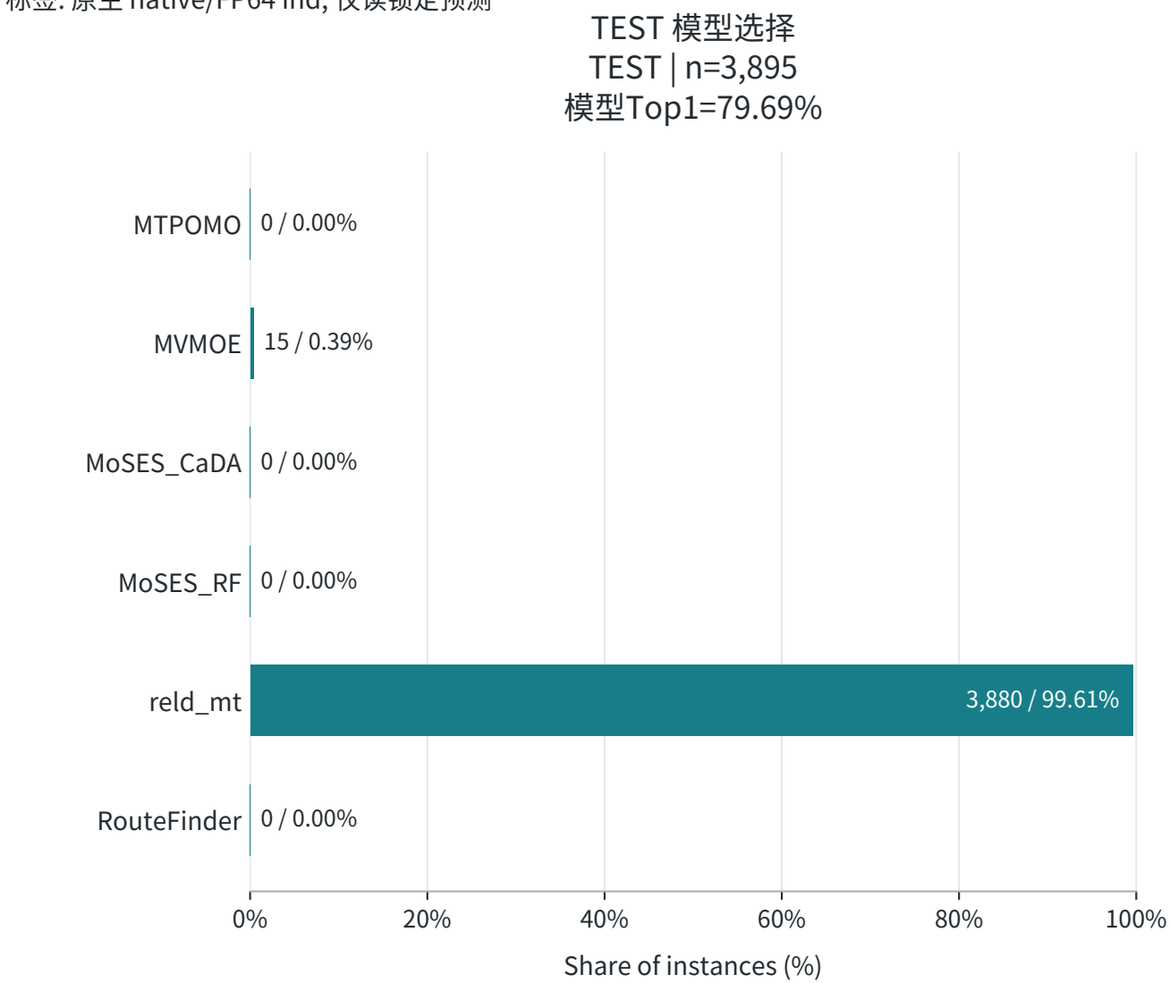

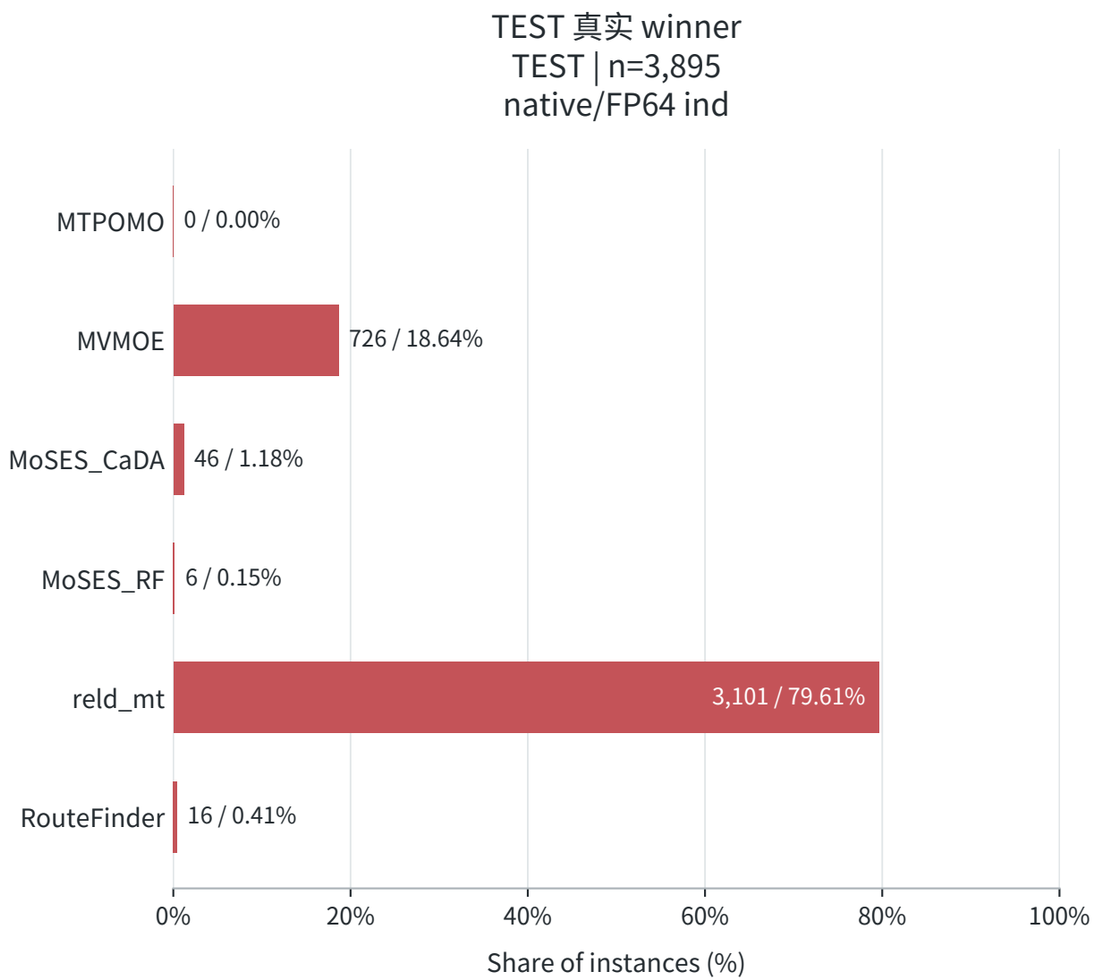

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBL | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

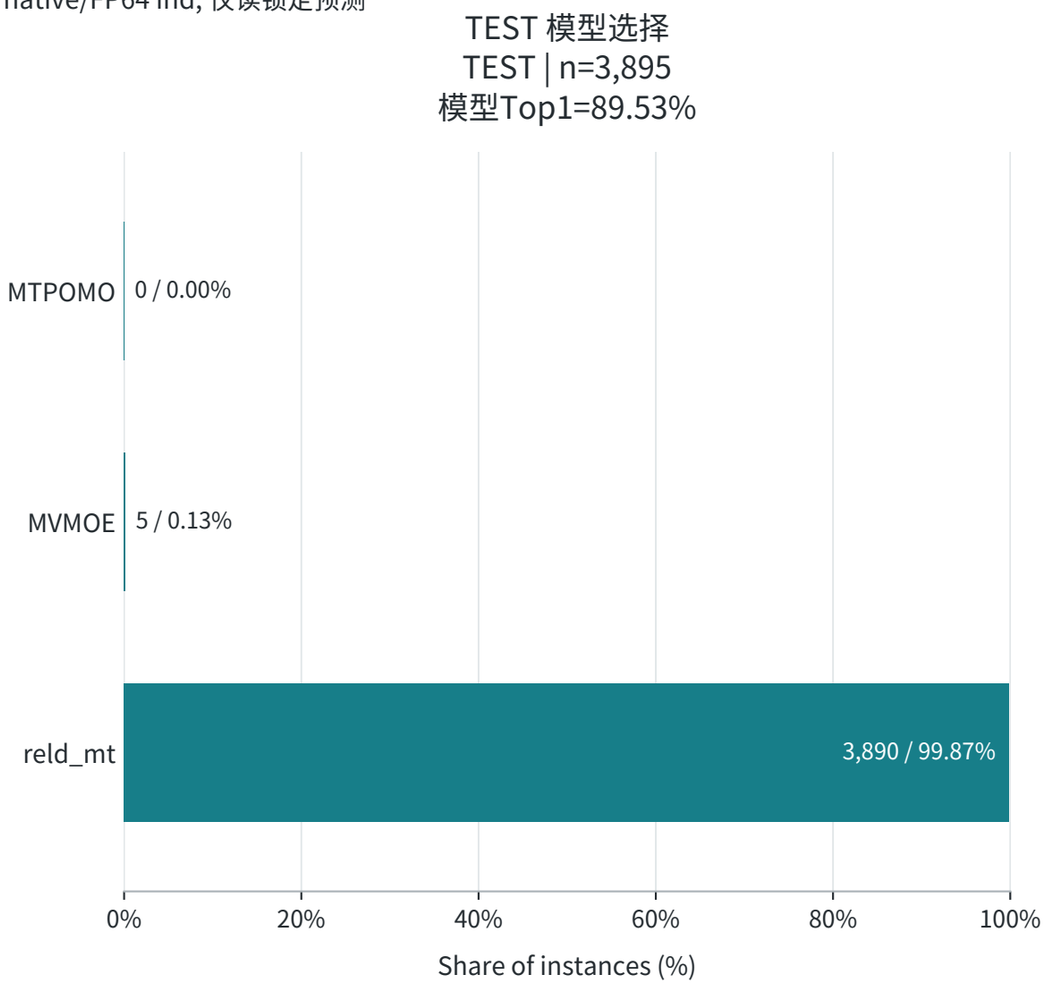

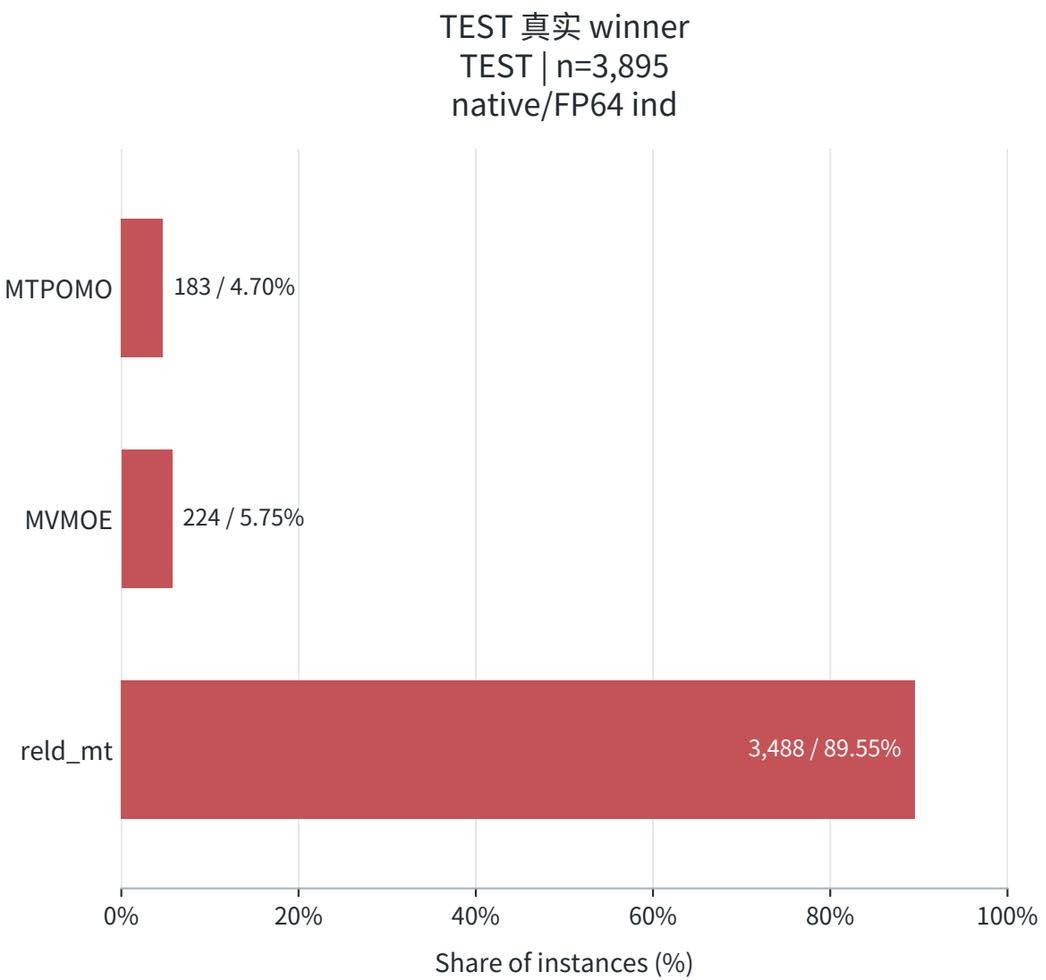

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

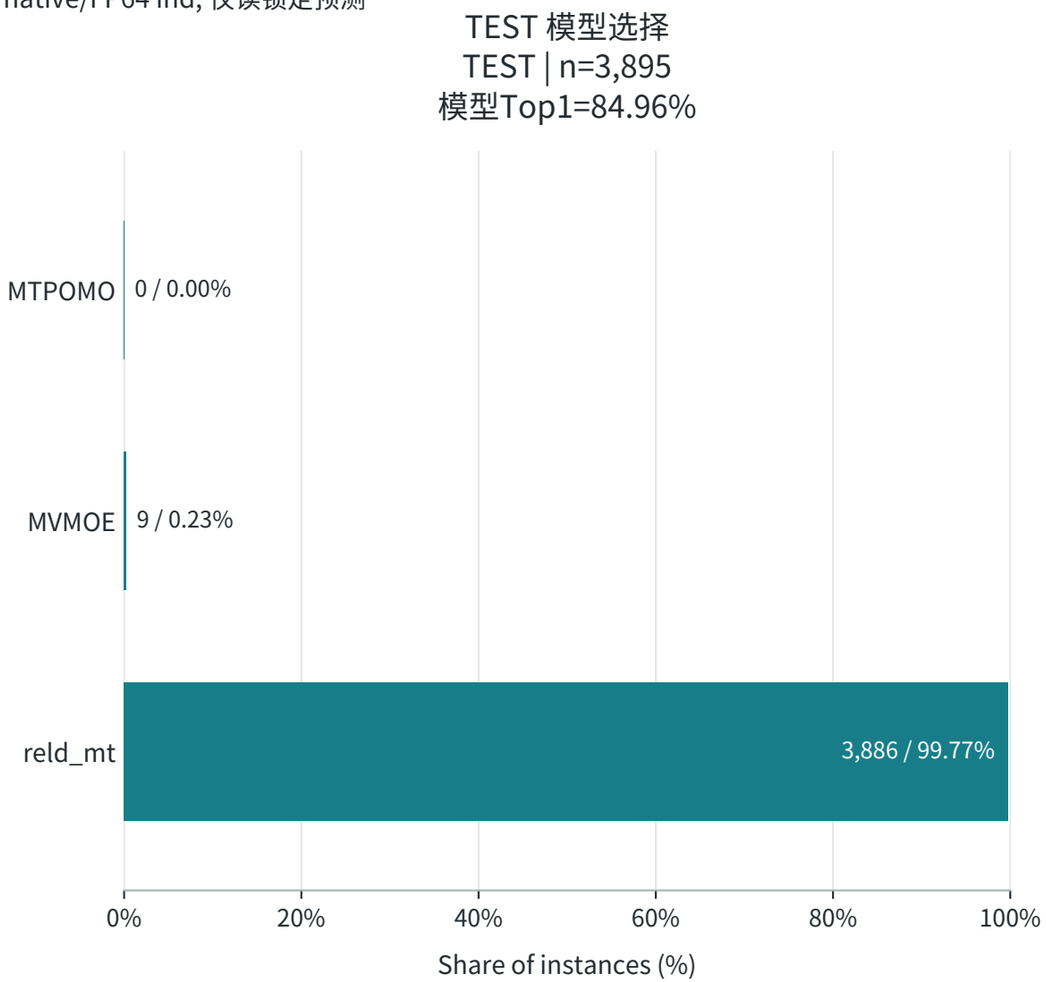

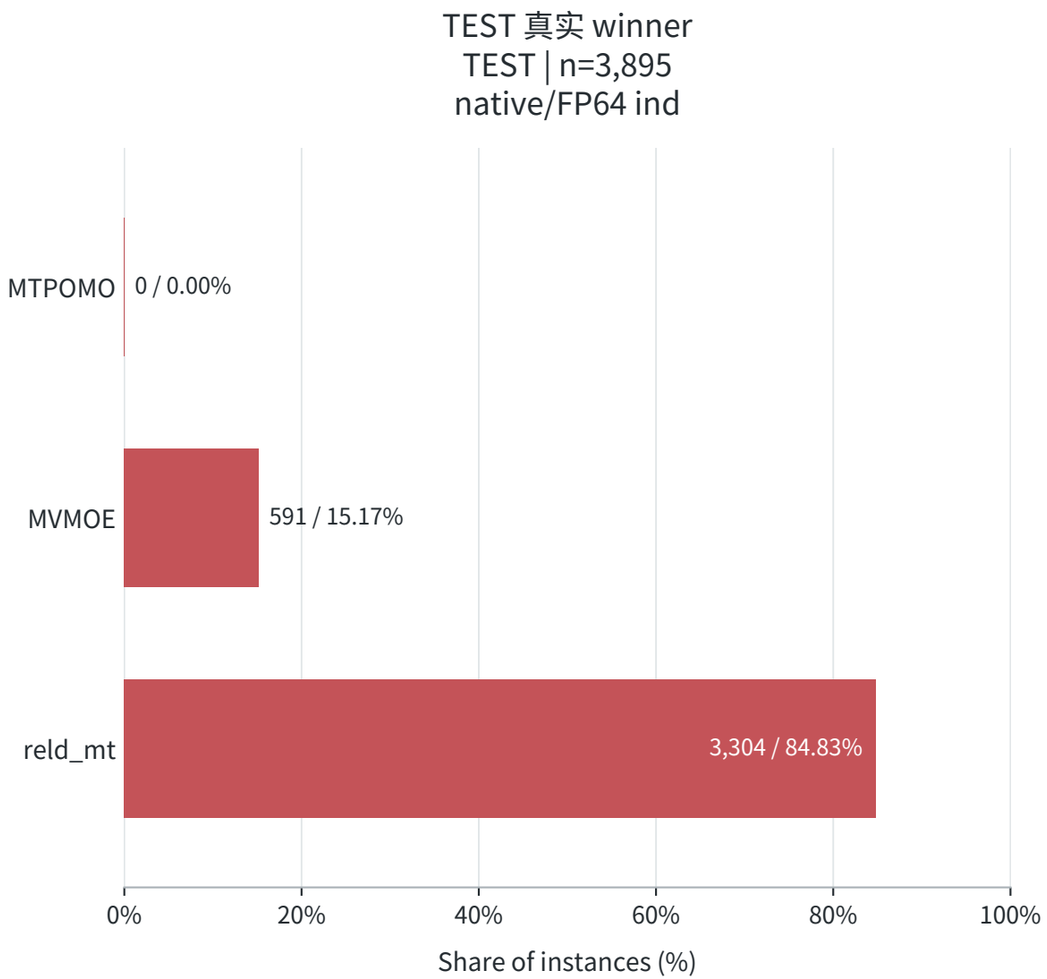

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

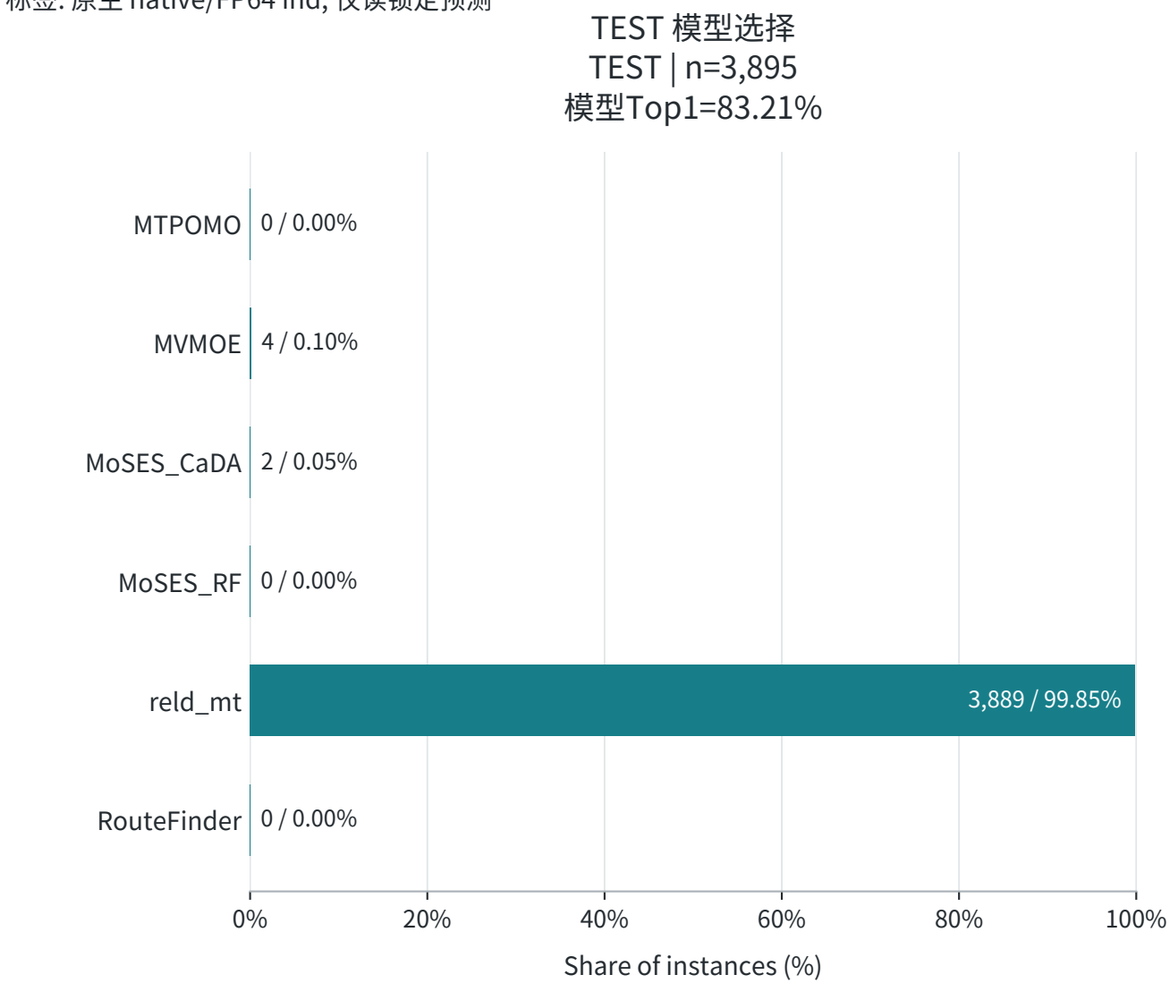

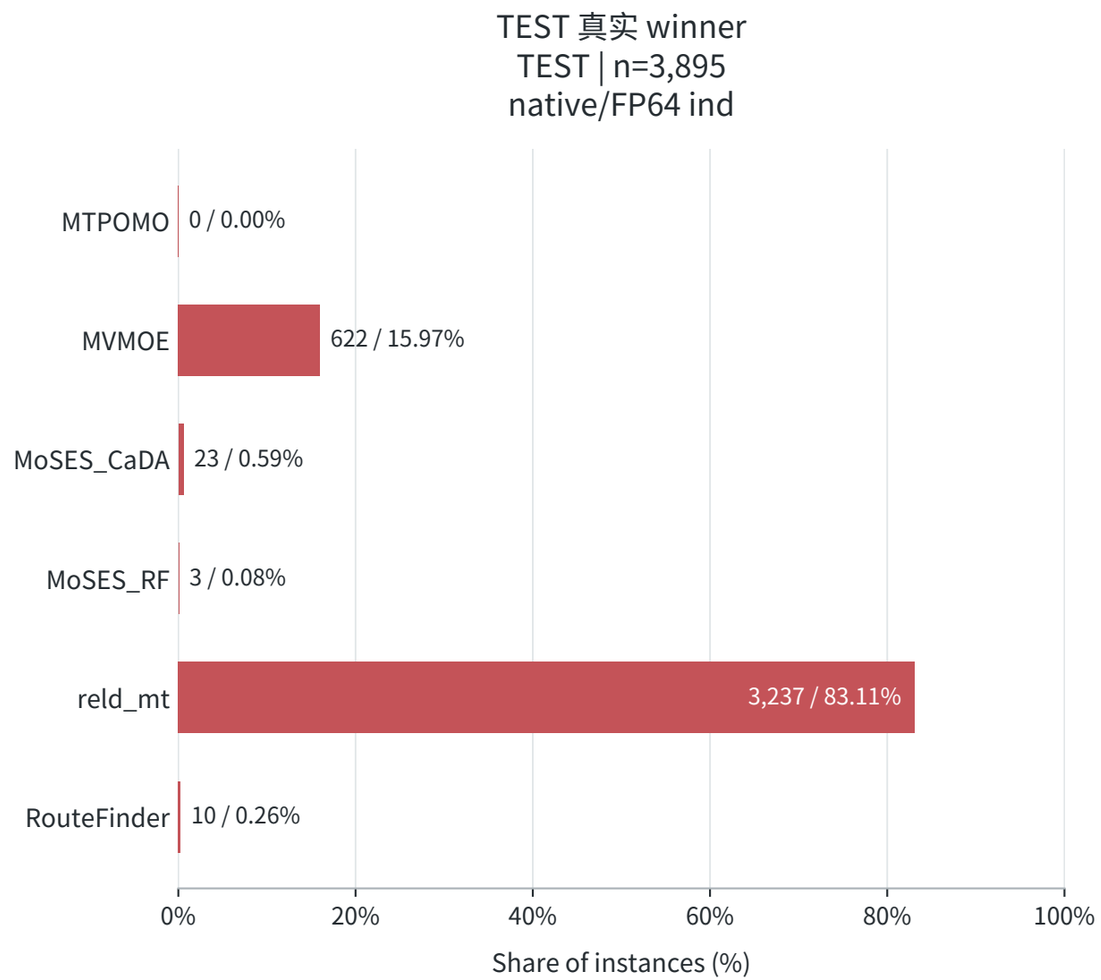

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | VRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

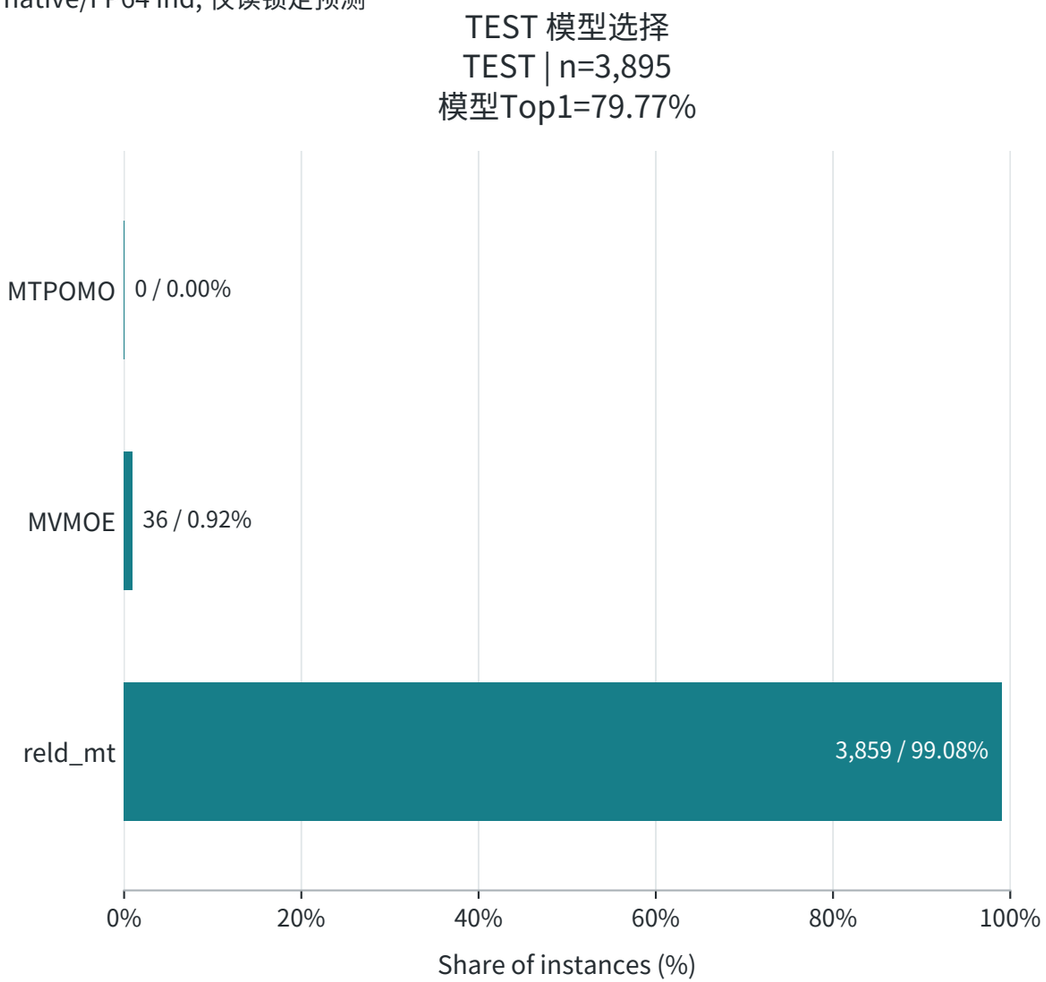

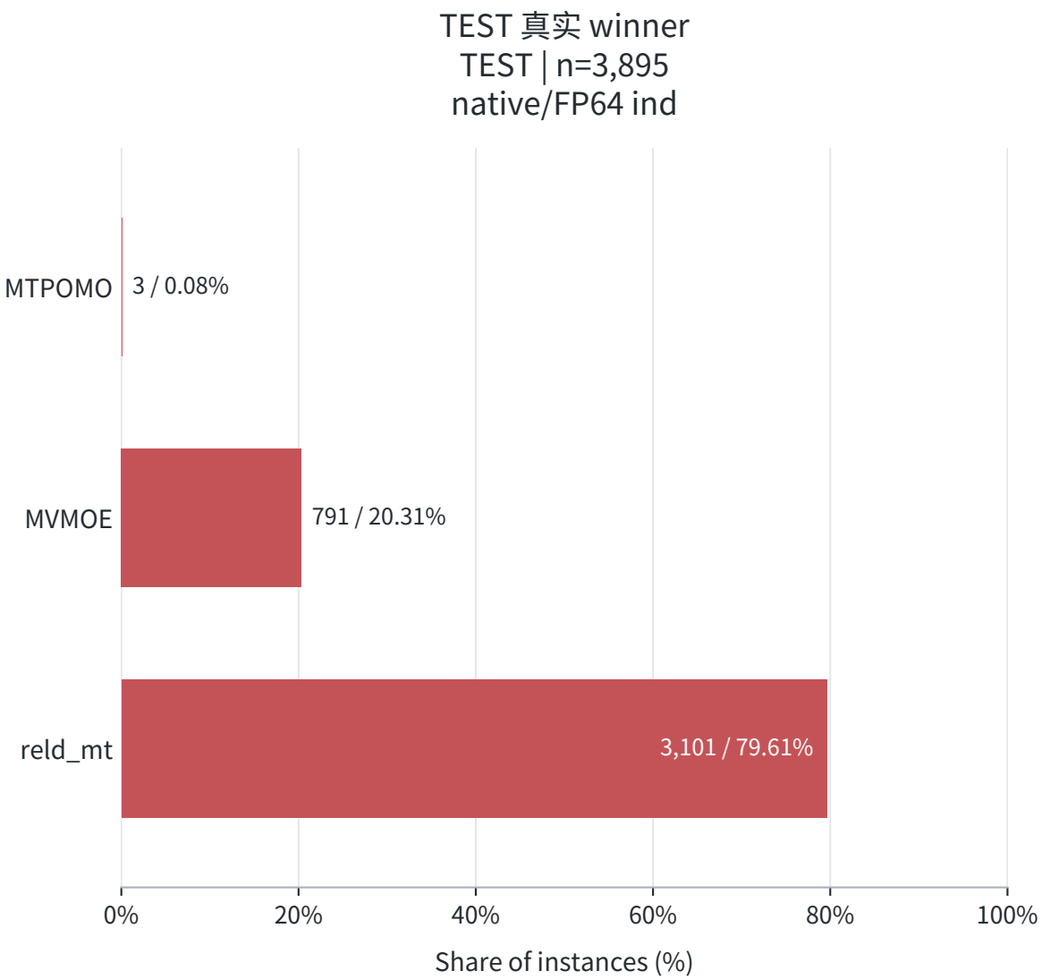

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R81B_cross_instance_rank_seed2 | OVRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 34776 / SHA256 daacf8b70210c3dd

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

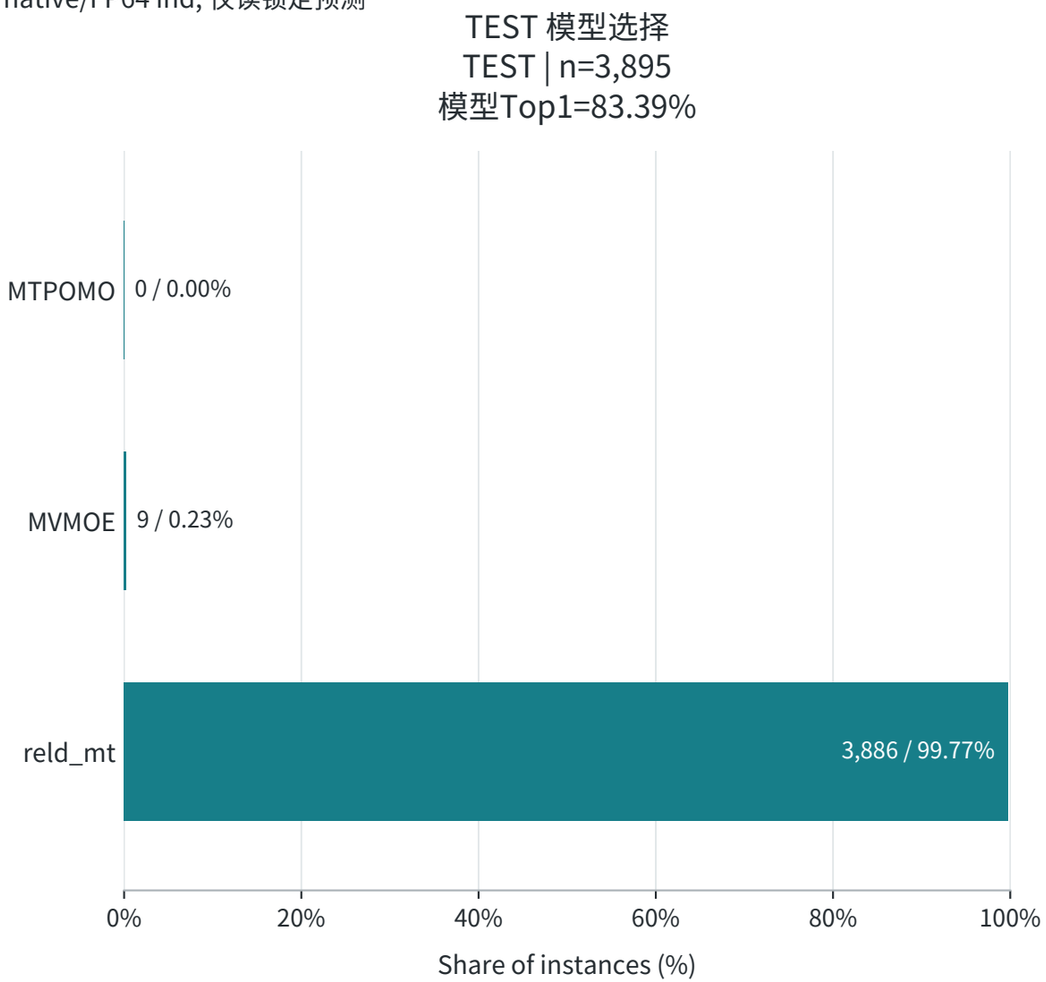

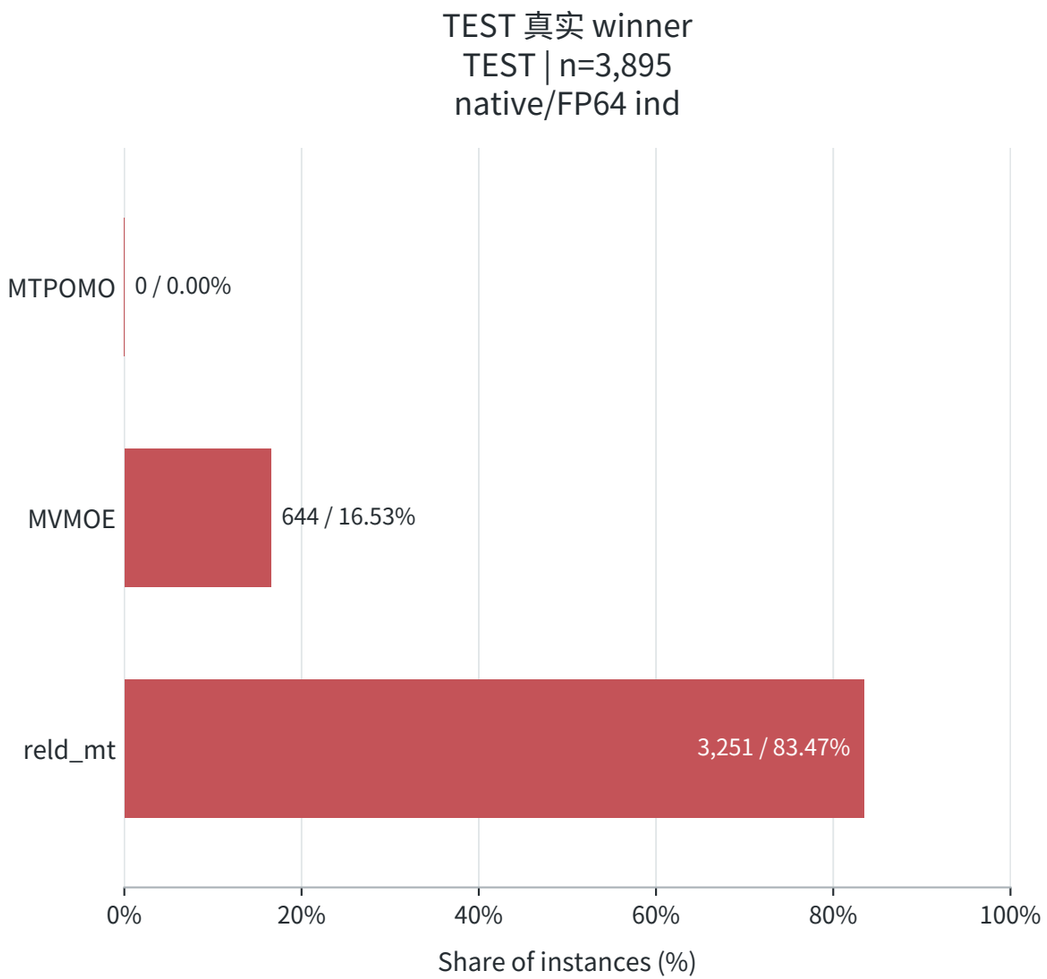

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R81B_cross_instance_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.