R82B_context_matched_rank_seed2 | Locked Full-Model Statistics

Requested_R80B_context_matched_residual_ranking; native FP64 labels; no TEST/LIB checkpoint or inference reselection.

Seed2 scratch | update 32292 | SHA256 139e5c1735e51fd985c73204807d63b773f81af0a0b37b82bd9026a96b112566

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.9314	66.1147	11.395611	11.406477	11.350910	-0.1915	+0.3917	0.4026
TEST ALL	71.2780	66.1746	11.345856	11.356886	11.302177	-0.1957	+0.3839	0.3933

Dataset	n	NSS Top1 (%)	R82B Top1 (%)	NSS mean_cost	R82B mean_cost
TSP TEST	3895	44.3389	45.1091	7.63439063	7.63476869
CVRP TEST	3895	46.2131	47.3684	17.89581829	17.90570463
TSPLIB	49	20.4082	16.3265	8.21790707	8.22063385
CVRPLIB	100	70.0000	60.0000	67.10111172	67.37801620

Historical R77B reference only. Matched R82A not run; no strict A/B causal conclusion.

Frozen R77B VAL zero support: 2648; near-zero <=0.1%; diagnostics only.

SBS identities: FULL TRAIN fit. Oracle: per-instance legal-pool minimum. ALL: equal-problem means.

vs_SBS/vs_Oracle are ratios of means; actual regret is the mean per-instance relative regret.

Earlier TEST results informed multi-round R&D. This is not an untouched blind evaluation.

Missing NSS remains missing; no retraining, no per-dataset Rxx or checkpoint mixing.

R82B_context_matched_rank_seed2 | VAL: ALL + 18 Problems

selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
ALL	70.9314	66.1147	11.395611	11.406477	11.350910	-0.1915	+0.3917	0.4026
TSP	45.3659	32.5289	7.674543	7.691719	7.642213	-0.2233	+0.4230	0.4118
CVRP	46.7779	18.6393	18.129877	18.235344	18.033230	-0.5784	+0.5359	0.7104
ATSP	77.3813	47.3427	1.639630	1.678143	1.633464	-2.2950	+0.3775	0.3751
OVRP	41.2580	35.6611	7.455721	7.463758	7.410647	-0.1077	+0.6082	0.6226
VRPB	80.9243	80.6932	9.348240	9.350167	9.314024	-0.0206	+0.3674	0.3744
VRPL	37.4326	32.8113	12.423586	12.430138	12.375775	-0.0527	+0.3863	0.3948
VRPTW	80.1284	80.0513	18.844093	18.844840	18.791002	-0.0040	+0.2825	0.3015
OVRPTW	83.6457	83.6457	10.168231	10.168648	10.142136	-0.0041	+0.2573	0.2535
OVRPB	88.2927	88.3184	6.359932	6.359253	6.343047	+0.0107	+0.2662	0.2761
OVRPL	40.6932	36.0976	7.430057	7.437230	7.382246	-0.0964	+0.6476	0.6655
VRPBL	79.0501	78.6393	9.376784	9.379846	9.336336	-0.0326	+0.4332	0.4357
VRPBTW	78.6393	78.6136	19.901459	19.904962	19.806866	-0.0176	+0.4776	0.4593
VRPLTW	78.5366	78.4596	18.788084	18.789198	18.731398	-0.0059	+0.3026	0.3210
OVRPBL	89.3196	89.2169	6.370570	6.371327	6.354706	-0.0119	+0.2496	0.2594
OVRPBTW	83.6970	83.6200	10.665885	10.666245	10.629124	-0.0034	+0.3459	0.3198
OVRPLTW	83.0809	83.0809	10.158283	10.158206	10.129911	+0.0008	+0.2801	0.2869
VRPBLTW	79.3838	79.3582	19.780800	19.782852	19.694102	-0.0104	+0.4402	0.4333
OVRPBLTW	83.1579	83.2863	10.605221	10.604709	10.566155	+0.0048	+0.3697	0.3467

ALL uses equal problem weights; raw cross-problem mean costs are descriptive only.

R82B_context_matched_rank_seed2 | TEST: ALL + 18 Problems

selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
ALL	71.2780	66.1746	11.345856	11.356886	11.302177	-0.1957	+0.3839	0.3933
TSP	45.1091	34.0693	7.634769	7.648986	7.602818	-0.1859	+0.4202	0.4096
CVRP	47.3684	18.1001	17.905705	18.013673	17.810107	-0.5994	+0.5368	0.7021
ATSP	77.0475	47.2914	1.634279	1.673244	1.628462	-2.3287	+0.3572	0.3582
OVRP	41.1040	33.2221	7.444444	7.455280	7.399322	-0.1454	+0.6098	0.6207
VRPB	80.3338	80.1027	9.348332	9.350709	9.313495	-0.0254	+0.3741	0.3788
VRPL	37.5096	32.0154	12.355621	12.362834	12.307678	-0.0583	+0.3895	0.4000
VRPTW	81.0783	80.8472	18.678455	18.679226	18.626242	-0.0041	+0.2803	0.2915
OVRPTW	84.0822	84.0308	10.098261	10.098565	10.073411	-0.0030	+0.2467	0.2362
OVRPB	88.0616	88.0873	6.371315	6.371519	6.352881	-0.0032	+0.2902	0.2973
OVRPL	41.8485	34.7368	7.465280	7.473924	7.419485	-0.1157	+0.6172	0.6292
VRPBL	79.8716	79.6662	9.390500	9.392364	9.351966	-0.0198	+0.4120	0.4157
VRPBTW	79.0244	78.7933	19.657134	19.660290	19.572604	-0.0161	+0.4319	0.4309
VRPLTW	79.6919	79.6149	18.767834	18.766509	18.711715	+0.0071	+0.2999	0.3202
OVRPBL	89.5764	89.5507	6.372763	6.372881	6.356685	-0.0019	+0.2529	0.2633
OVRPBTW	84.9294	84.8267	10.656279	10.656749	10.622470	-0.0044	+0.3183	0.2900
OVRPLTW	83.2349	83.1065	10.083532	10.084034	10.056522	-0.0050	+0.2686	0.2700
VRPBLTW	79.6406	79.6149	19.711638	19.713491	19.619916	-0.0094	+0.4675	0.4520
OVRPBLTW	83.4917	83.4660	10.649268	10.649666	10.613413	-0.0037	+0.3378	0.3138

ALL uses equal problem weights; raw cross-problem mean costs are descriptive only.

R82B_context_matched_rank_seed2 | Same Checkpoint On Native LIB

R82 checkpoint factory restores all TRAIN geometry/ID/feature buffers. No historical LIB-score substitution.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB n=49	16.3265	10.2041	8.220634	8.240435	8.142167	-0.2403	+0.9637	0.9560
CVRPLIB n=100	60.0000	45.0000	67.378016	67.245364	66.945093	+0.1973	+0.6467	0.6883

eval mode, original R77 maximin scores, stable ascending-global-solver-ID tie break

Primary: native/FP64 ind. FP32 argmin is compatibility-only.

Candidate names/IDs and instance identities are checked before reusing predictions.

Continuous-regret concordance compares only rows in the same TRAIN-defined context.

TPR@FPR<=1%,5% uses whole tied-score groups, without interpolation or threshold fitting.

Utility diagnostics do not change maximin inference. Zero/near-zero sets never influence training.


Historical R77B reference only. Matched R82A not run; no strict A/B causal conclusion.


R82B_context_matched_rank_seed2 | TSP | 方法分布


同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/TSPLIB (original native LIB / historical NSS comparison)

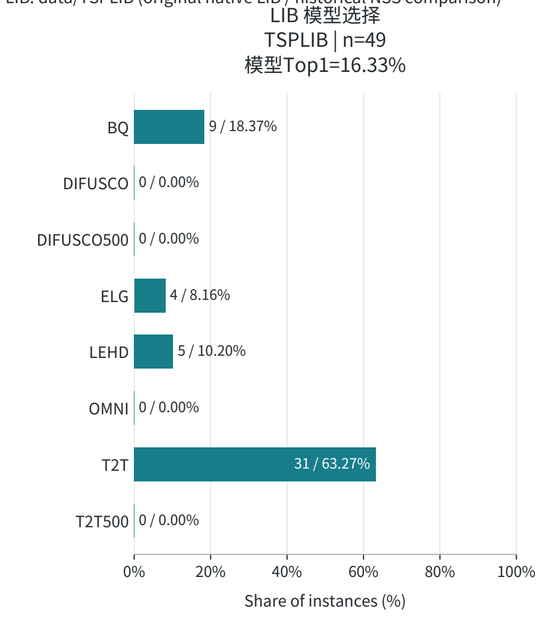

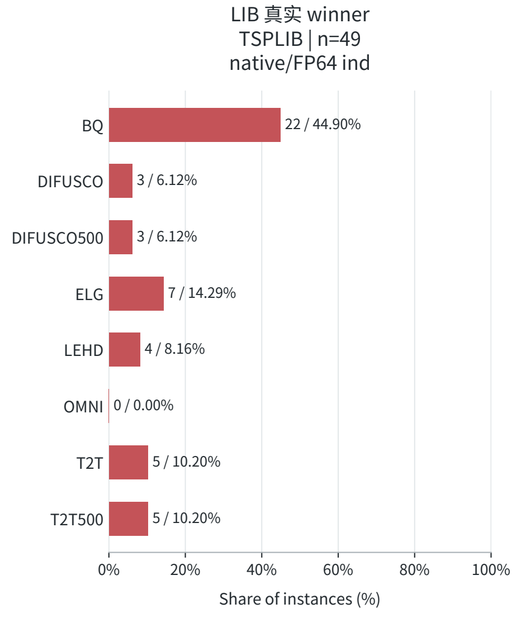

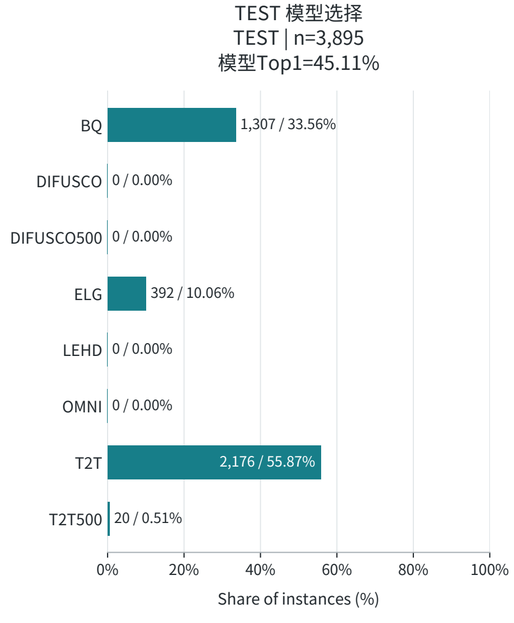

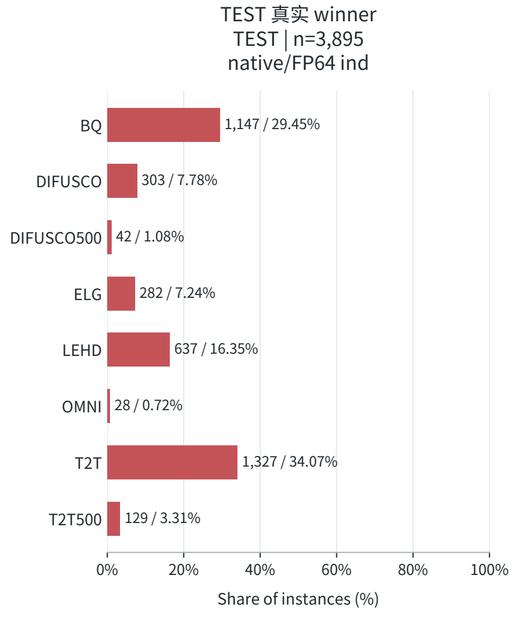

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | CVRP | 方法分布


同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9


新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/CVRPLIB (original native LIB / historical NSS comparison)

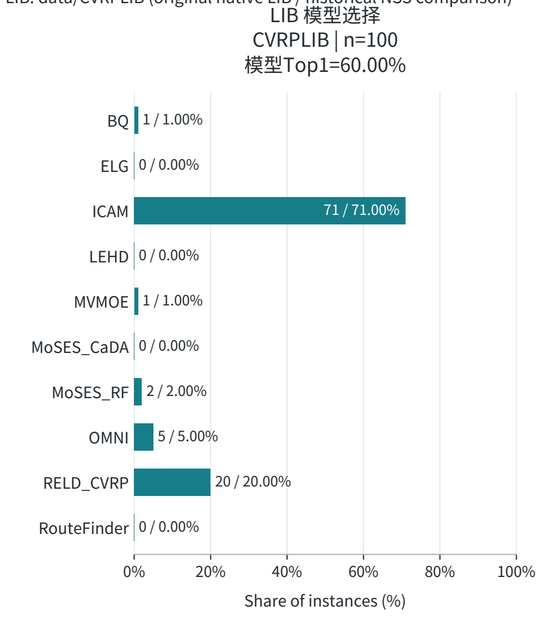

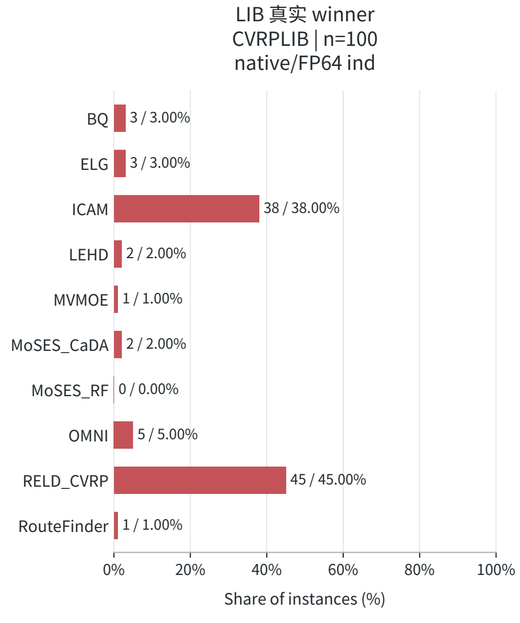

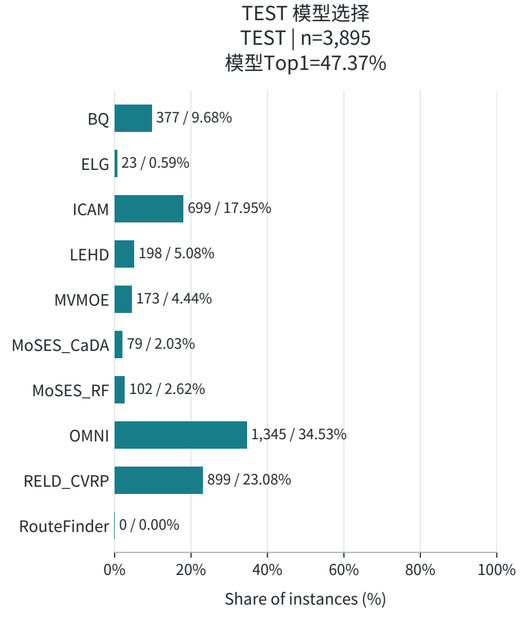

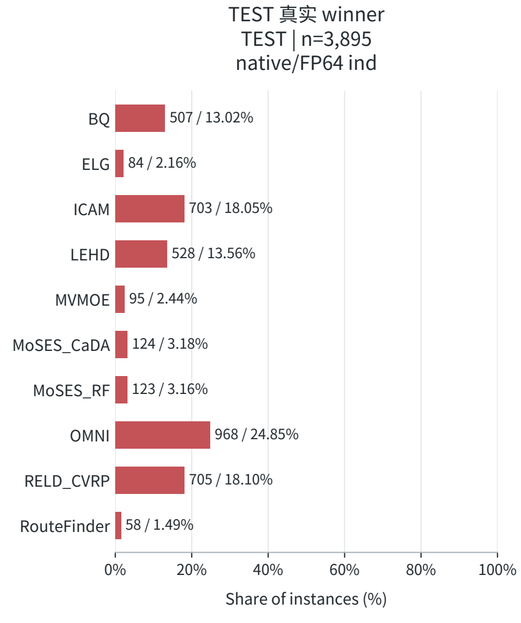

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | ATSP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

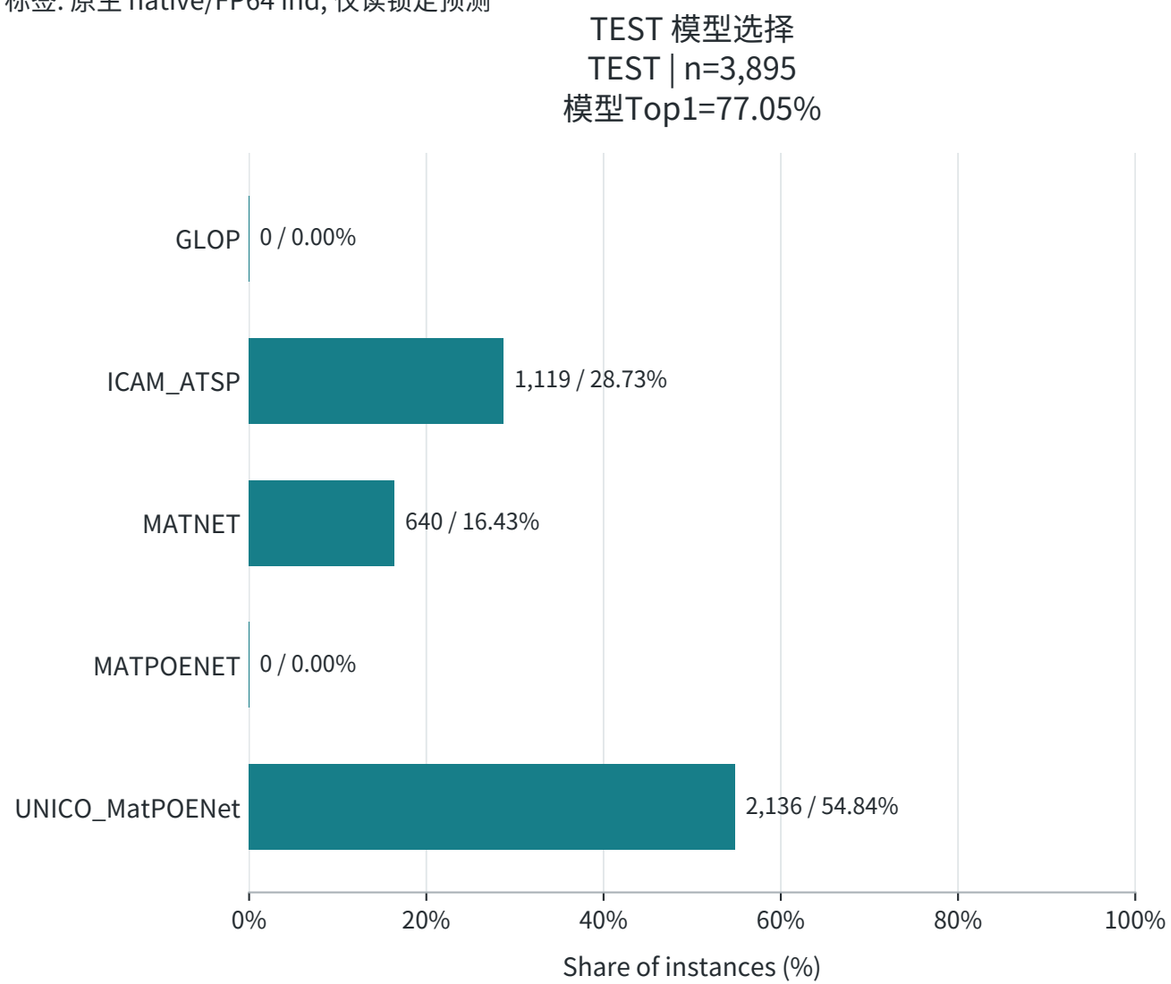

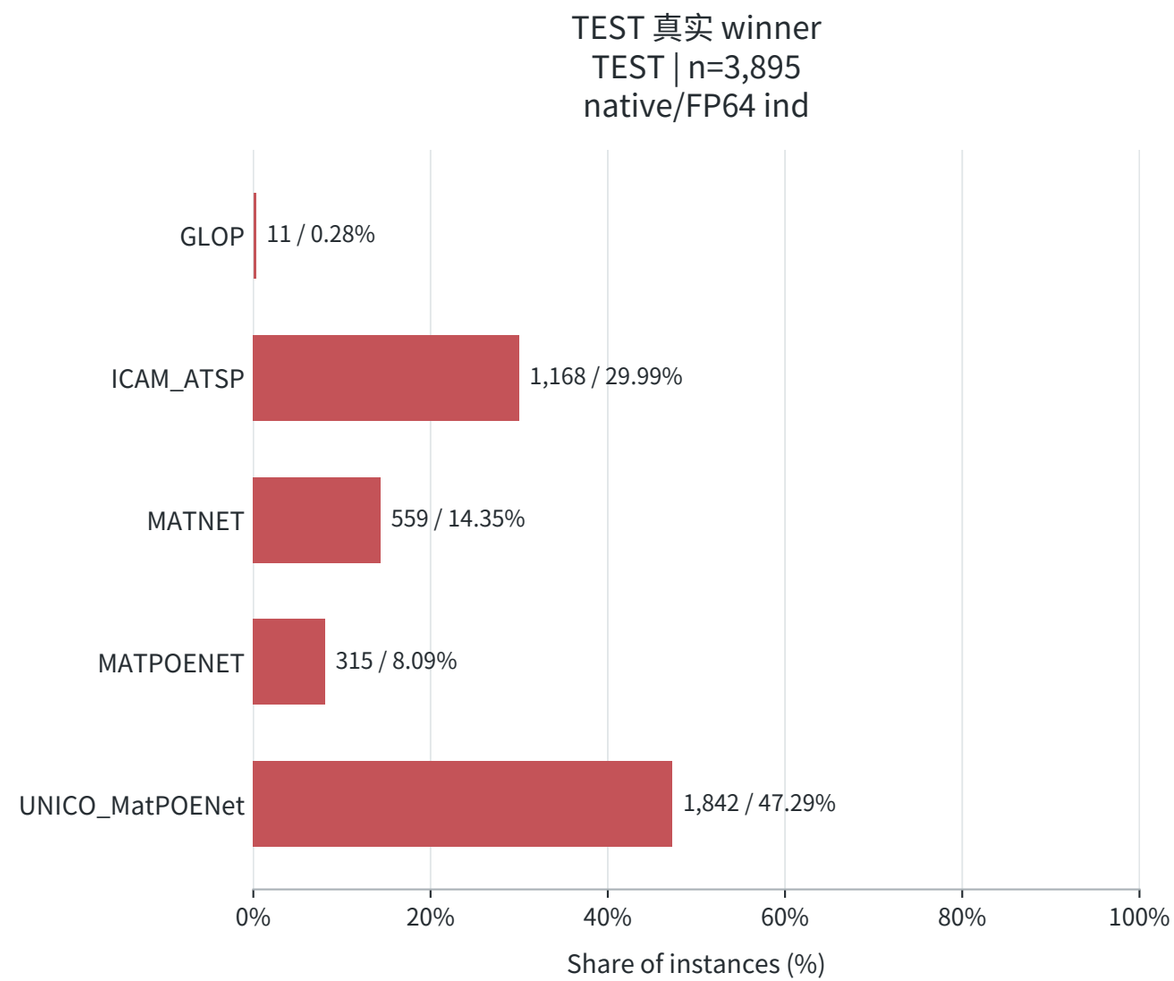

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

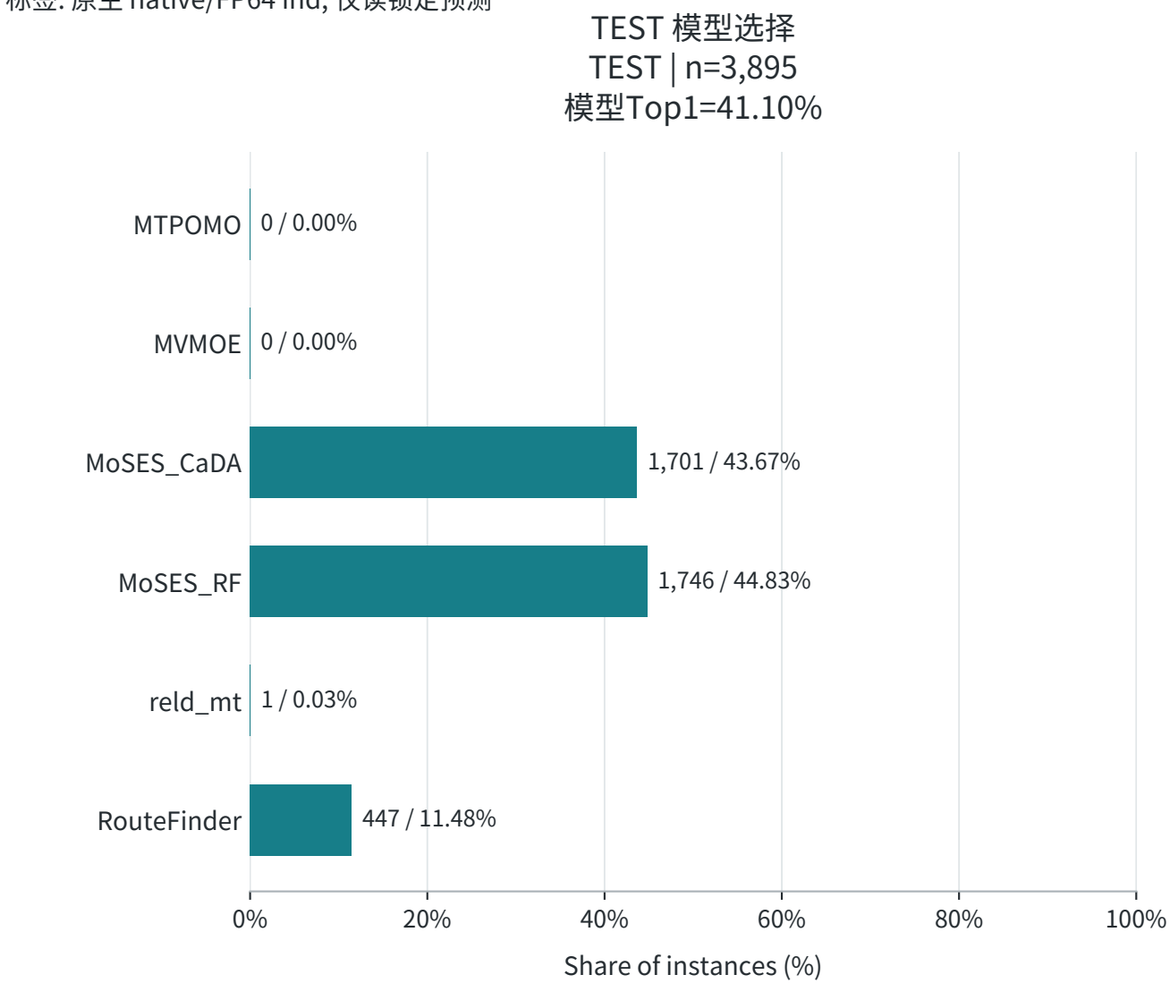

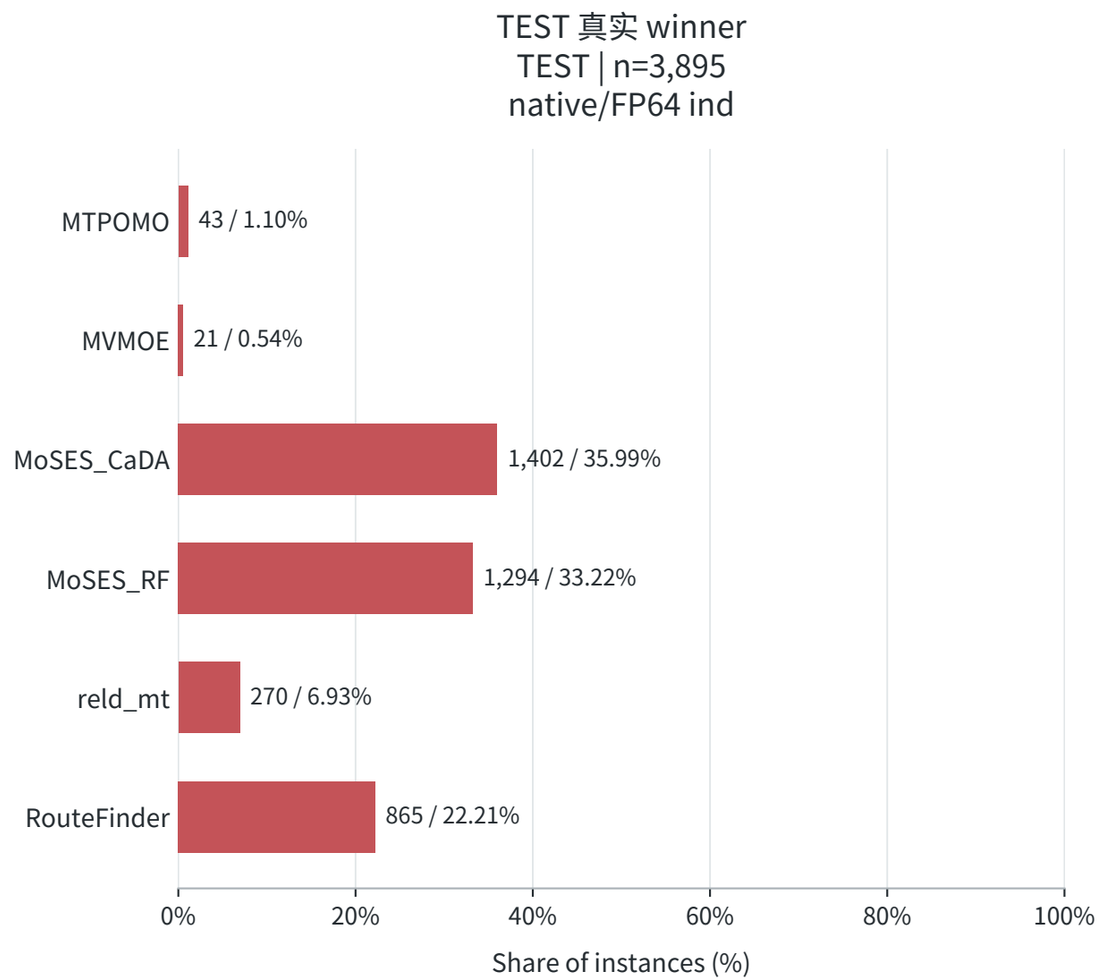

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPB | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

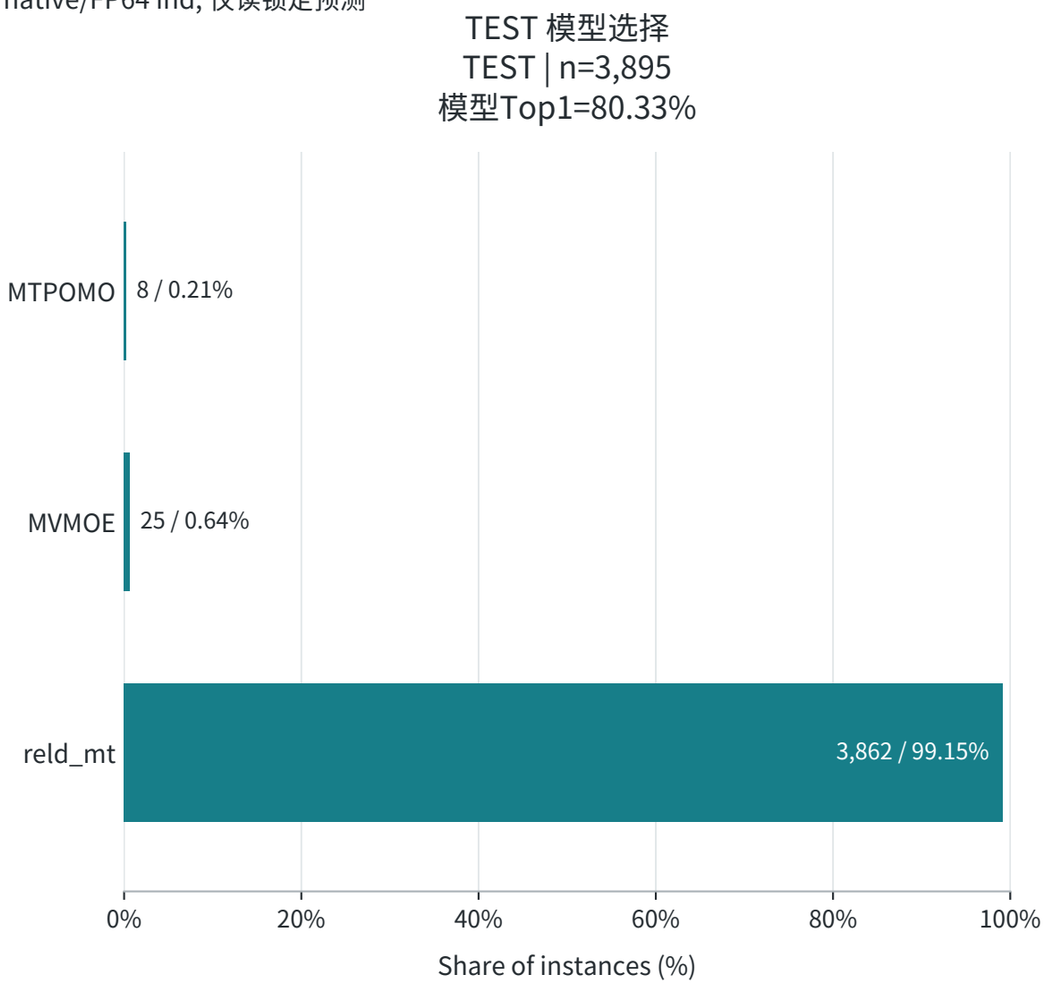

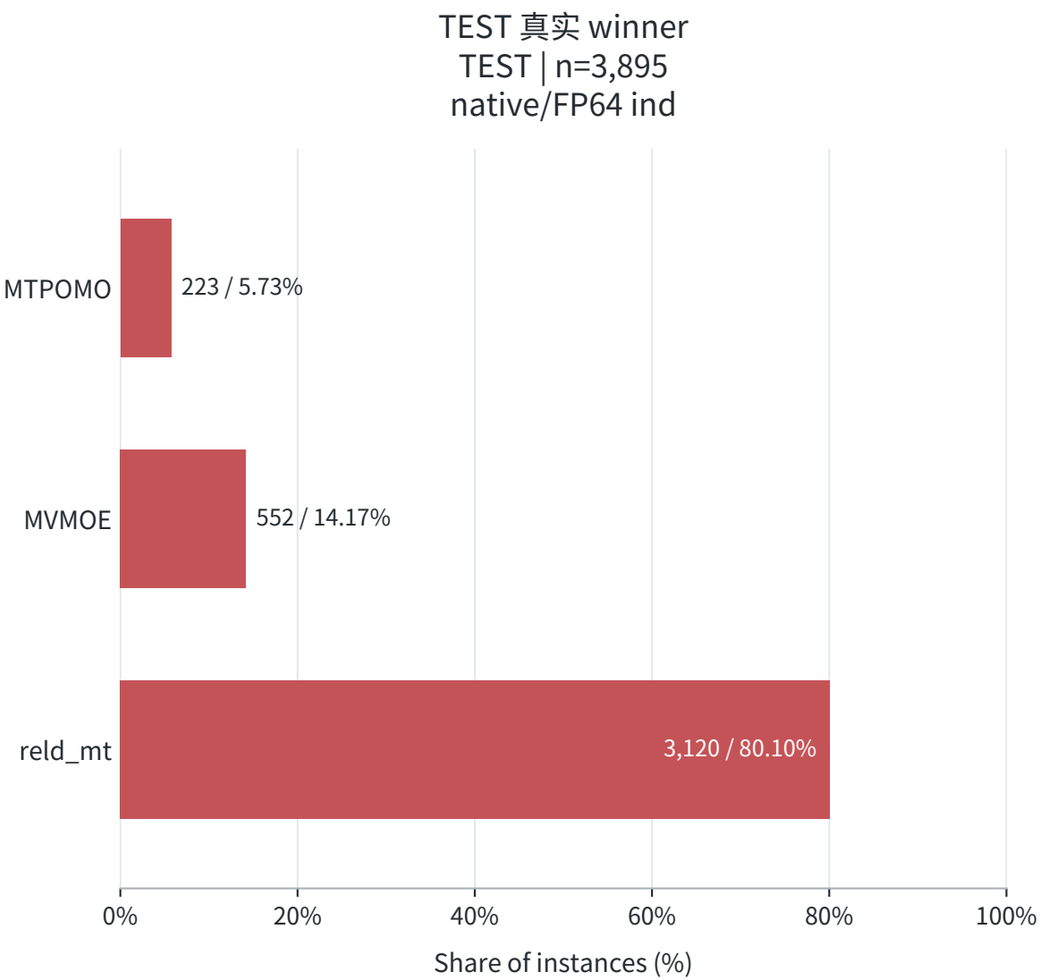

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

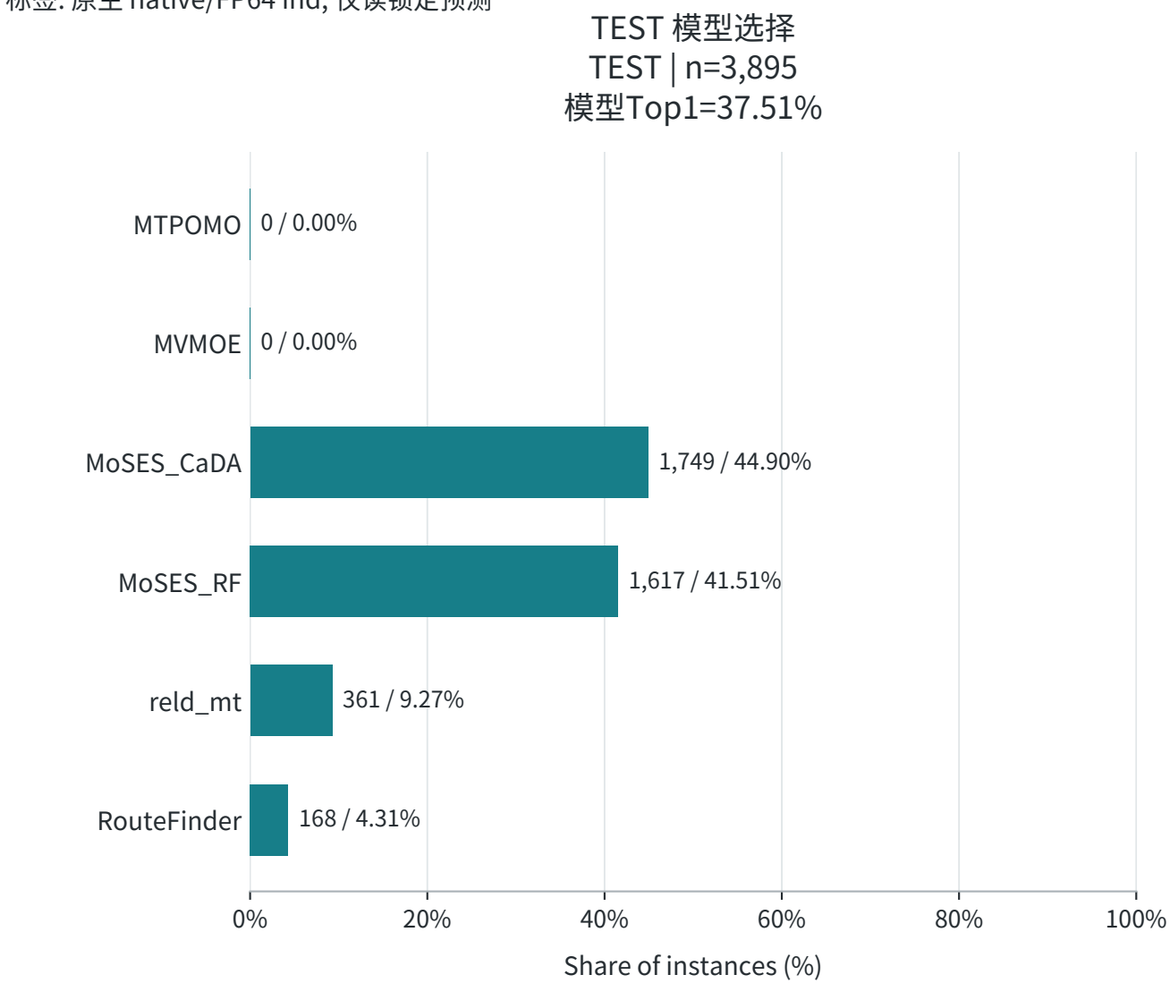

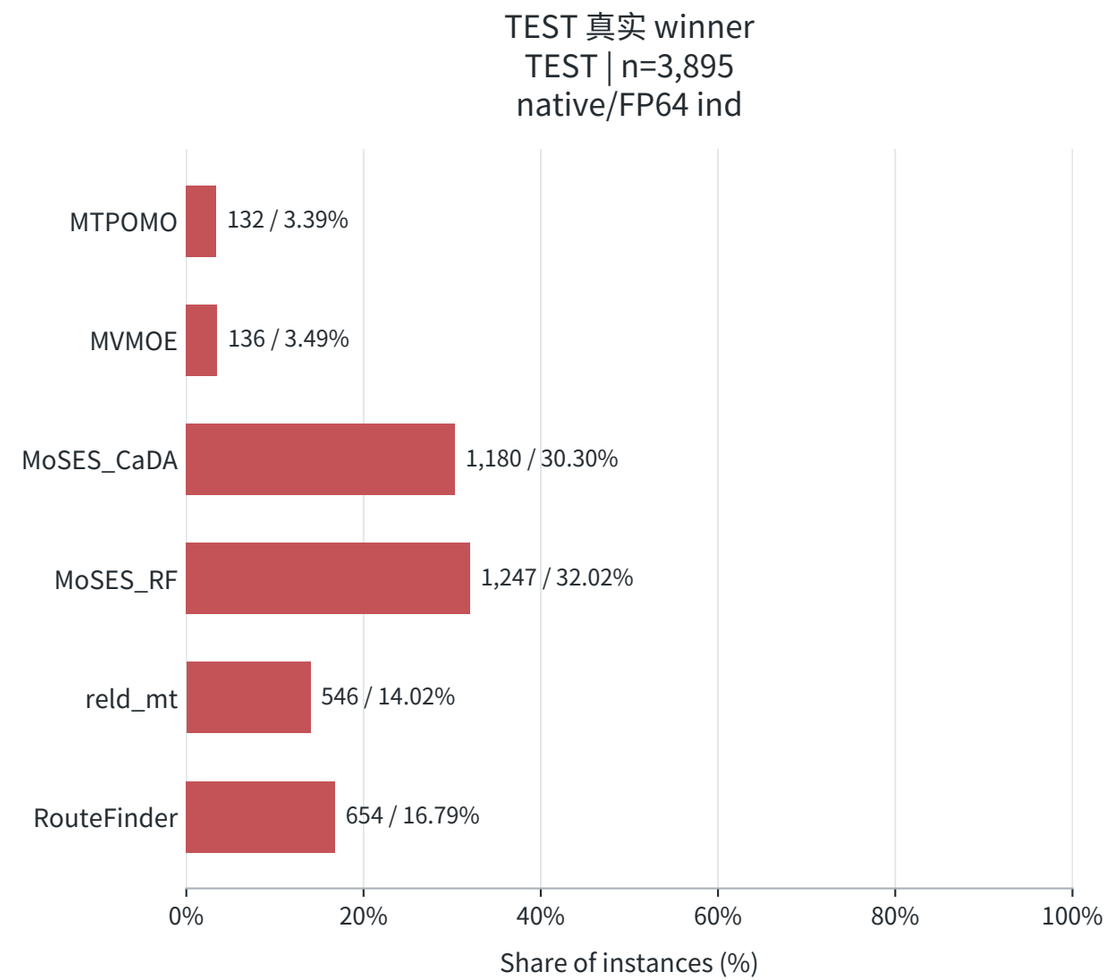

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

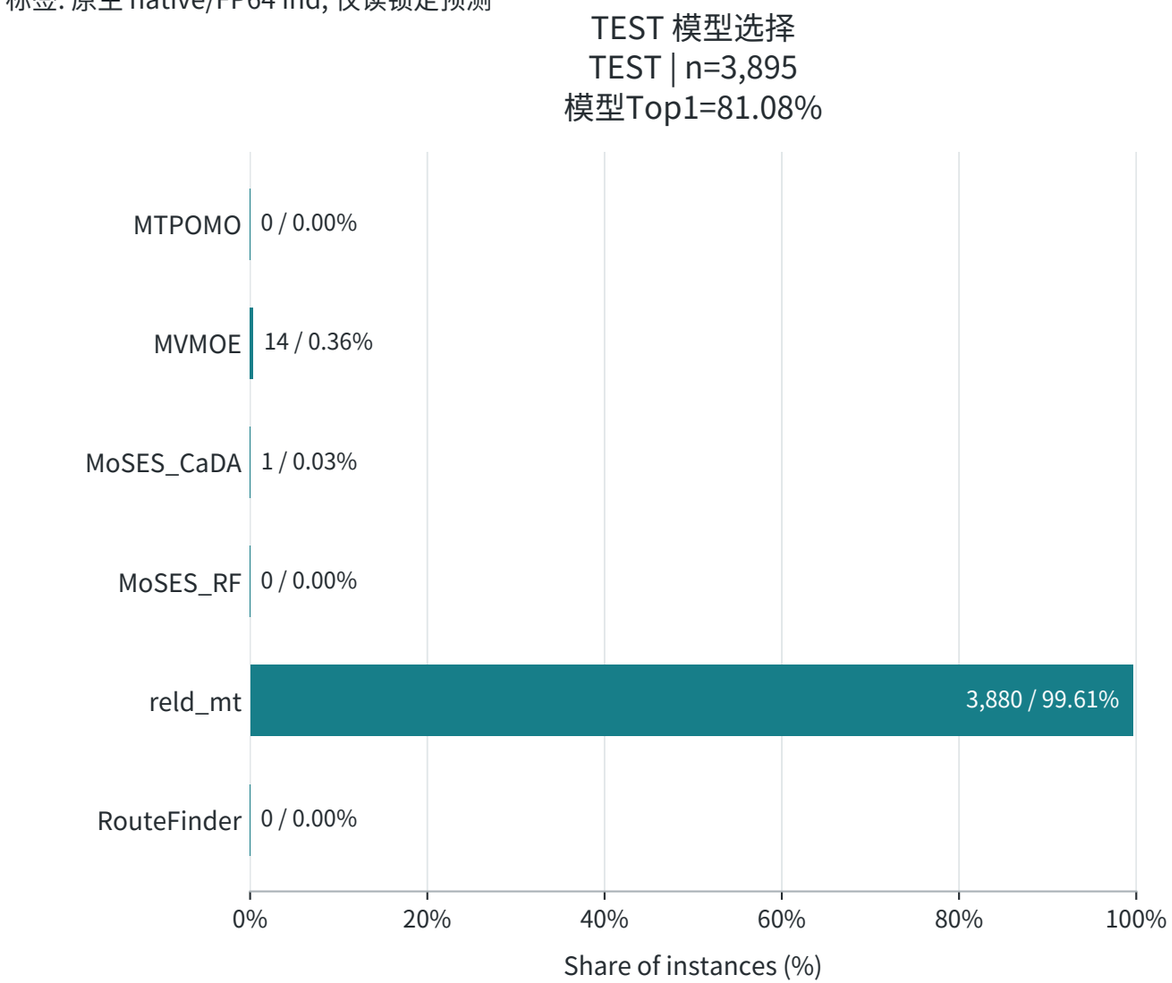

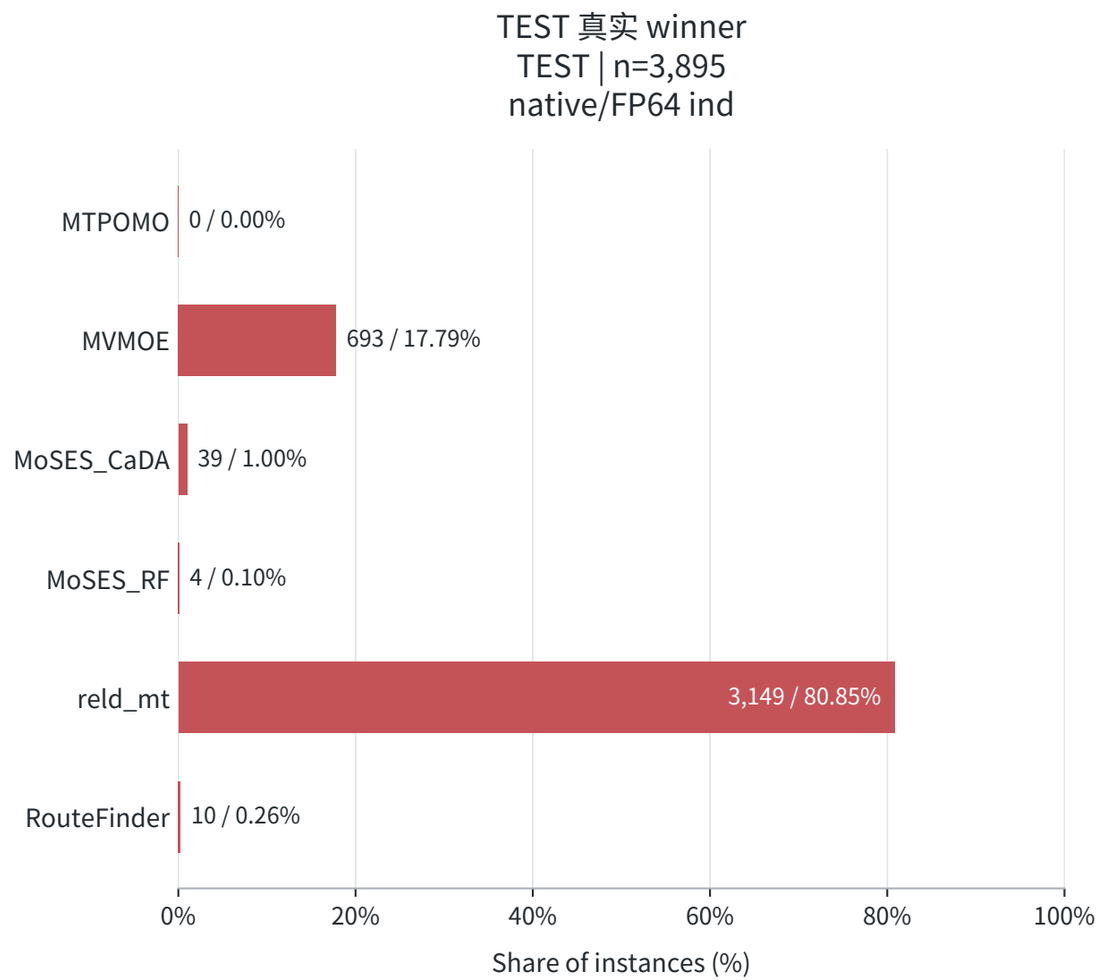

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

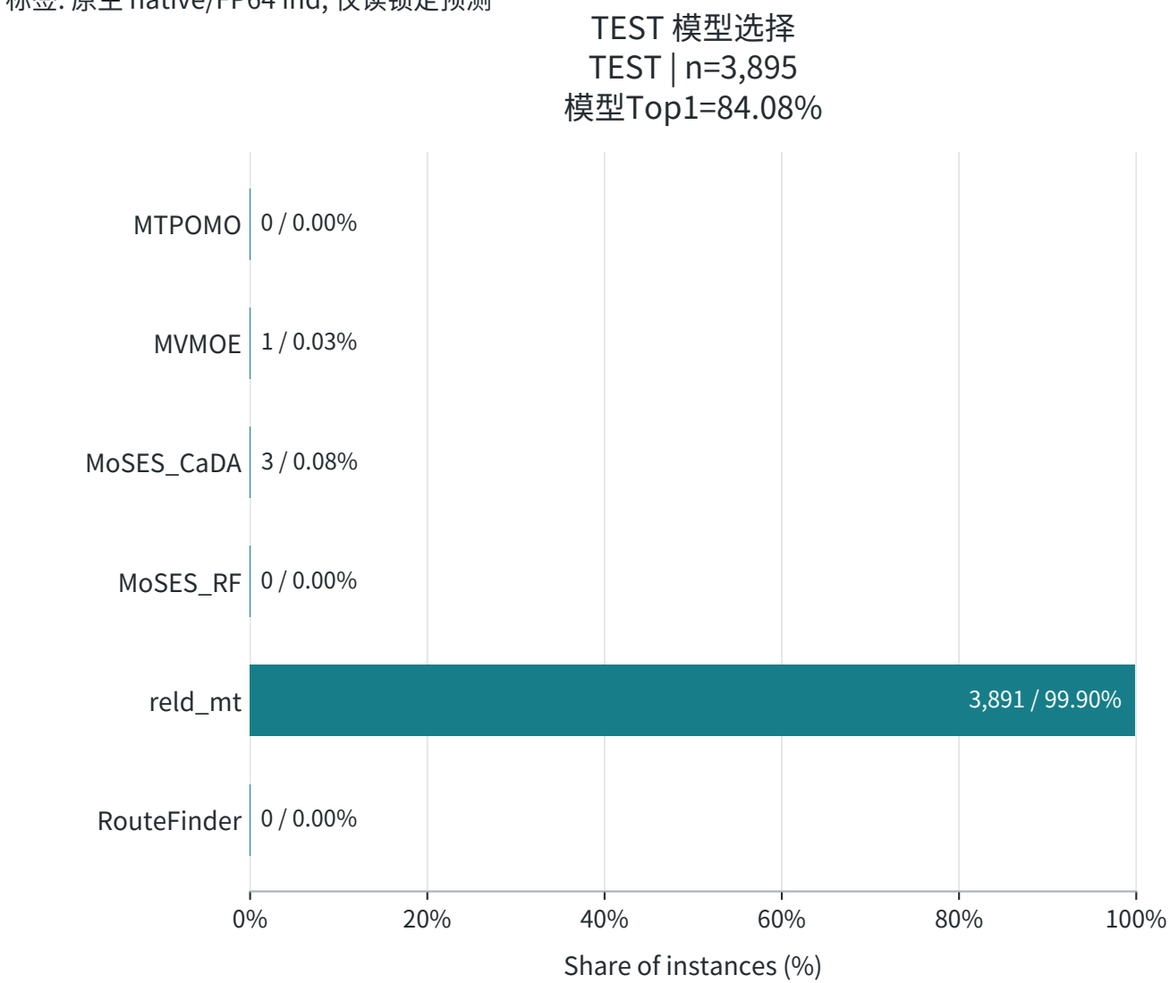

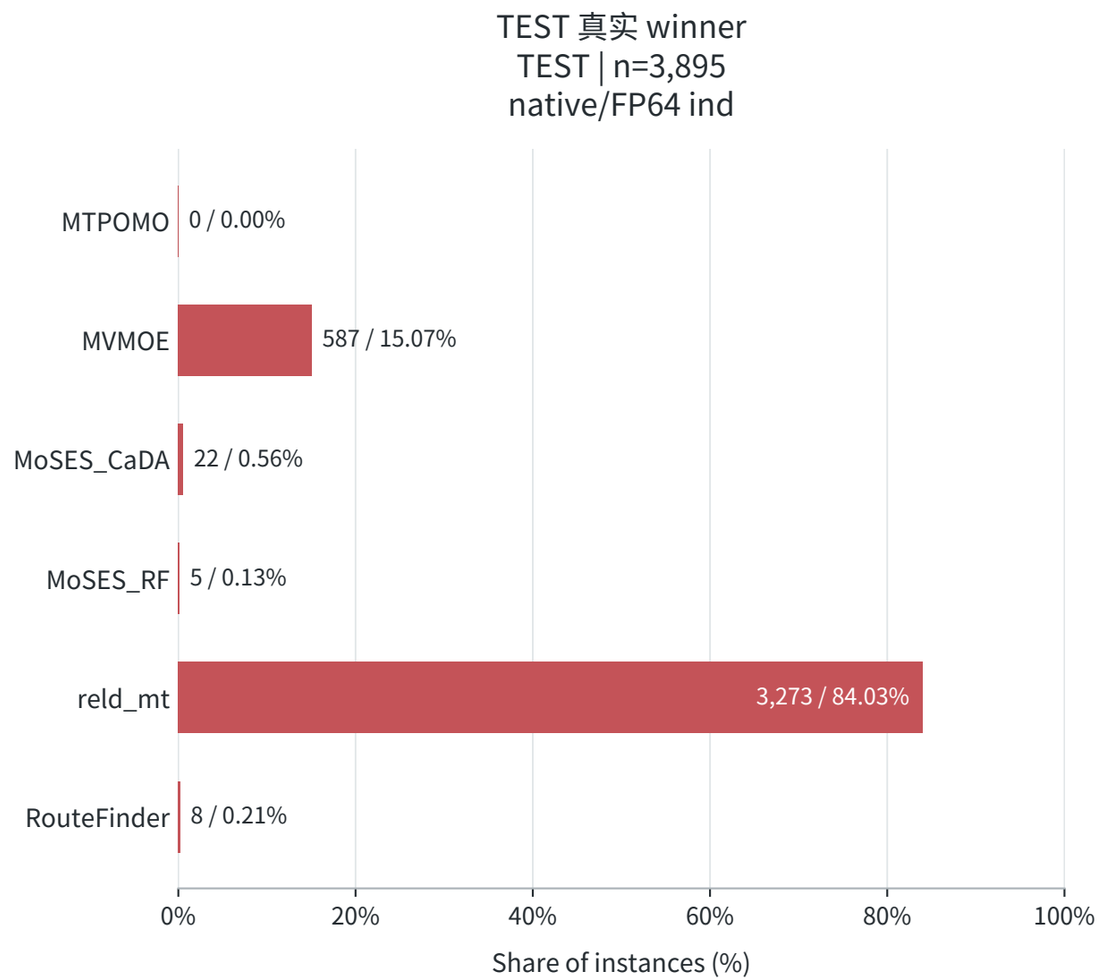

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

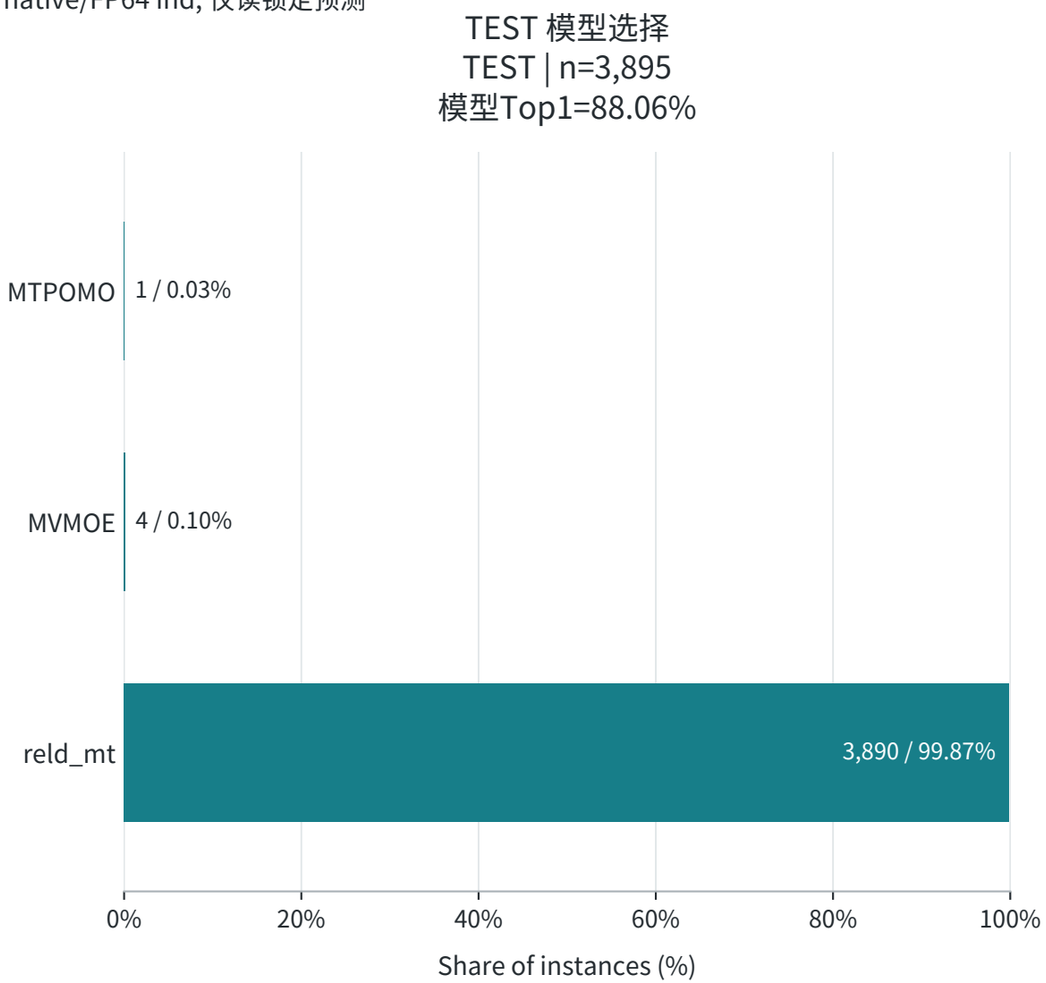

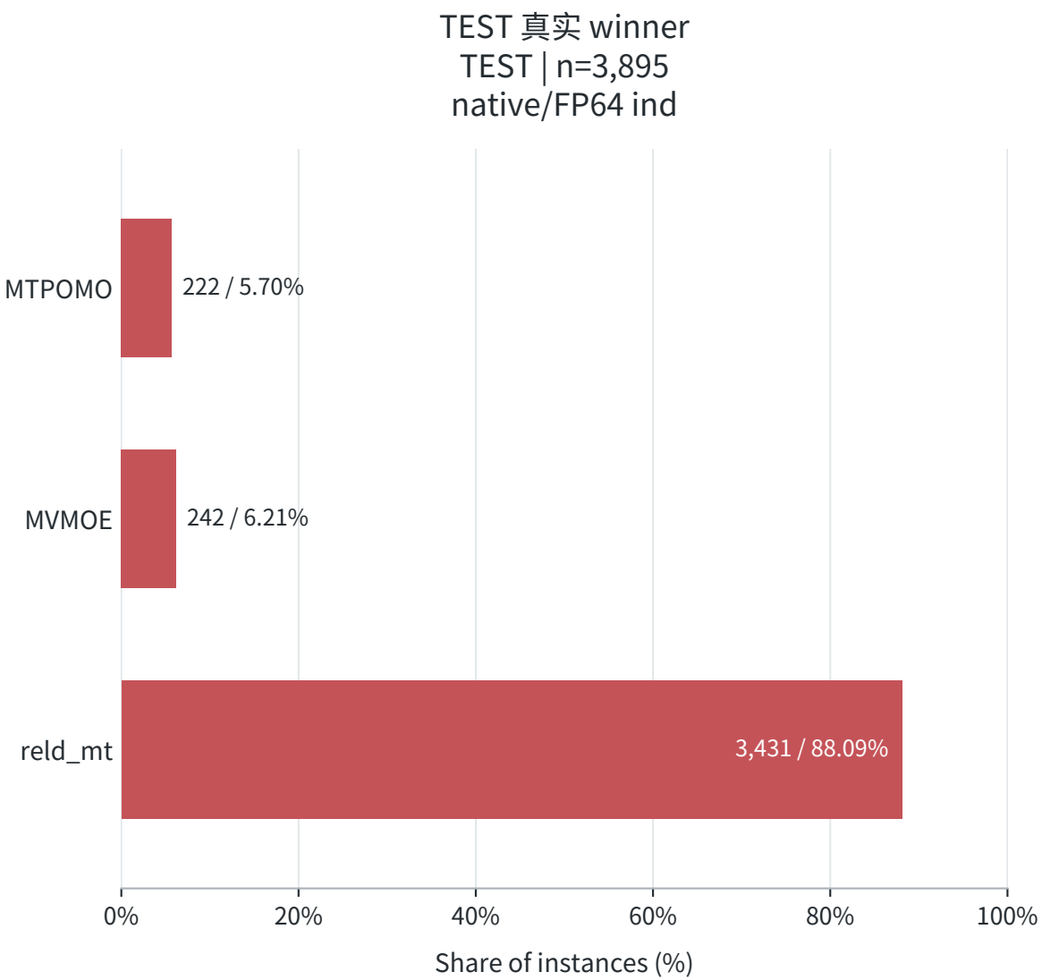

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

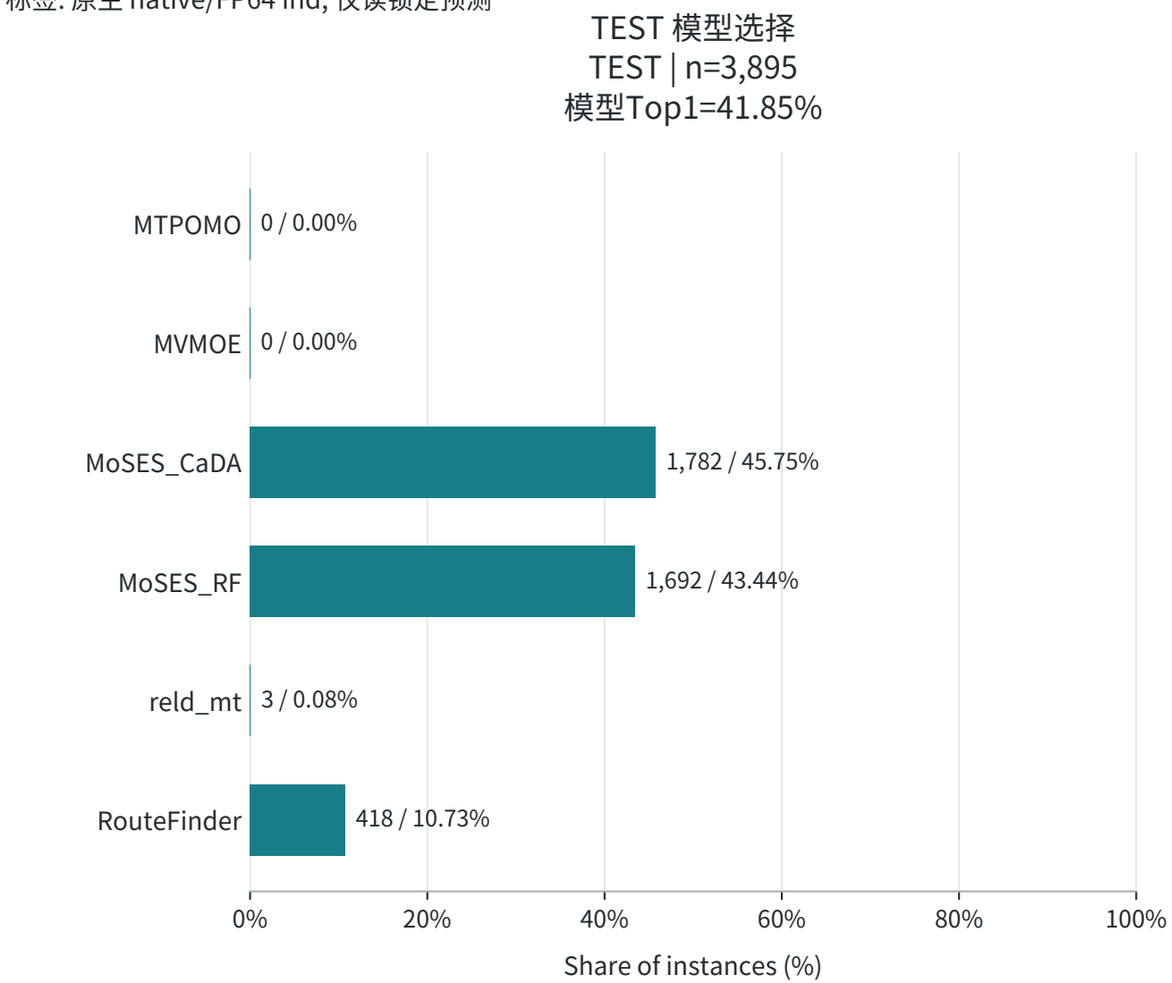

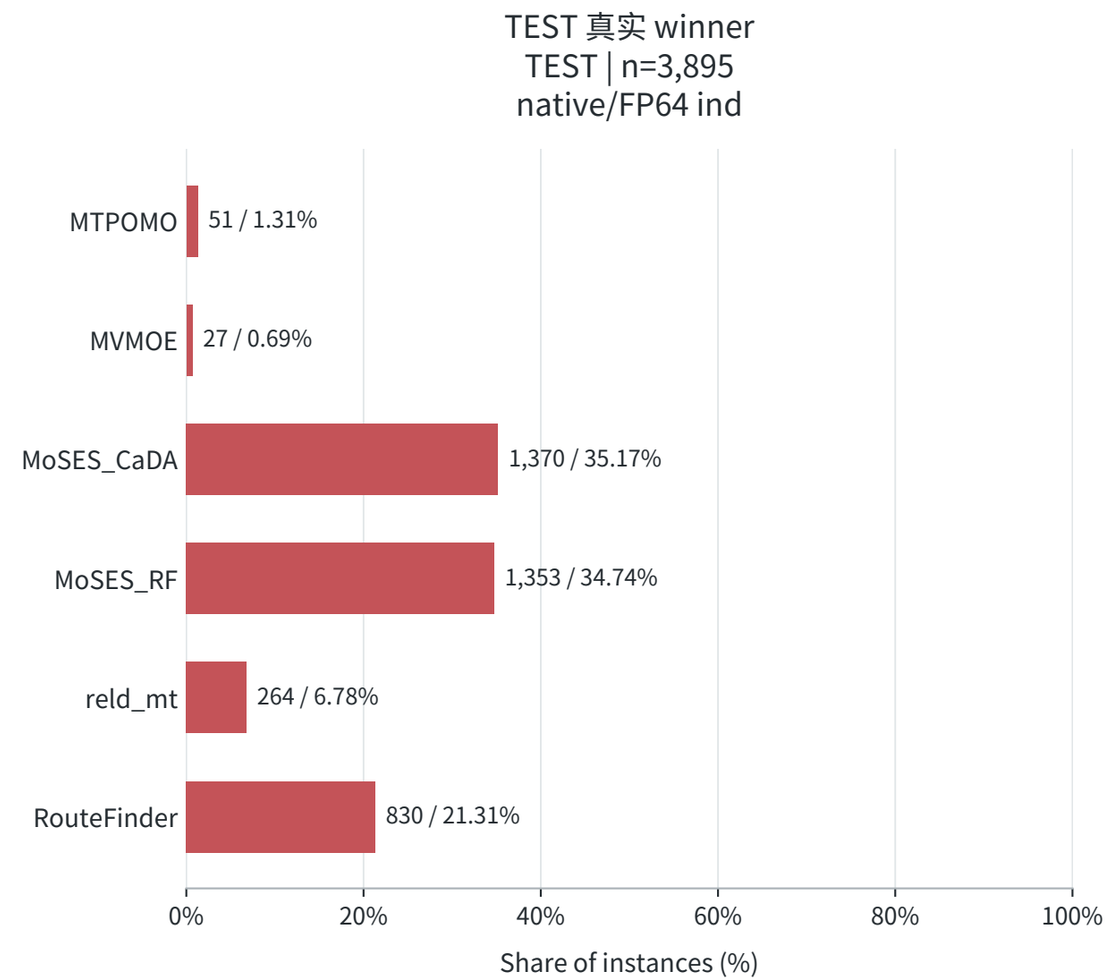

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

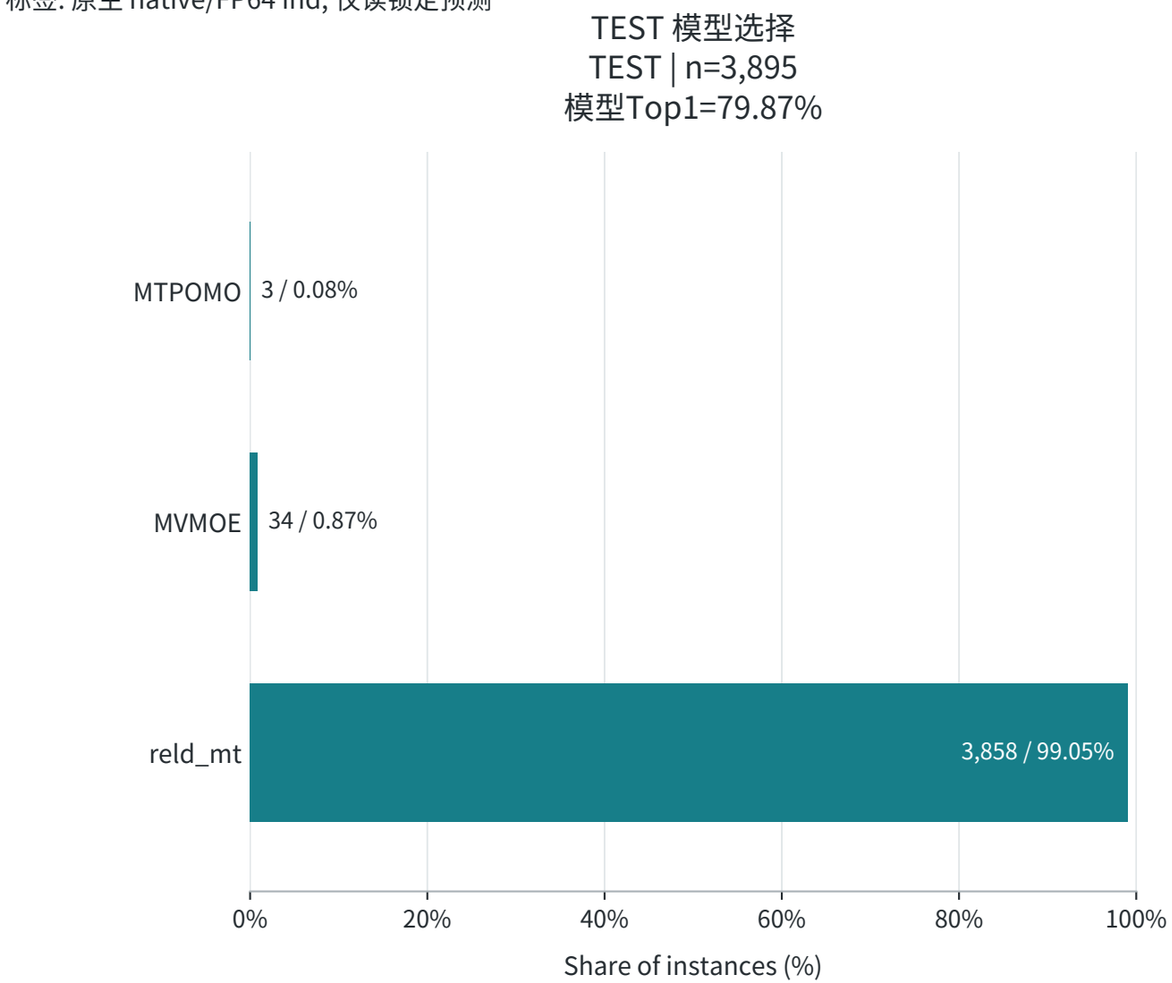

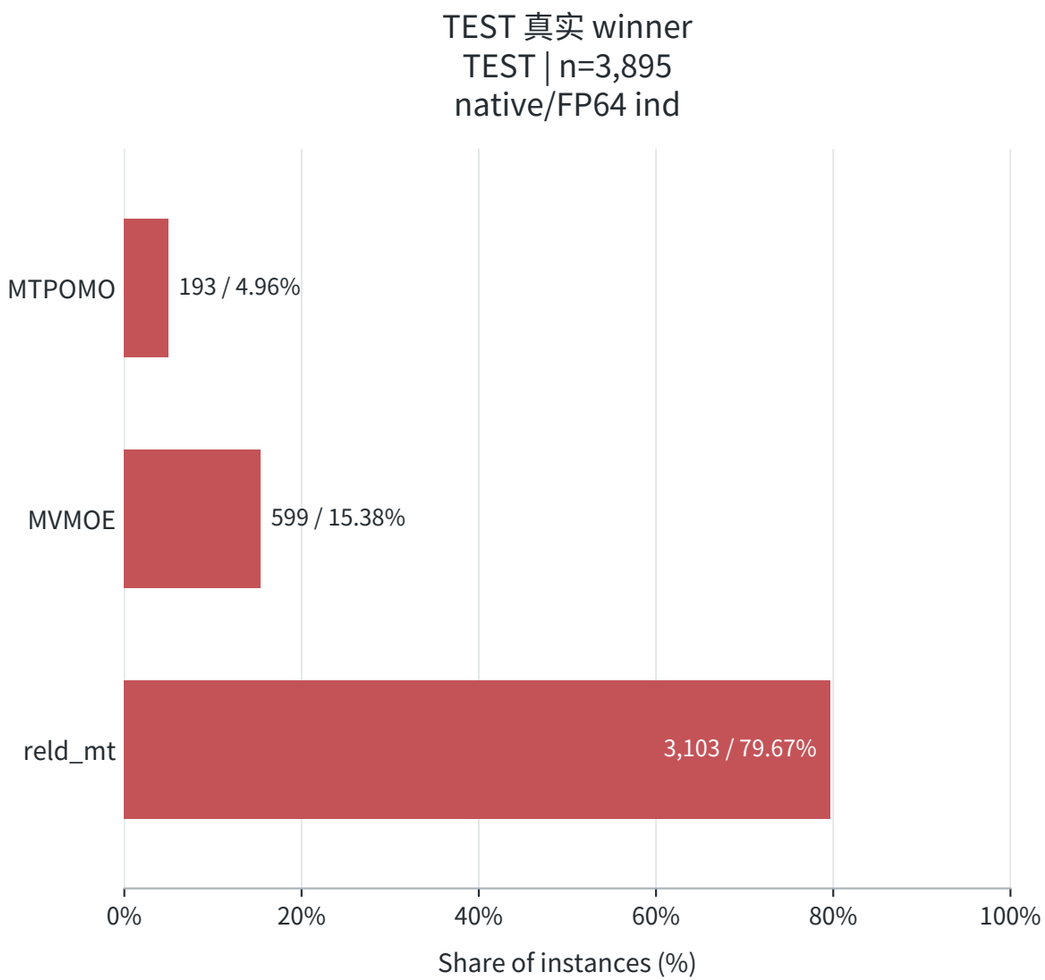

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

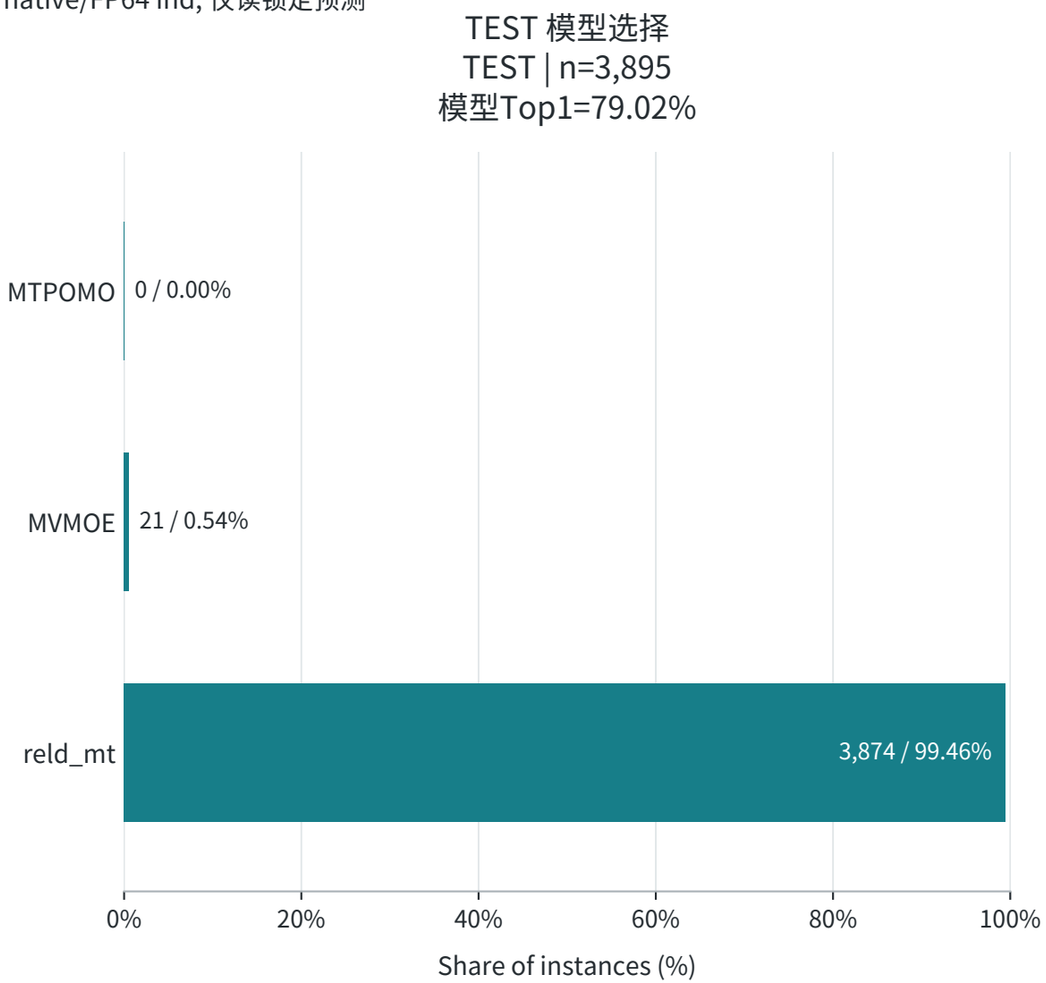

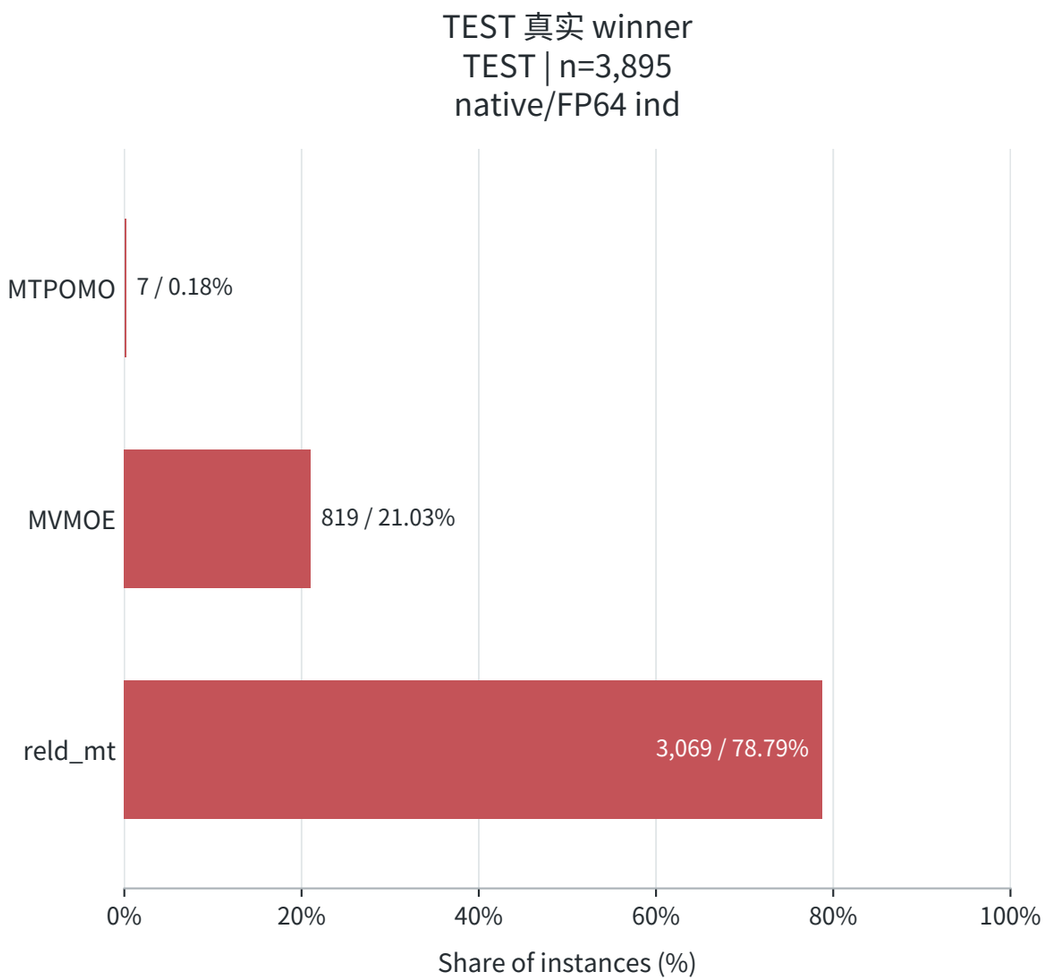

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

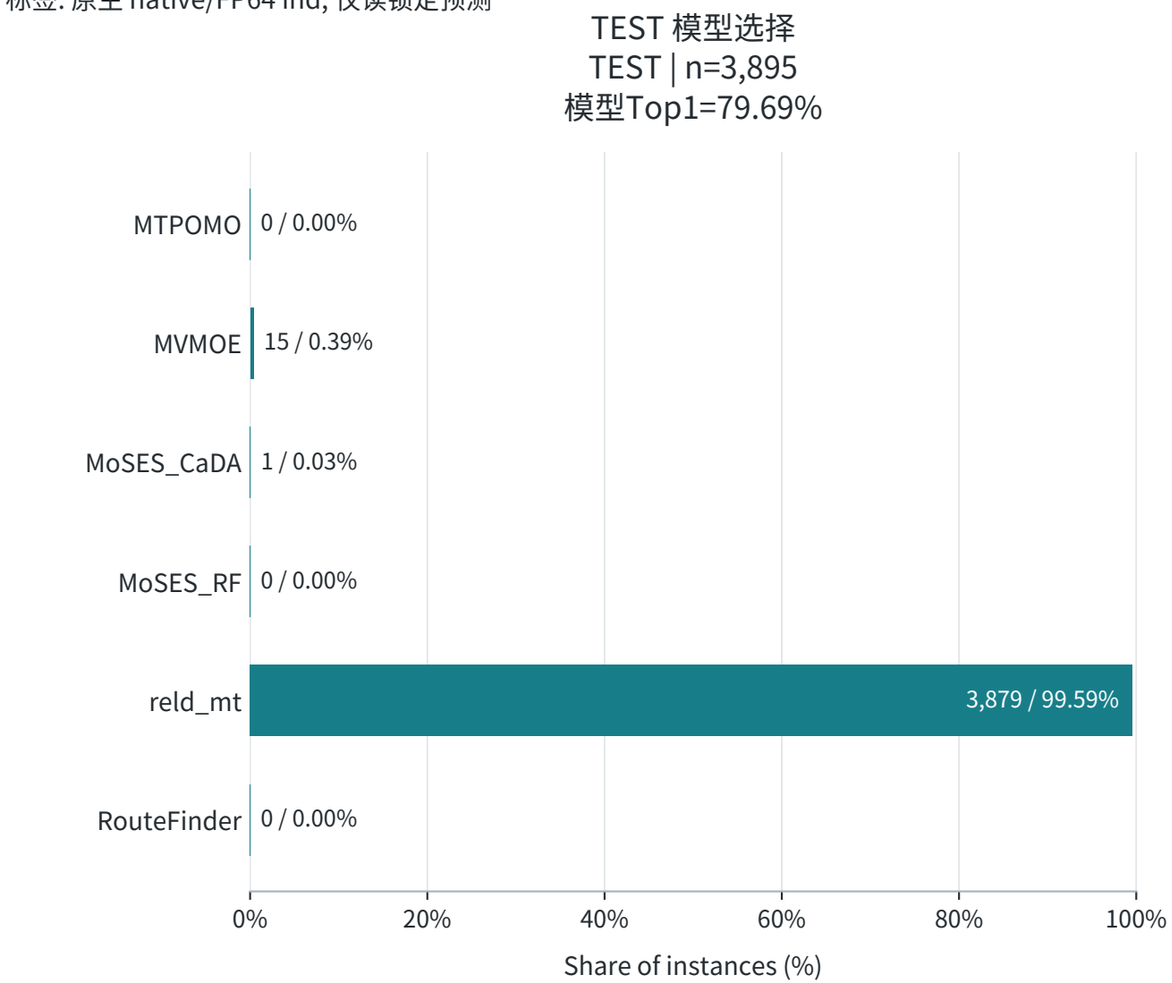

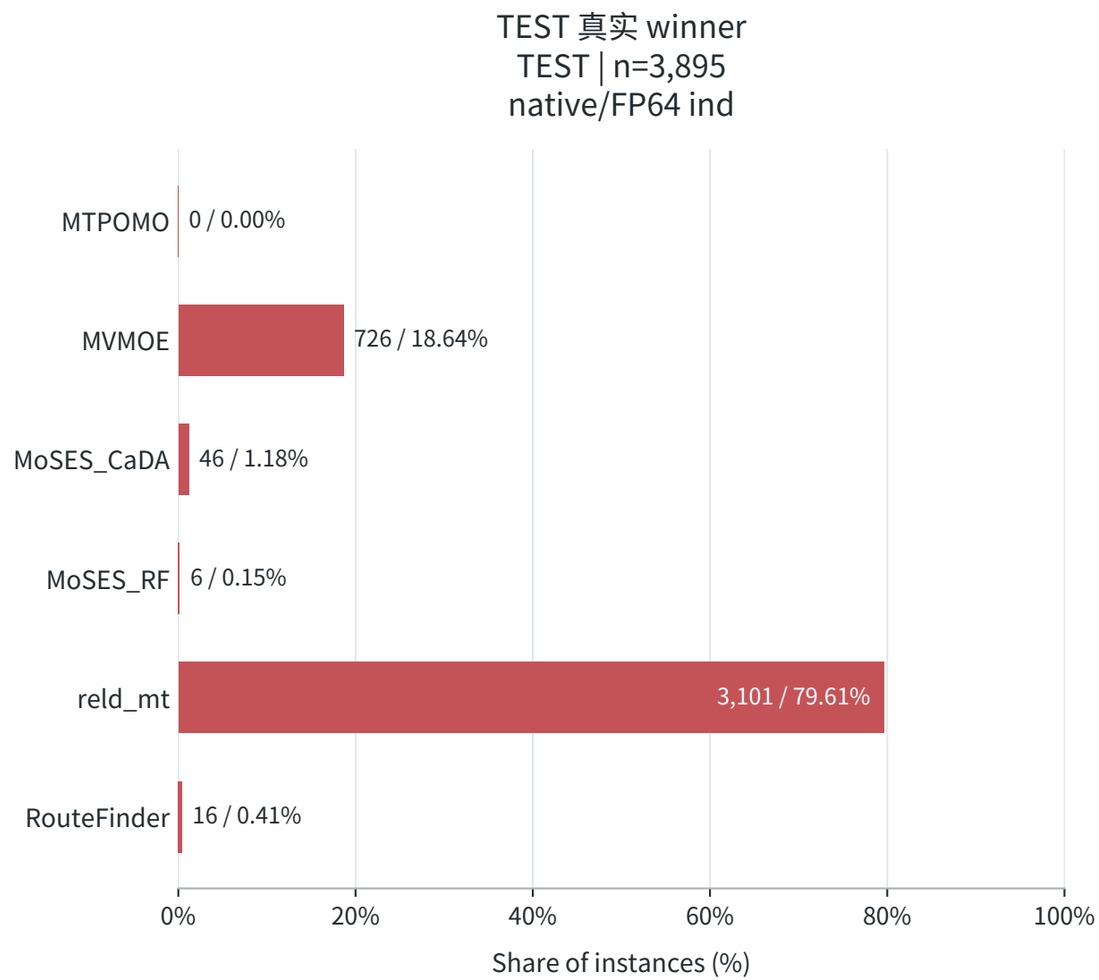

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

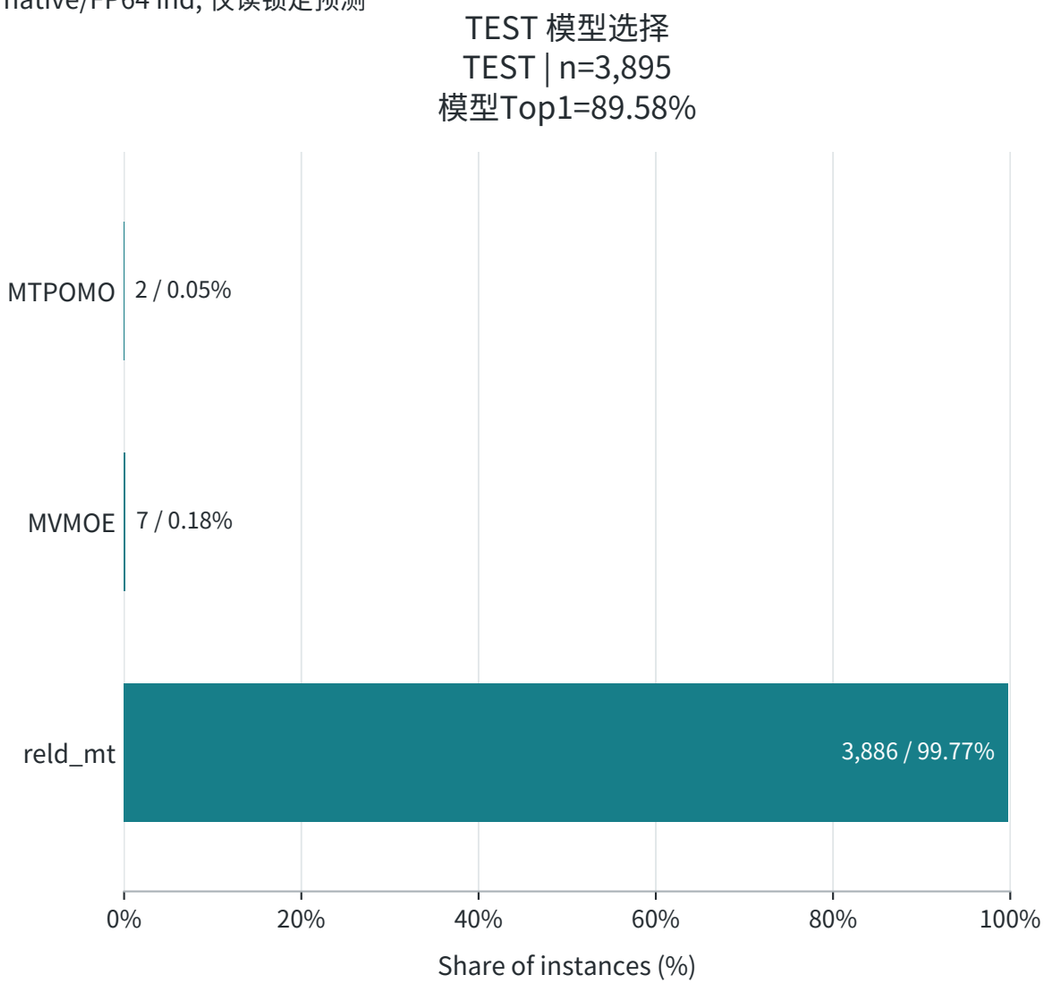

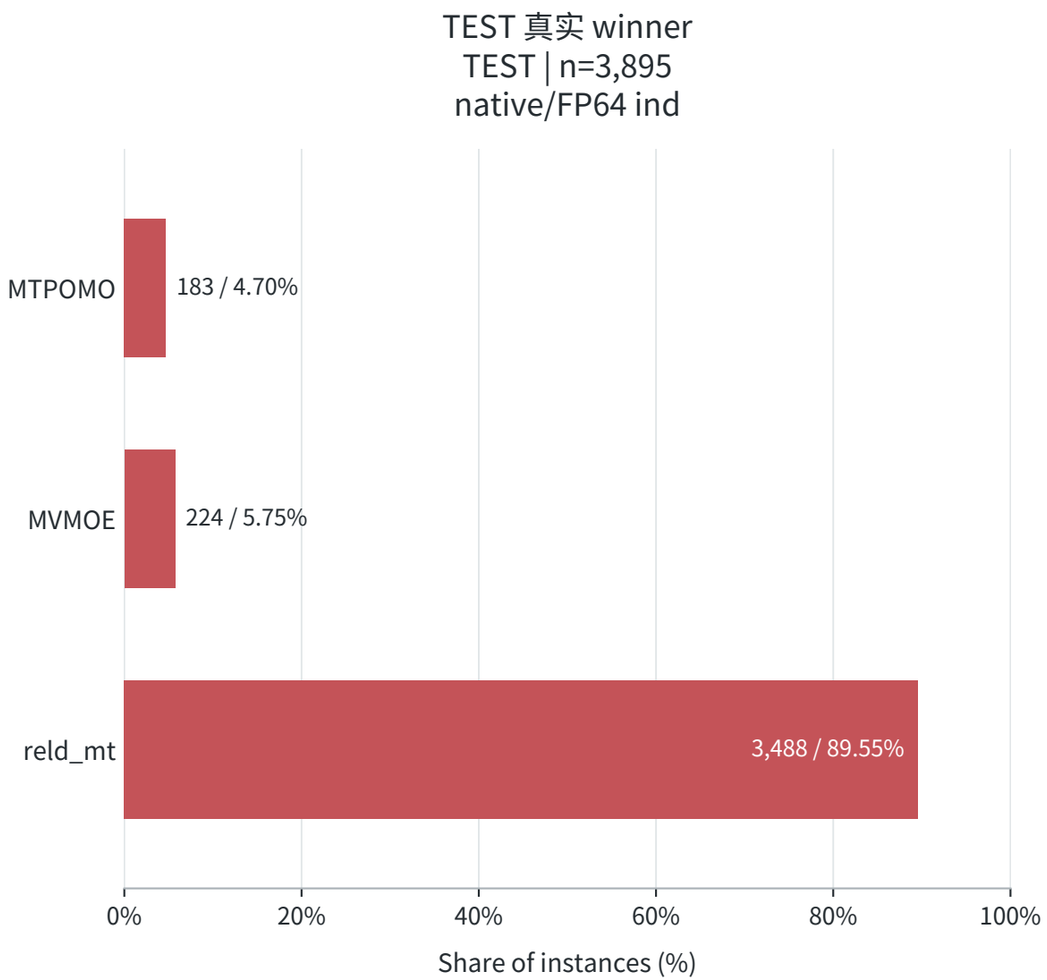

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

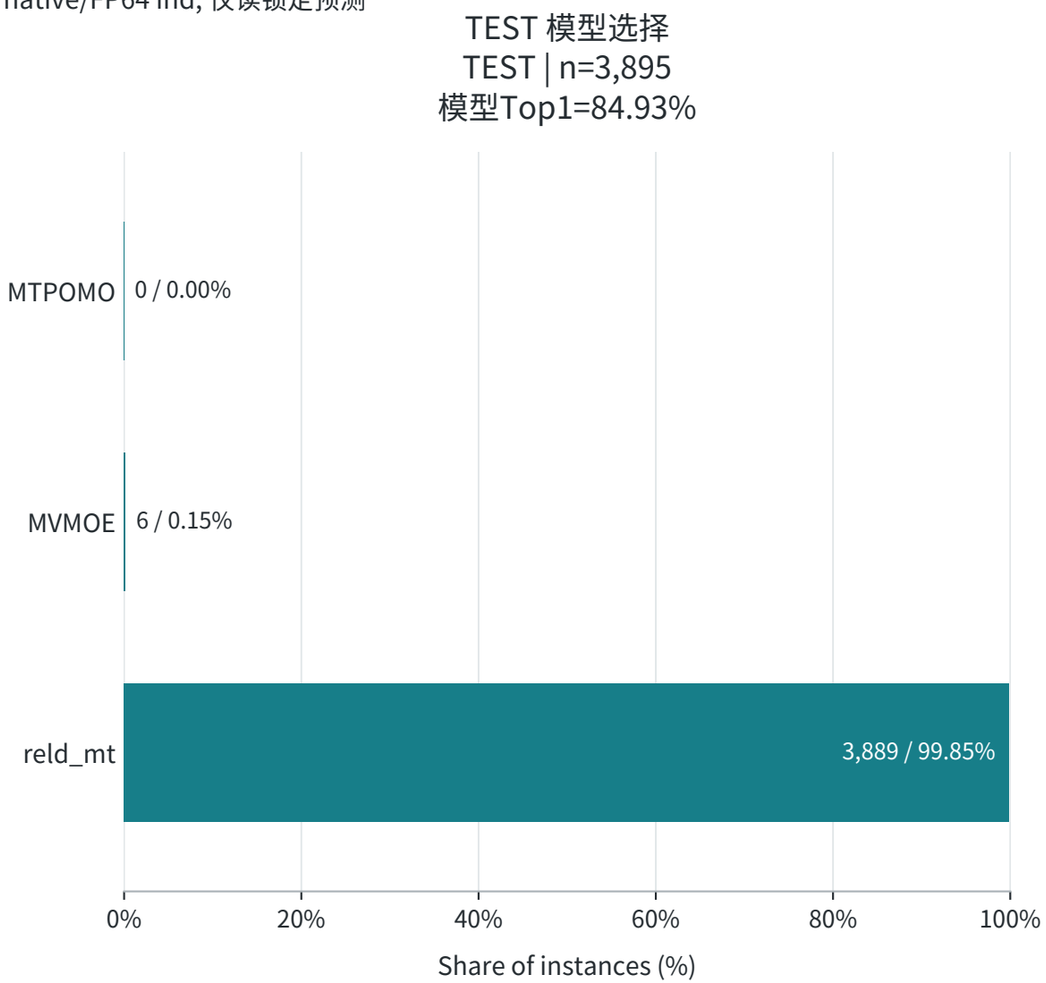

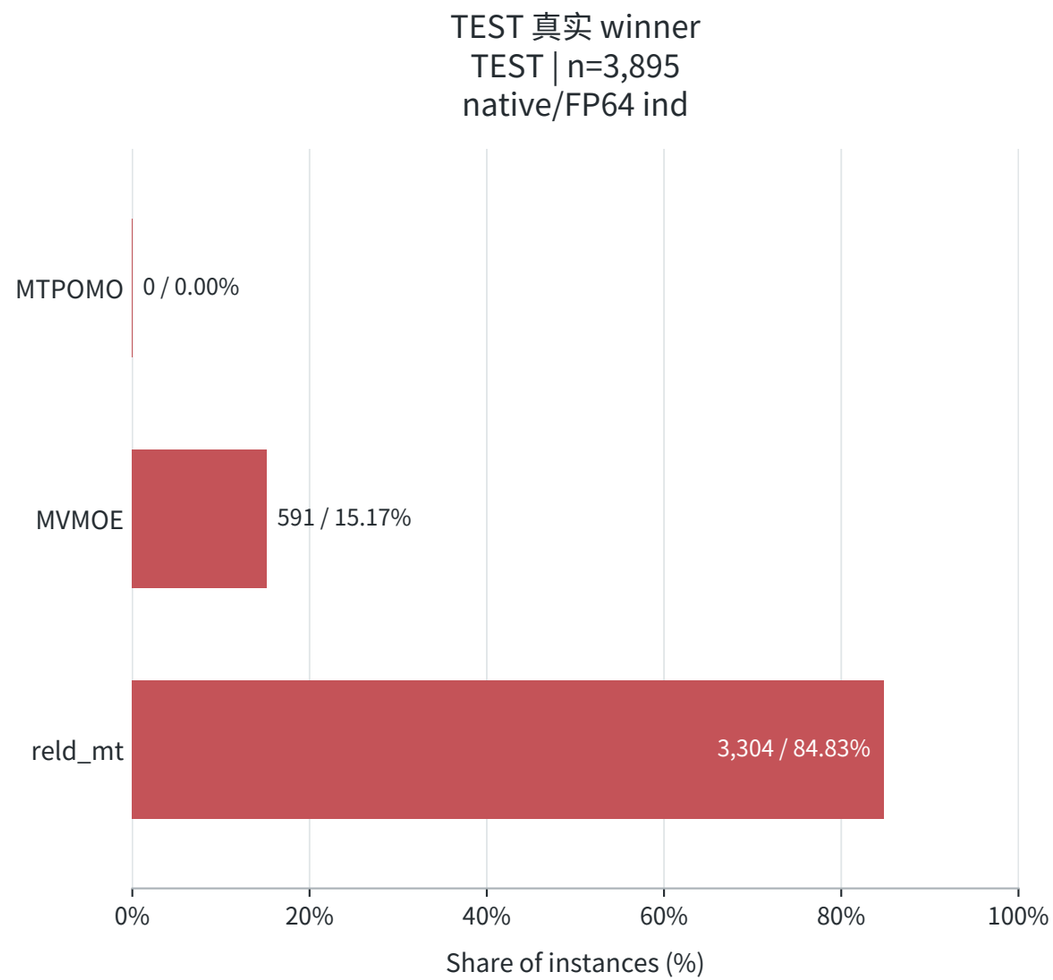

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

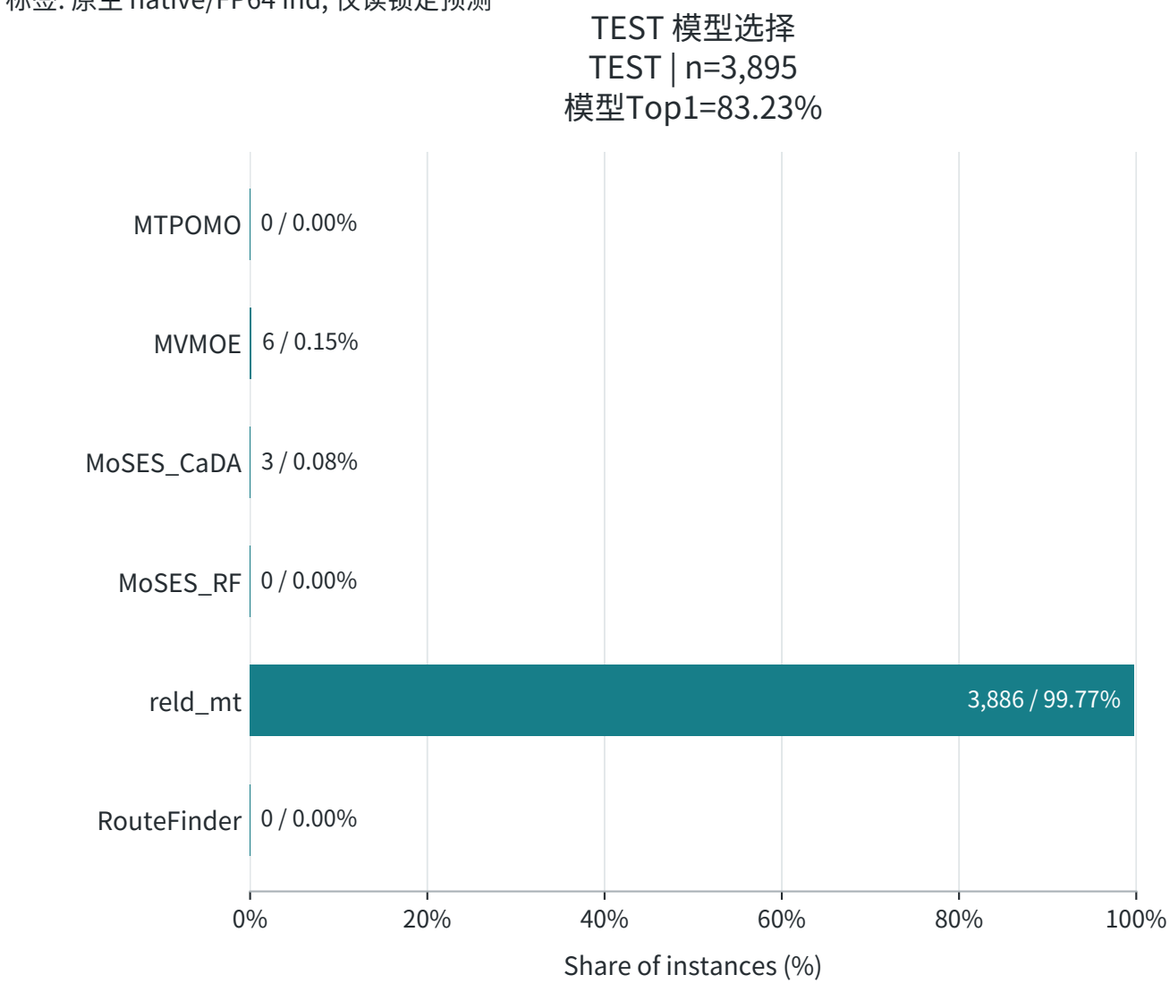

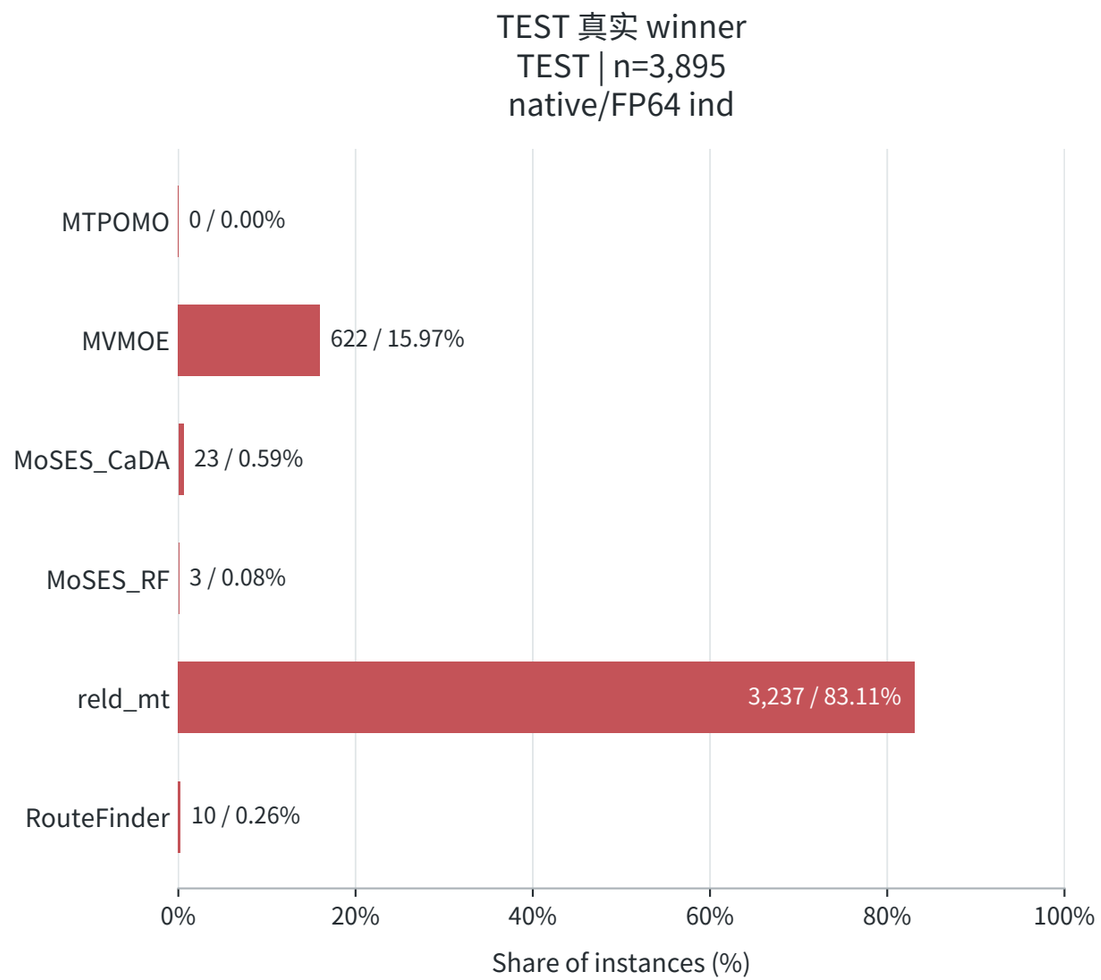

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

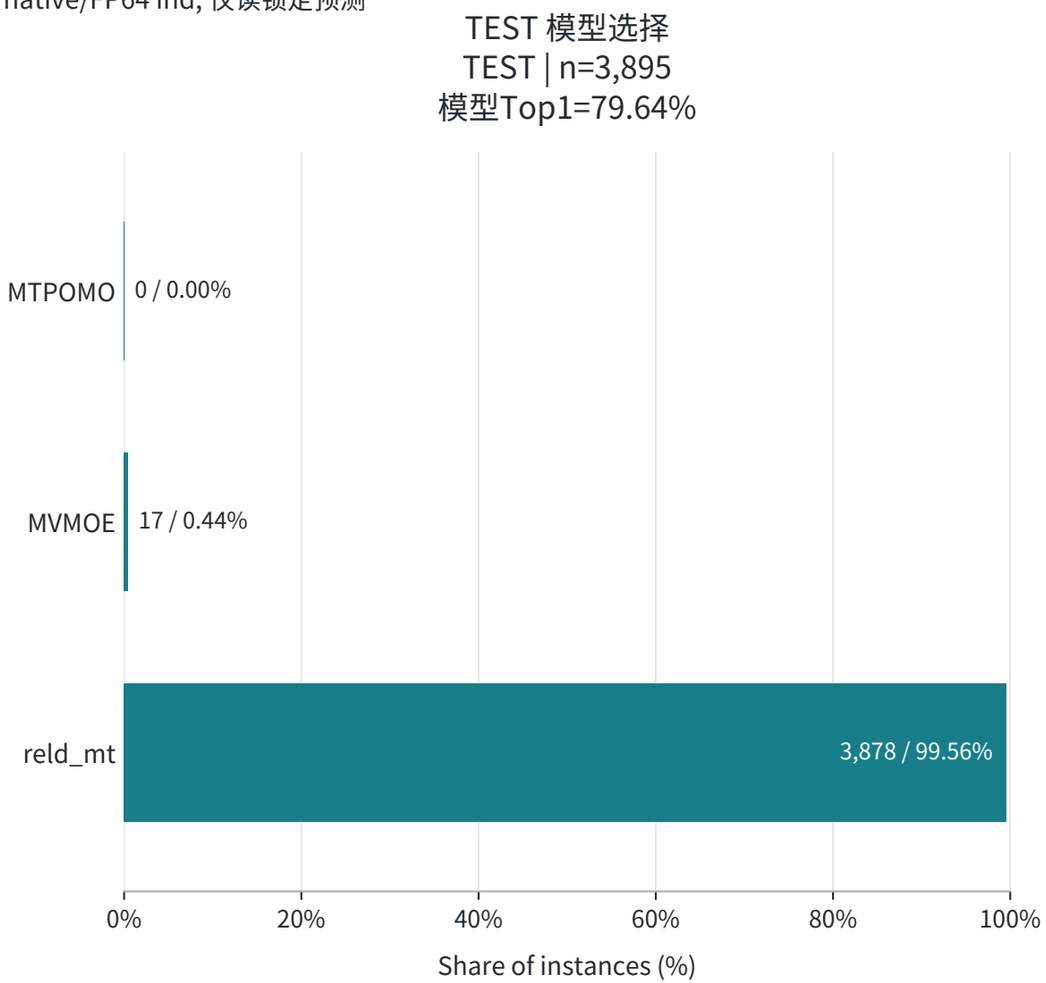

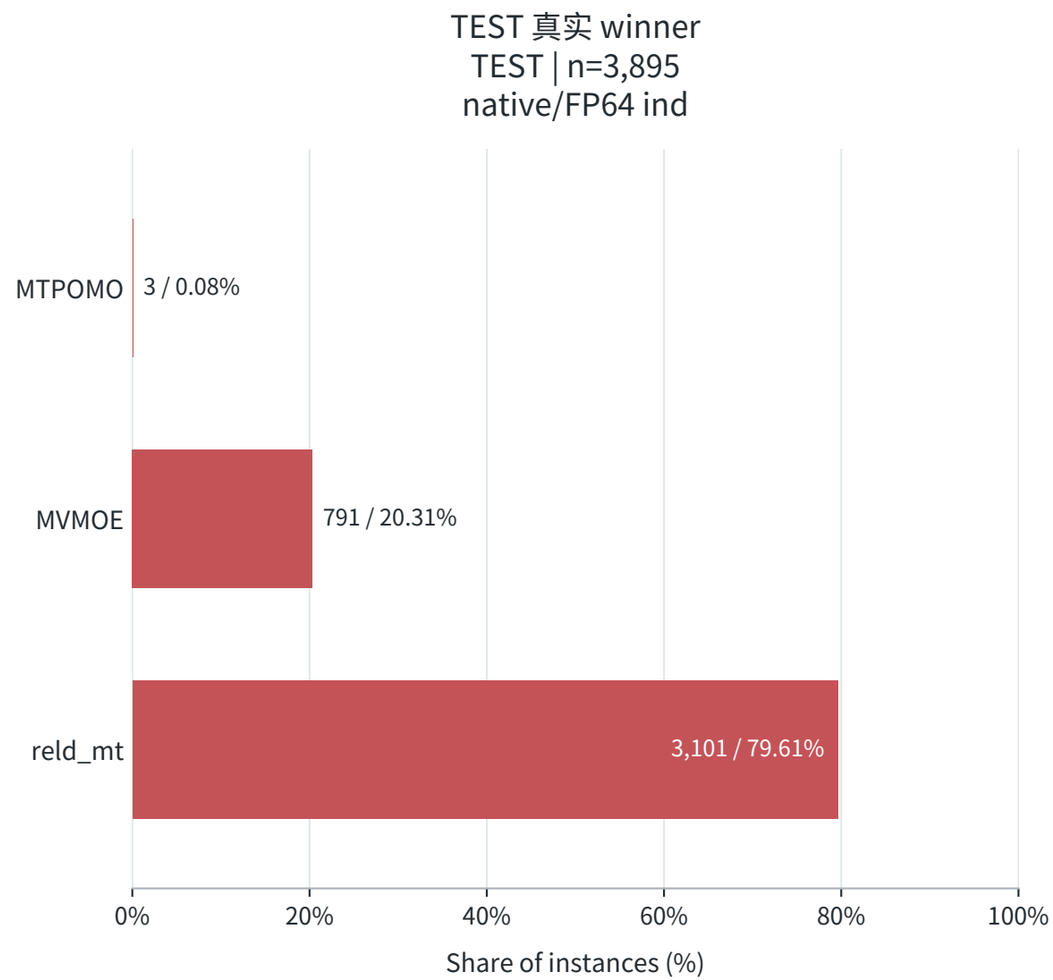

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.


R82B_context_matched_rank_seed2 | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 139e5c1735e51fd9

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

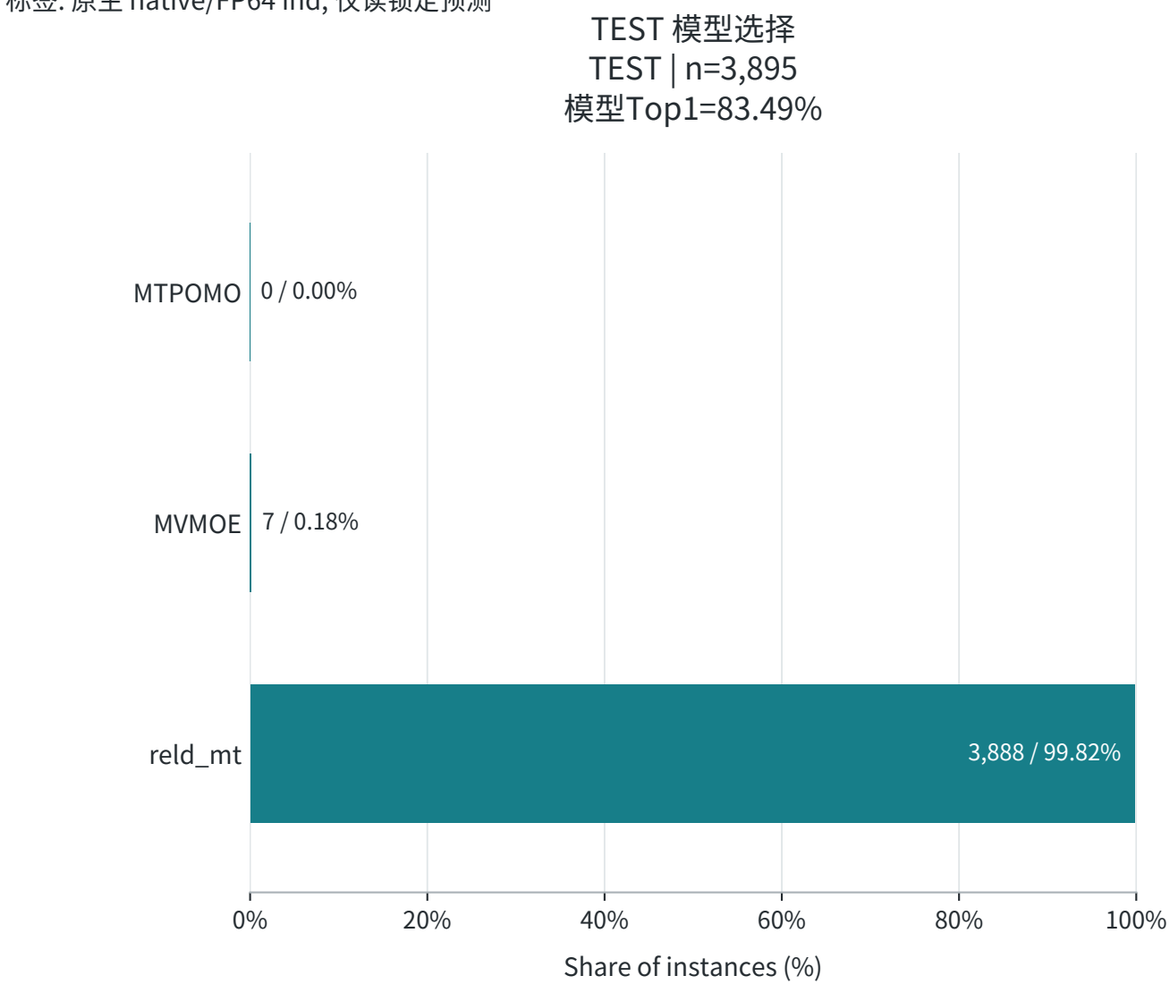

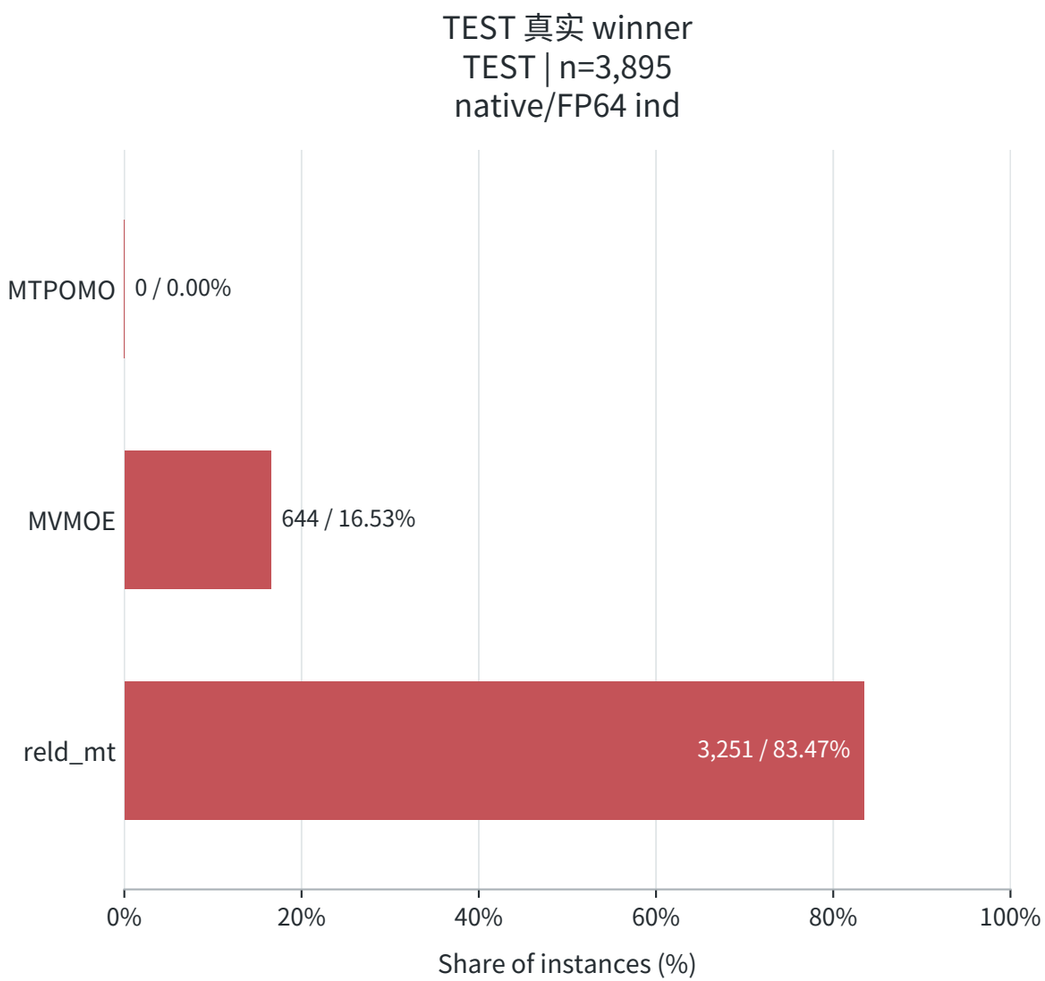

标注为 count / %; 候选按 TEST 名称固定顺序对齐，含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R82B_context_matched_rank_seed2: stable global solver-ID score ties. Saved same-lock predictions. No training, checkpoint reselection or Rxx mixing.