

# R82B_context_matched_rank_seed2 | Saved Training History


Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.






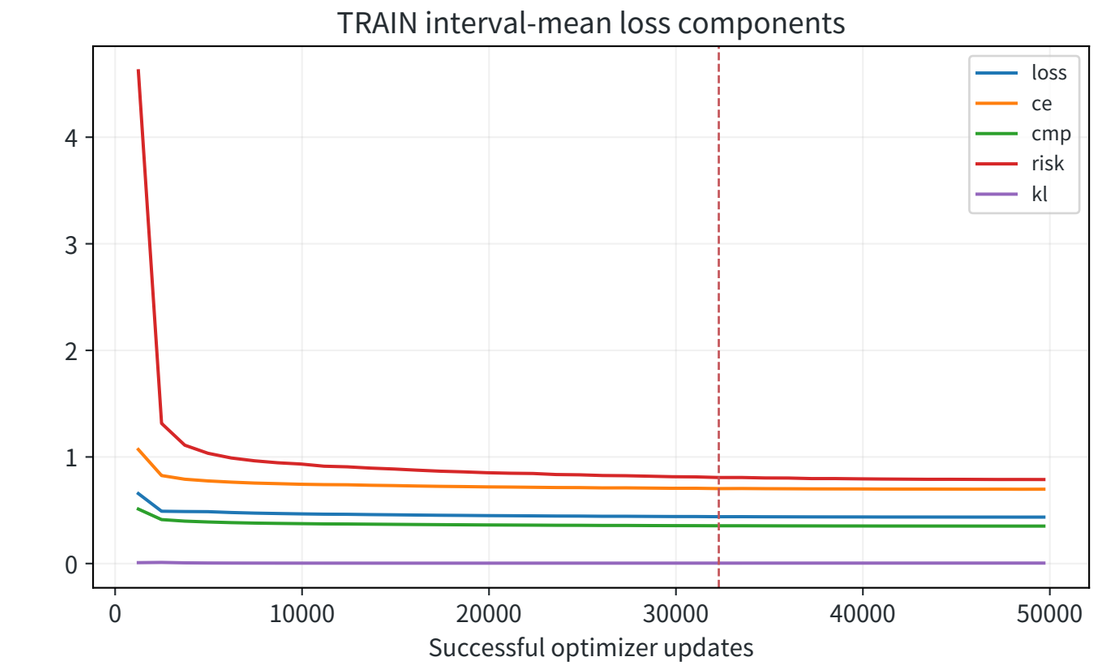


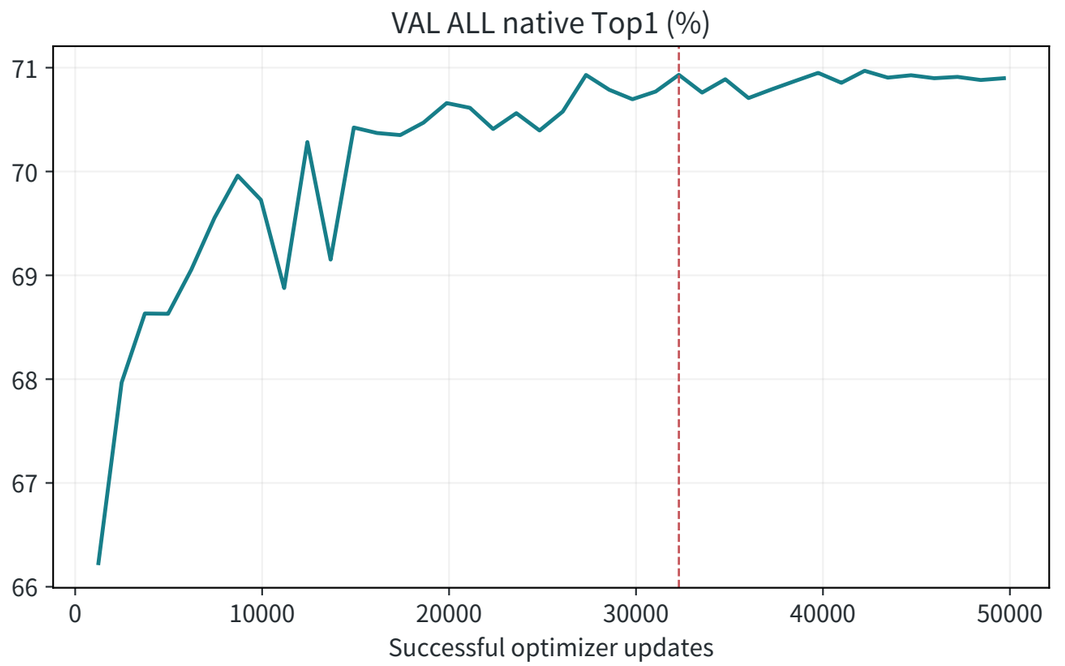


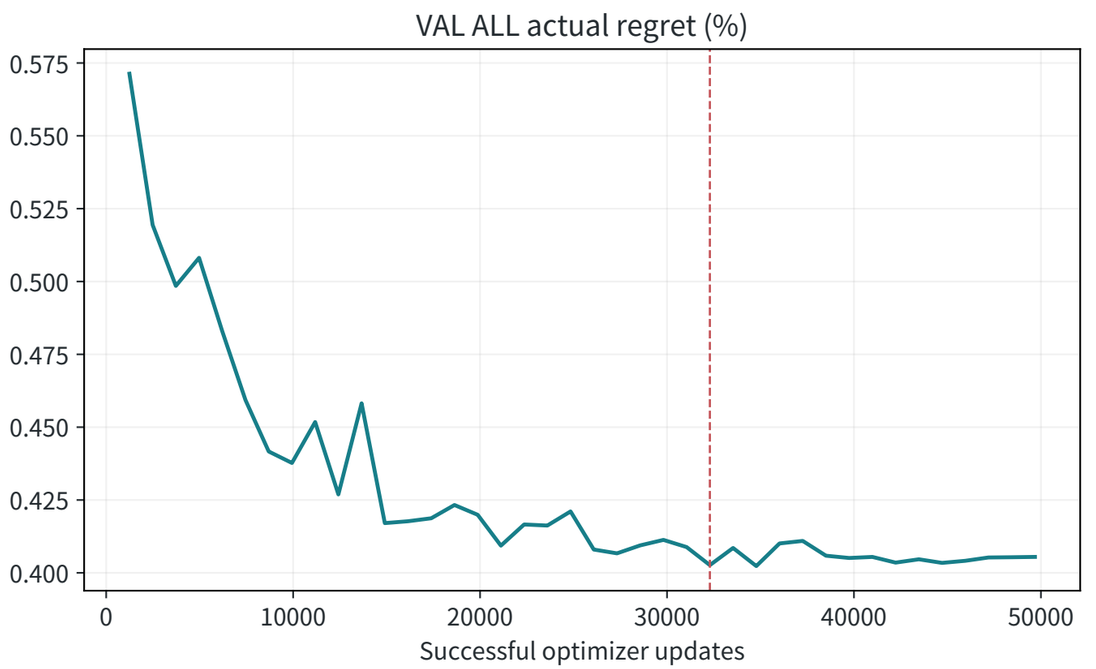
# R82B_context_matched_rank_seed2 | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

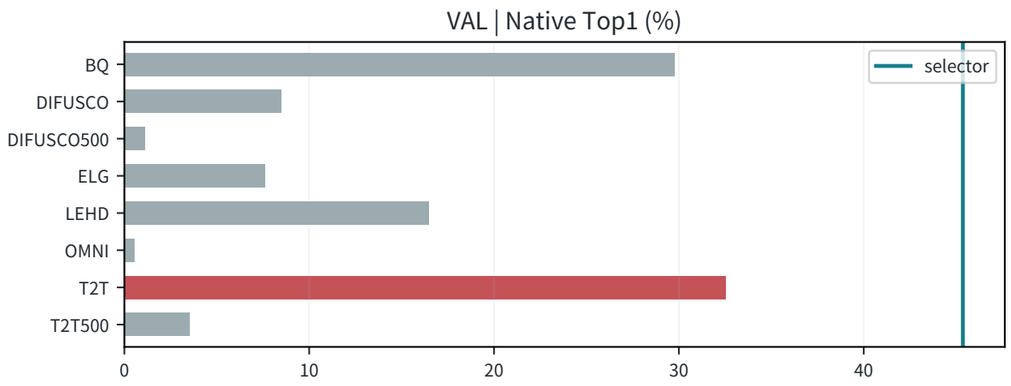


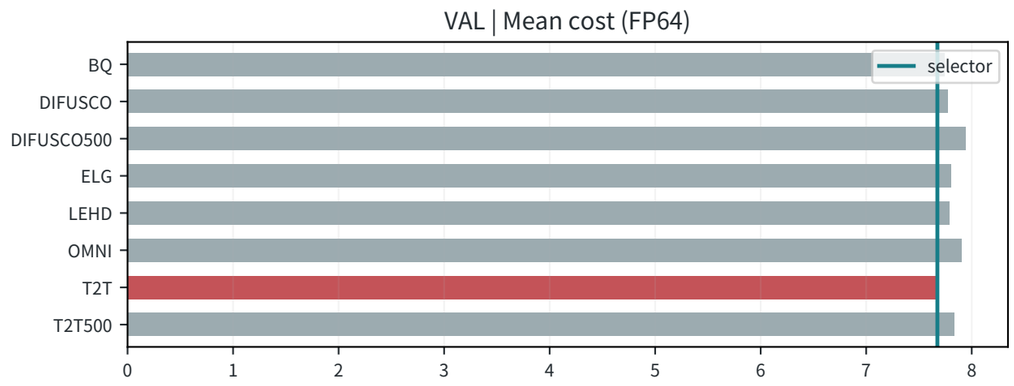


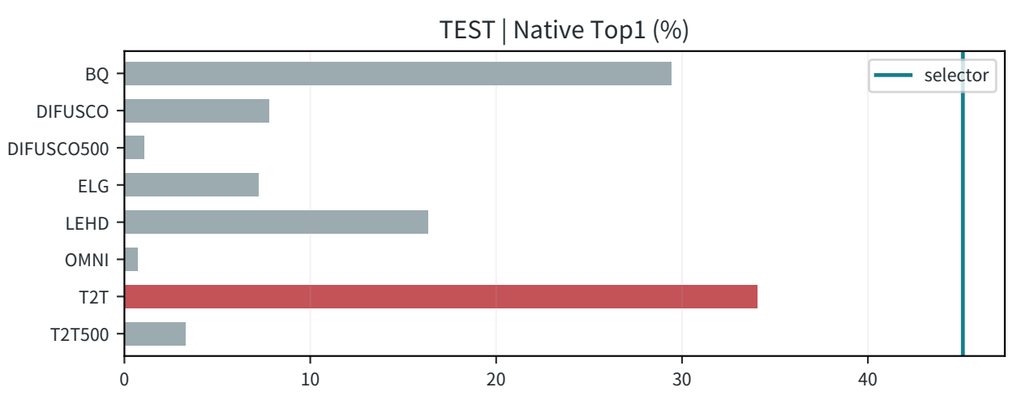
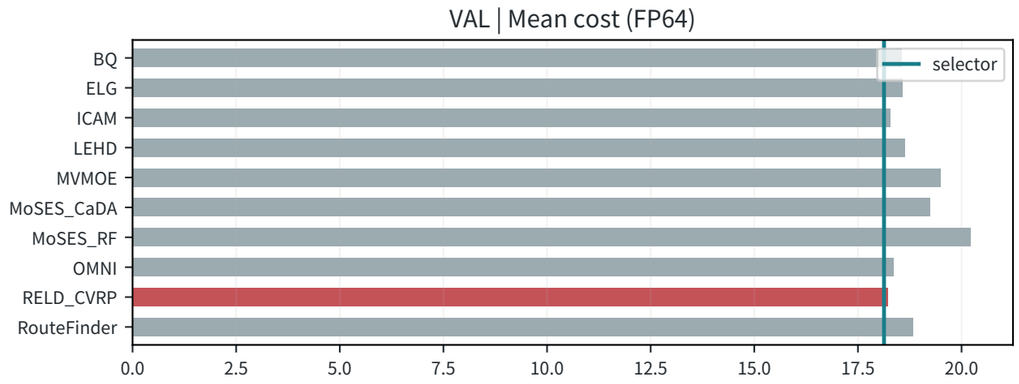


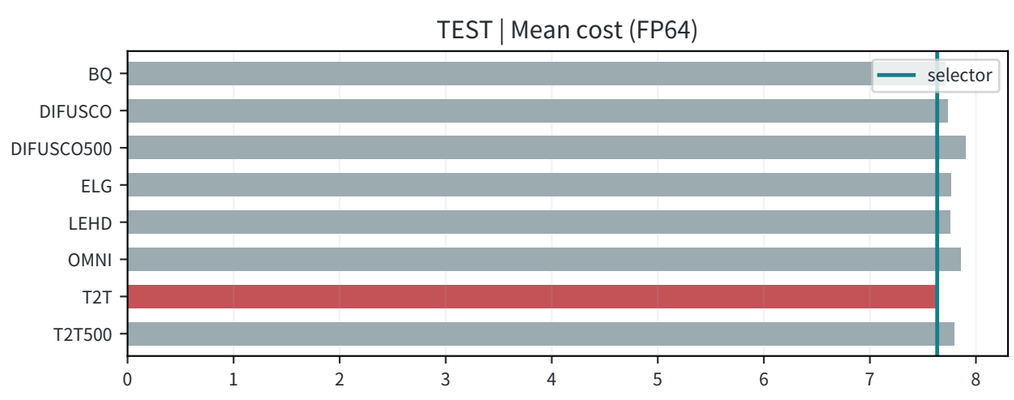
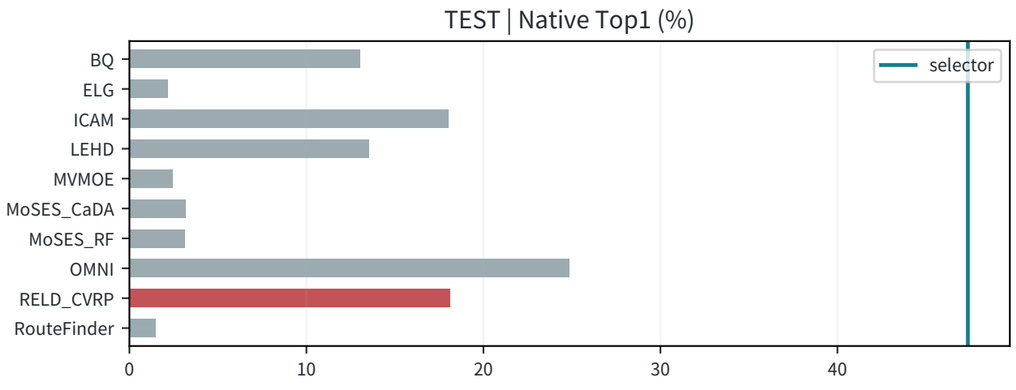


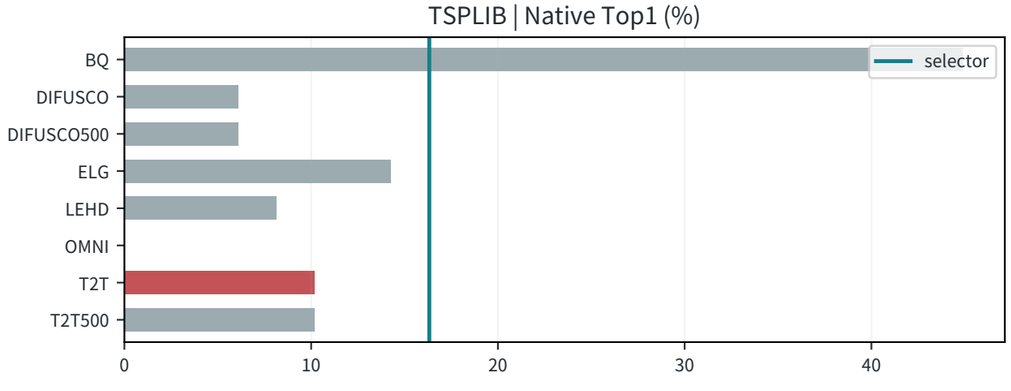
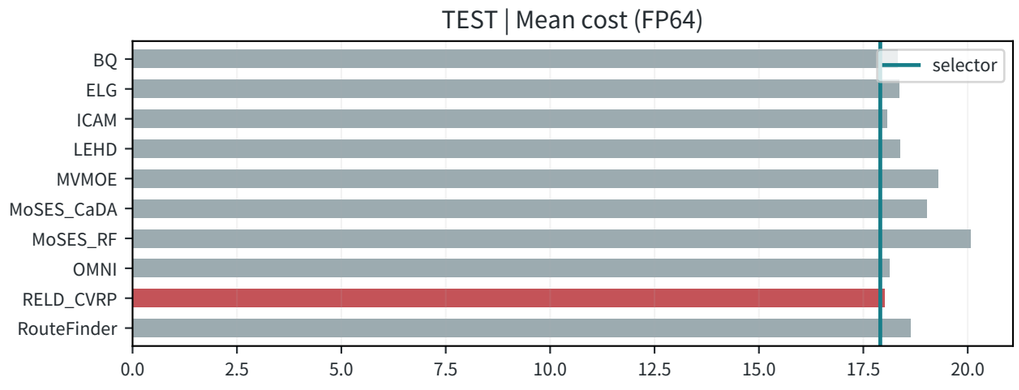
# R82B_context_matched_rank_seed2 | CVRP: Selector vs Single Methods

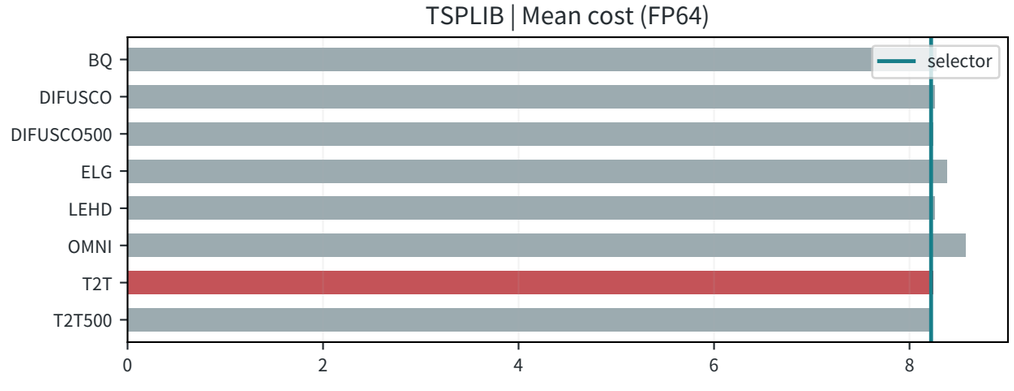
Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

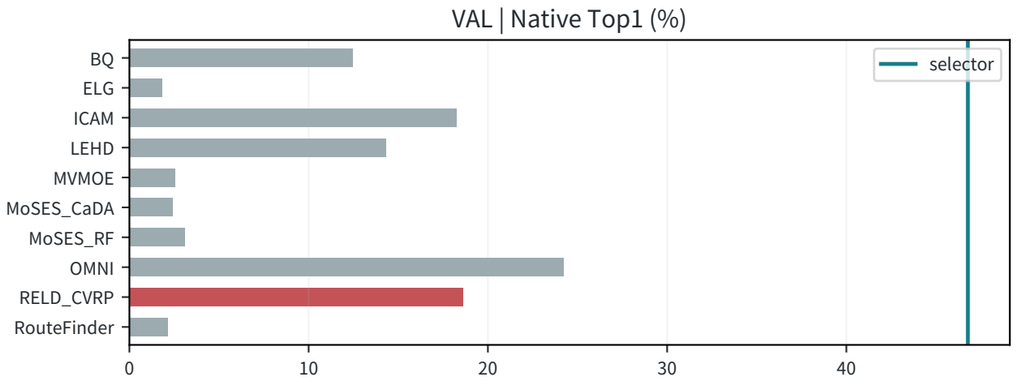






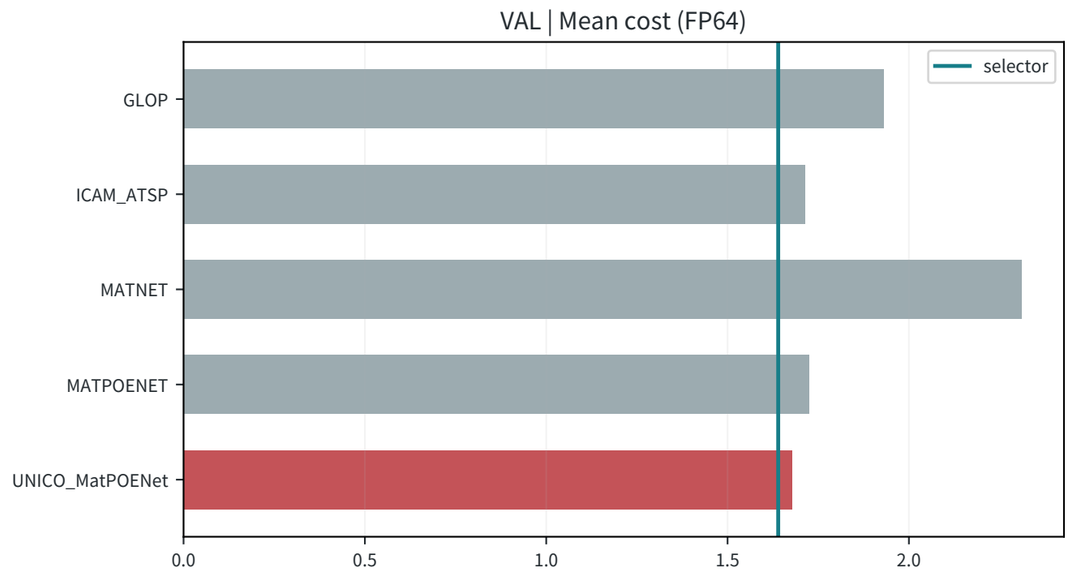



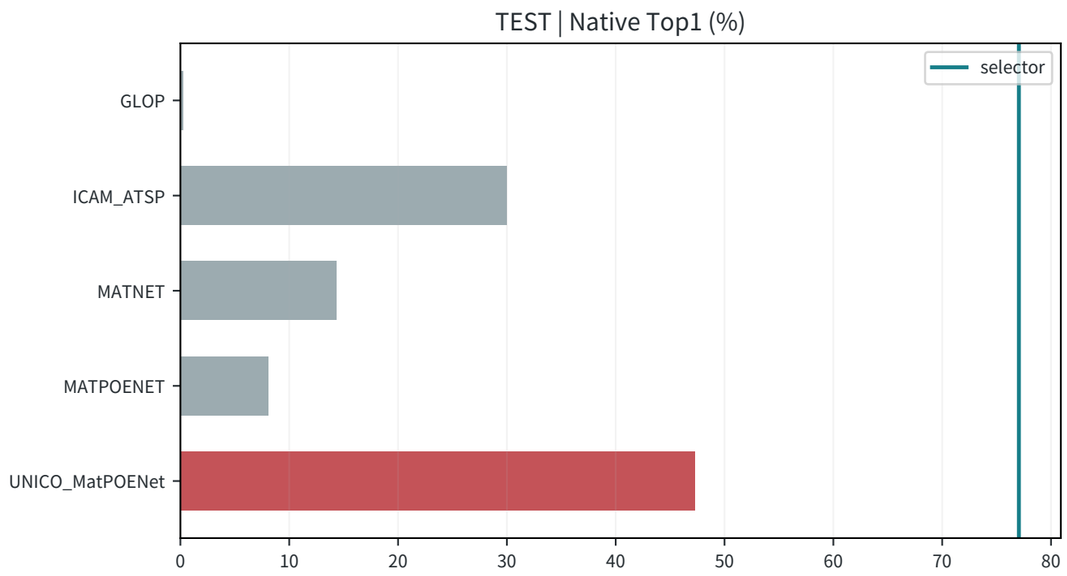


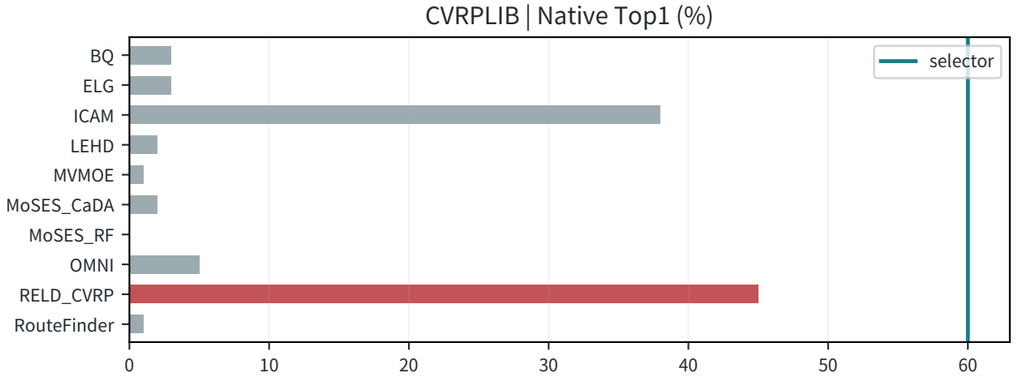
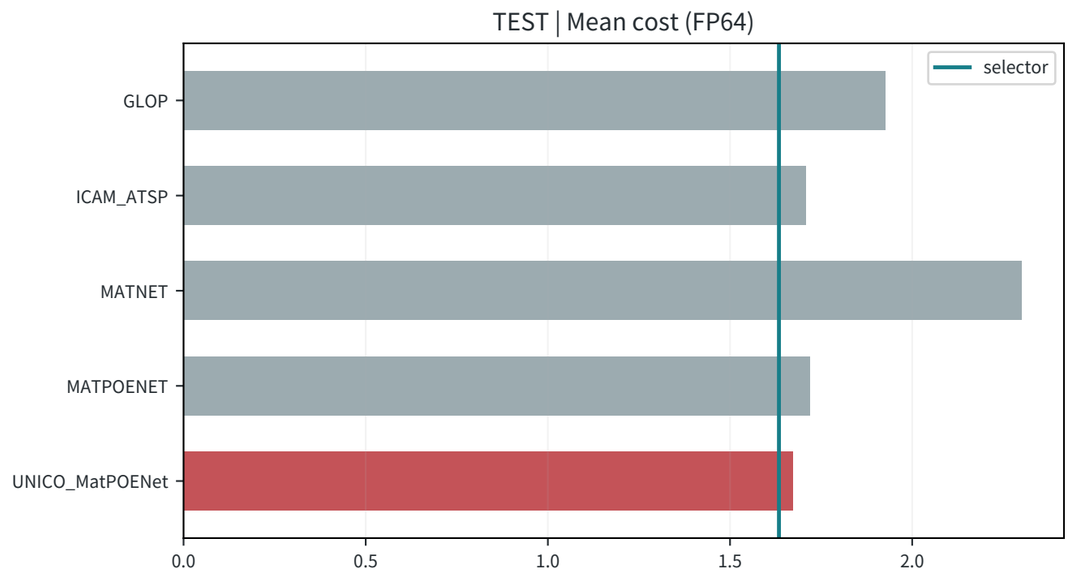
# R82B_context_matched_rank_seed2 | ATSP: Selector vs Single Methods

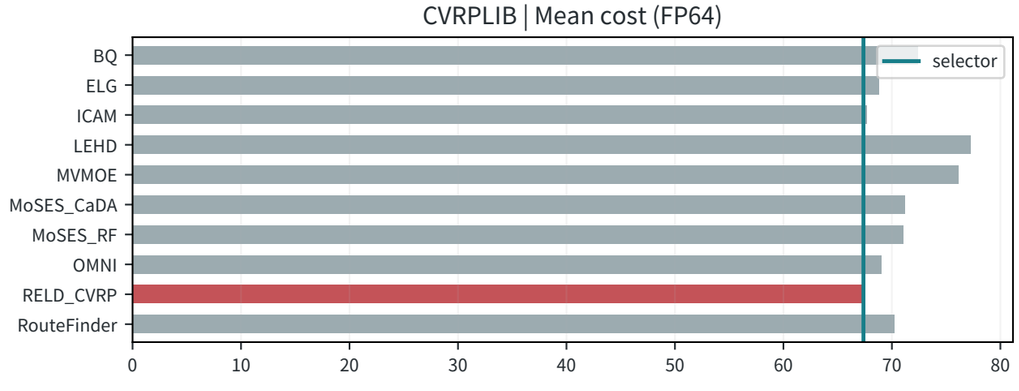Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

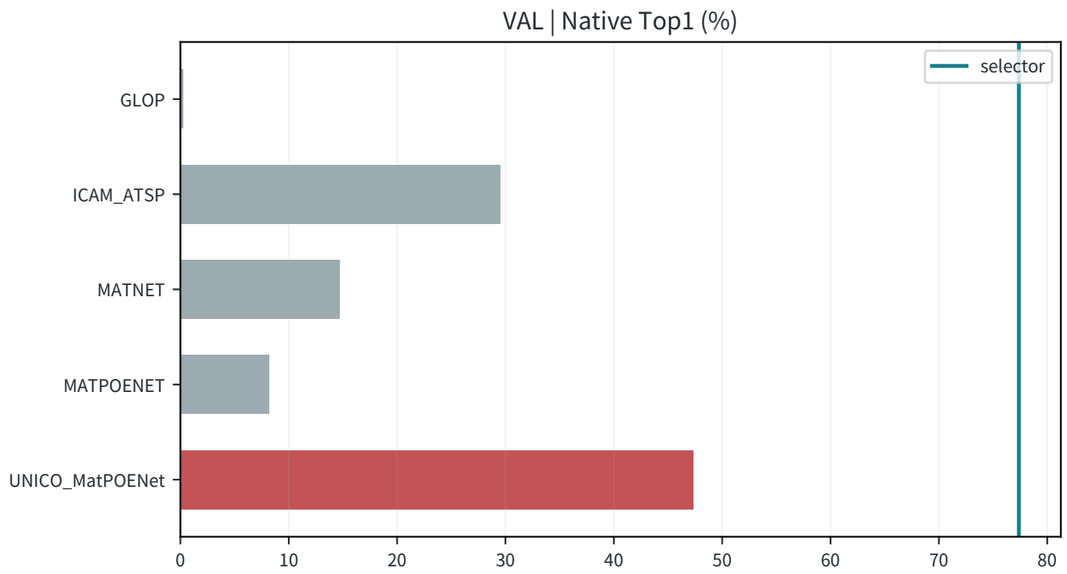





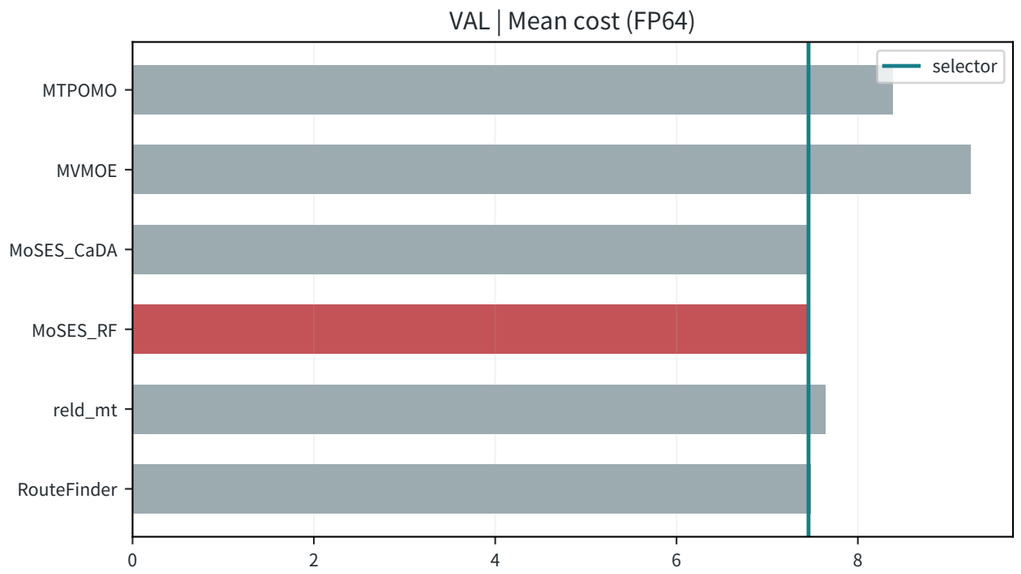



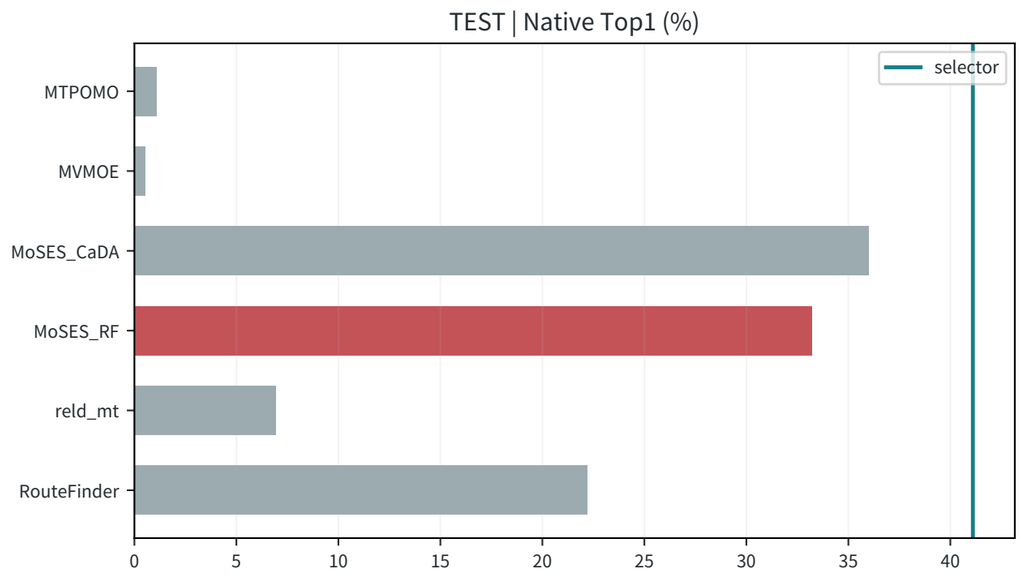



# R82B_context_matched_rank_seed2 | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

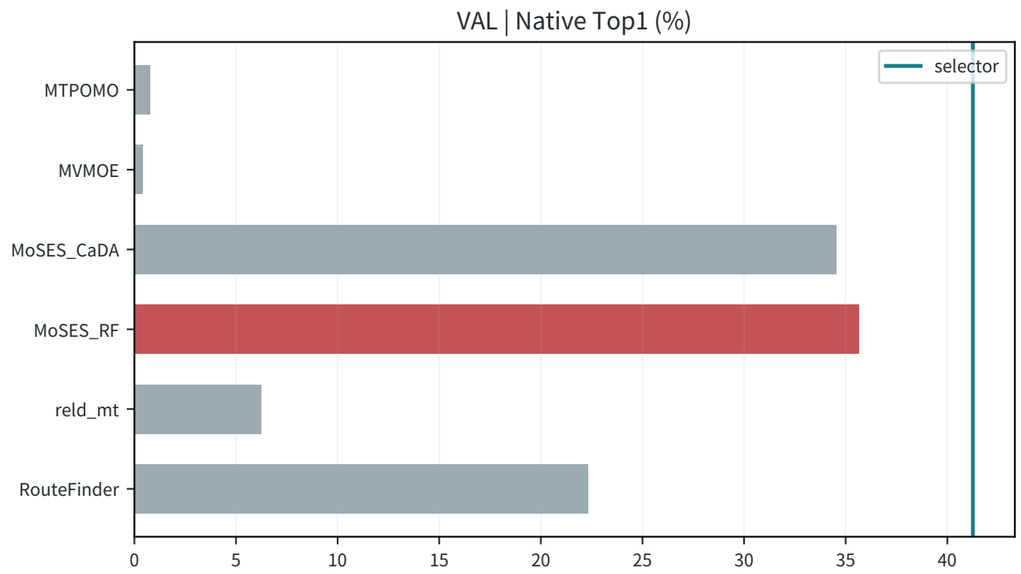





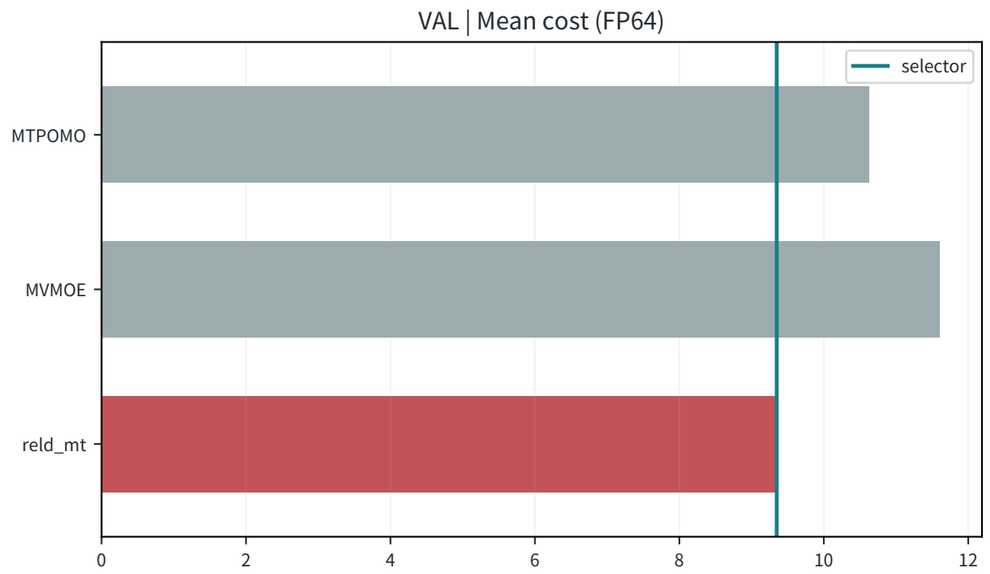



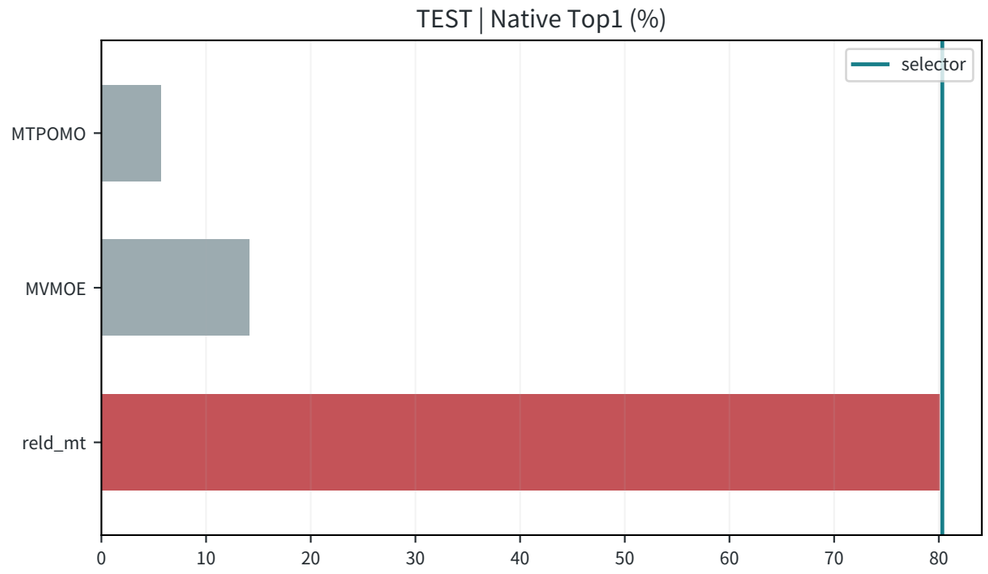




# R82B_context_matched_rank_seed2 | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

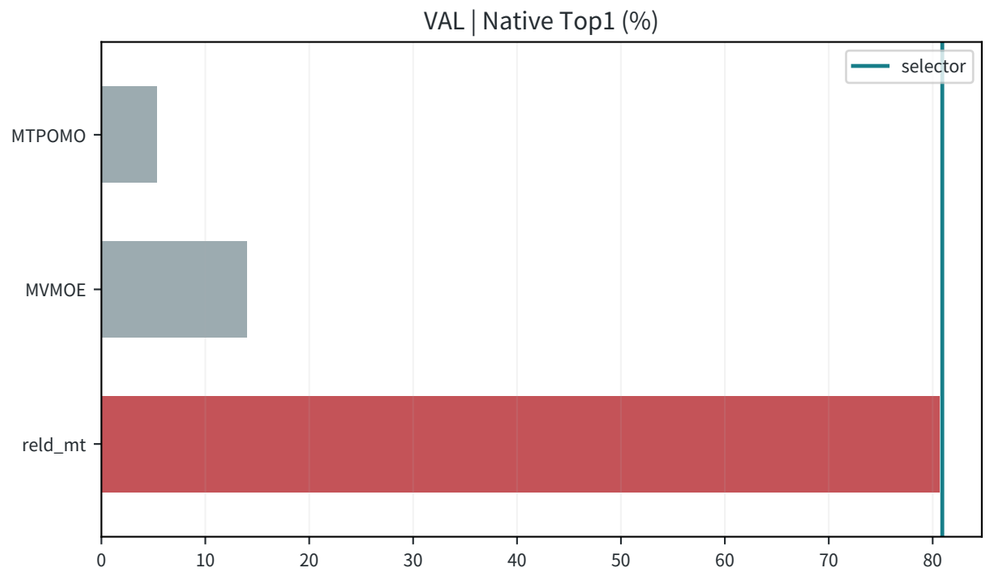





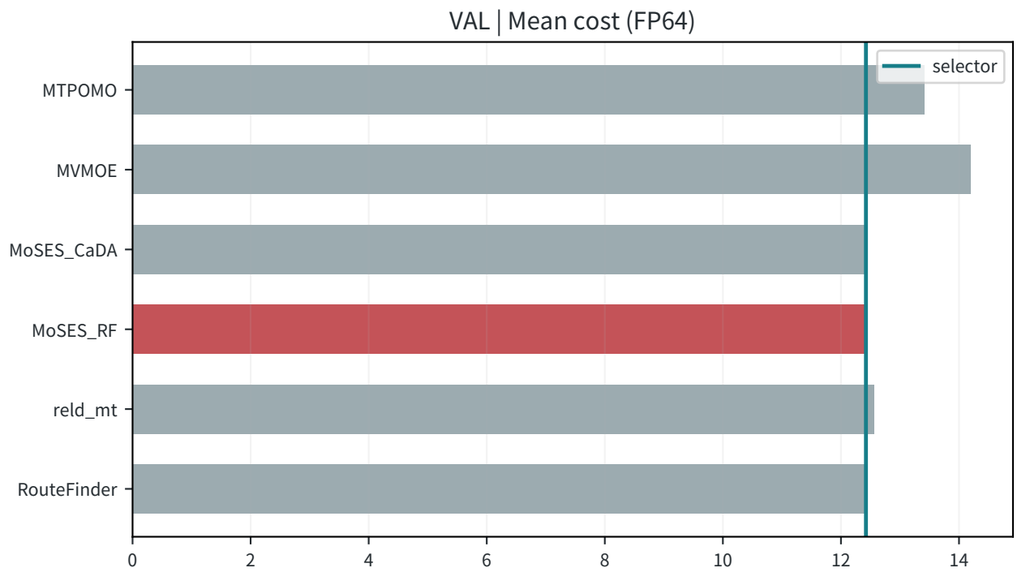


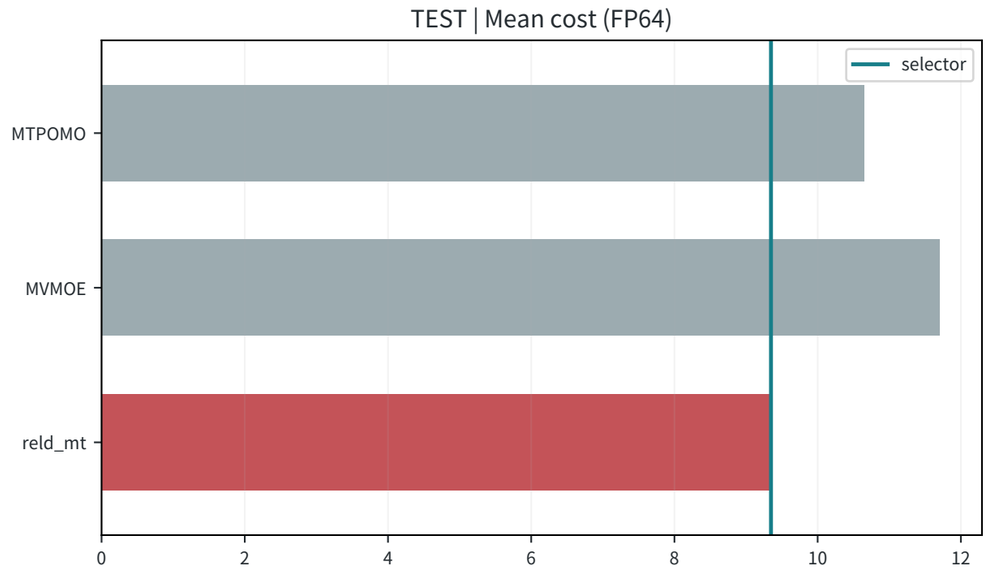
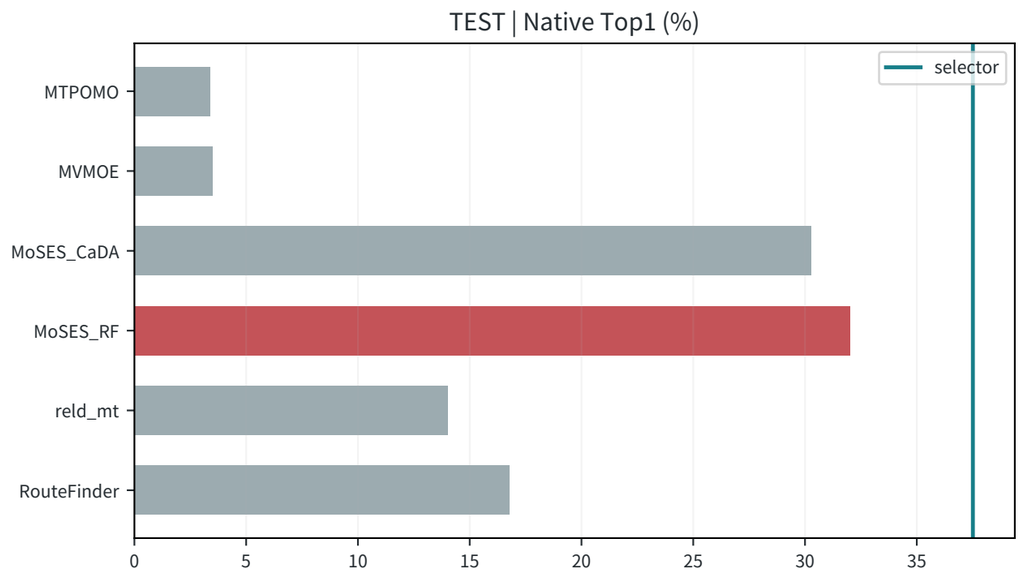



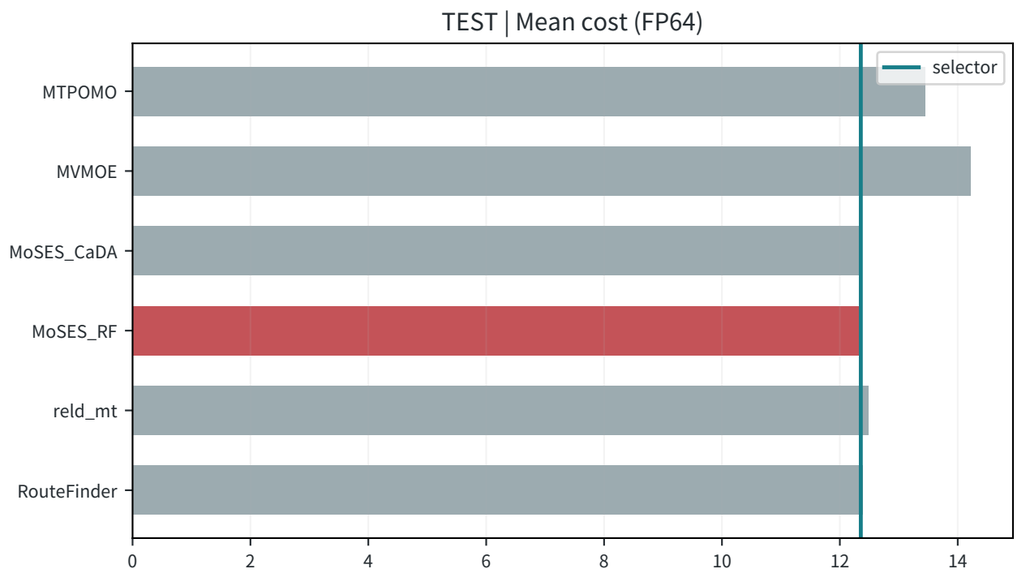
# R82B_context_matched_rank_seed2 | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

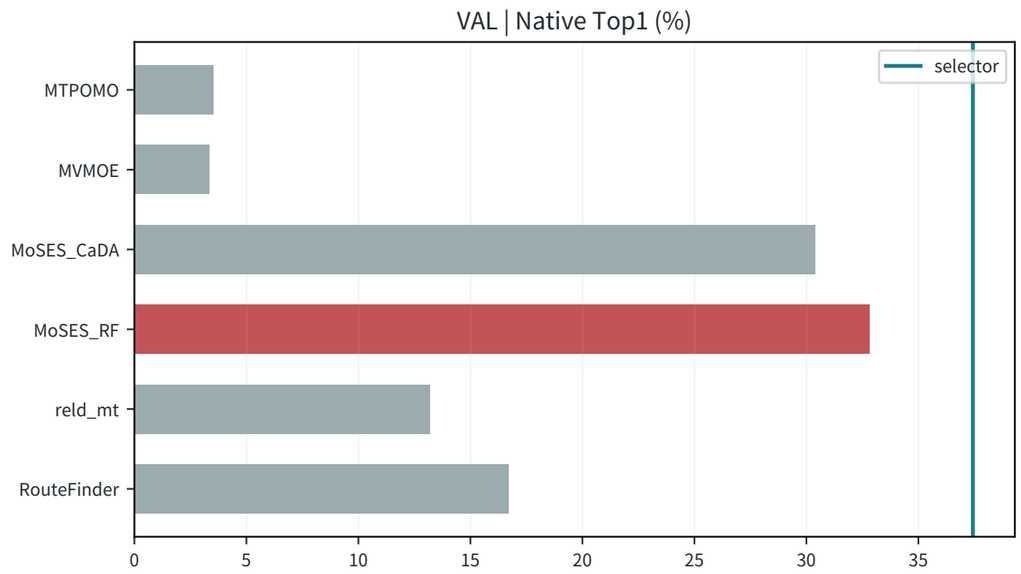





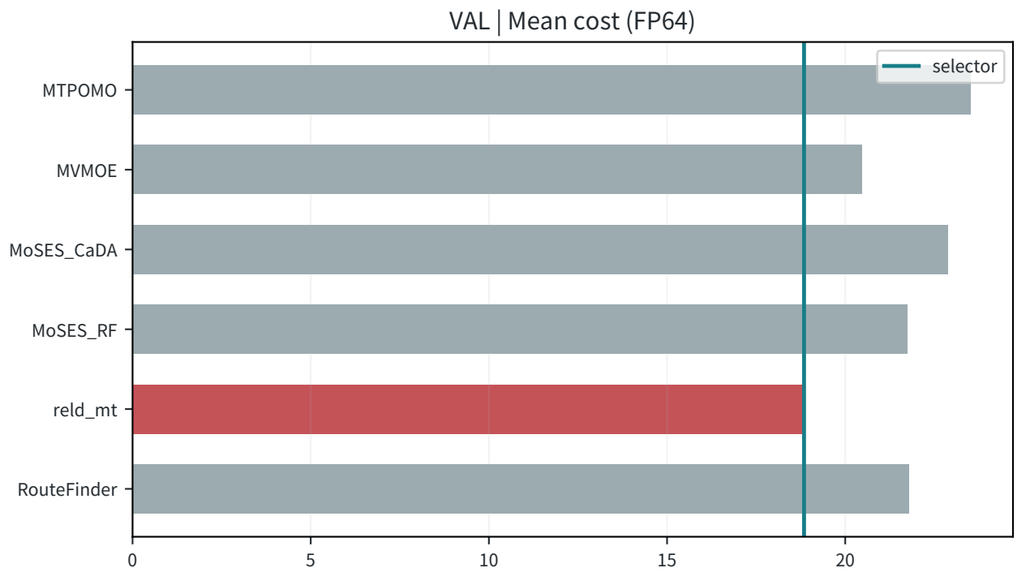



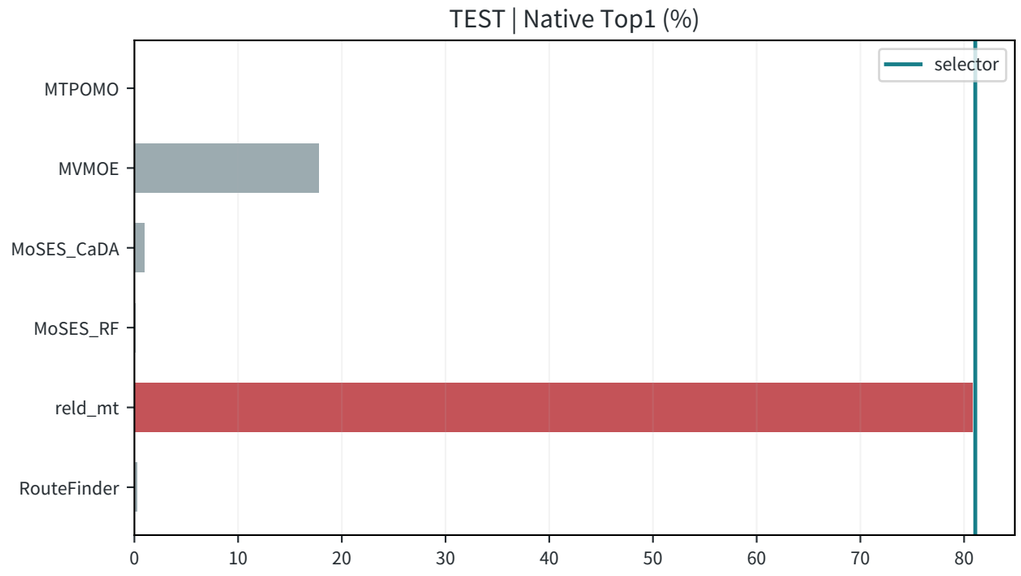



# R82B_context_matched_rank_seed2 | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

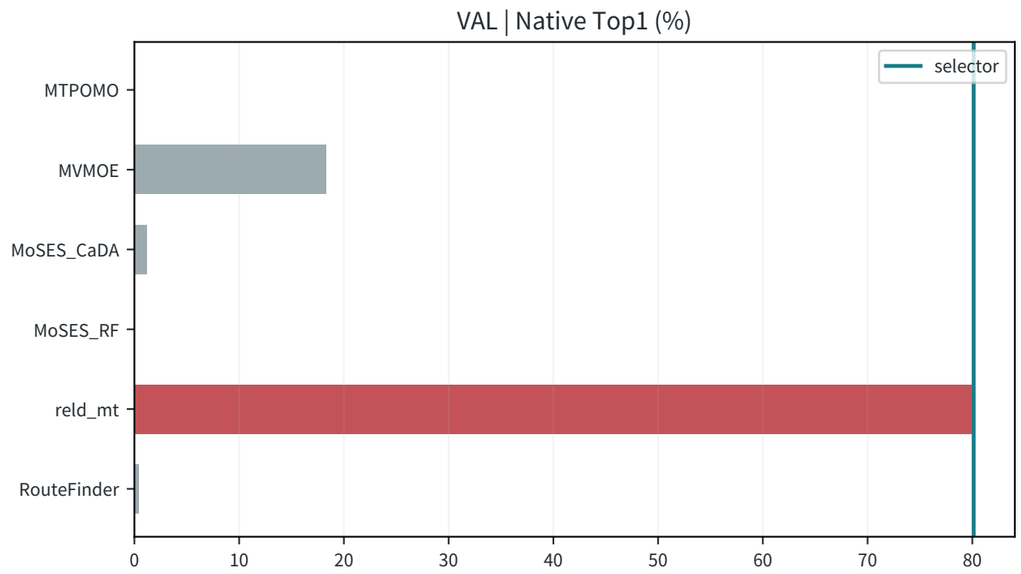





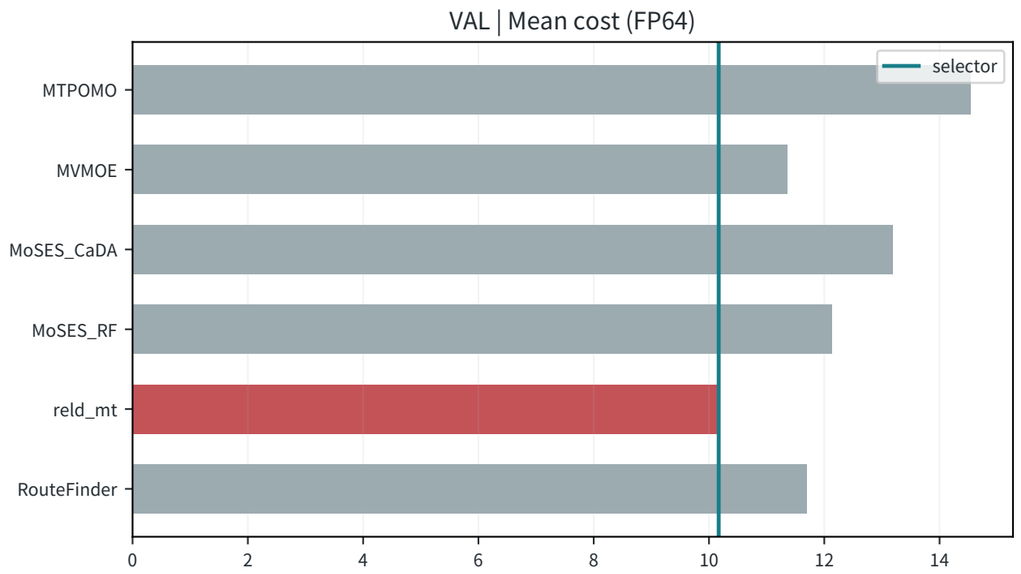



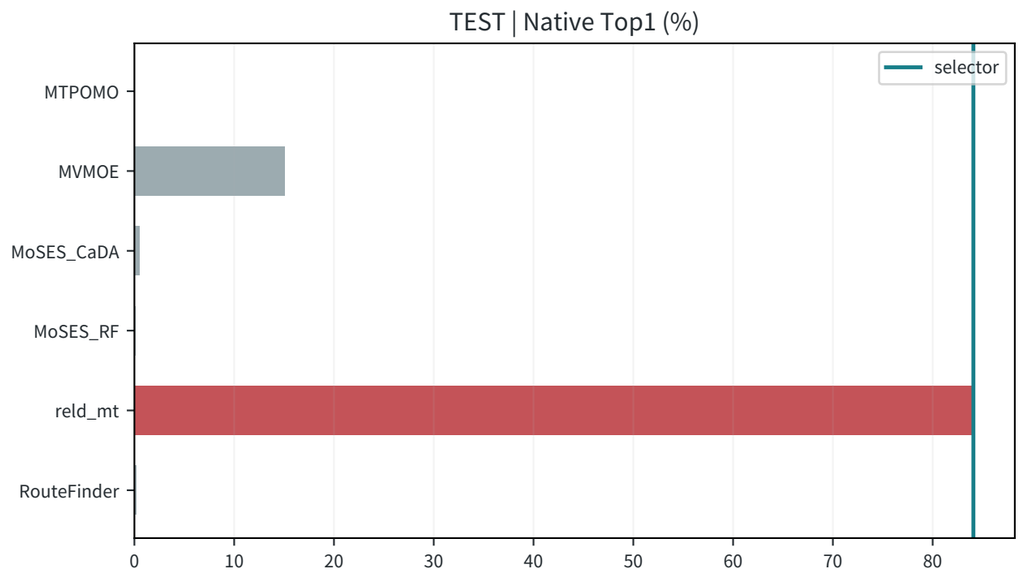




# R82B_context_matched_rank_seed2 | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

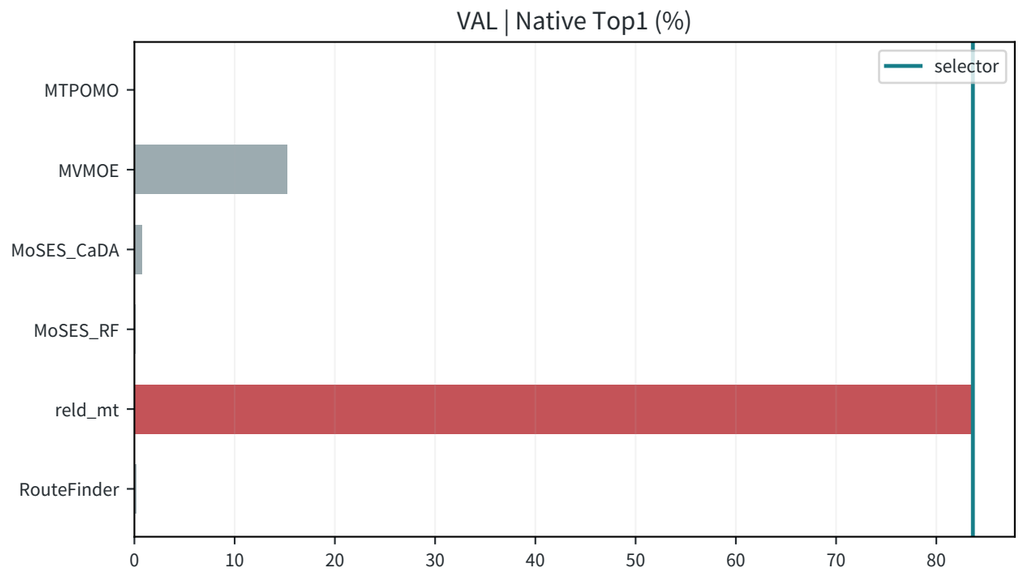





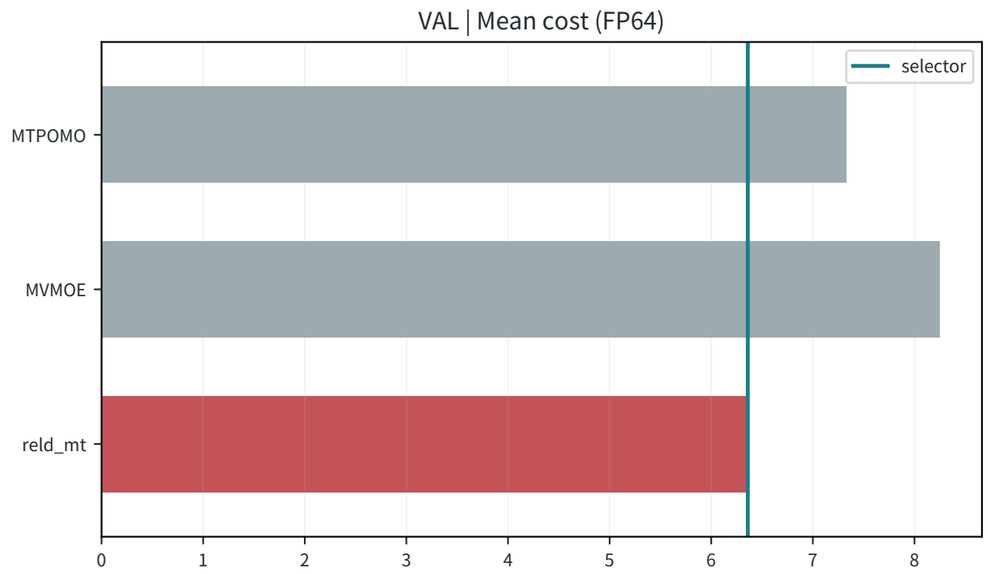


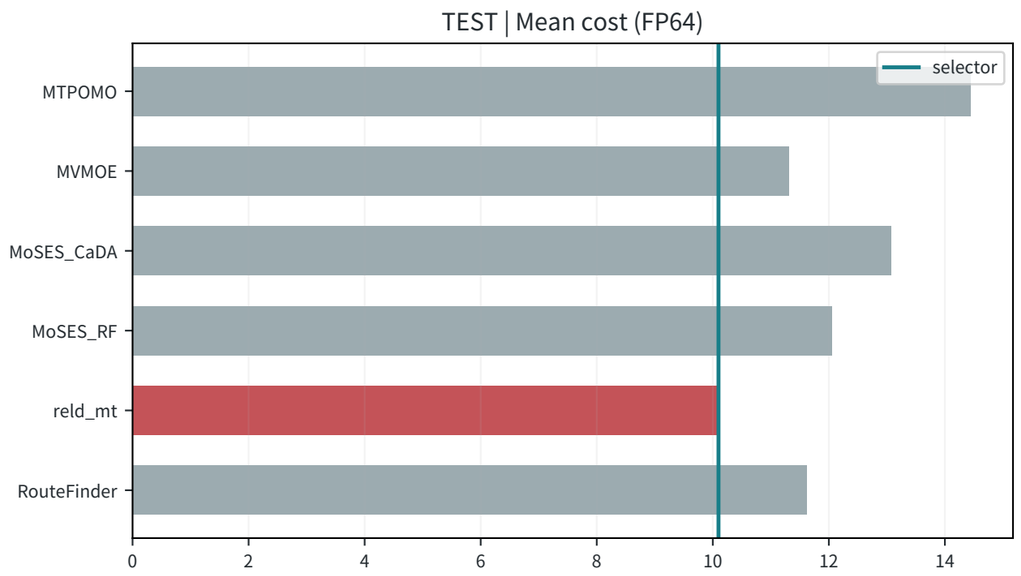
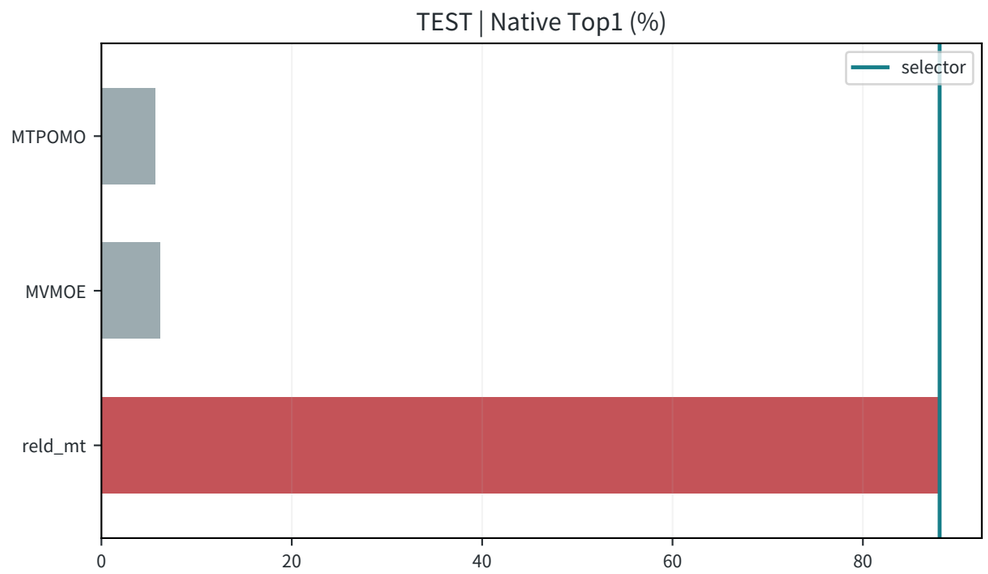



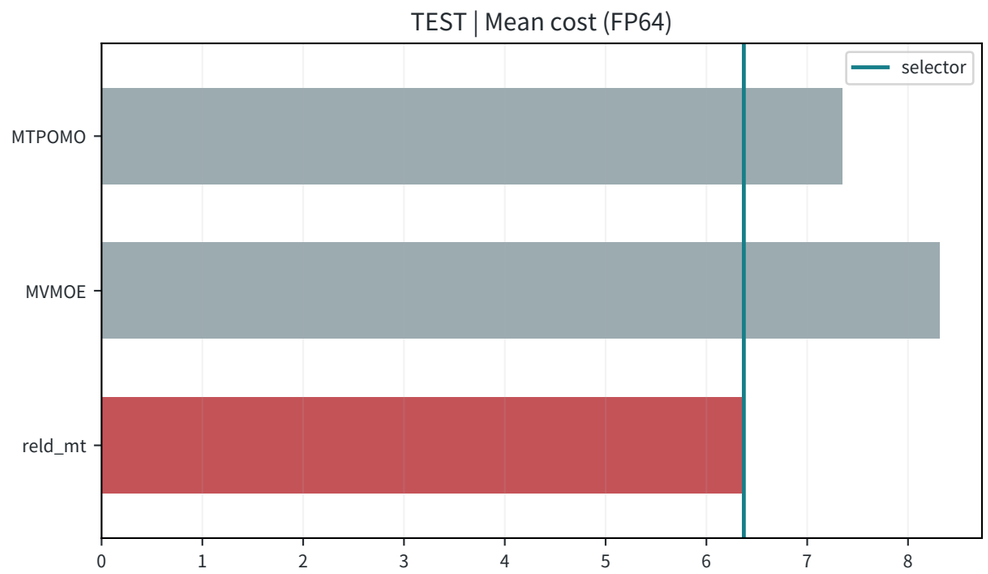
# R82B_context_matched_rank_seed2 | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

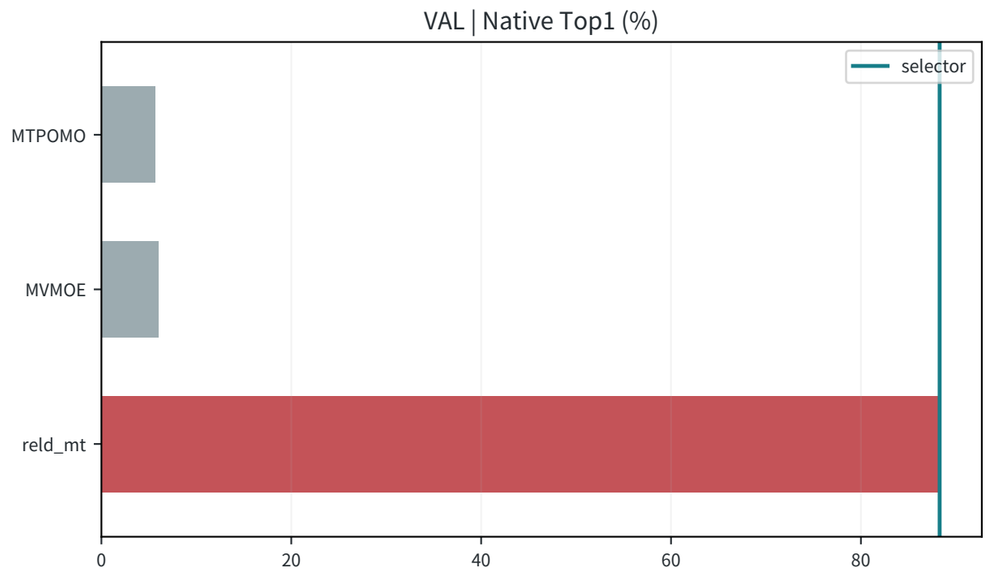





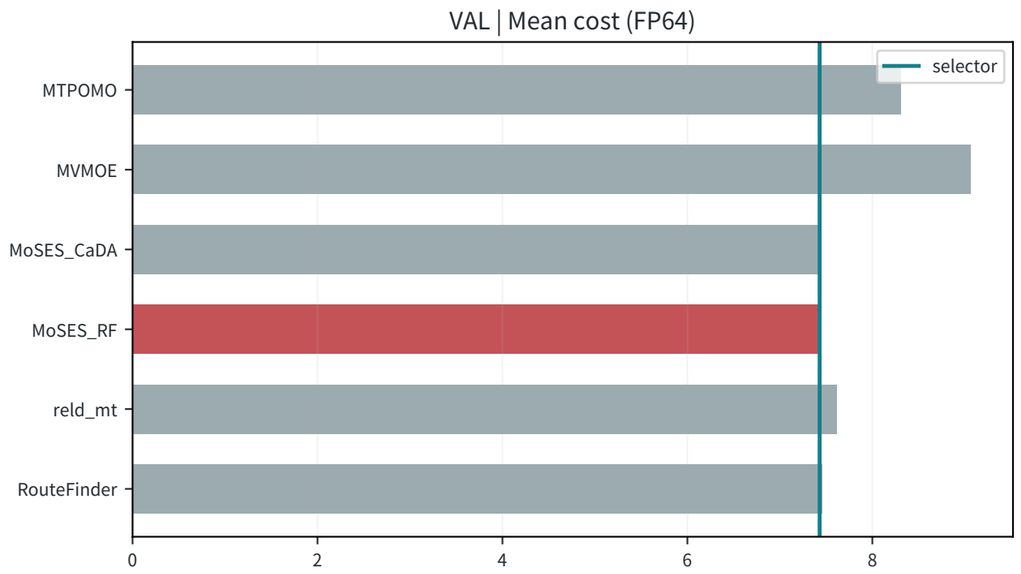



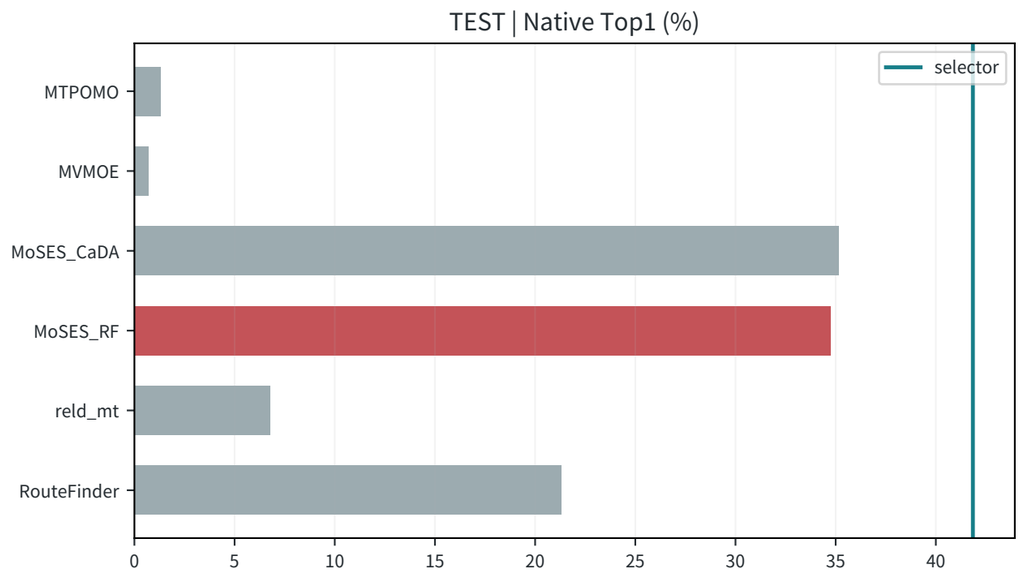



# R82B_context_matched_rank_seed2 | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

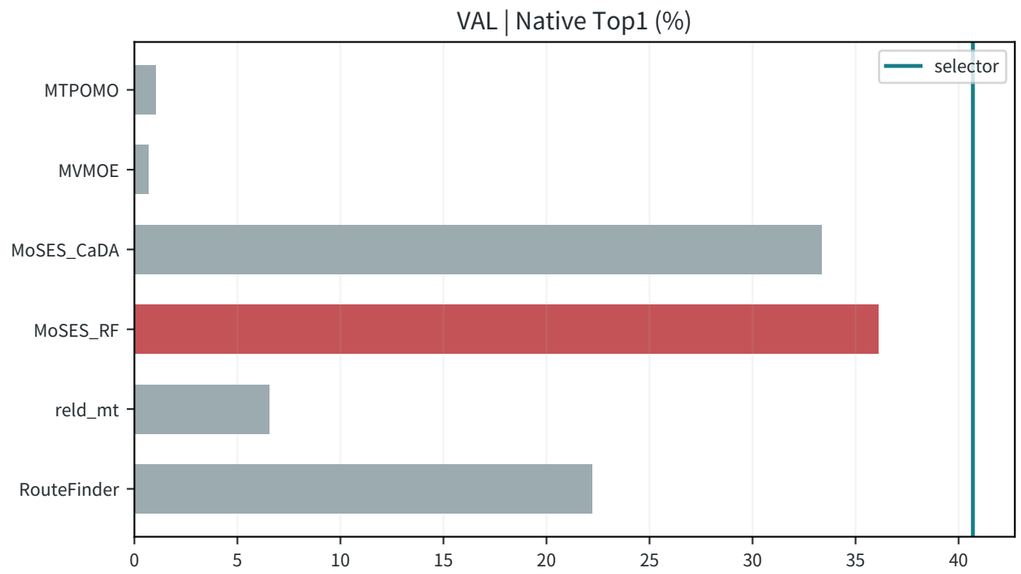





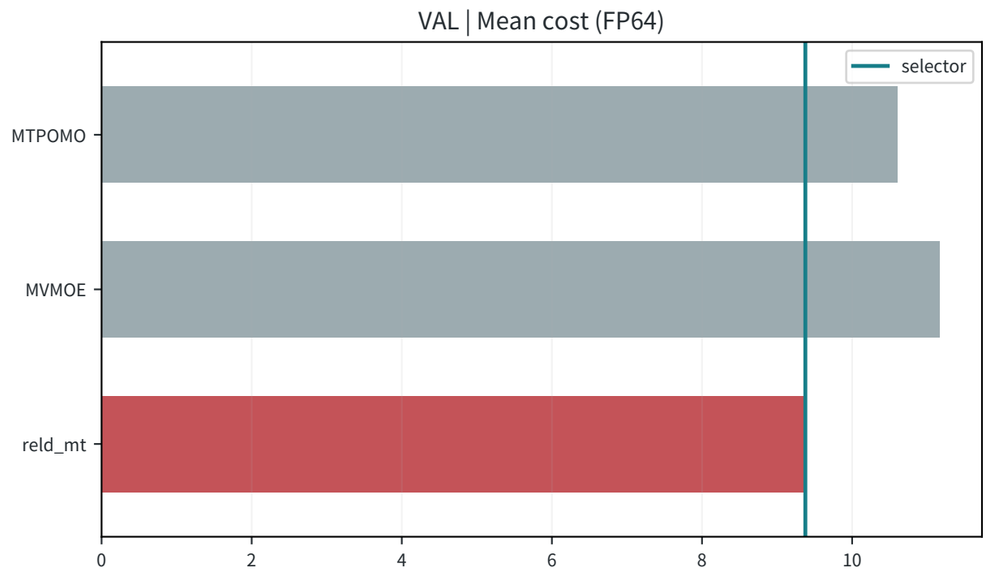



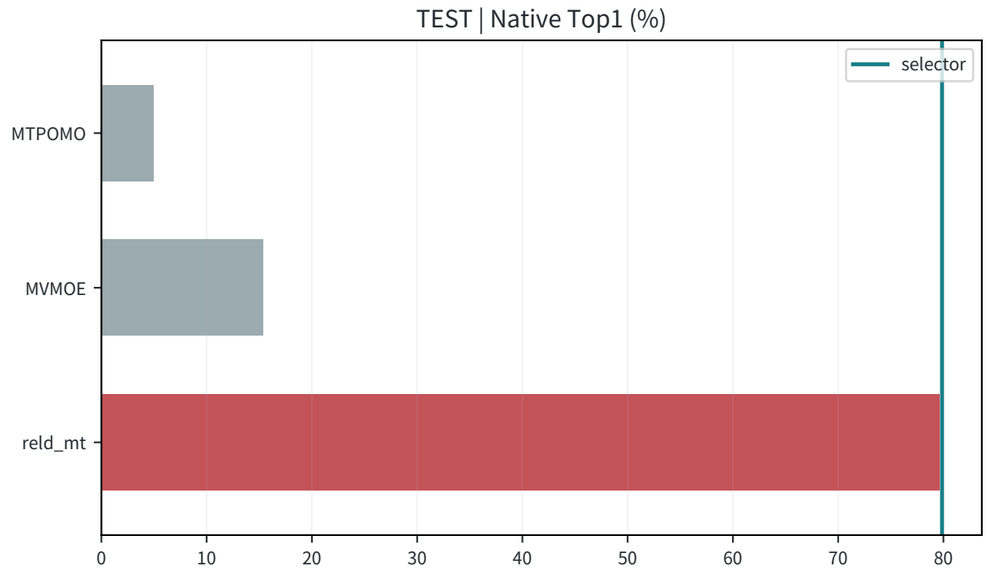




# R82B_context_matched_rank_seed2 | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

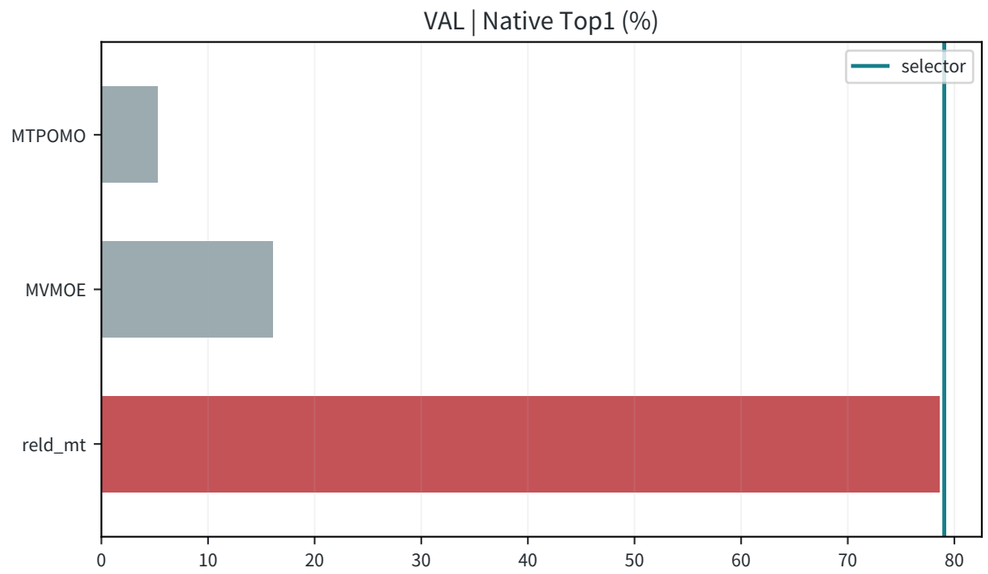





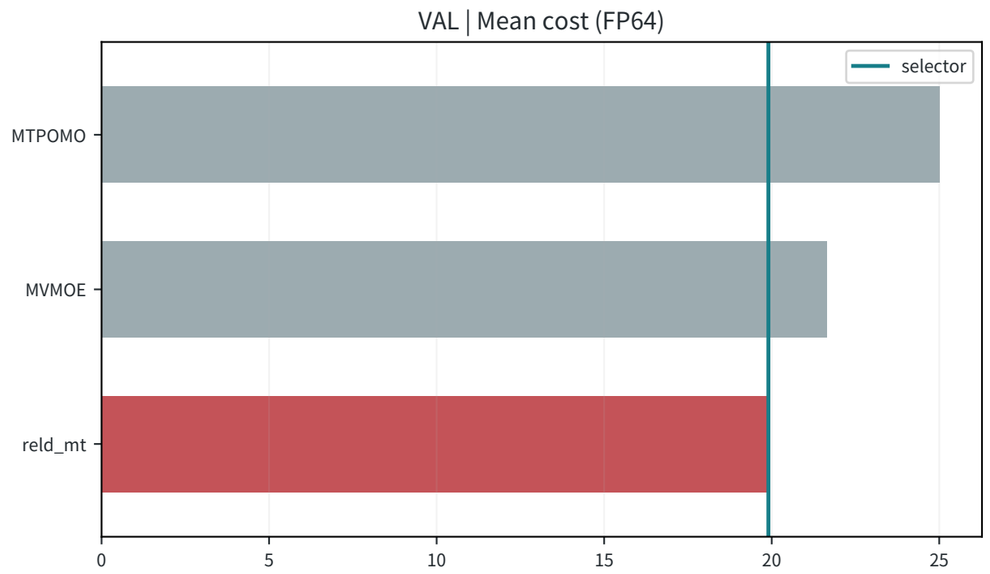


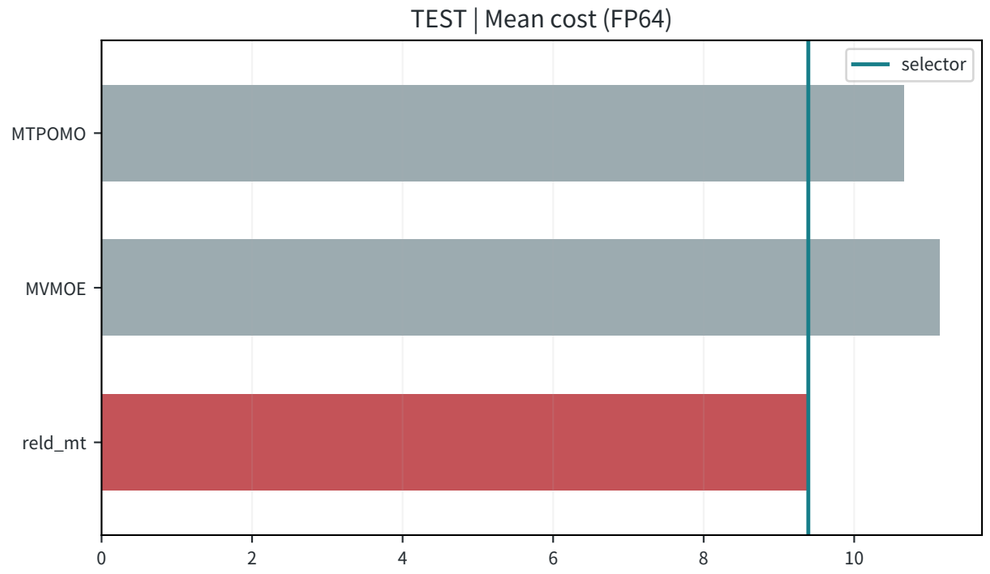
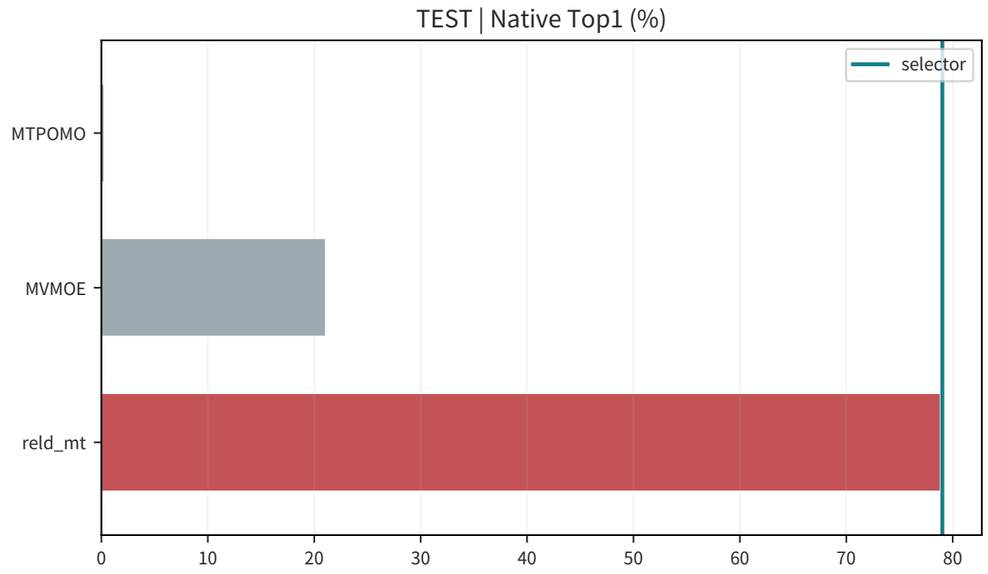



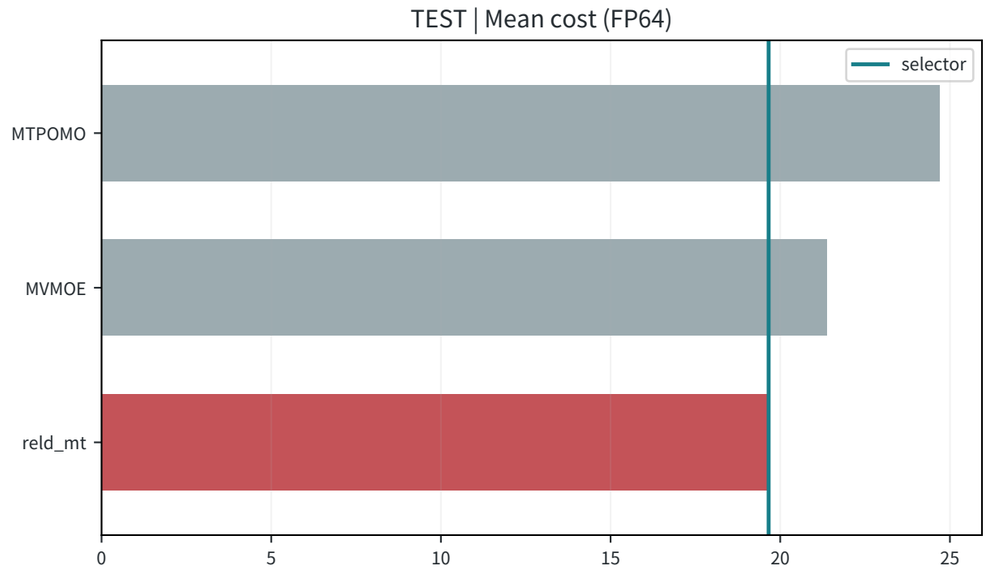
# R82B_context_matched_rank_seed2 | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

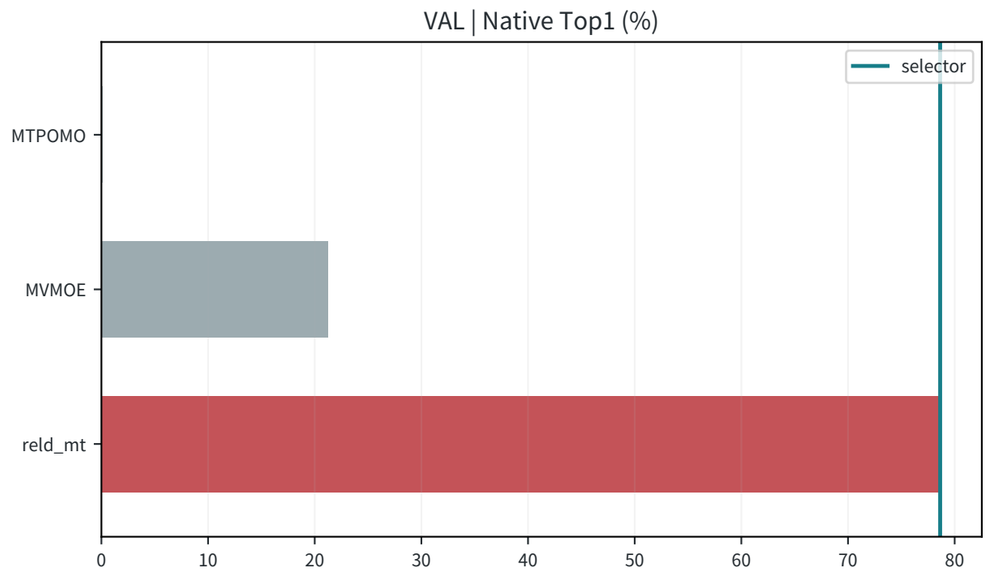





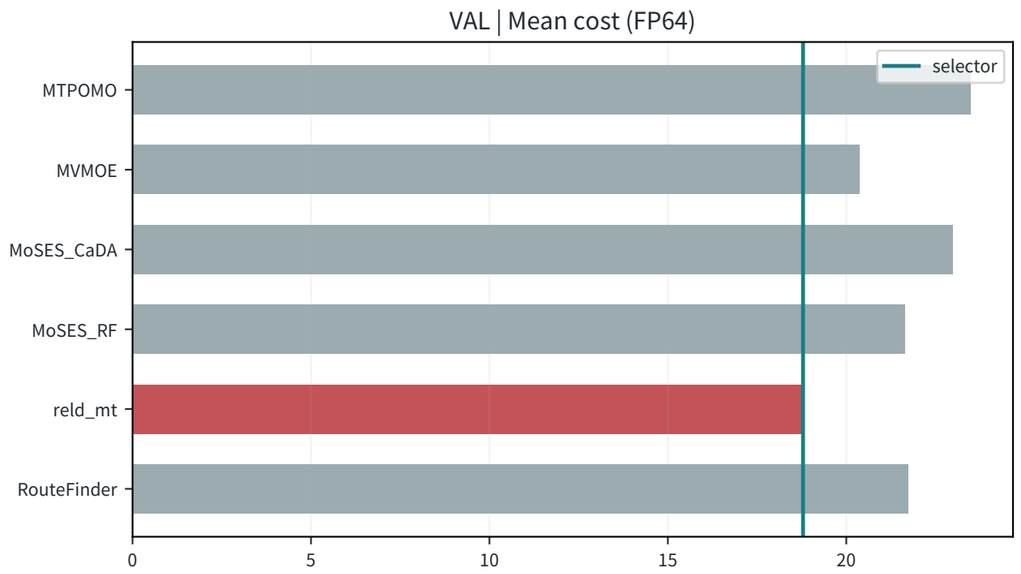



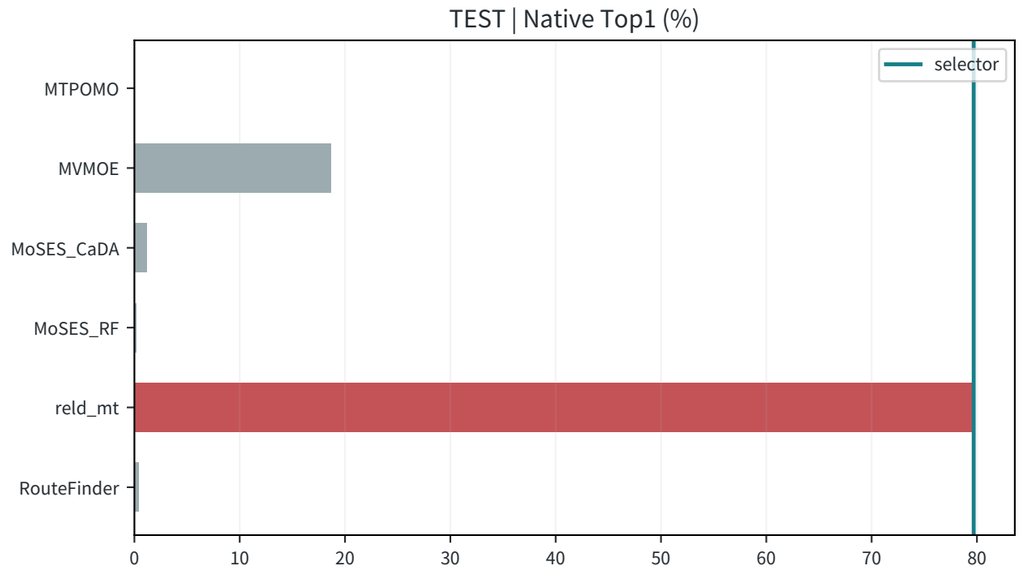



# R82B_context_matched_rank_seed2 | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

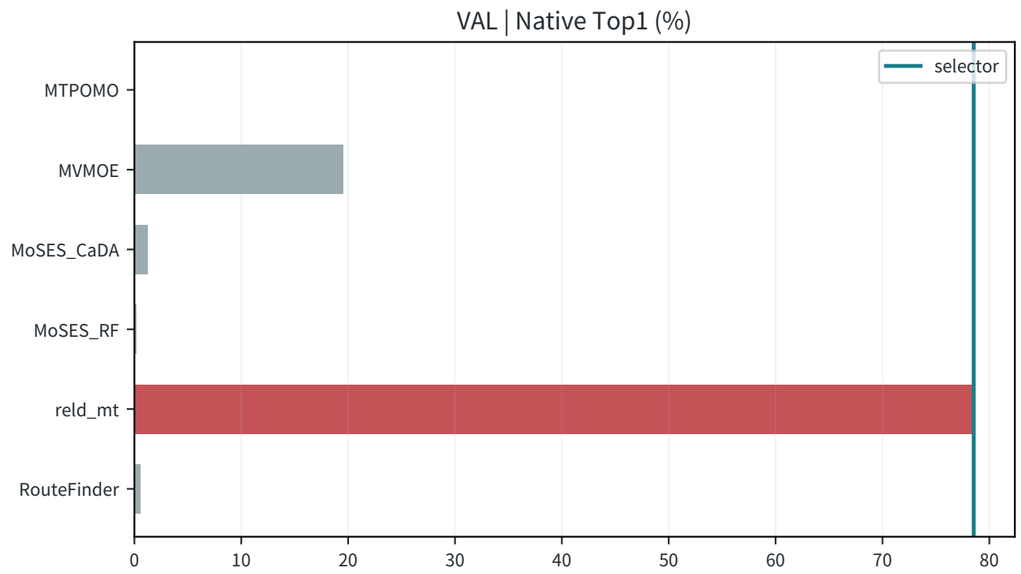





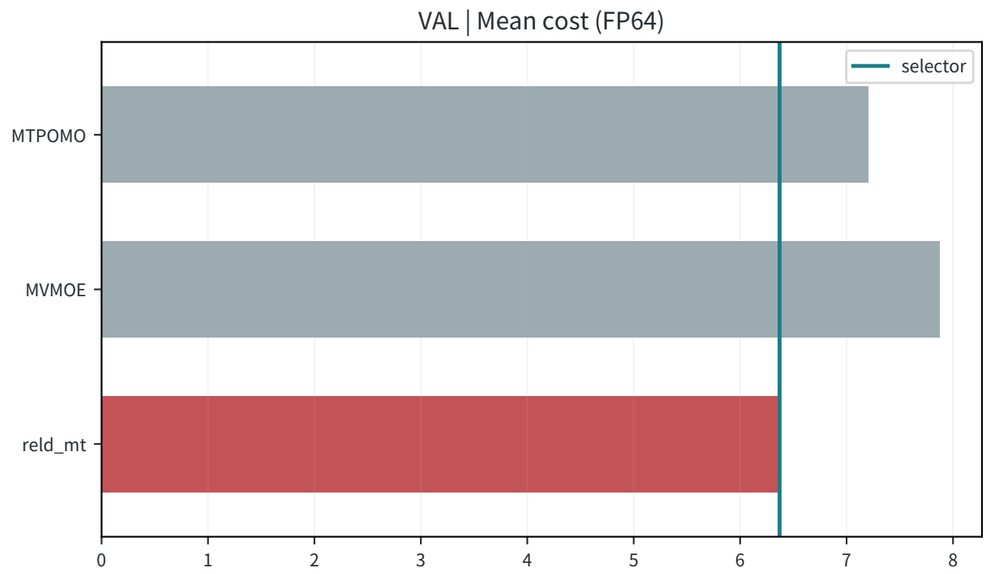



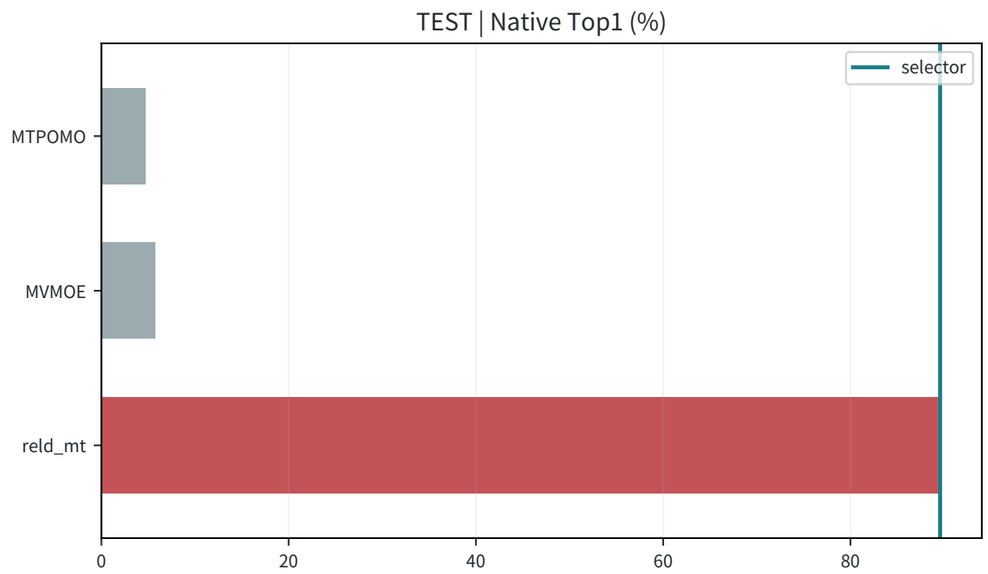




# R82B_context_matched_rank_seed2 | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

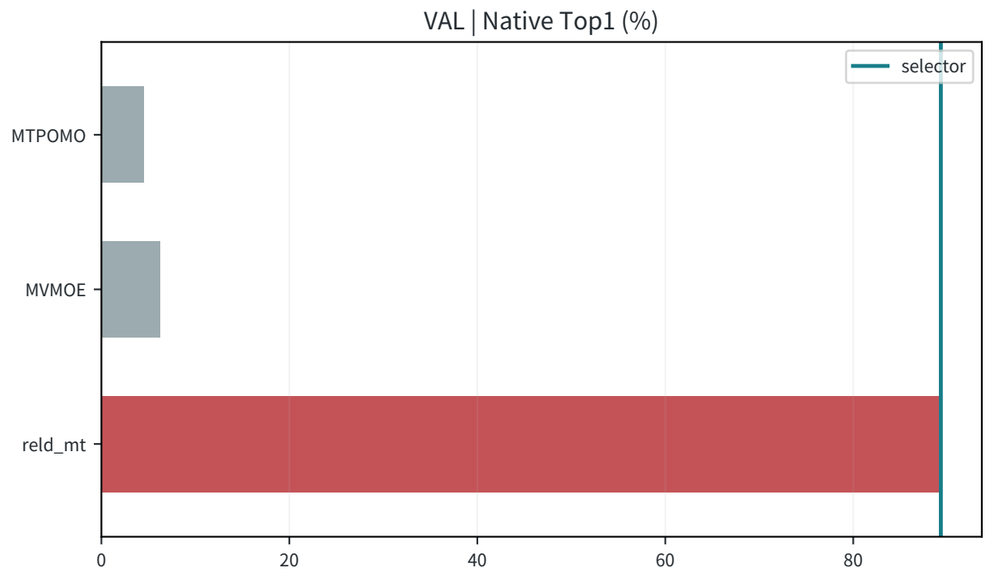





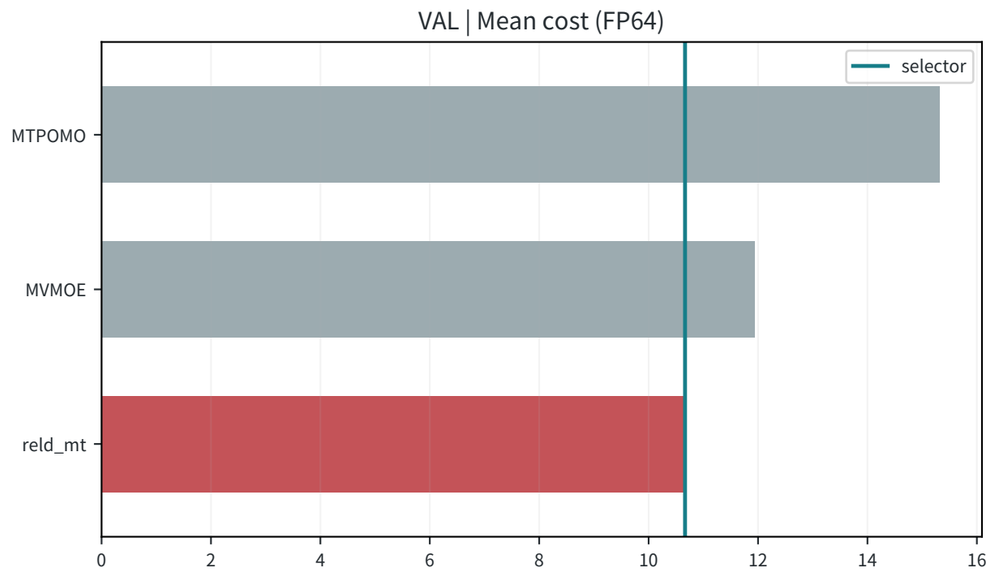


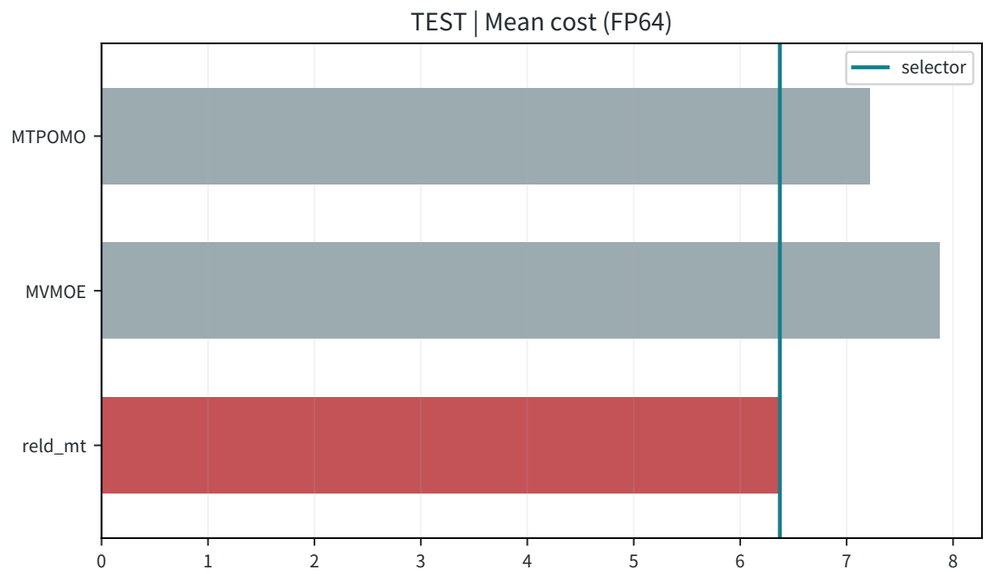
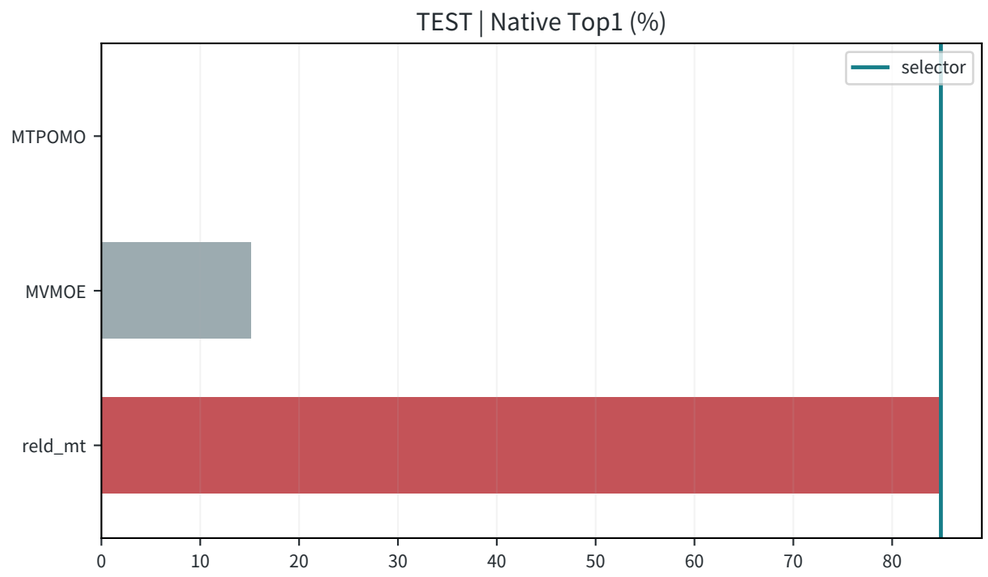



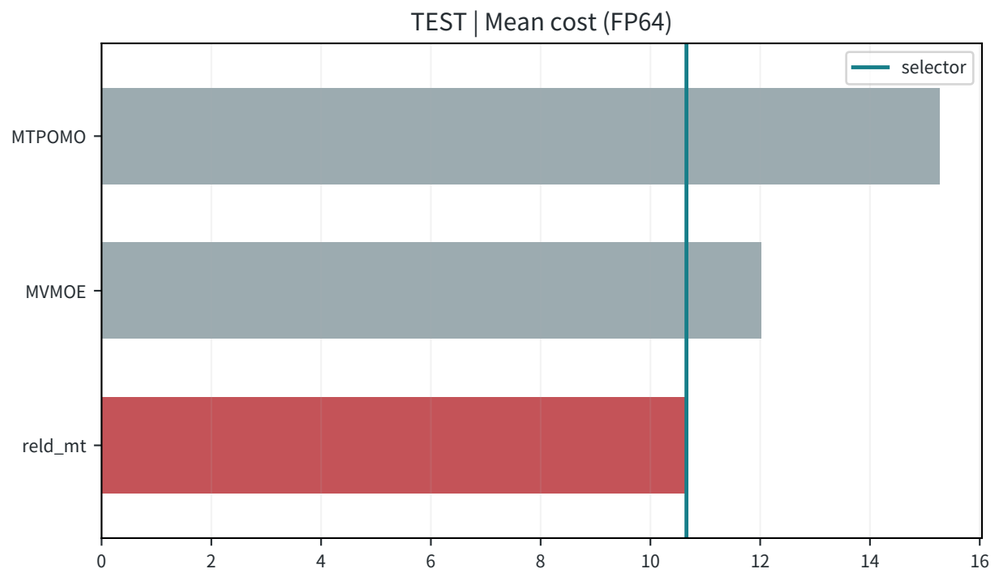
# R82B_context_matched_rank_seed2 | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

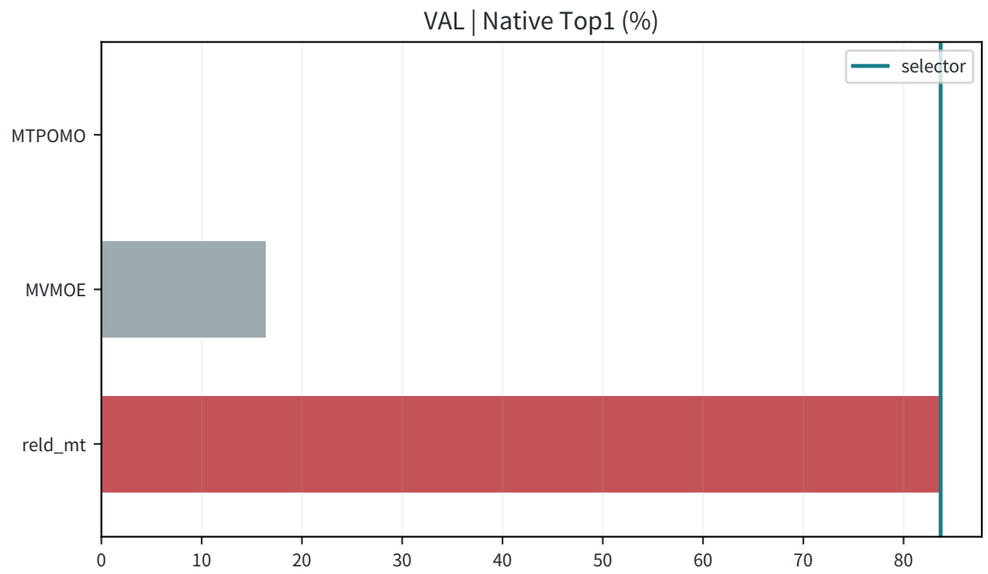





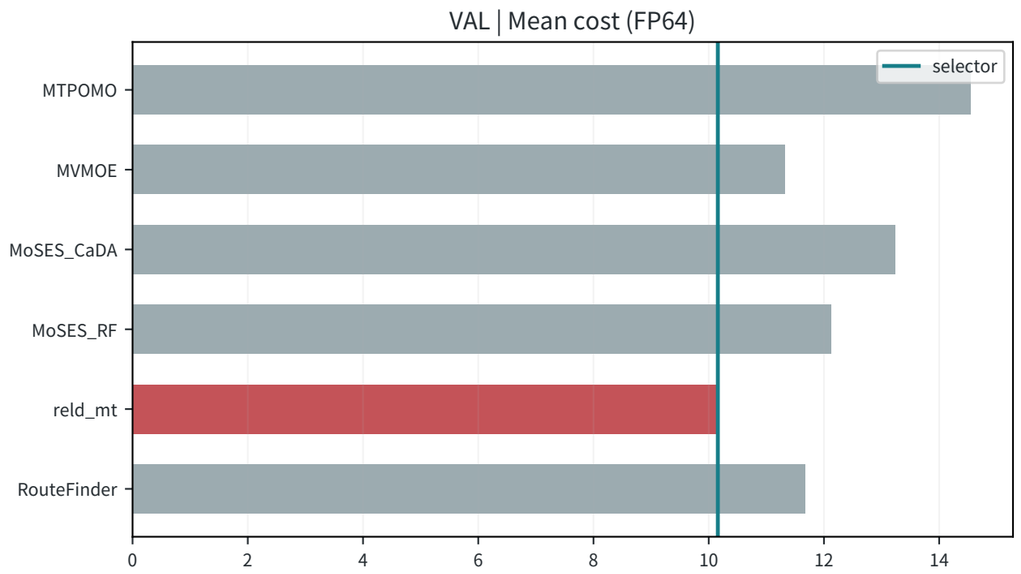



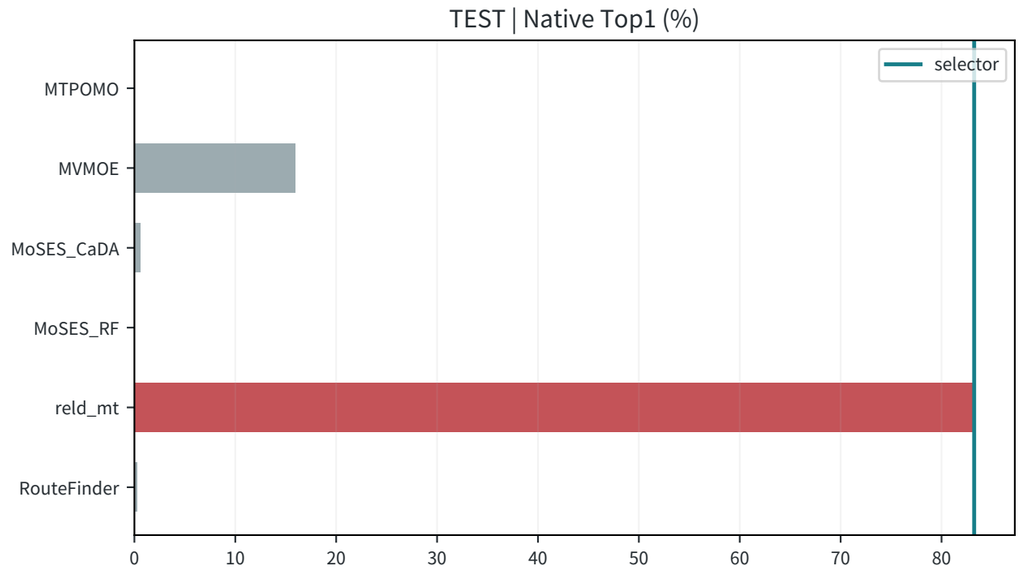



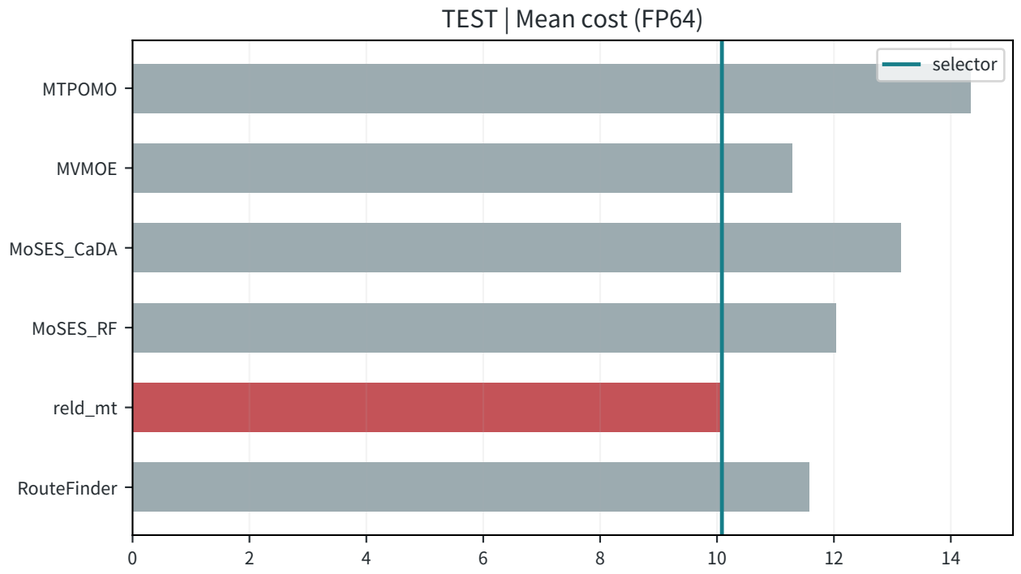
# R82B_context_matched_rank_seed2 | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

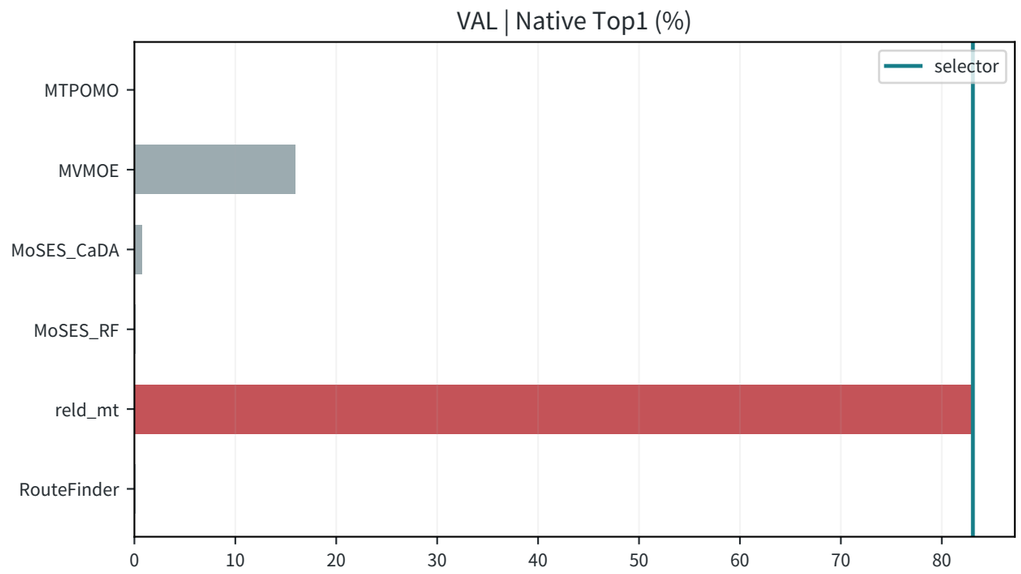





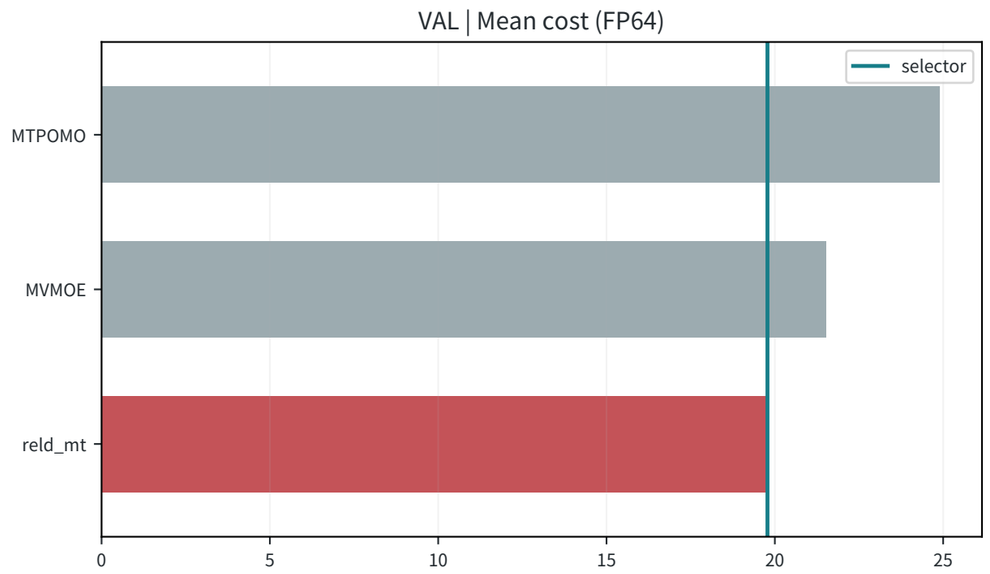



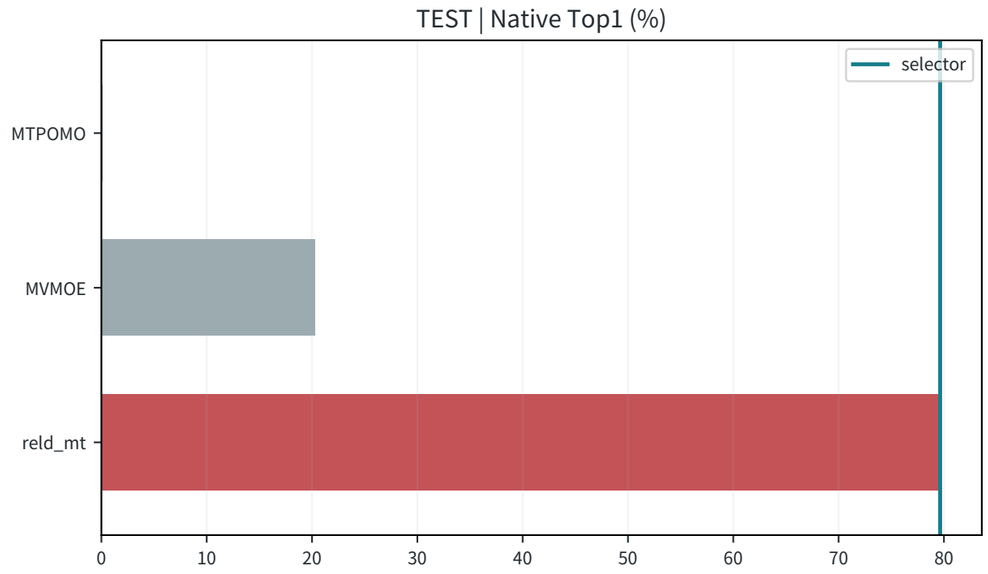



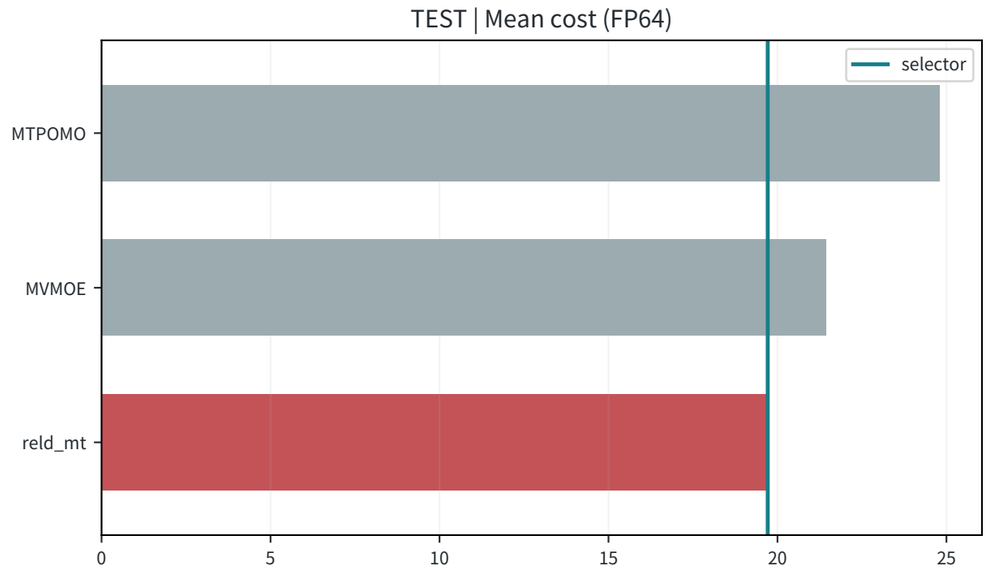
# R82B_context_matched_rank_seed2 | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

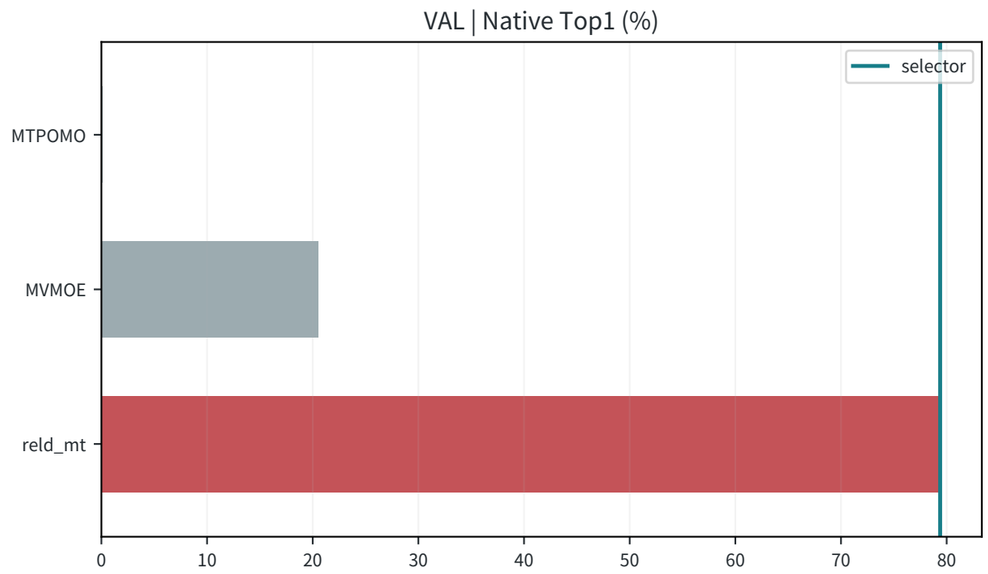

# R82B_context_matched_rank_seed2 | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

