R83/model_only_seed2 | Locked Full-Model Statistics

VAL-selected unique checkpoint; native/FP64 ind primary; no TEST/LIB reselection.

epoch 26 | selected update 32292 | seed 2 | from scratch

SHA256: 66920175a887dbf88339ca4292a42b39ed08c9de84a90b49f44c367bea991955

New data: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.8344	66.1147	11.395967	11.406477	11.350910	-0.1882	+0.3950	0.4057
TEST ALL	71.2067	66.1746	11.345720	11.356886	11.302177	-0.1949	+0.3847	0.3934

NSS vs current R83 | Same native winner definition; saved R79 selections

Dataset	n	NSS native Top1 (%)	R83 native Top1 (%)	NSS mean_cost	R83 mean_cost	NSS FP32 Top1 (%)	R83 FP32 Top1 (%)
TSP TEST	3895	44.338896	45.006418	7.634390635	7.635467429	43.953787	44.621309
CVRP TEST	3895	46.213094	46.983312	17.895818295	17.902176677	46.213094	46.983312
TSPLIB	49	20.408163	16.326531	8.217907074	8.216595444	20.408163	16.326531
CVRPLIB	100	70.000000	58.000000	67.101111717	67.306853914	70.000000	58.000000

Primary Top1 = 100 * mean(pred == native/FP64 ind). FP32 columns are compatibility-only.

R79 NSS TSP TEST: native 44.338896%; FP32 argmin 43.953786%. No label-definition mixing.

SBS identities are fixed on FULL TRAIN. Oracle is the per-instance legal-pool minimum.

ALL = equal-problem mean of each metric; cross-problem raw costs are descriptive only.

TSP/CVRP TEST: new data; TSPLIB/CVRPLIB: original native LIB, not old TEST results.

TEST partly informed prior multi-round R&D; not an untouched blind-set claim. No reselection here.

GLOP = glop_atsp_init_only (random insertion): no neural source; original trainable ID only. Candidates/IDs unchanged.

R83/model_only_seed2 | VAL: ALL + 18 Problems

Native/FP64 ind; same locked checkpoint and FULL TRAIN SBS; Top2/3 and method comparisons in CSV.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	70.8344	66.1147	11.395967	11.406477	11.350910	-0.1882	+0.3950	0.4057	per-problem
TSP	45.5199	32.5289	7.674558	7.691719	7.642213	-0.2231	+0.4232	0.4123	T2T
CVRP	46.3928	18.6393	18.130064	18.235344	18.033230	-0.5773	+0.5370	0.7128	RELD_CVRP
ATSP	77.2272	47.3427	1.639715	1.678143	1.633464	-2.2899	+0.3827	0.3800	UNICO_MatPOENet
OVRP	40.6675	35.6611	7.456476	7.463758	7.410647	-0.0976	+0.6184	0.6327	MoSES_RF
VRPB	80.7959	80.6932	9.349985	9.350167	9.314024	-0.0019	+0.3861	0.3961	reld_mt
VRPL	37.6123	32.8113	12.423838	12.430138	12.375775	-0.0507	+0.3884	0.3965	MoSES_RF
VRPTW	80.0770	80.0513	18.844347	18.844840	18.791002	-0.0026	+0.2839	0.3023	reld_mt
OVRPTW	83.6970	83.6457	10.168193	10.168648	10.142136	-0.0045	+0.2569	0.2533	reld_mt
OVRPB	88.3184	88.3184	6.359210	6.359253	6.343047	-0.0007	+0.2548	0.2612	reld_mt
OVRPL	40.0000	36.0976	7.430975	7.437230	7.382246	-0.0841	+0.6601	0.6767	MoSES_RF
VRPBL	78.8447	78.6393	9.378384	9.379846	9.336336	-0.0156	+0.4504	0.4545	reld_mt
VRPBTW	78.6136	78.6136	19.902675	19.904962	19.806866	-0.0115	+0.4837	0.4634	reld_mt
VRPLTW	78.5623	78.4596	18.787860	18.789198	18.731398	-0.0071	+0.3014	0.3199	reld_mt
OVRPBL	89.2683	89.2169	6.370641	6.371327	6.354706	-0.0108	+0.2508	0.2607	reld_mt
OVRPBTW	83.7484	83.6200	10.665761	10.666245	10.629124	-0.0045	+0.3447	0.3191	reld_mt
OVRPLTW	83.1579	83.0809	10.158014	10.158206	10.129911	-0.0019	+0.2774	0.2810	reld_mt
VRPBLTW	79.2811	79.3582	19.782089	19.782852	19.694102	-0.0039	+0.4468	0.4402	reld_mt
OVRPBLTW	83.2349	83.2863	10.604619	10.604709	10.566155	-0.0008	+0.3640	0.3398	reld_mt

vs_SBS = 100*(mean_cost/SBS_cost - 1); vs_Oracle = 100*(mean_cost/Oracle_cost - 1).

actual regret = mean_i[100*(selected_i-min_legal_i)/min_legal_i]; not a ratio of means.

ALL rates/costs are equal-weight means across 18 problems. Do not compare mixed raw-cost ratios.

Data: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

R83/model_only_seed2 | TEST: ALL + 18 Problems

Native/FP64 ind; same locked checkpoint and FULL TRAIN SBS; Top2/3 and method comparisons in CSV.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2067	66.1746	11.345720	11.356886	11.302177	-0.1949	+0.3847	0.3934	per-problem
TSP	45.0064	34.0693	7.635467	7.648986	7.602818	-0.1767	+0.4294	0.4188	T2T
CVRP	46.9833	18.1001	17.902177	18.013673	17.810107	-0.6190	+0.5169	0.6731	RELD_CVRP
ATSP	76.9705	47.2914	1.634505	1.673244	1.628462	-2.3152	+0.3711	0.3717	UNICO_MatPOENet
OVRP	40.8472	33.2221	7.445083	7.455280	7.399322	-0.1368	+0.6185	0.6298	MoSES_RF
VRPB	80.3338	80.1027	9.348804	9.350709	9.313495	-0.0204	+0.3791	0.3814	reld_mt
VRPL	37.4583	32.0154	12.355818	12.362834	12.307678	-0.0568	+0.3911	0.3993	MoSES_RF
VRPTW	81.0526	80.8472	18.678468	18.679226	18.626242	-0.0041	+0.2804	0.2918	reld_mt
OVRPTW	84.0308	84.0308	10.098197	10.098565	10.073411	-0.0036	+0.2461	0.2371	reld_mt
OVRPB	88.1130	88.0873	6.371228	6.371519	6.352881	-0.0046	+0.2888	0.2964	reld_mt
OVRPL	41.7715	34.7368	7.465110	7.473924	7.419485	-0.1179	+0.6149	0.6254	MoSES_RF
VRPBL	79.8460	79.6662	9.390919	9.392364	9.351966	-0.0154	+0.4165	0.4213	reld_mt
VRPBTW	78.8960	78.7933	19.658479	19.660290	19.572604	-0.0092	+0.4388	0.4382	reld_mt
VRPLTW	79.6149	79.6149	18.765900	18.766509	18.711715	-0.0032	+0.2896	0.3082	reld_mt
OVRPBL	89.5250	89.5507	6.372939	6.372881	6.356685	+0.0009	+0.2557	0.2669	reld_mt
OVRPBTW	84.9037	84.8267	10.656160	10.656749	10.622470	-0.0055	+0.3171	0.2880	reld_mt
OVRPLTW	83.2092	83.1065	10.083494	10.084034	10.056522	-0.0054	+0.2682	0.2698	reld_mt
VRPBLTW	79.6662	79.6149	19.710845	19.713491	19.619916	-0.0134	+0.4635	0.4479	reld_mt
OVRPBLTW	83.4917	83.4660	10.649372	10.649666	10.613413	-0.0028	+0.3388	0.3155	reld_mt

vs_SBS = 100*(mean_cost/SBS_cost - 1); vs_Oracle = 100*(mean_cost/Oracle_cost - 1).

actual regret = mean_i[100*(selected_i-min_legal_i)/min_legal_i]; not a ratio of means.

ALL rates/costs are equal-weight means across 18 problems. Do not compare mixed raw-cost ratios.

Data: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

R83/model_only_seed2 | Native LIB And Evaluation Provenance

R83 factory and every source/ID/geometry checkpoint buffer restored; no historical R77/R76 LIB scores.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB n=49	16.3265	10.2041	8.216595	8.240435	8.142167	-0.2893	+0.9141	0.9236
CVRPLIB n=100	58.0000	45.0000	67.306854	67.245364	66.945093	+0.0914	+0.5404	0.6528

Lock rule: strict minimum full VAL macro_vs_sbs_pct with common FULL TRAIN-fitted SBS; first wins ties

All problems, VAL/TEST, TSPLIB and CVRPLIB use one arm/checkpoint, not per-dataset best versions.

Inference: single FP32 forward; logits argmax; exact ties use lowest stable global solver ID.

Native FP64 costs and saved ind are preserved; no solver solving, embedding API, or normalization refit.

Main SBS uses the precommitted FULL TRAIN identity, not the retrospective best LIB solver.

NSS uses saved pred directly, including its original score-tie behavior; it is never retrained here.

NSS alignment: same new-data version, candidates aligned by name; three instance rows checked per dataset.

Prediction paths, data hashes, model factory, candidate order and formulas are in protocol.json.

Reporting failure preserves completed training/TEST. Re-running this reporter reuses checked same-lock LIB predictions.


Native model Top1 is shown only on model-selection panels, never assigned to true-winner panels.


R83/model_only_seed2 | TSP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/TSPLIB | native/FP64 ind

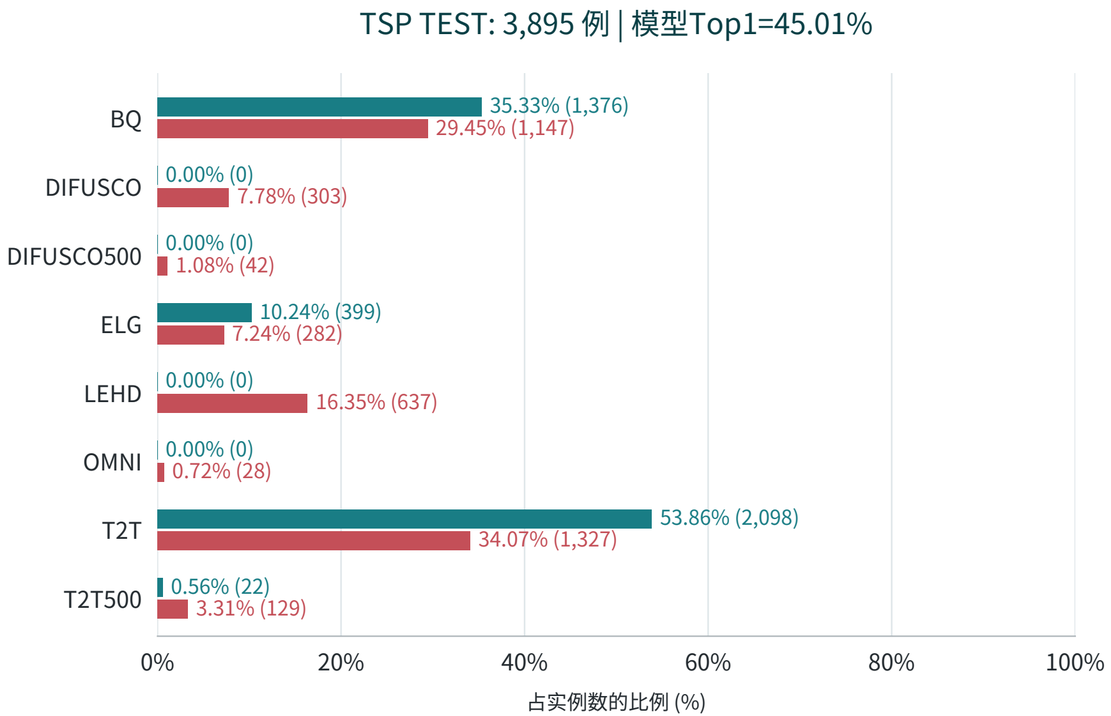

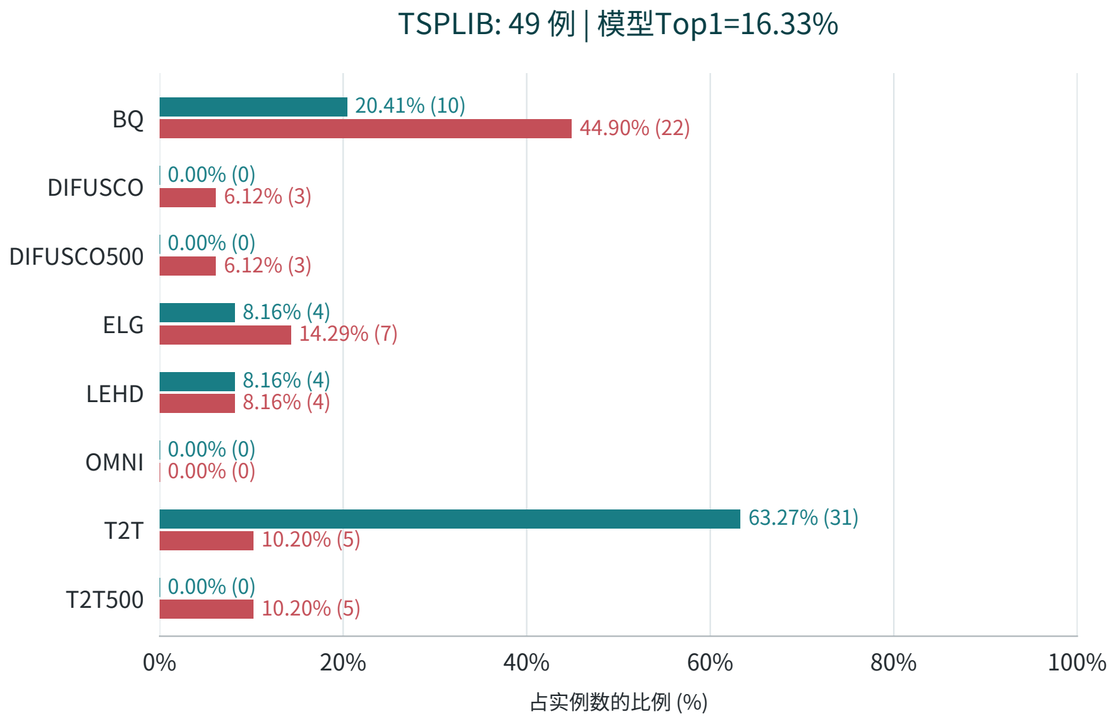

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.


R83/model_only_seed2 | CVRP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

LIB: data/CVRPLIB | native/FP64 ind

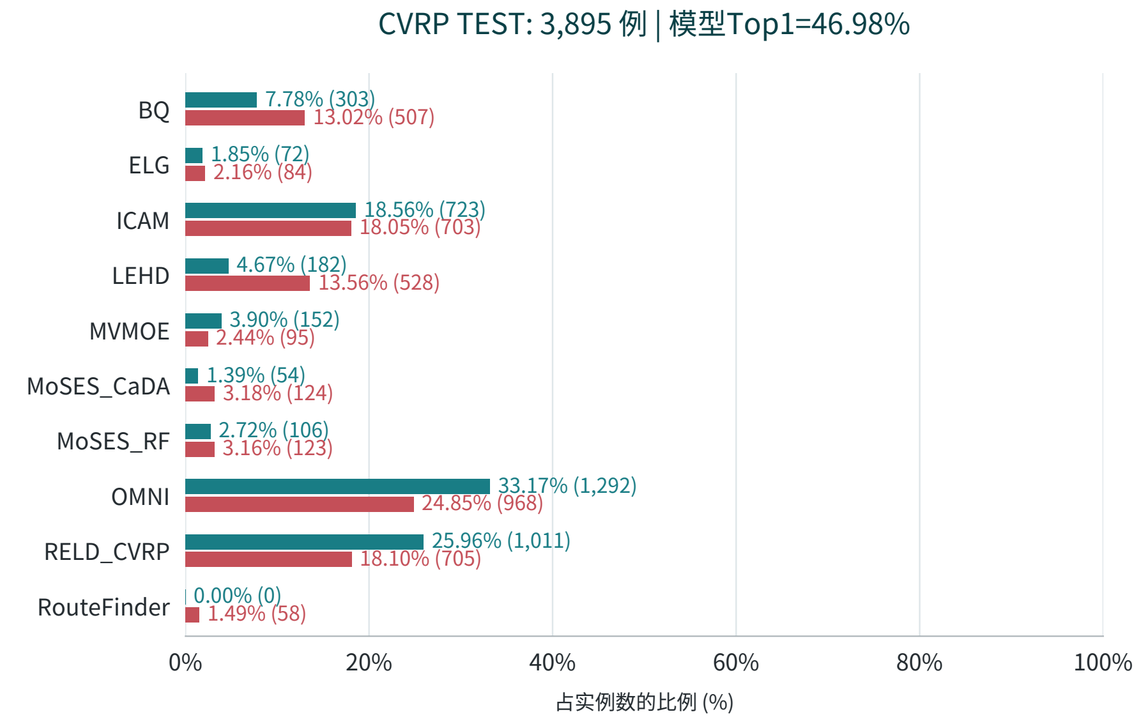

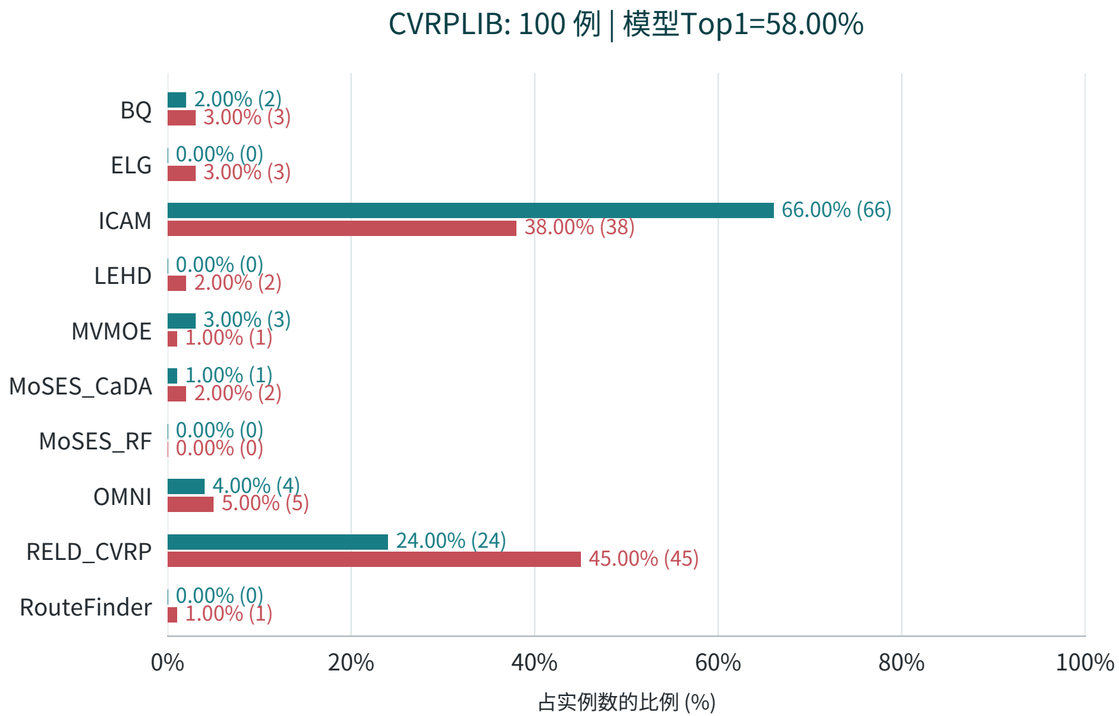

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | ATSP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

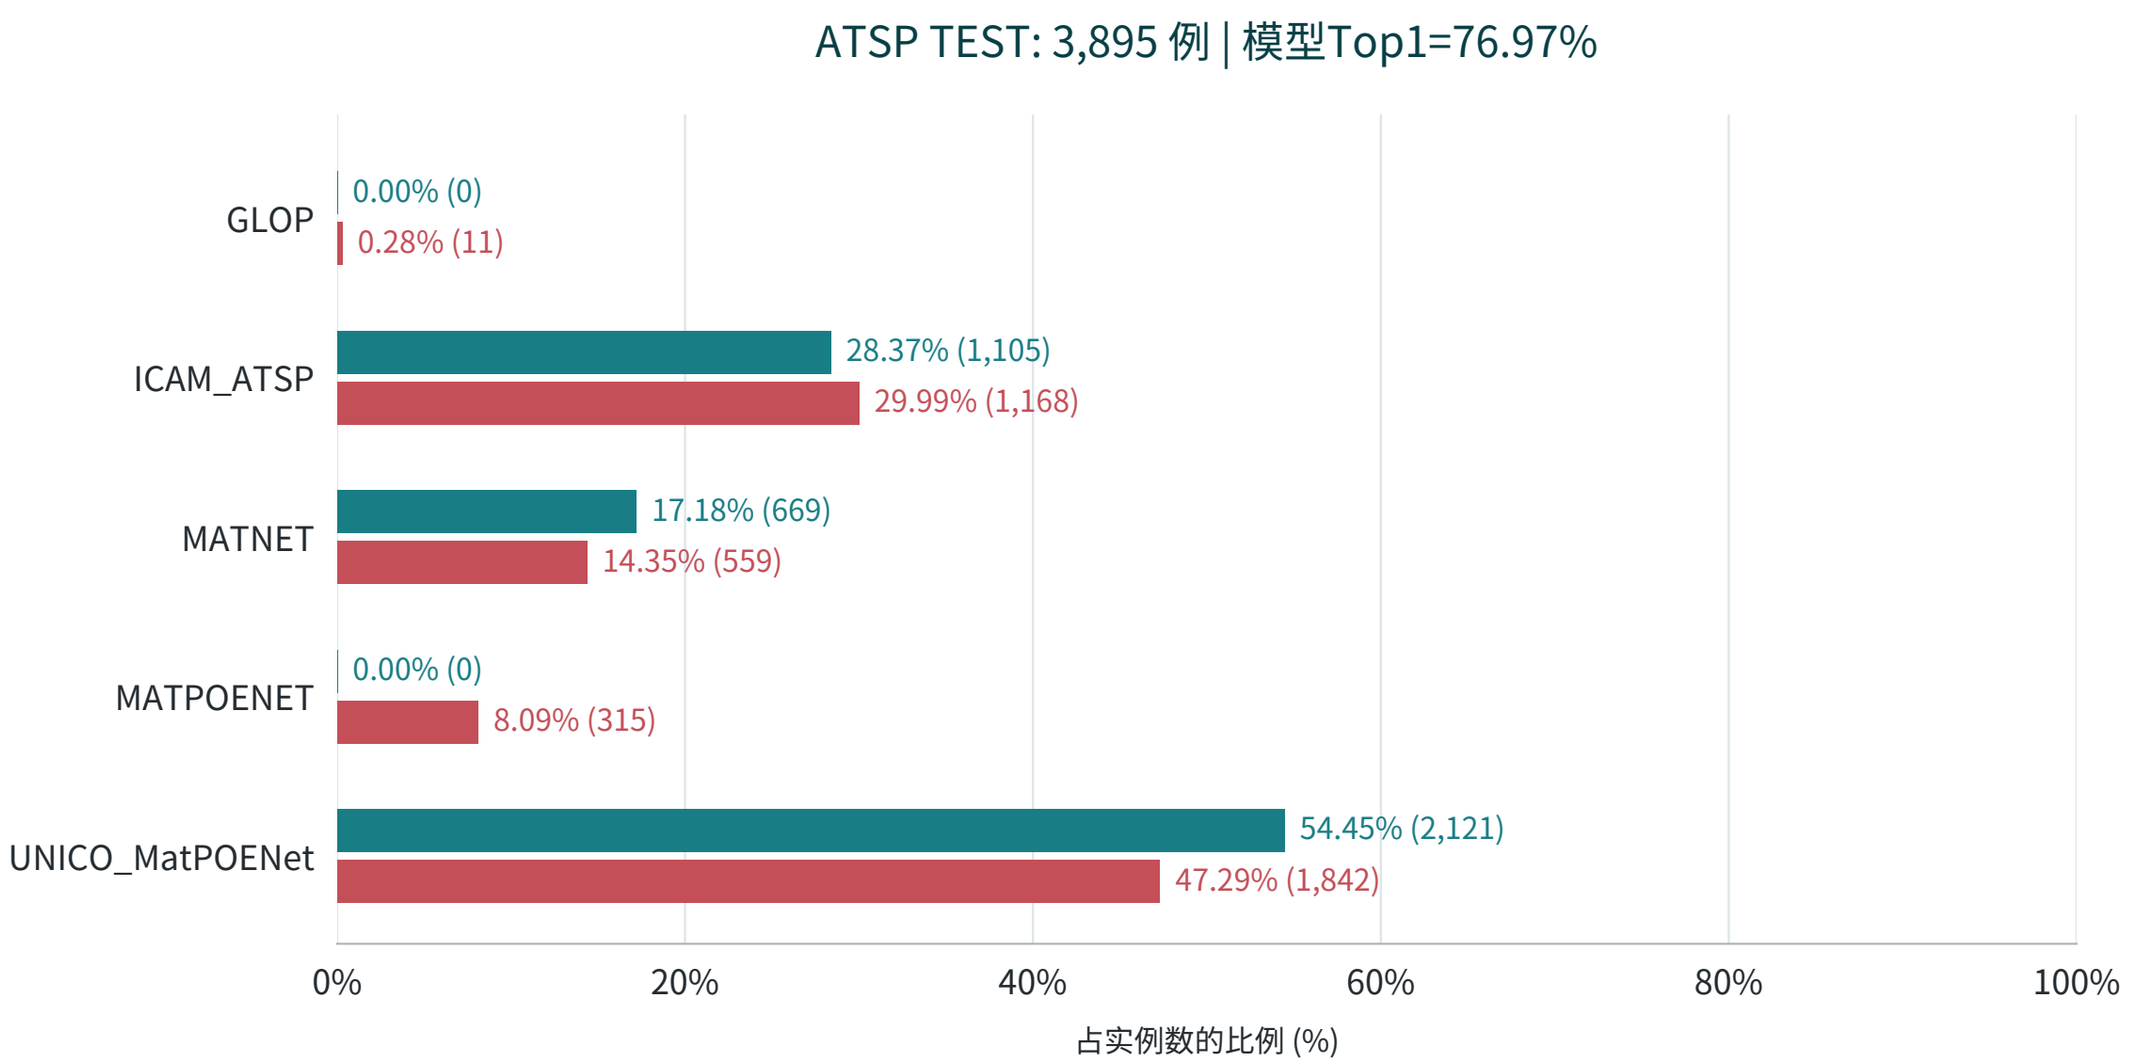

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


GLOP: no neural model (glop_atsp_init_only random insertion); original trainable ID only. Candidates/IDs unchanged.

R83/model_only_seed2 | OVRP | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

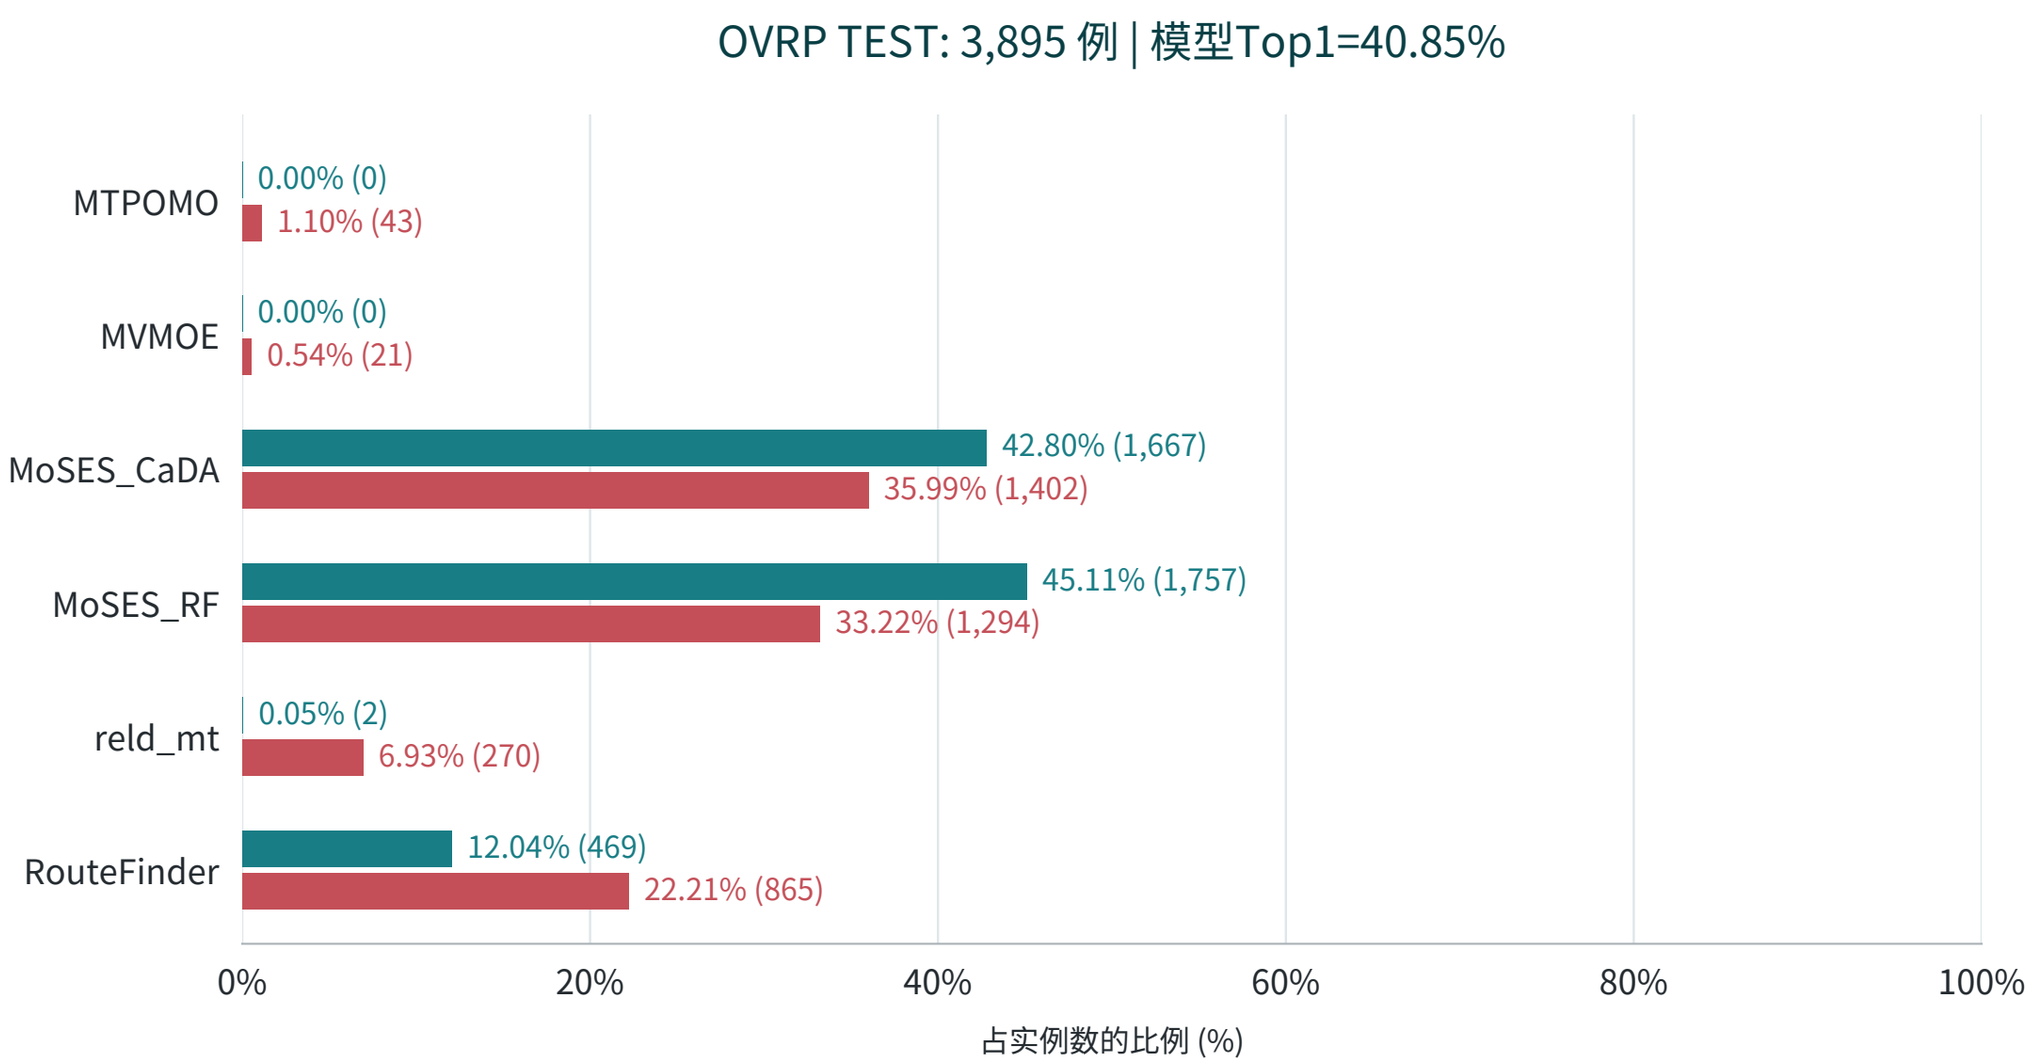

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPB | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

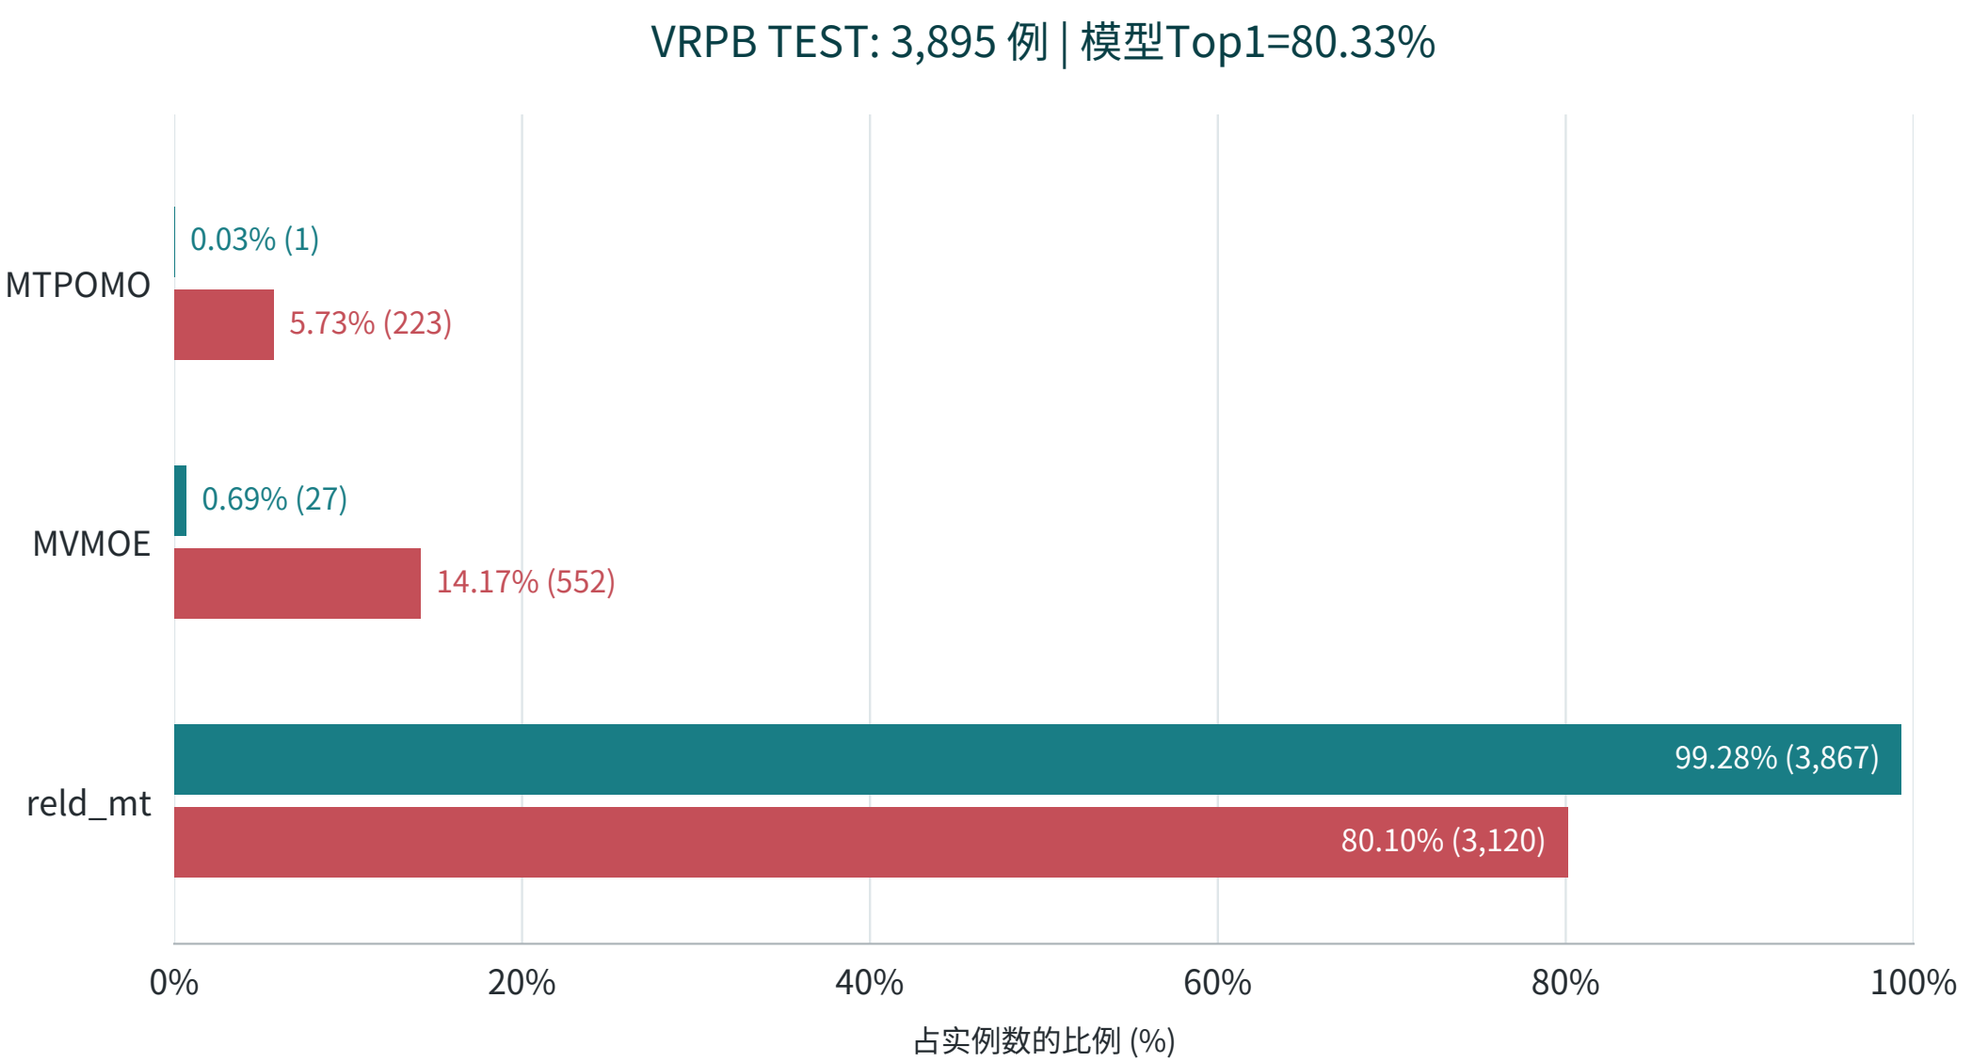

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

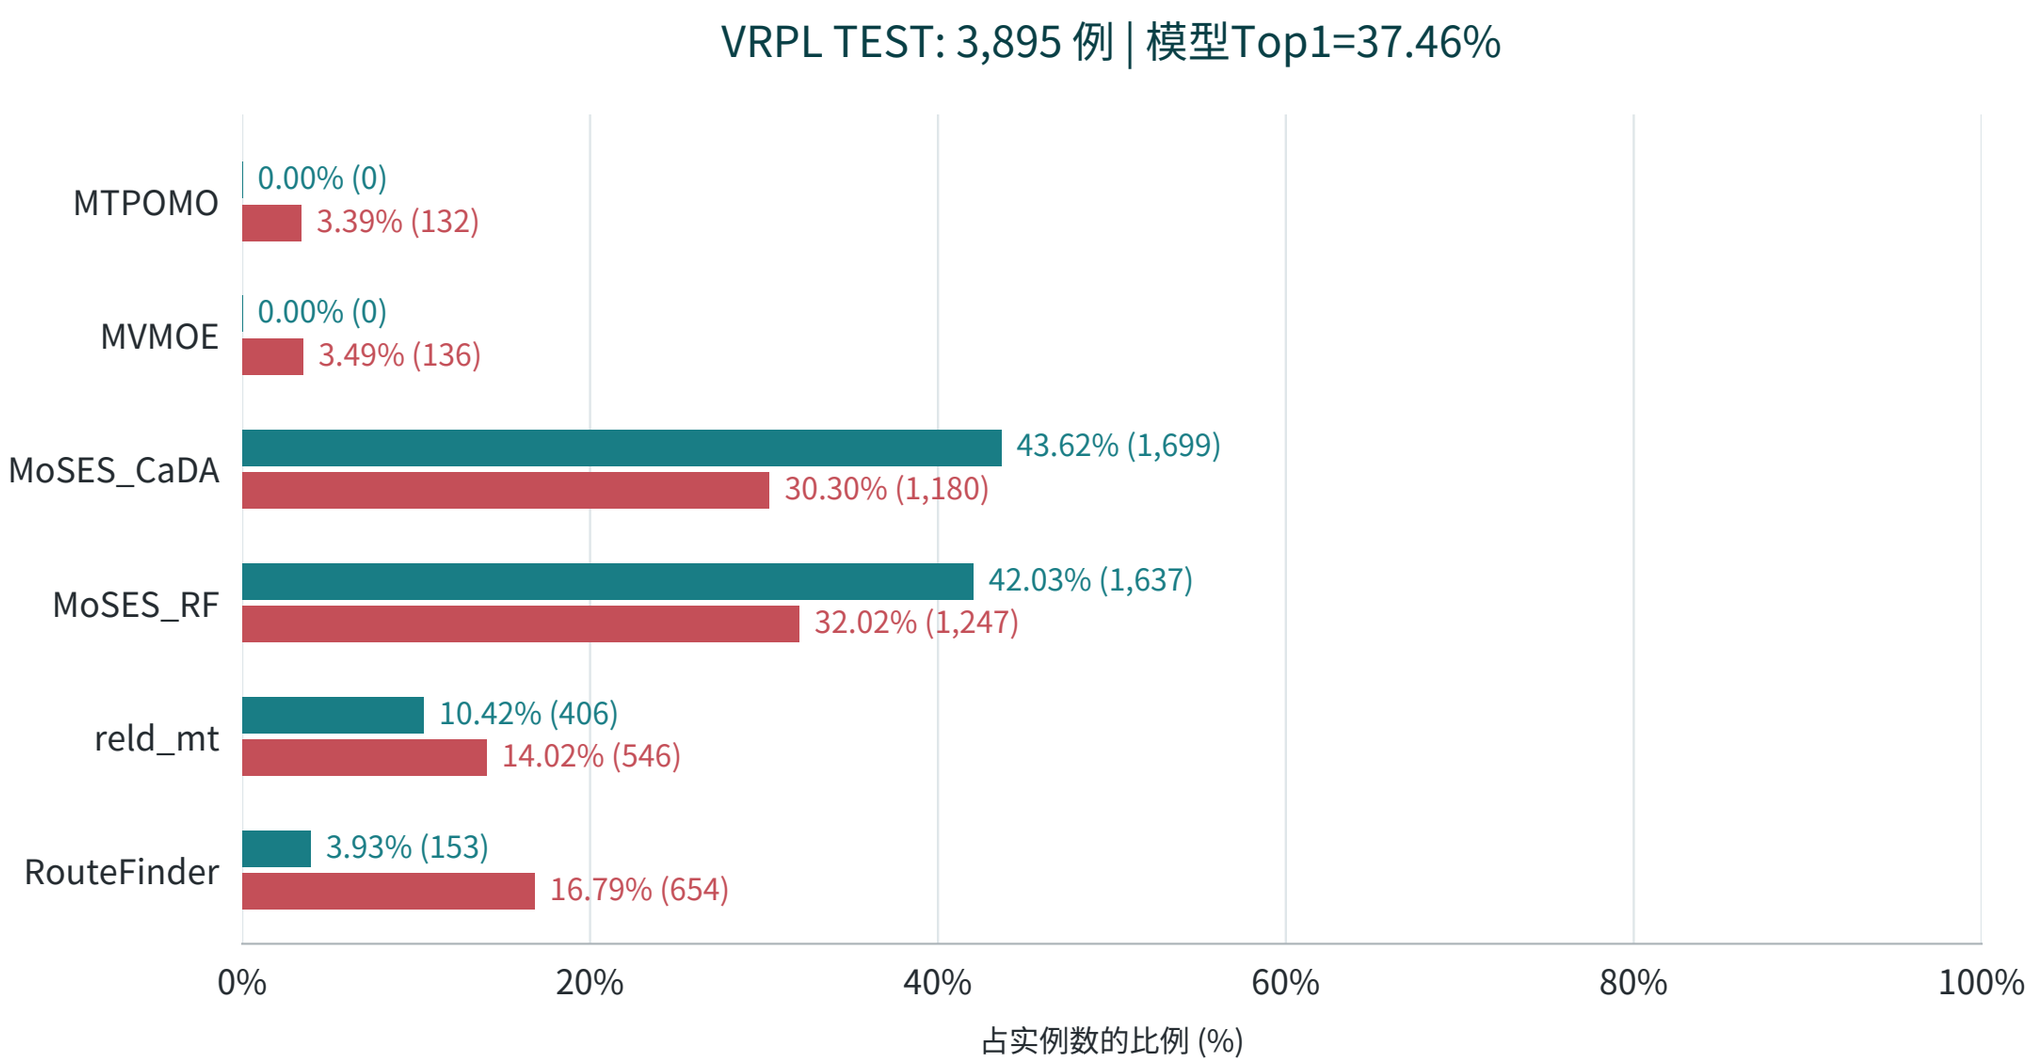

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

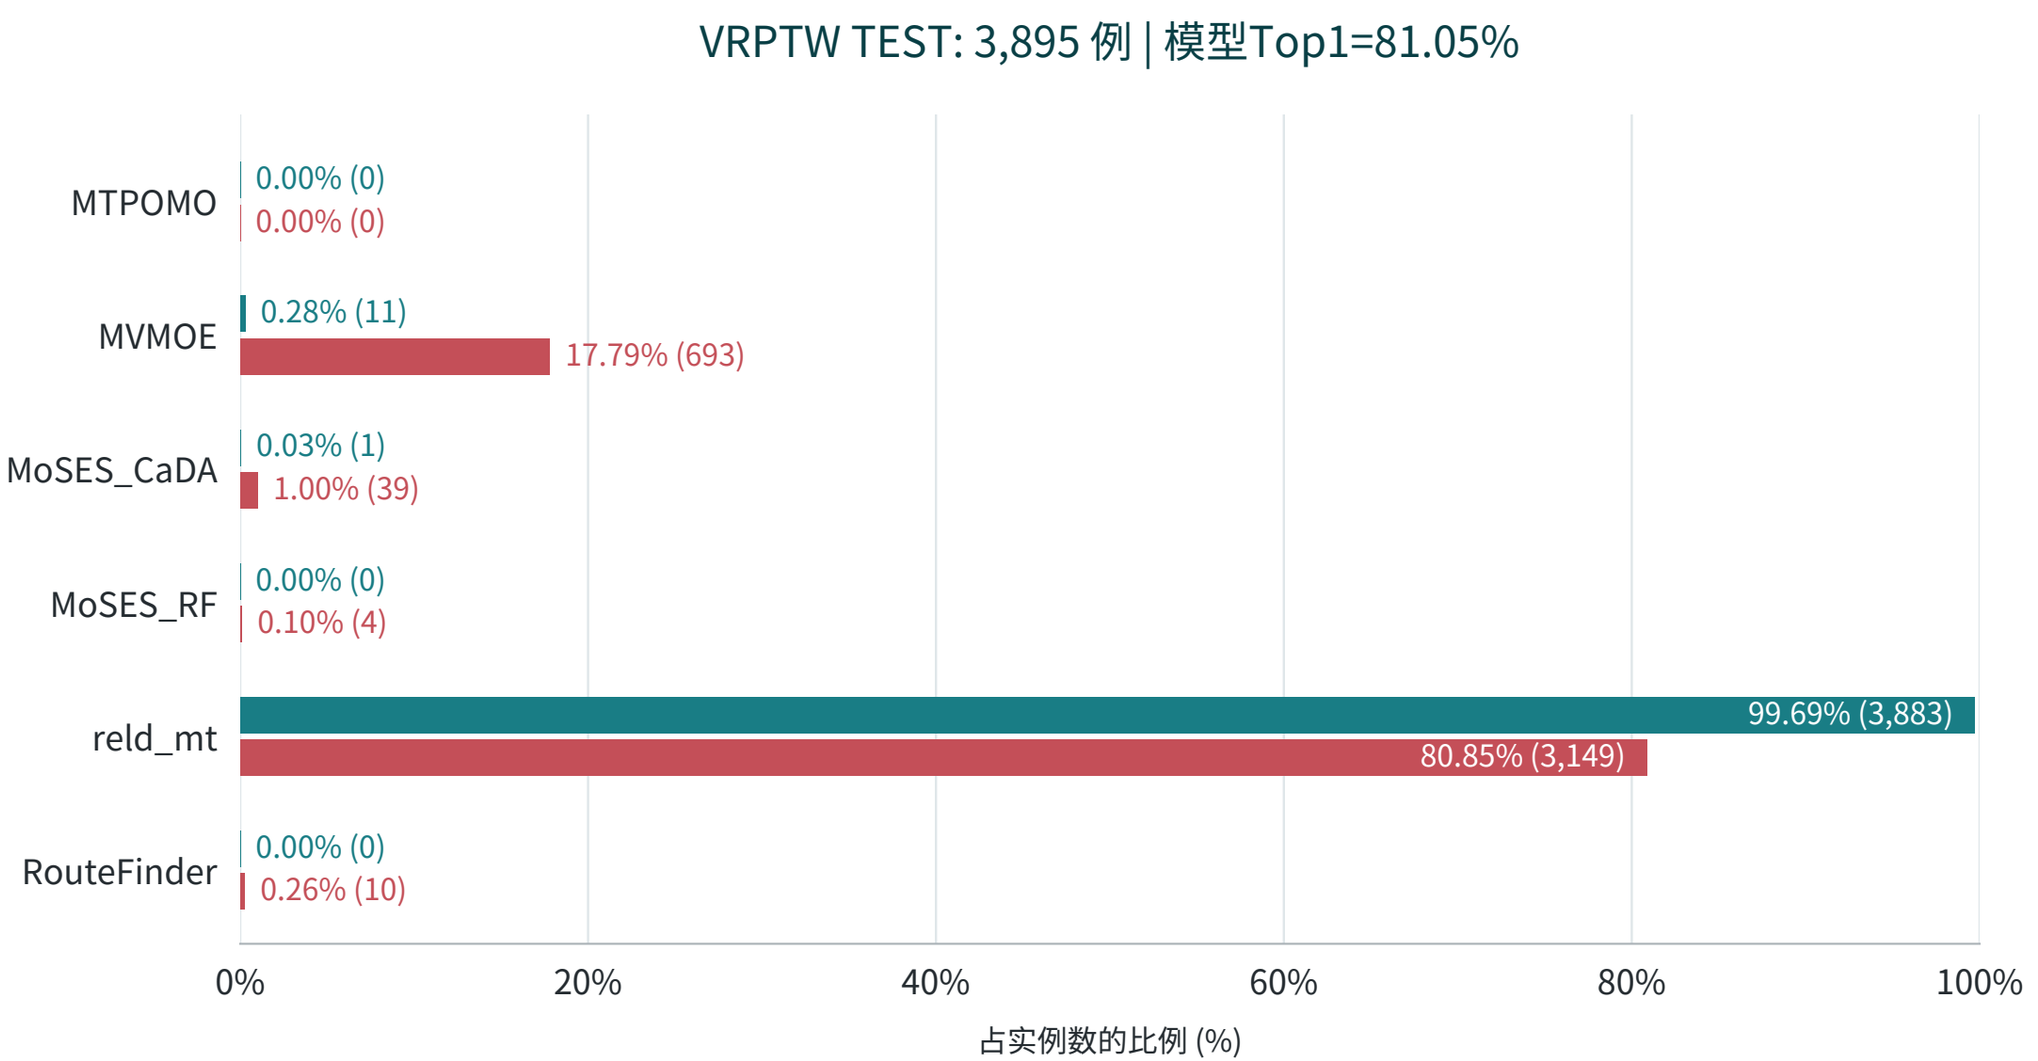

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

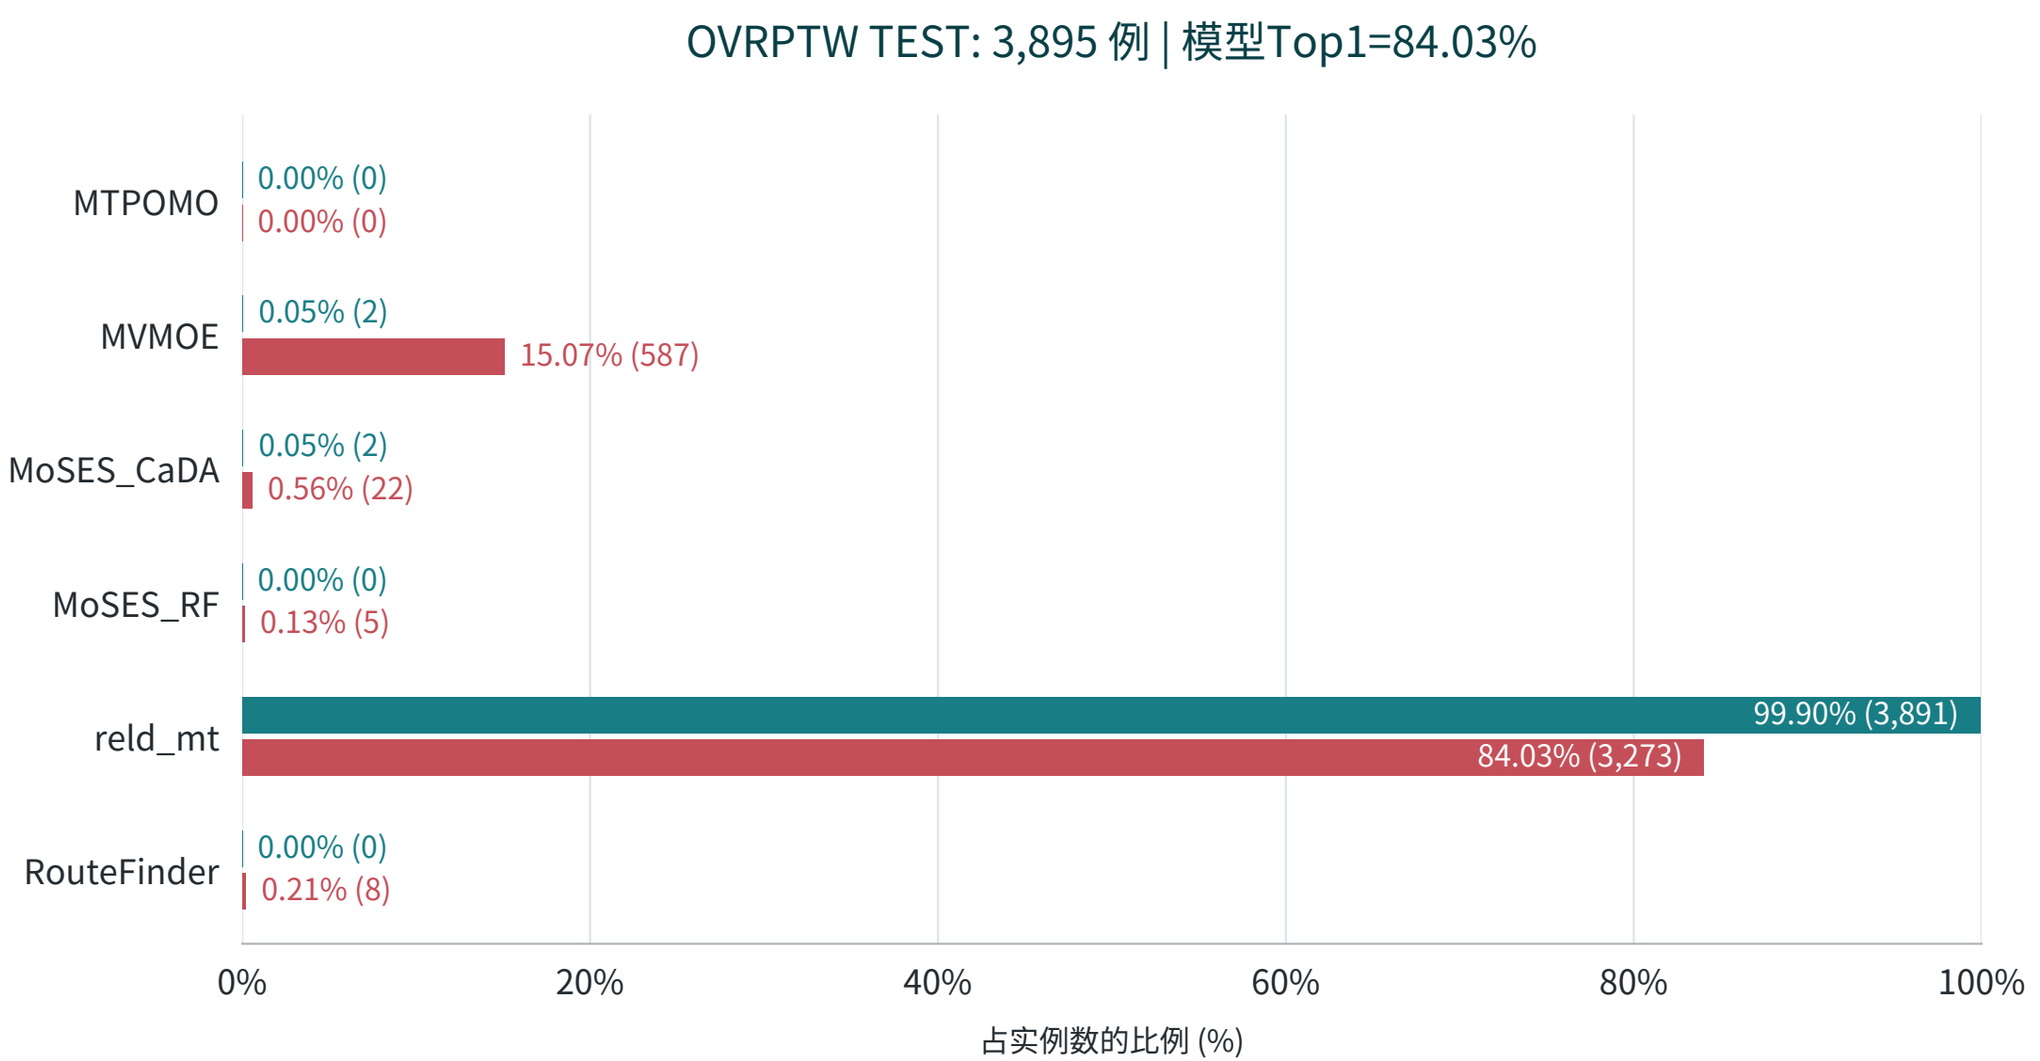

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

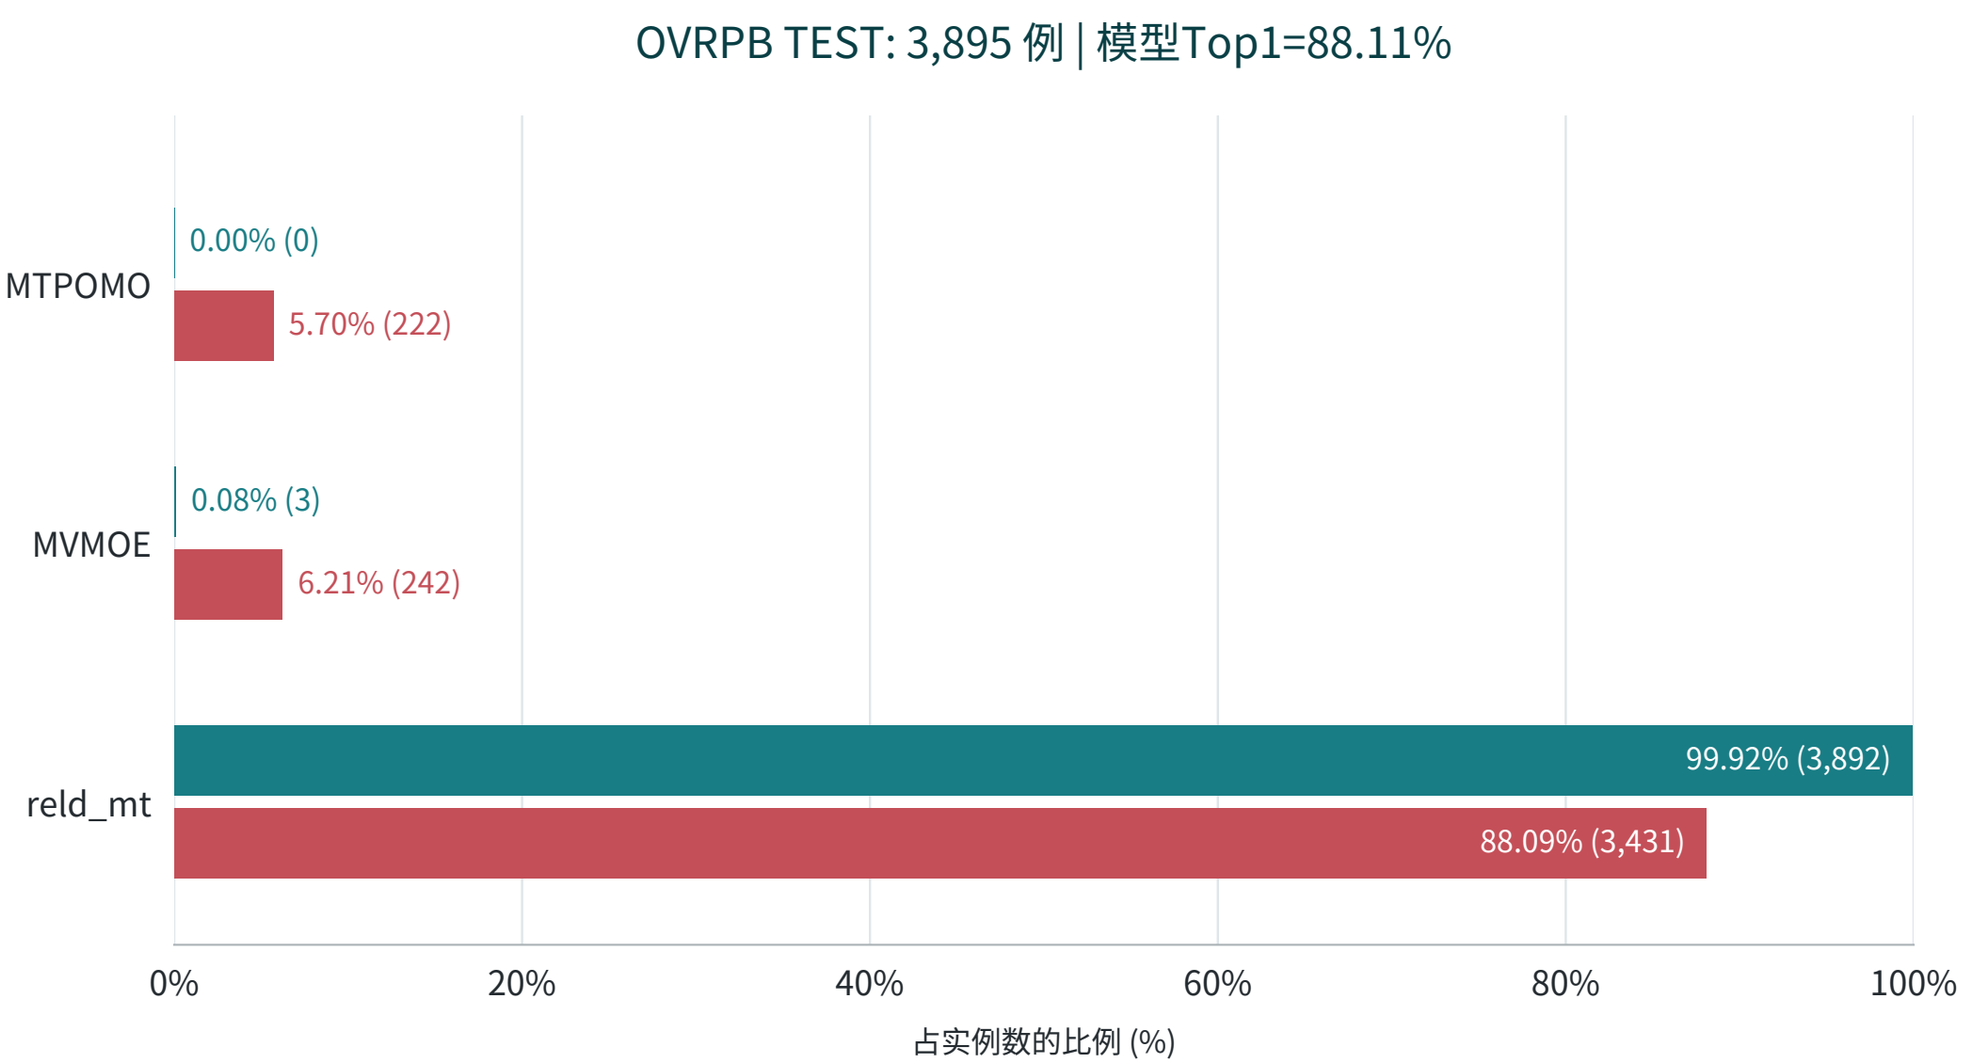

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

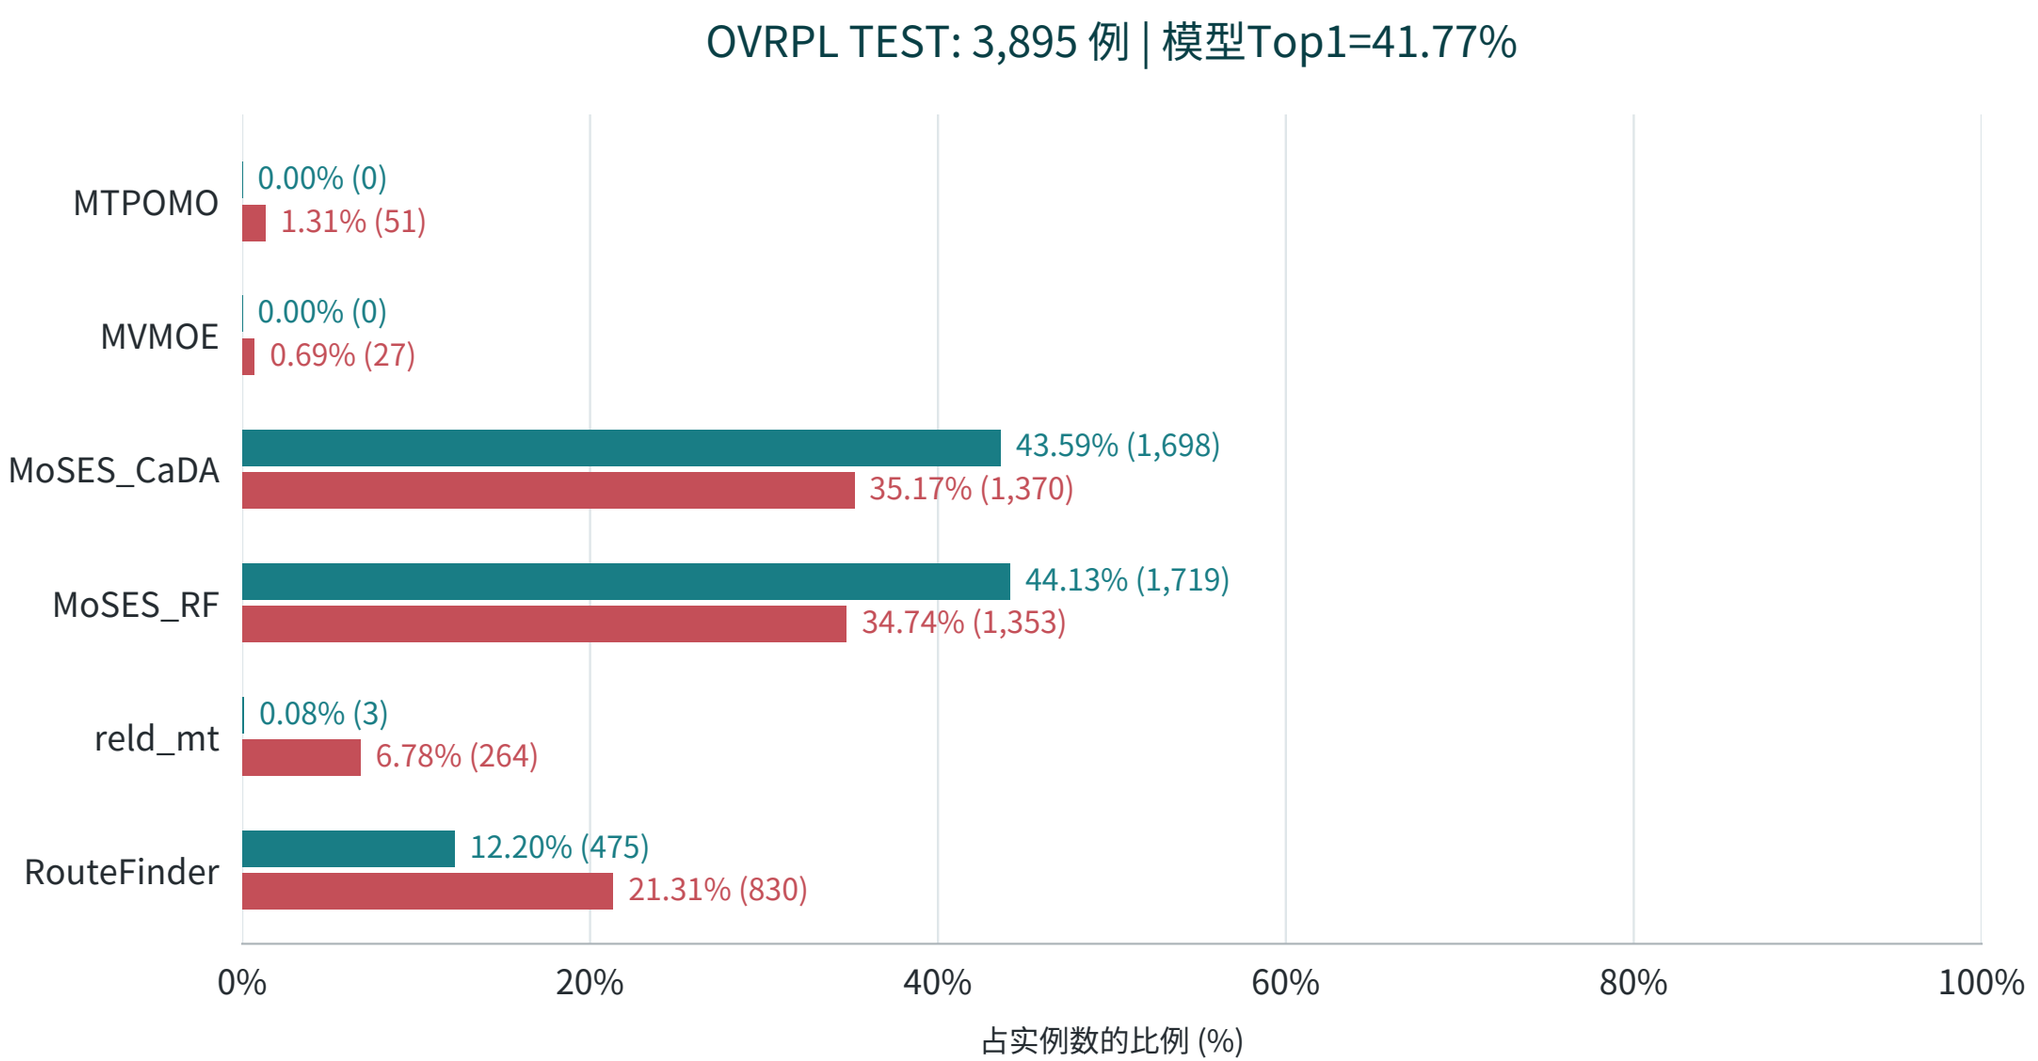

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

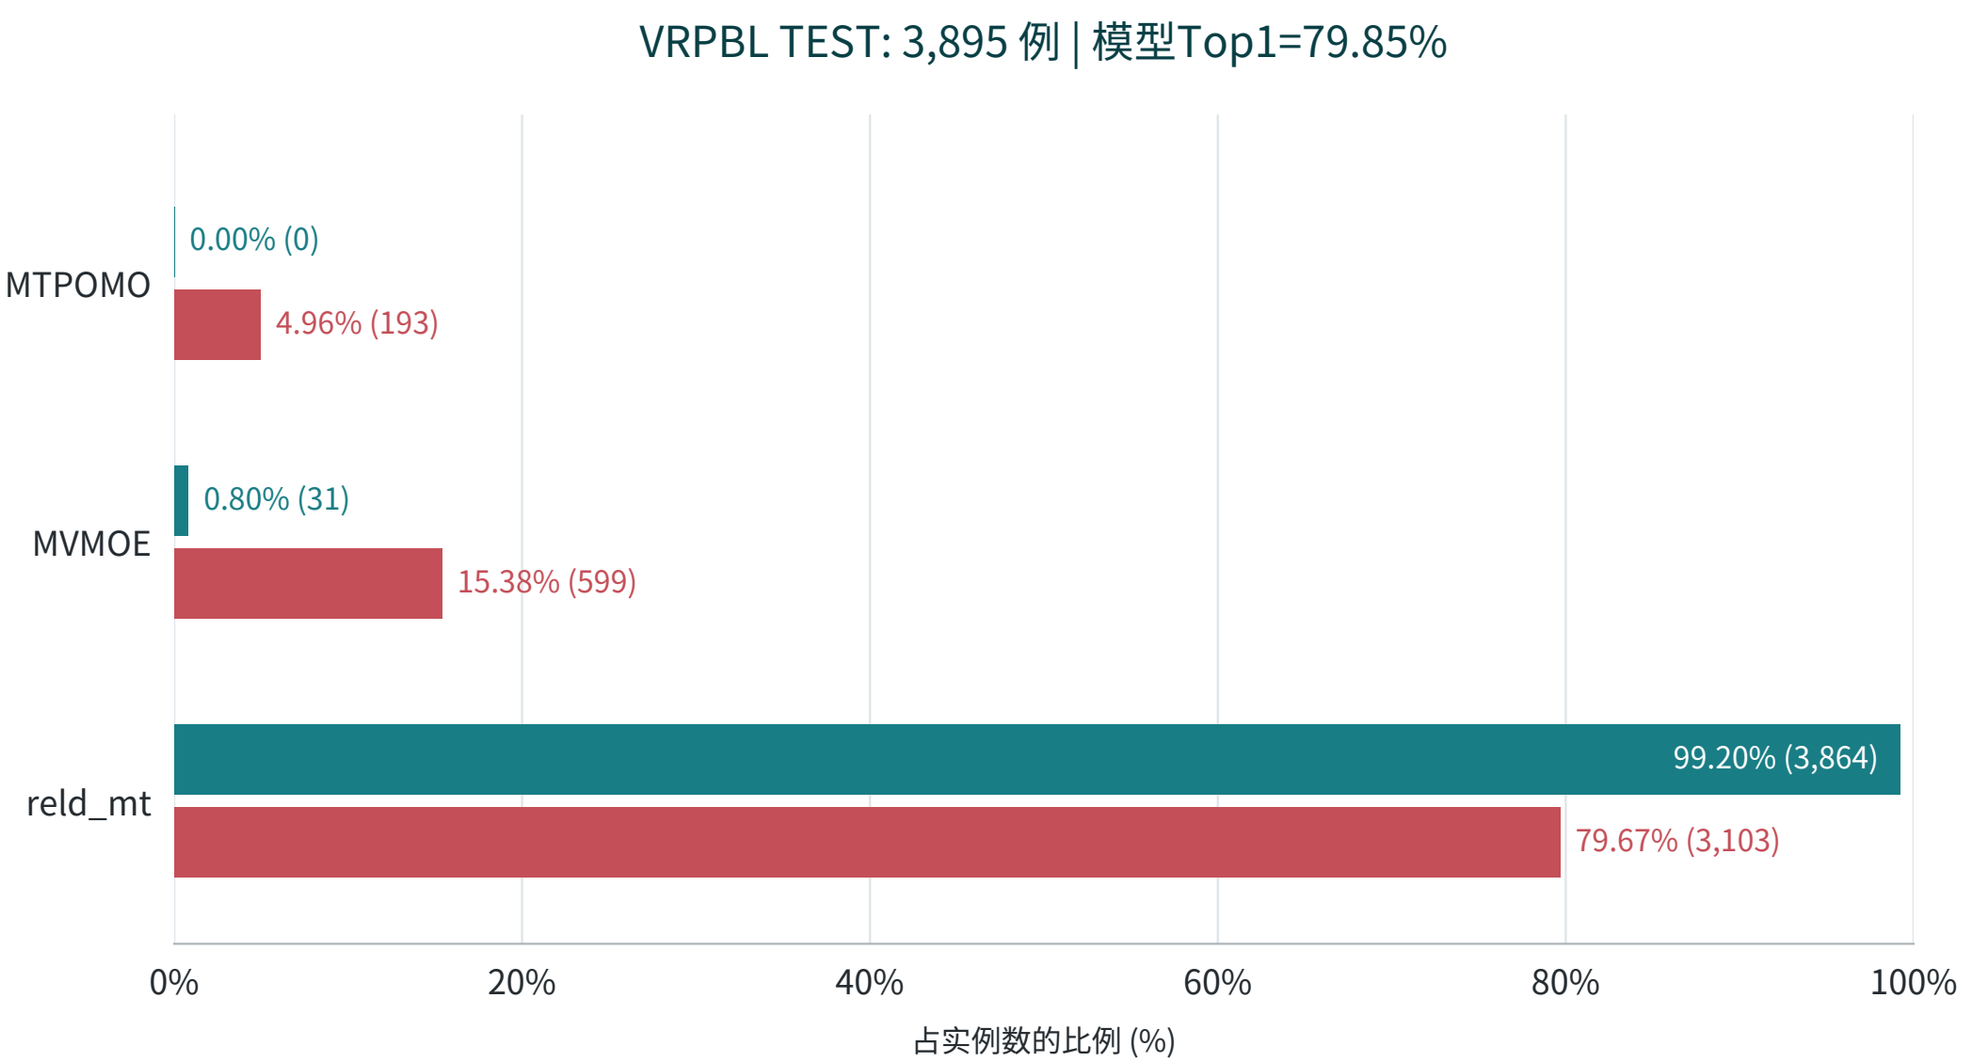

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

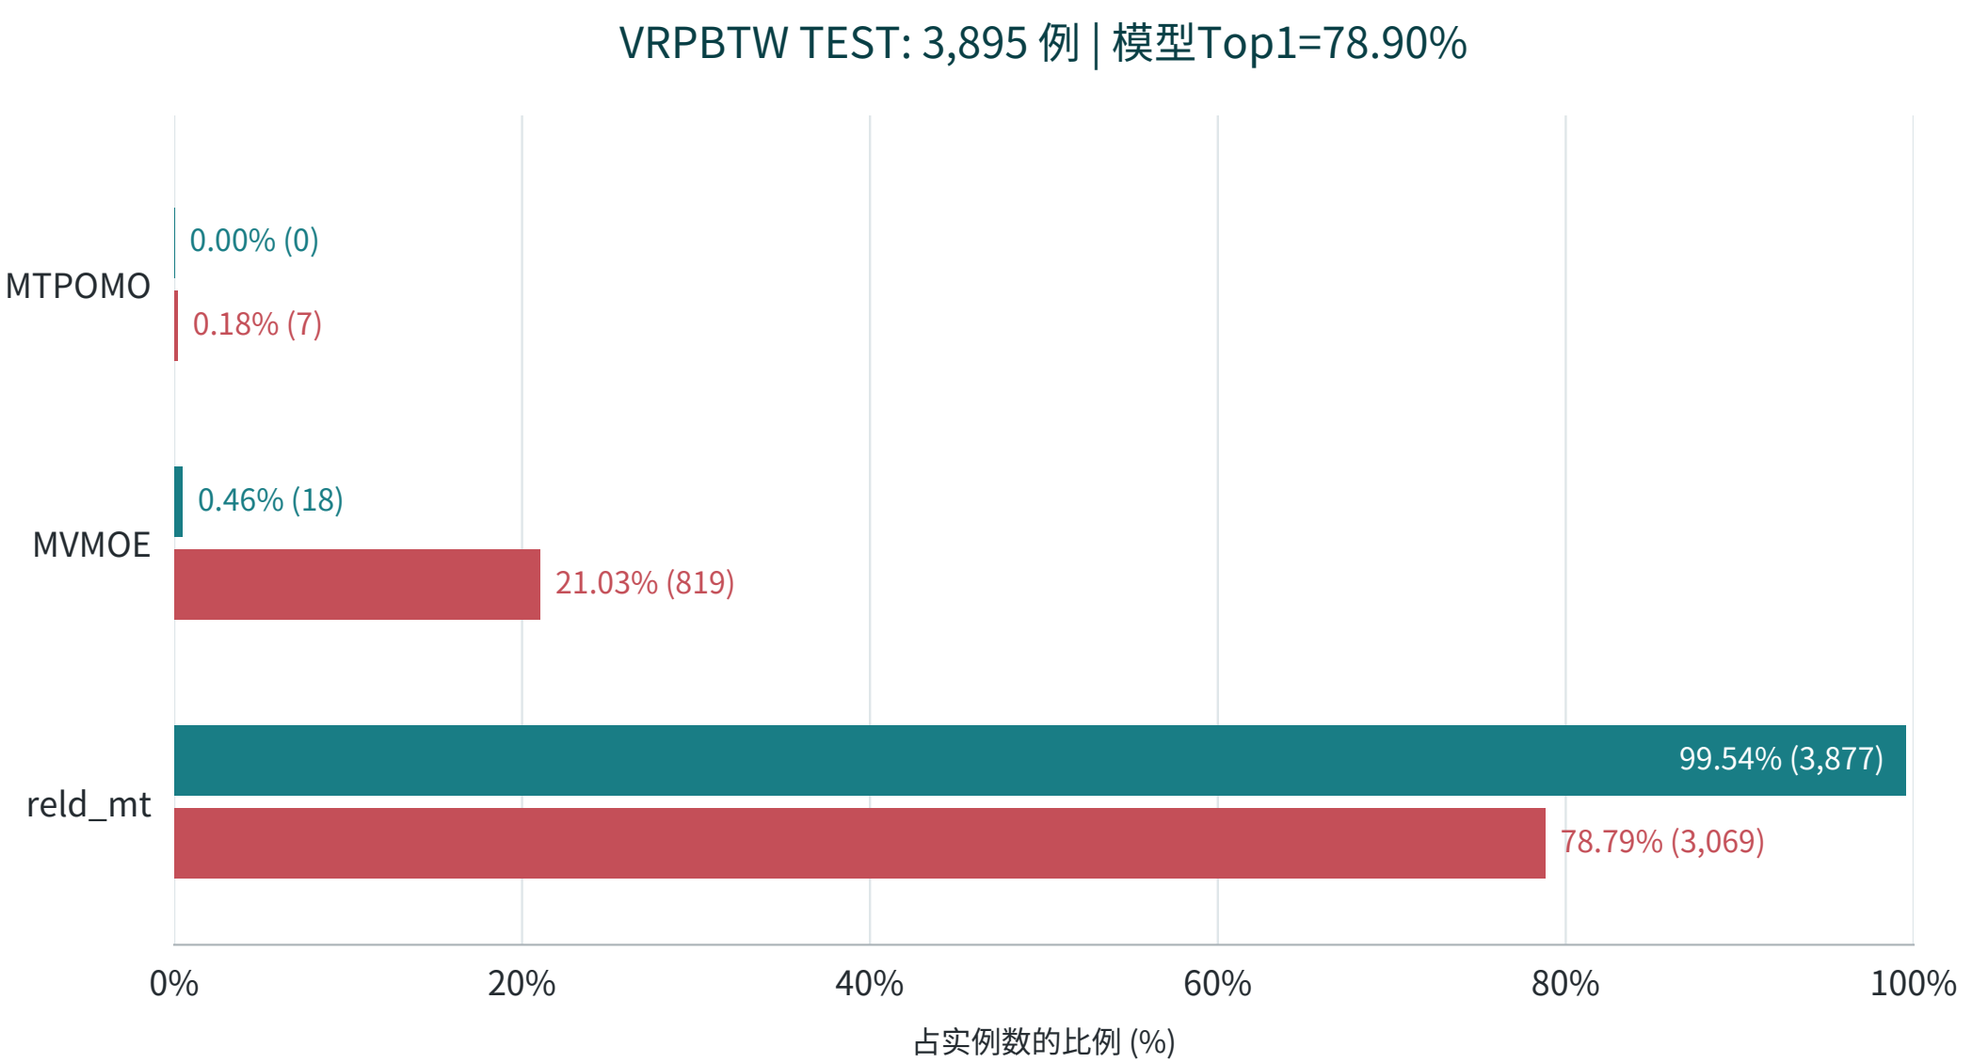

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

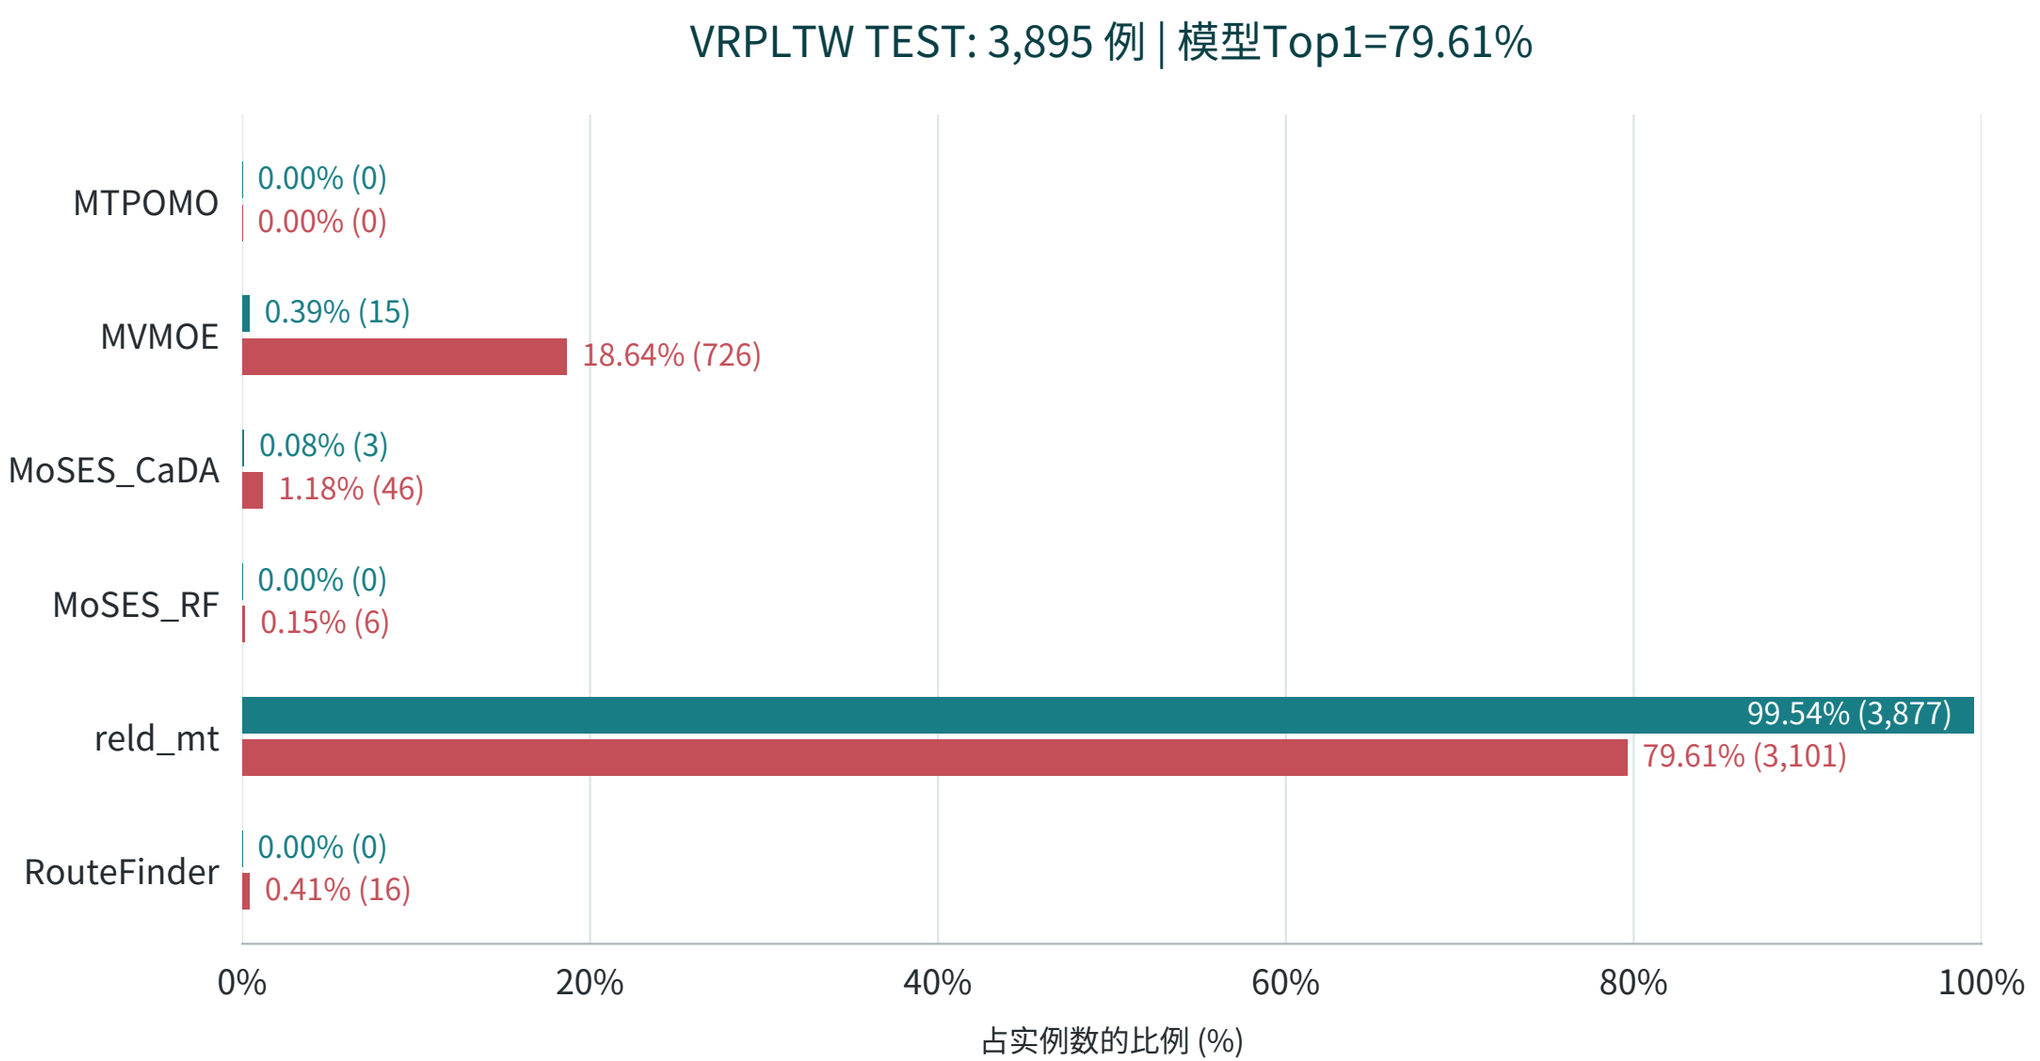

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

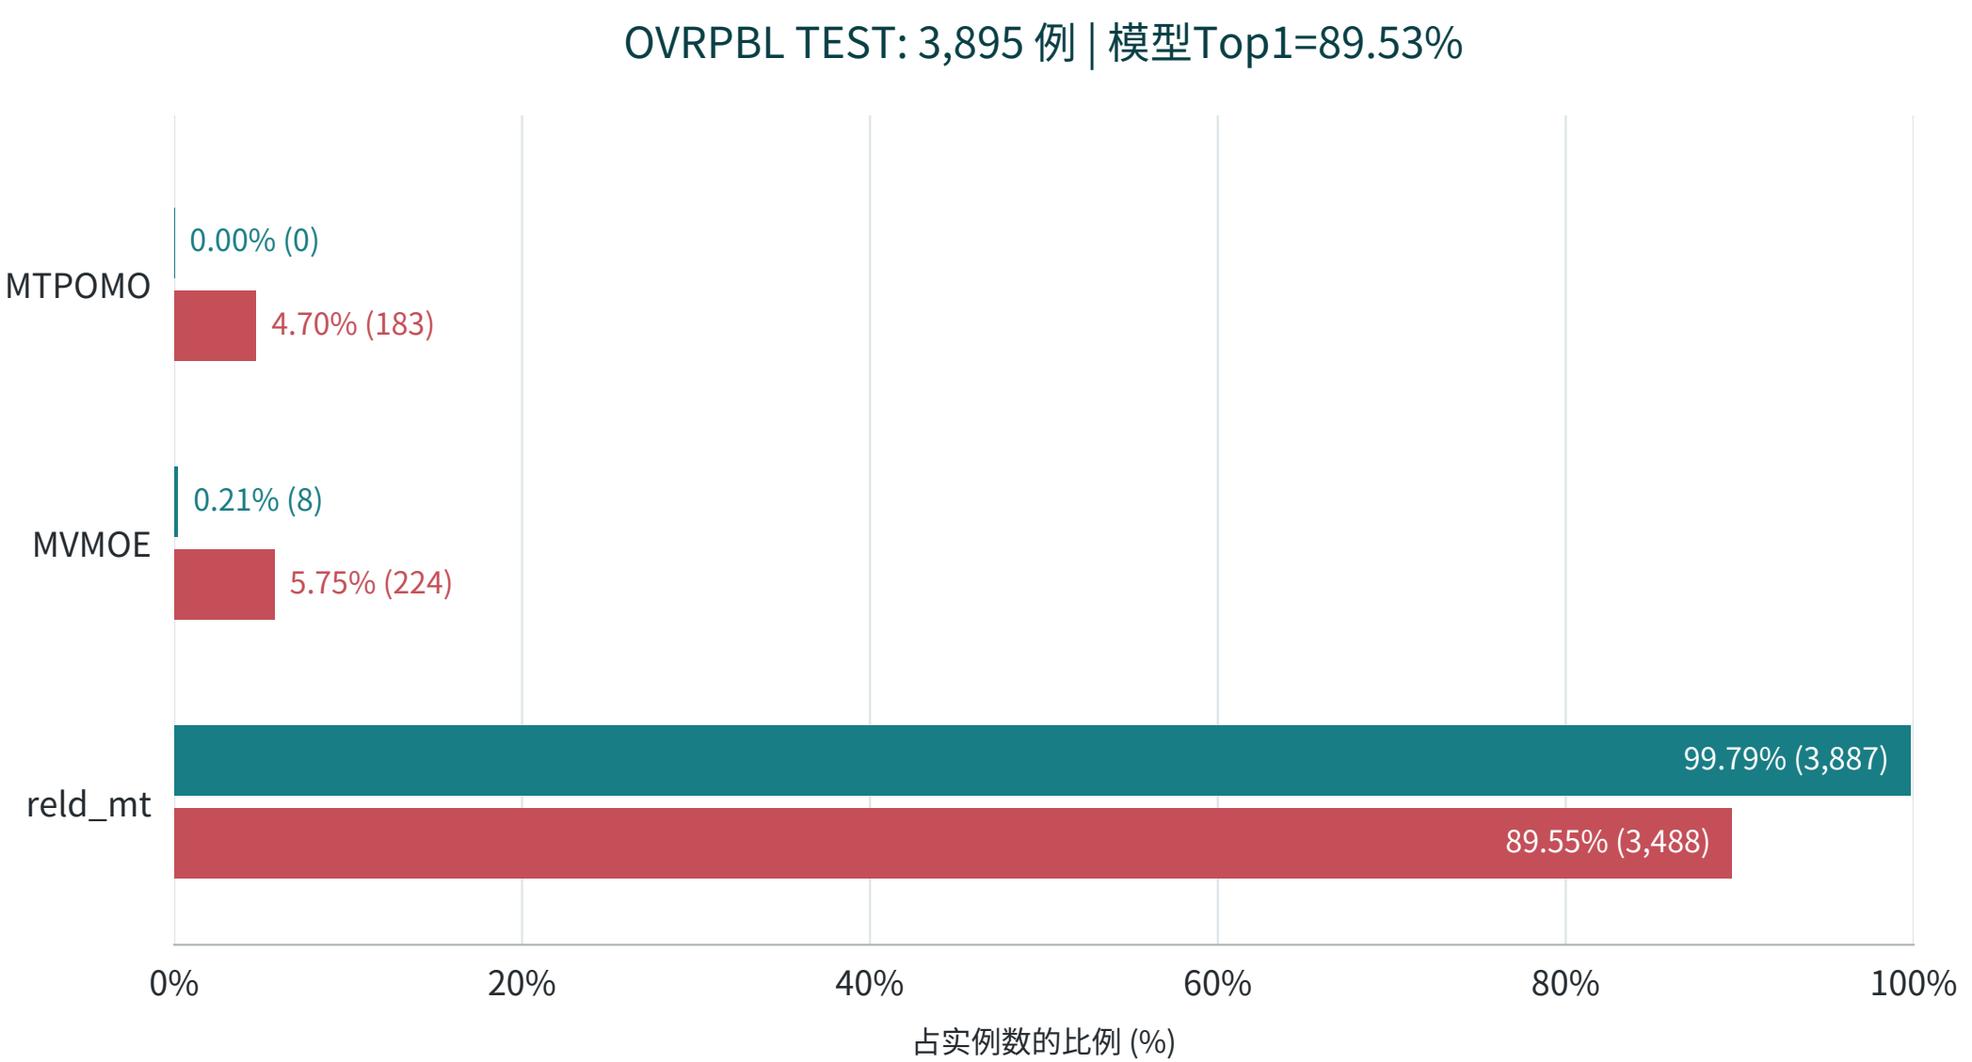

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

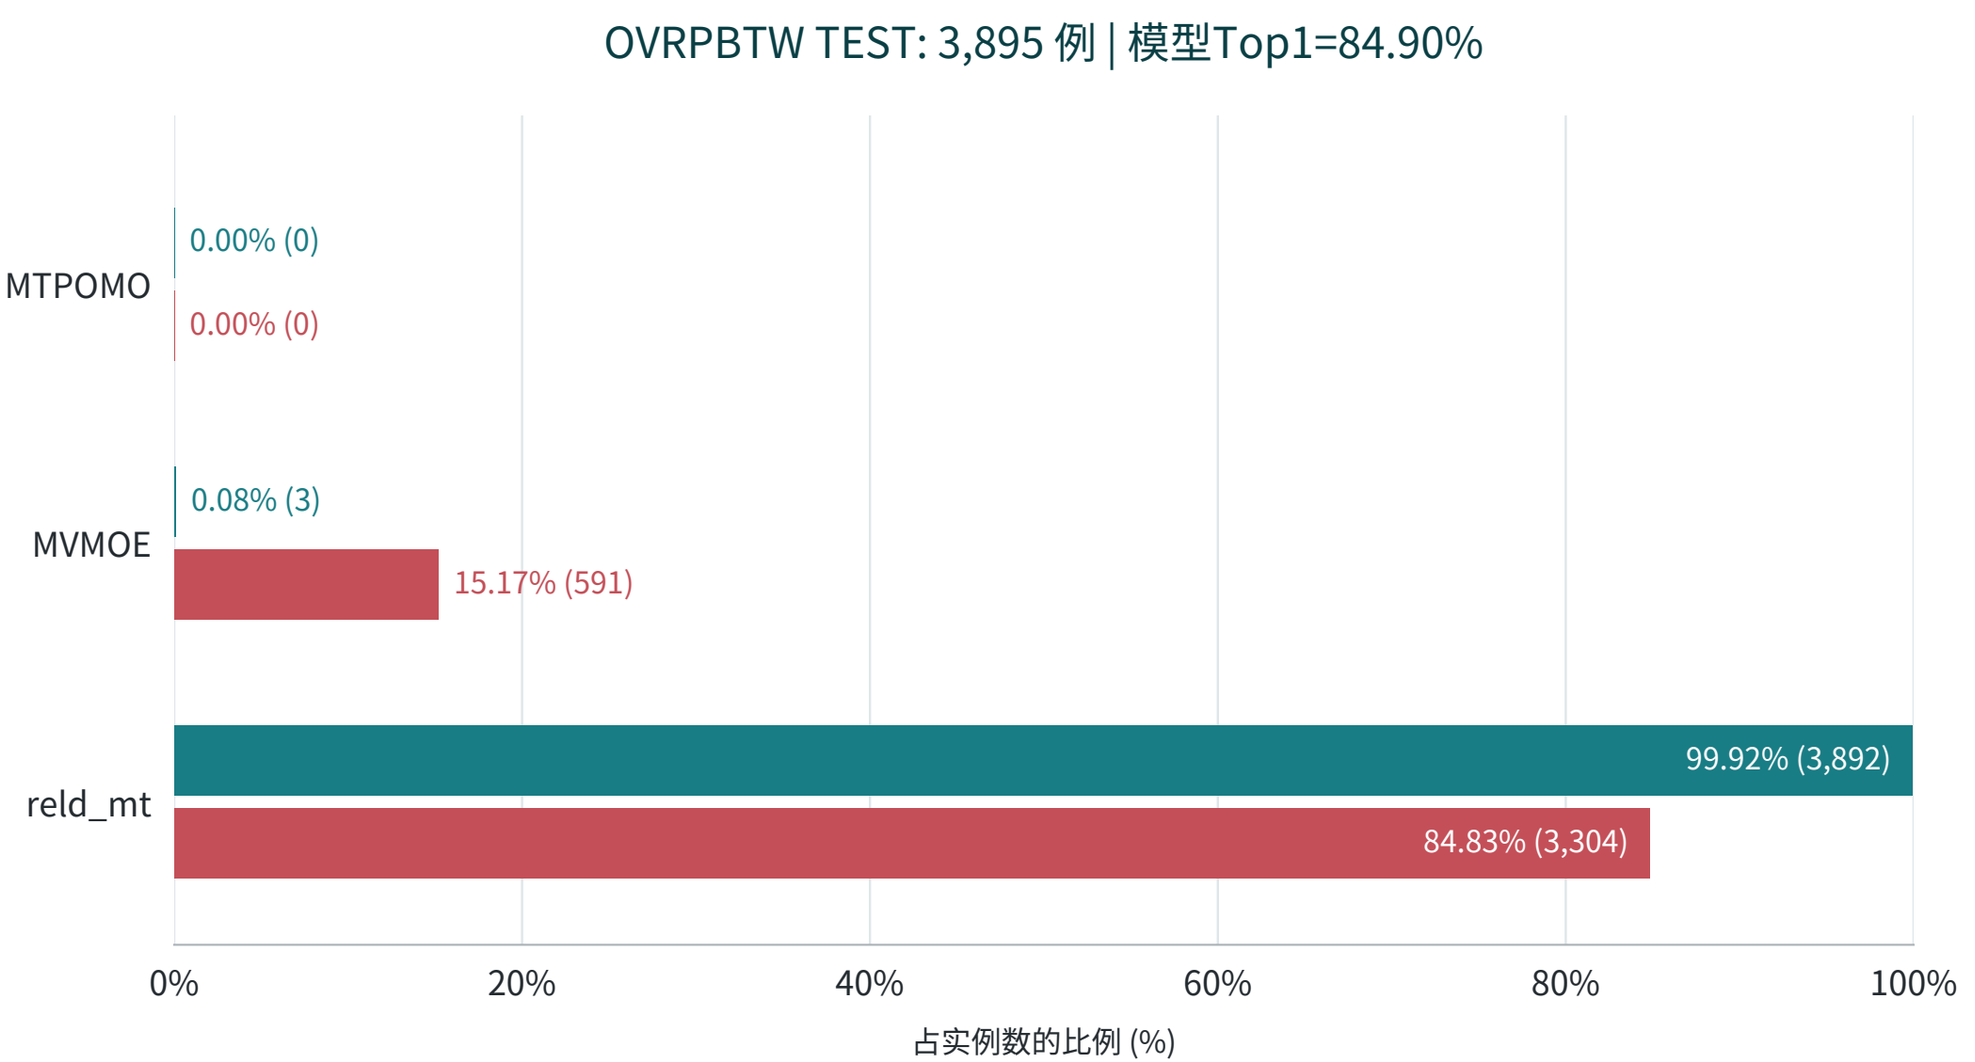

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

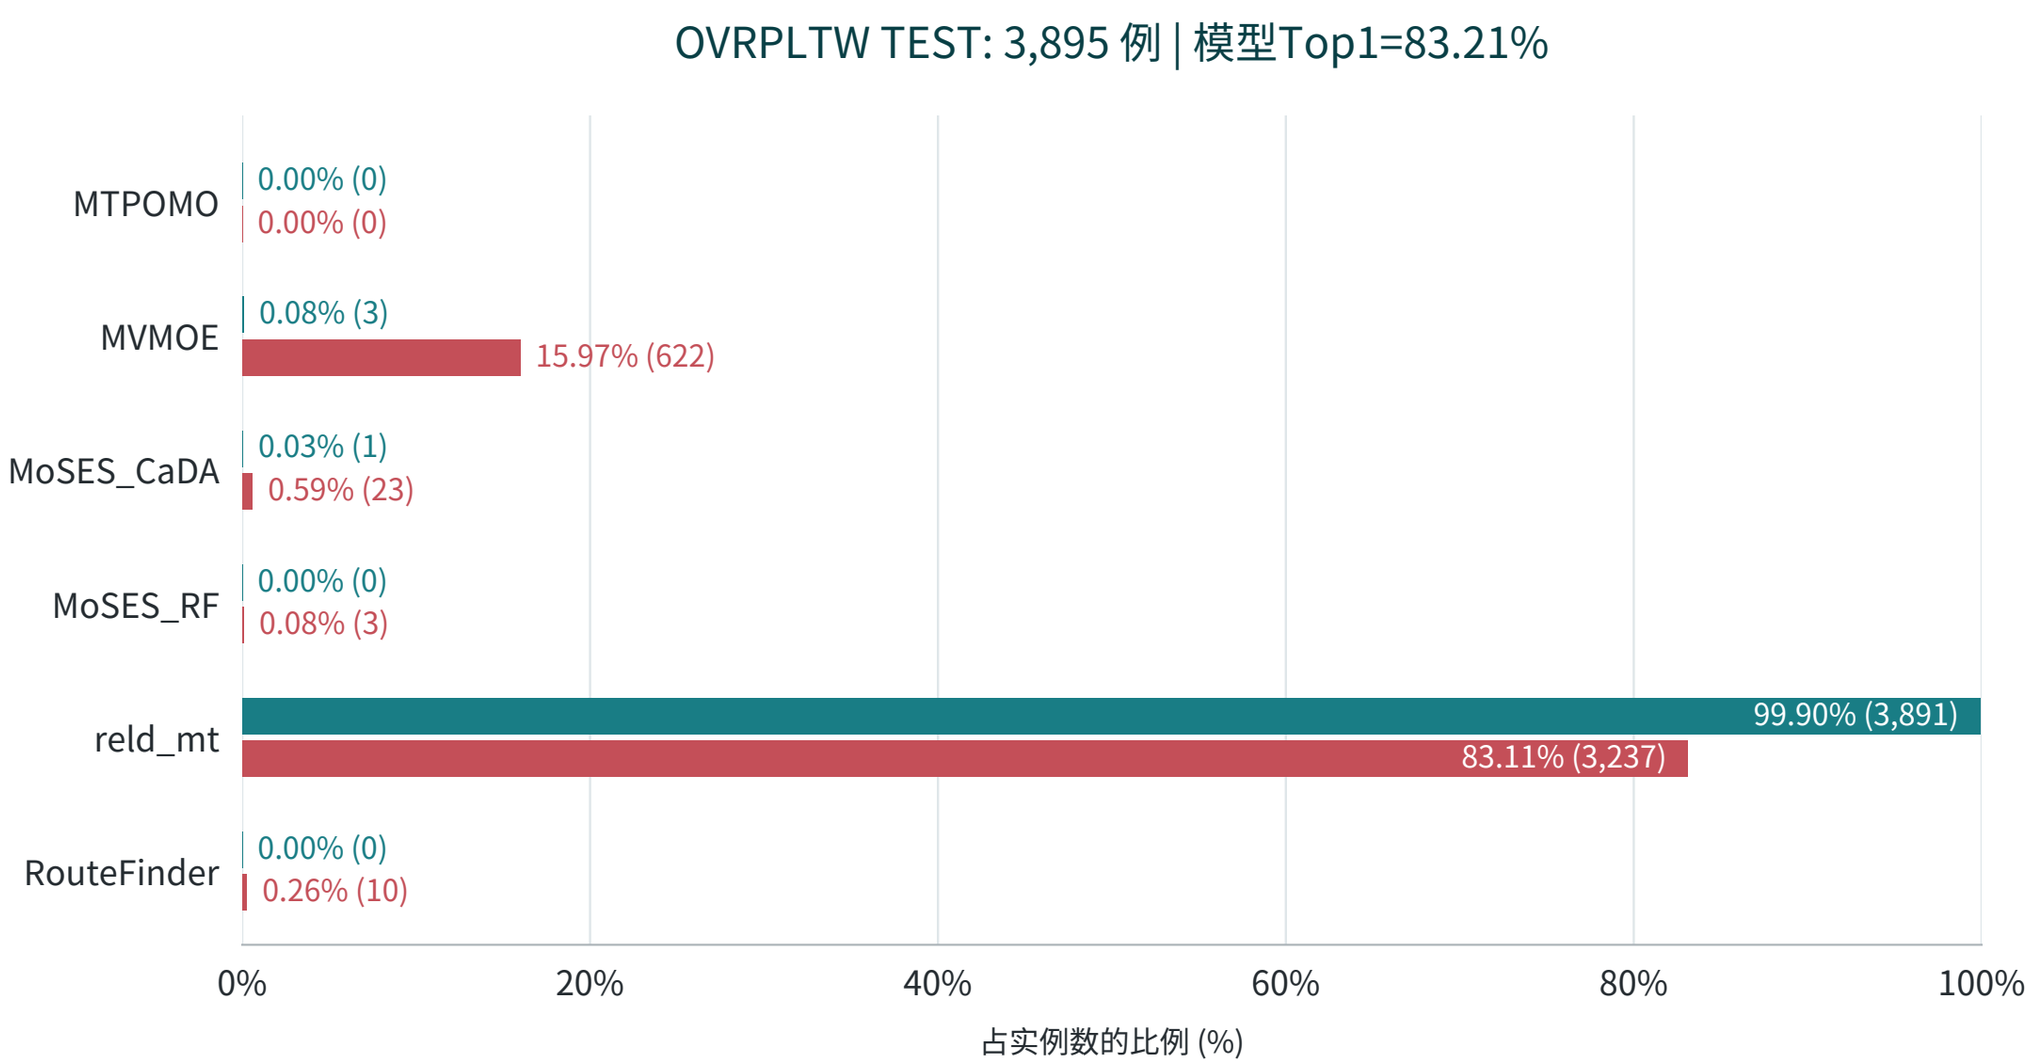

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

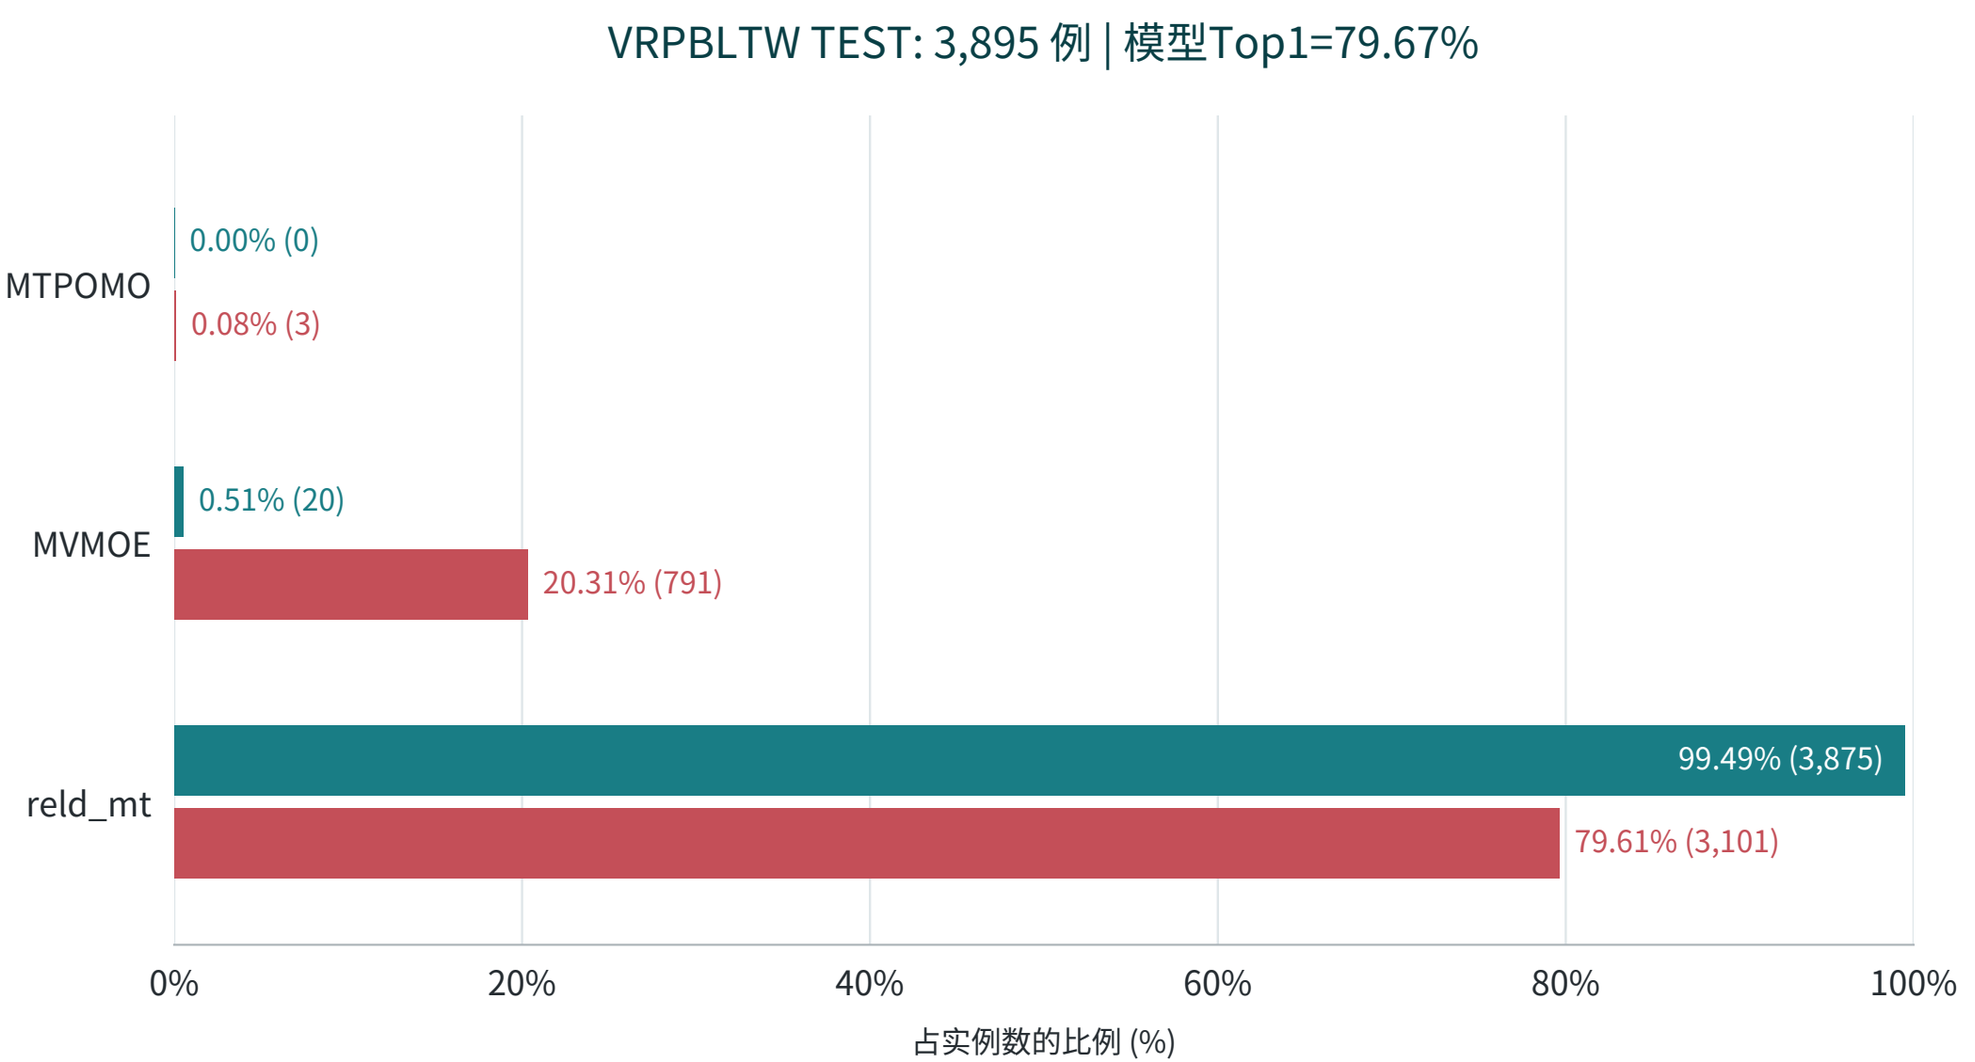

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.

R83/model_only_seed2 | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 32292 / SHA256 66920175a887dbf8

新 TEST 数据版本: selection_data_new_only_B_filtered_single_reld_mt_seed2_20261014

标签: 原生 native/FP64 ind; 仅读锁定预测

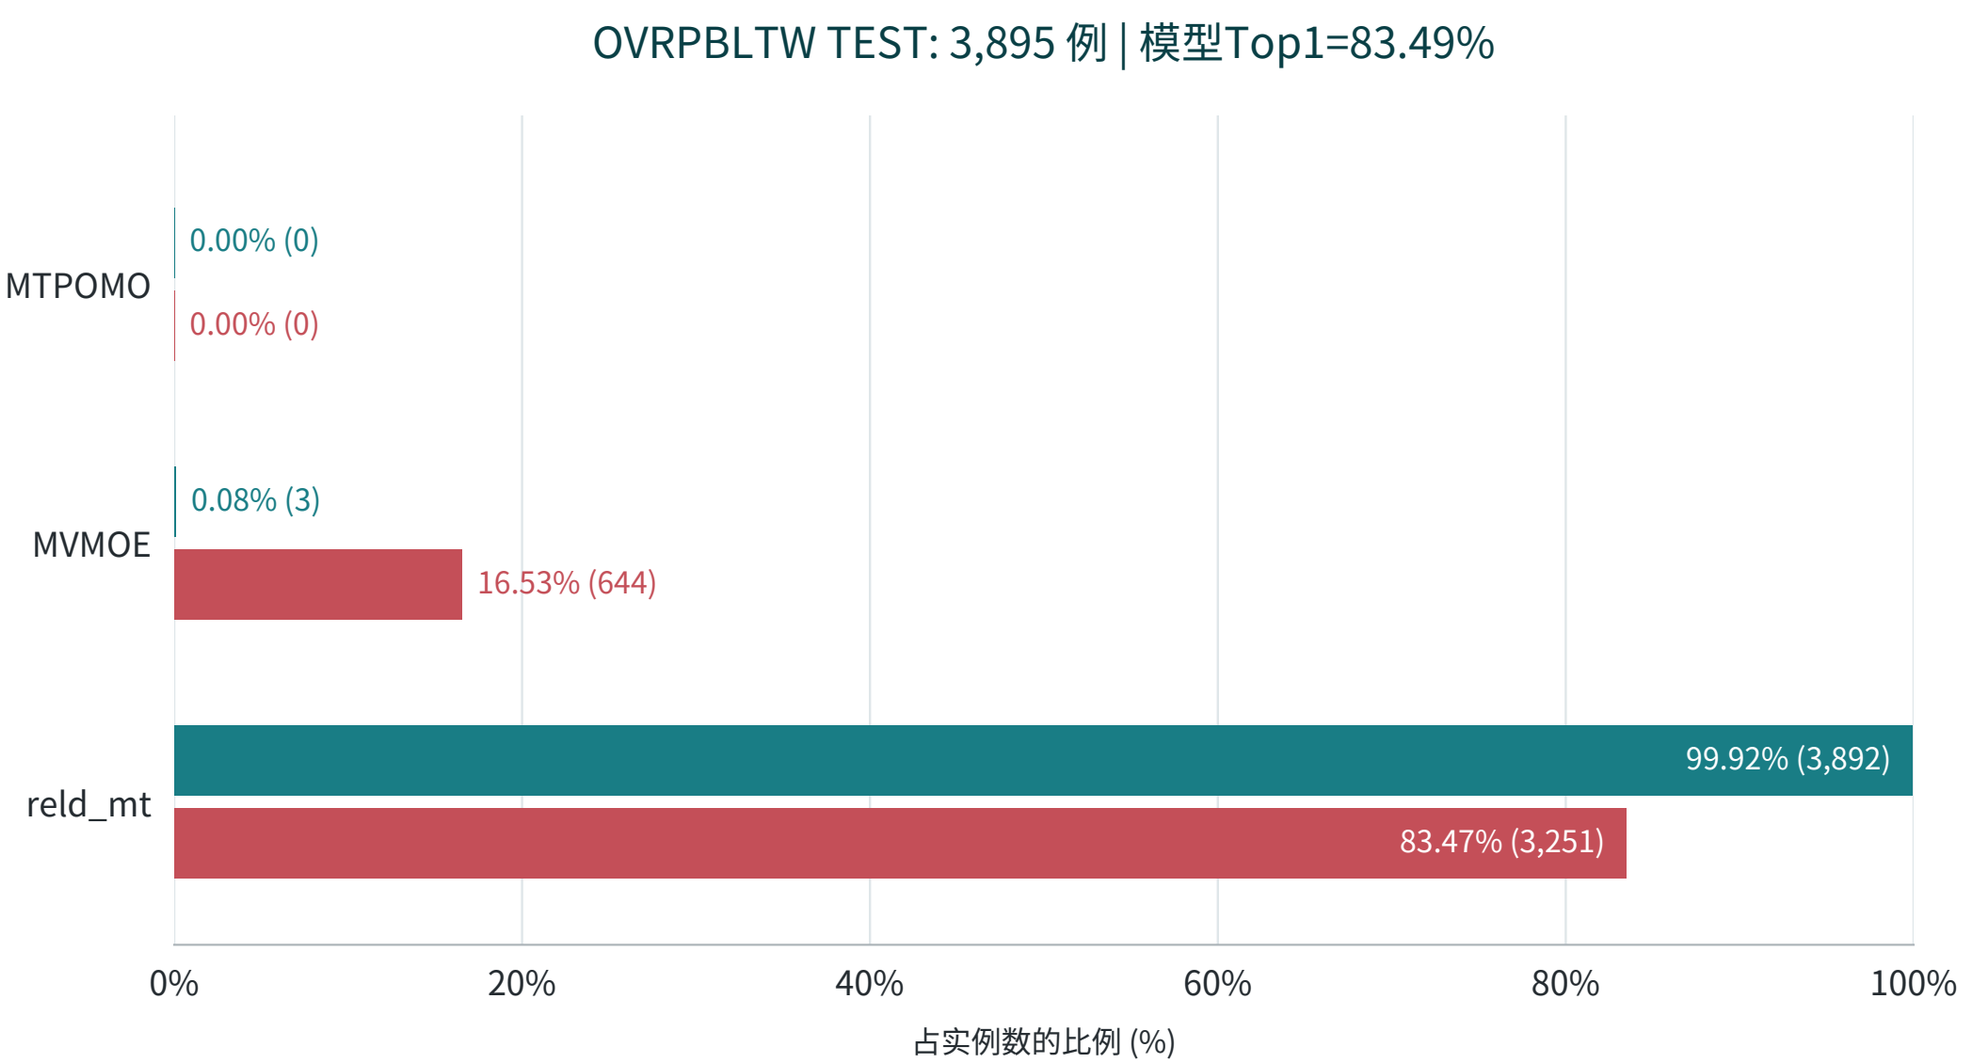

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R83/model_only_seed2: stable global solver-ID score ties. Same R83 lock; LIB inference only; no training/reselection/Rxx mixing.