# R84/A_baseline | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 26 | update 37440 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

| Split / Problem | Top1 (%) | SBS Top1 (%) | mean_cost | SBS cost | Oracle cost | vs_SBS (%) | vs_Oracle (%) | actual regret (%) |
|---|---|---|---|---|---|---|---|---|
| VAL ALL | 71.0852 | 66.2037 | 11.416611 | 11.427978 | 11.371692 | -0.1942 | +0.3934 | 0.4035 |
| TEST ALL | 71.2358 | 66.1802 | 11.373843 | 11.385299 | 11.329932 | -0.1971 | +0.3861 | 0.3948 |

| Dataset | n | NSS Top1 (%) | R84 Top1 (%) | NSS cost | R84 cost |
|---|---|---|---|---|---|
| TSP TEST | 4500 | 45.888889 | 46.400000 | 7.970400719 | 7.971454899 |
| CVRP TEST | 4500 | 45.977778 | 47.111111 | 18.004802368 | 18.012592266 |
| TSPLIB | 49 | 20.408163 | 20.408163 | 8.217907074 | 8.209464367 |
| CVRPLIB | 100 | 70.000000 | 63.000000 | 67.101111717 | 67.250372038 |

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | focal extra: False

# R84/A_baseline | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

| Split / Problem | Top1 (%) | SBS Top1 (%) | mean_cost | SBS cost | Oracle cost | vs_SBS (%) | vs_Oracle (%) | actual regret (%) | TRAIN SBS |
|---|---|---|---|---|---|---|---|---|---|
| ALL | 71.0852 | 66.2037 | 11.416611 | 11.427978 | 11.371692 | -0.1942 | +0.3934 | 0.4035 | per-problem TRAIN SBS |
| TSP | 46.7556 | 33.1111 | 8.024989 | 8.045354 | 7.990533 | -0.2531 | +0.4312 | 0.4197 | T2T |
| CVRP | 46.9333 | 18.7111 | 18.158268 | 18.269377 | 18.064087 | -0.6082 | +0.5214 | 0.6944 | RELD_CVRP |
| ATSP | 77.0444 | 47.4889 | 1.638752 | 1.676905 | 1.632471 | -2.2752 | +0.3848 | 0.3802 | UNICO_MatPOENet |
| OVRP | 40.7111 | 35.7556 | 7.461412 | 7.469579 | 7.415777 | -0.1093 | +0.6154 | 0.6291 | MoSES_RF |
| VRPB | 81.2000 | 80.8444 | 9.353100 | 9.354876 | 9.318750 | -0.0190 | +0.3686 | 0.3744 | reld_mt |
| VRPL | 38.0889 | 33.0889 | 12.431397 | 12.437959 | 12.383444 | -0.0528 | +0.3872 | 0.3939 | MoSES_RF |
| VRPTW | 79.9556 | 79.9556 | 18.819120 | 18.819431 | 18.766139 | -0.0017 | +0.2823 | 0.2986 | reld_mt |
| OVRPTW | 83.8222 | 83.7778 | 10.143315 | 10.143730 | 10.116859 | -0.0041 | +0.2615 | 0.2584 | reld_mt |
| OVRPB | 88.4889 | 88.5111 | 6.357252 | 6.357254 | 6.341078 | -0.0000 | +0.2551 | 0.2649 | reld_mt |
| OVRPL | 41.2222 | 35.9111 | 7.438192 | 7.445709 | 7.390416 | -0.1010 | +0.6465 | 0.6617 | MoSES_RF |
| VRPBL | 79.0222 | 78.5111 | 9.367875 | 9.371523 | 9.328366 | -0.0389 | +0.4235 | 0.4262 | reld_mt |
| VRPBTW | 78.5111 | 78.4222 | 19.946774 | 19.950430 | 19.851084 | -0.0183 | +0.4820 | 0.4621 | reld_mt |
| VRPLTW | 78.8222 | 78.7556 | 18.764571 | 18.765871 | 18.707843 | -0.0069 | +0.3032 | 0.3197 | reld_mt |
| OVRPBL | 89.3111 | 89.2000 | 6.369488 | 6.370093 | 6.352824 | -0.0095 | +0.2623 | 0.2736 | reld_mt |
| OVRPBTW | 83.4889 | 83.4444 | 10.662220 | 10.661098 | 10.623245 | +0.0105 | +0.3669 | 0.3451 | reld_mt |
| OVRPLTW | 83.5111 | 83.4889 | 10.157306 | 10.157423 | 10.129818 | -0.0011 | +0.2714 | 0.2740 | reld_mt |
| VRPBLTW | 79.4667 | 79.4000 | 19.794240 | 19.797044 | 19.706420 | -0.0142 | +0.4456 | 0.4346 | reld_mt |
| OVRPBLTW | 83.1778 | 83.2889 | 10.610735 | 10.609955 | 10.571302 | +0.0073 | +0.3730 | 0.3521 | reld_mt |

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

# R84/A_baseline | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

| Split / Problem | Top1 (%) | SBS Top1 (%) | mean_cost | SBS cost | Oracle cost | vs_SBS (%) | vs_Oracle (%) | actual regret (%) | TRAIN SBS |
|---|---|---|---|---|---|---|---|---|---|
| ALL | 71.2358 | 66.1802 | 11.373843 | 11.385299 | 11.329932 | -0.1971 | +0.3861 | 0.3948 | per-problem TRAIN SBS |
| TSP | 46.4000 | 34.5333 | 7.971455 | 7.989621 | 7.937593 | -0.2274 | +0.4266 | 0.4175 | T2T |
| CVRP | 47.1111 | 17.9333 | 18.012592 | 18.124983 | 17.918509 | -0.6201 | +0.5251 | 0.6919 | RELD_CVRP |
| ATSP | 76.7111 | 47.2444 | 1.635478 | 1.674207 | 1.629441 | -2.3133 | +0.3705 | 0.3686 | UNICO_MatPOENet |
| OVRP | 40.7111 | 33.6444 | 7.446637 | 7.455750 | 7.400487 | -0.1222 | +0.6236 | 0.6346 | MoSES_RF |
| VRPB | 80.6444 | 80.4000 | 9.349247 | 9.351810 | 9.315298 | -0.0274 | +0.3644 | 0.3681 | reld_mt |
| VRPL | 37.1556 | 32.2667 | 12.350513 | 12.356138 | 12.300958 | -0.0455 | +0.4028 | 0.4114 | MoSES_RF |
| VRPTW | 81.1556 | 80.8444 | 18.688786 | 18.690545 | 18.637408 | -0.0094 | +0.2757 | 0.2874 | reld_mt |
| OVRPTW | 84.0000 | 83.9333 | 10.092658 | 10.093063 | 10.068135 | -0.0040 | +0.2436 | 0.2344 | reld_mt |
| OVRPB | 88.1111 | 88.1333 | 6.370770 | 6.370826 | 6.352225 | -0.0009 | +0.2919 | 0.2997 | reld_mt |
| OVRPL | 41.8444 | 34.6000 | 7.464309 | 7.472542 | 7.418033 | -0.1102 | +0.6238 | 0.6339 | MoSES_RF |
| VRPBL | 79.5556 | 79.4222 | 9.394661 | 9.396379 | 9.355967 | -0.0183 | +0.4136 | 0.4176 | reld_mt |
| VRPBTW | 78.8667 | 78.7556 | 19.663826 | 19.665725 | 19.577666 | -0.0097 | +0.4401 | 0.4366 | reld_mt |
| VRPLTW | 79.4000 | 79.2444 | 18.801375 | 18.803136 | 18.745143 | -0.0094 | +0.3000 | 0.3171 | reld_mt |
| OVRPBL | 89.3111 | 89.2889 | 6.375372 | 6.375741 | 6.359310 | -0.0058 | +0.2526 | 0.2633 | reld_mt |
| OVRPBTW | 84.9333 | 84.8222 | 10.658972 | 10.659591 | 10.624748 | -0.0058 | +0.3221 | 0.2941 | reld_mt |
| OVRPLTW | 82.9333 | 82.8667 | 10.085766 | 10.086112 | 10.059001 | -0.0034 | +0.2661 | 0.2664 | reld_mt |
| VRPBLTW | 79.7333 | 79.7333 | 19.705021 | 19.707068 | 19.613284 | -0.0104 | +0.4677 | 0.4483 | reld_mt |
| OVRPBLTW | 83.6667 | 83.5778 | 10.661738 | 10.662149 | 10.625574 | -0.0039 | +0.3404 | 0.3166 | reld_mt |

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

# R84/A_baseline | LIB and locked provenance

Current R84 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

| Split / Problem | Top1 (%) | SBS Top1 (%) | mean_cost | SBS cost | Oracle cost | vs_SBS (%) | vs_Oracle (%) | actual regret (%) |
|---|---|---|---|---|---|---|---|---|
| TSPLIB | 20.4082 | 10.2041 | 8.209464 | 8.240435 | 8.142167 | -0.3758 | +0.8265 | 0.8390 |
| CVRPLIB | 63.0000 | 45.0000 | 67.250372 | 67.245364 | 66.945093 | +0.0074 | +0.4560 | 0.5453 |

SHA256: 23fb9a5cf621045138fcdcfe5e6613a1bfd061c8d4dfeca108db3548dbf8031f

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original R77 maximin logits, stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

# R84/A_baseline | TSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

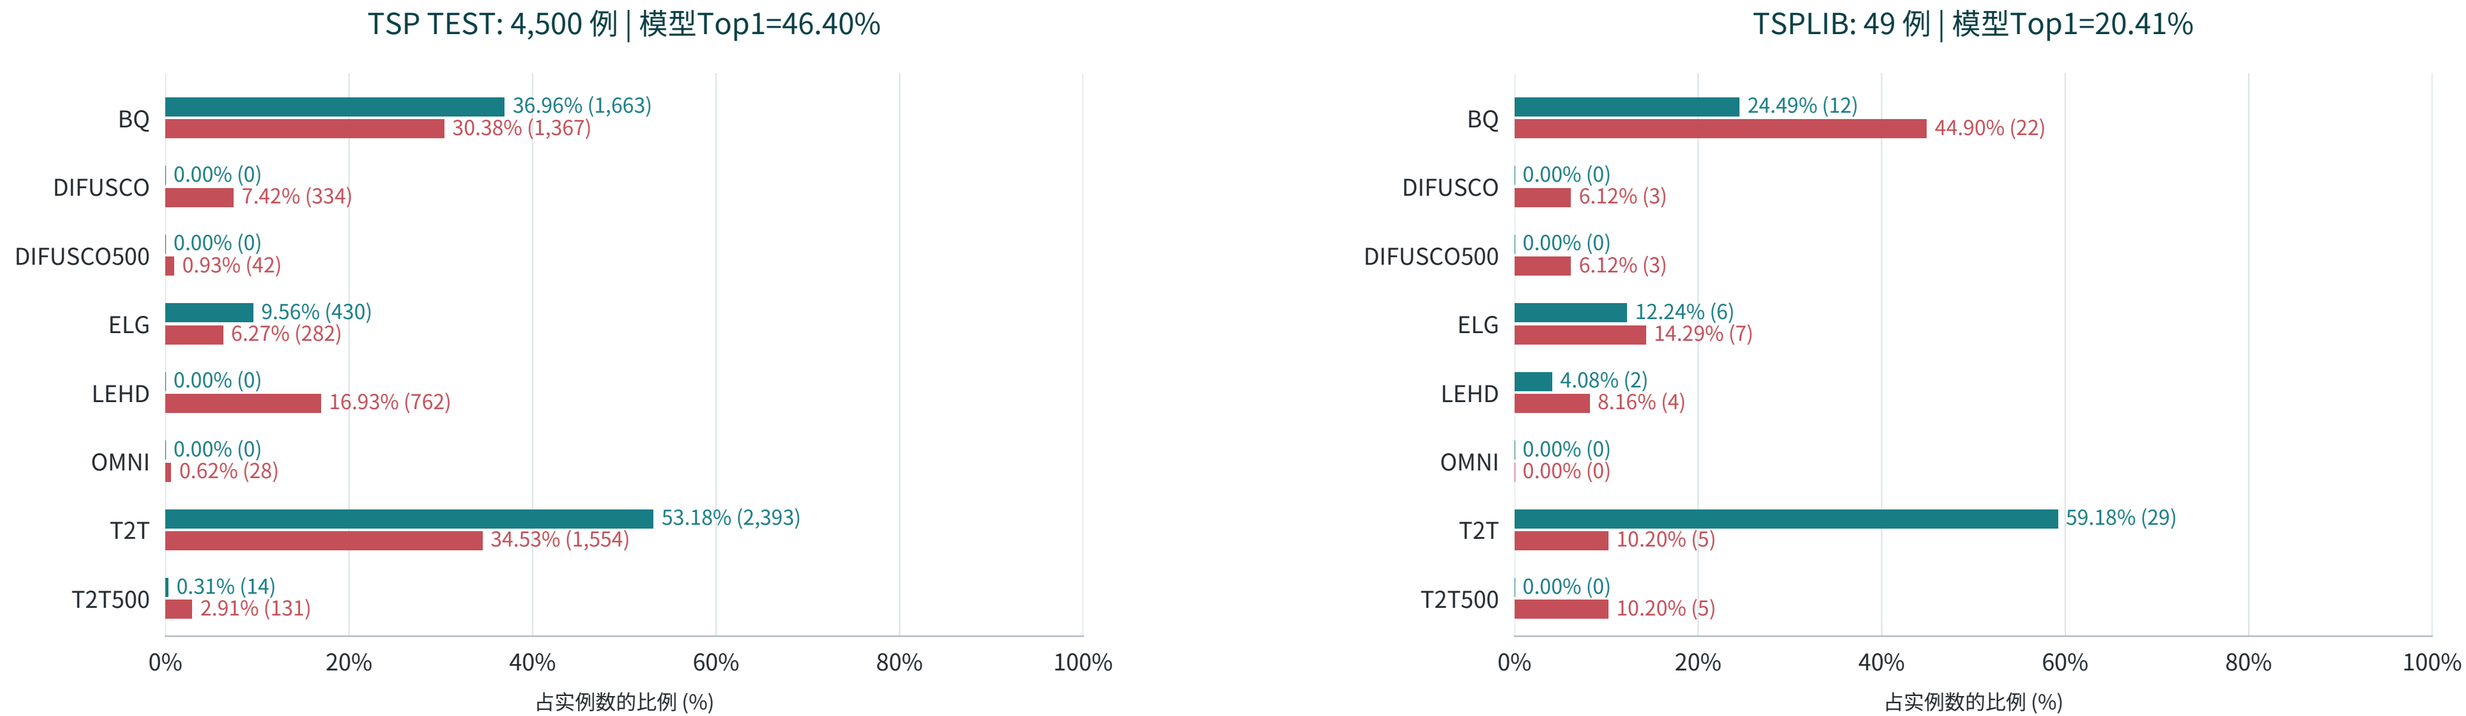


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | CVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

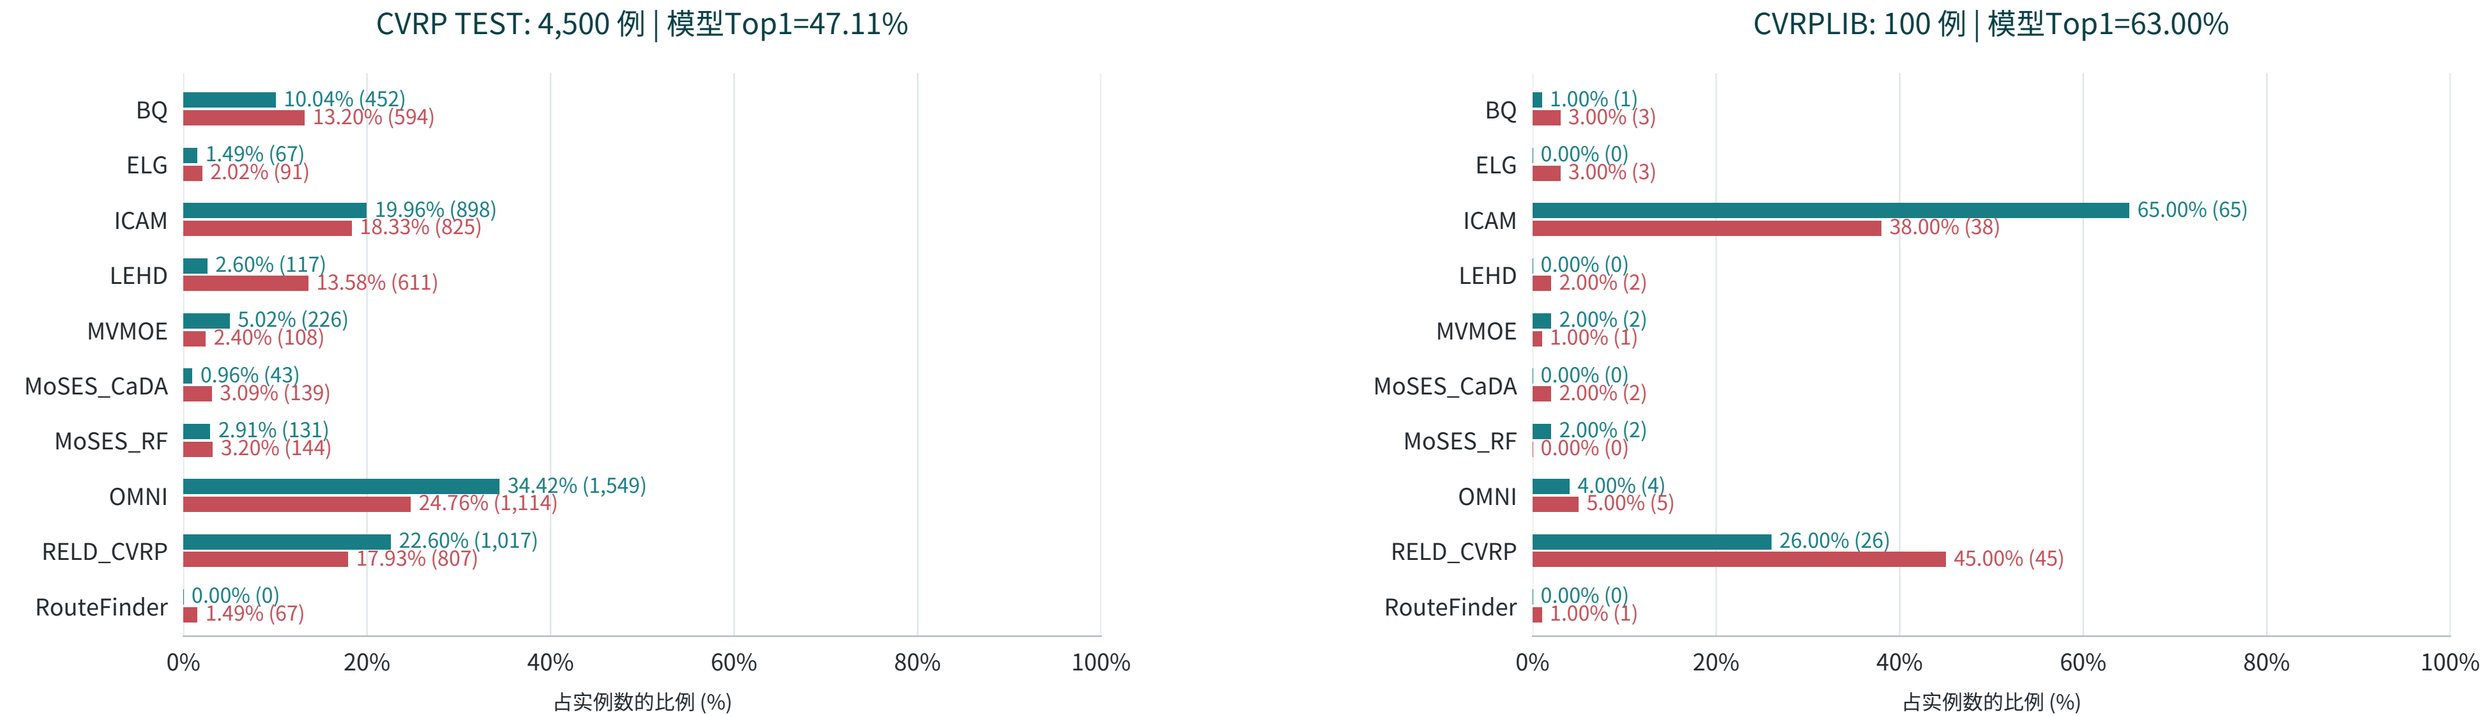


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | ATSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

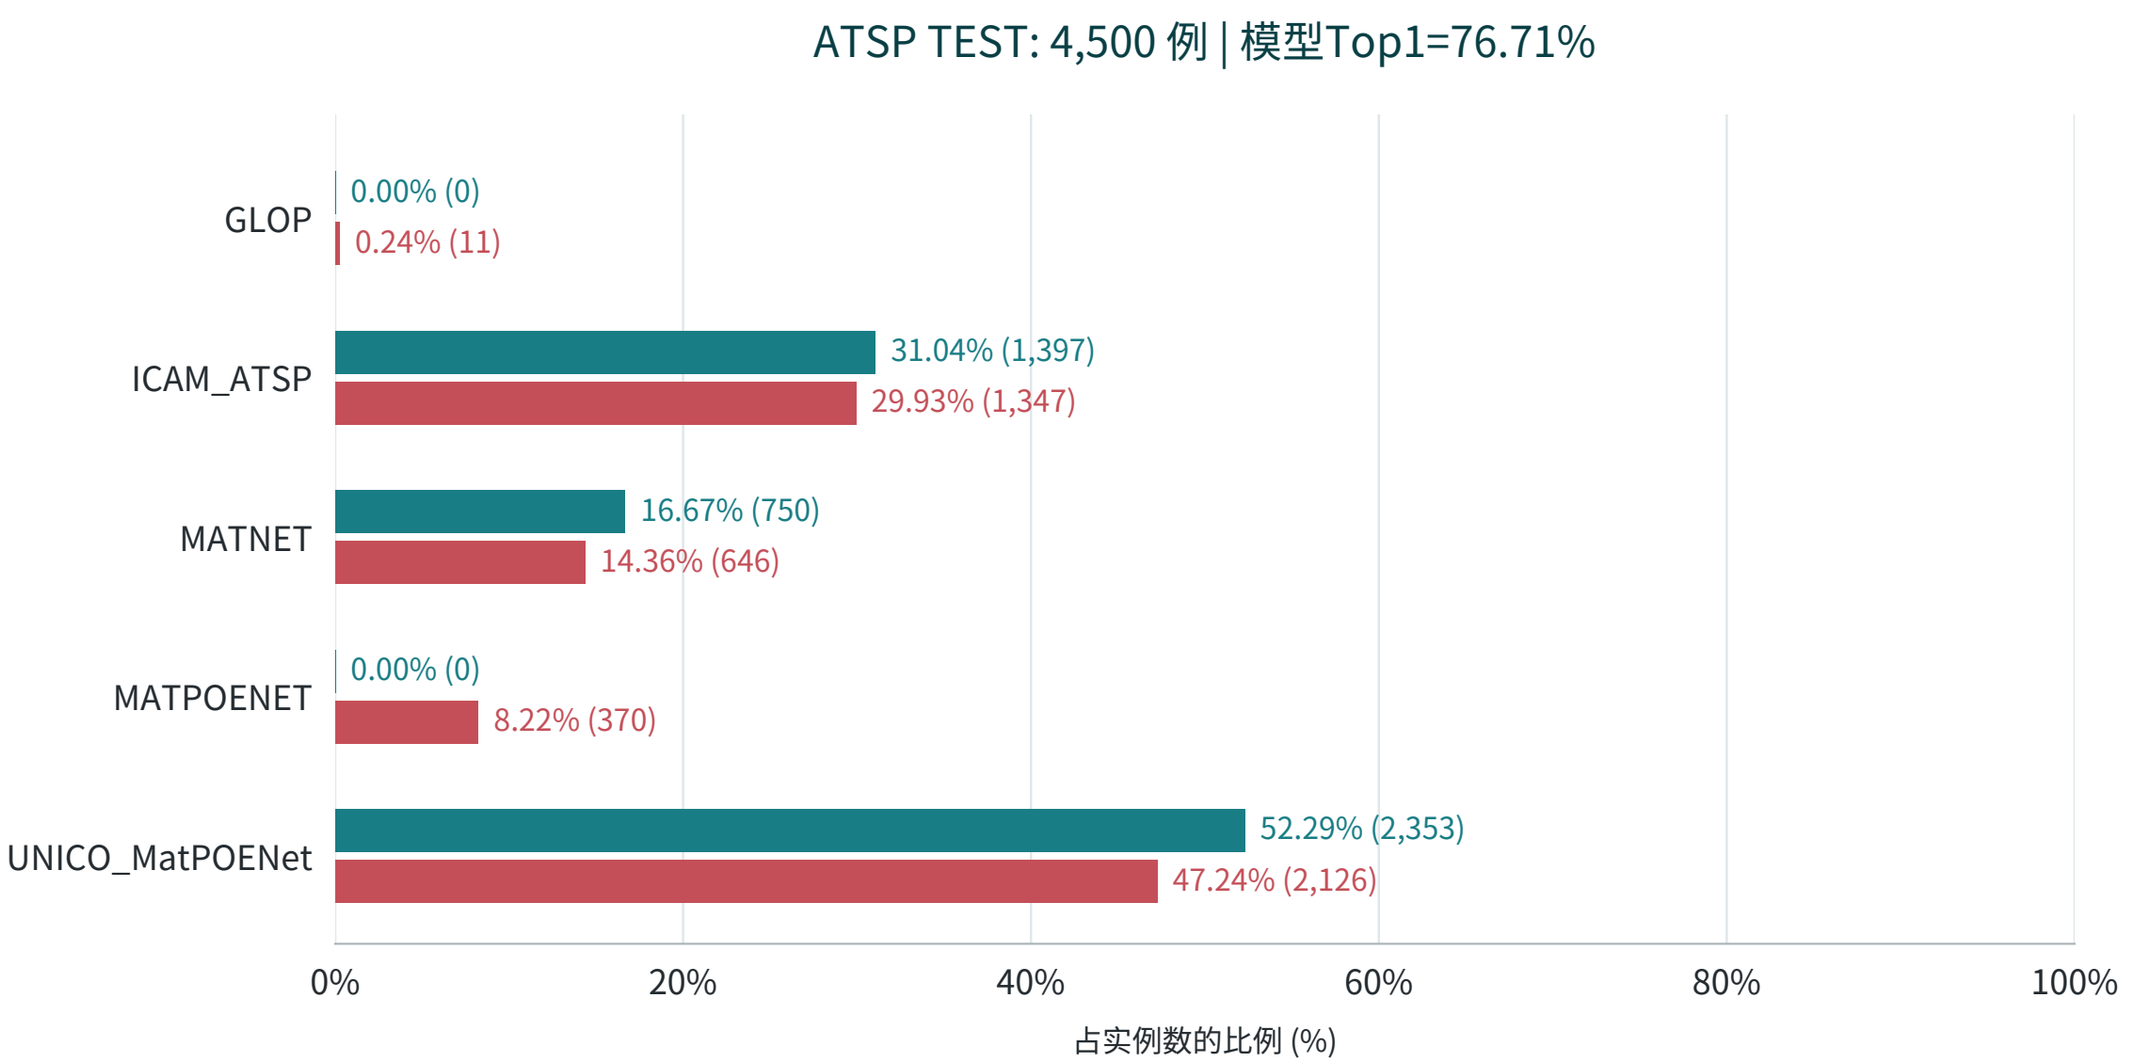


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

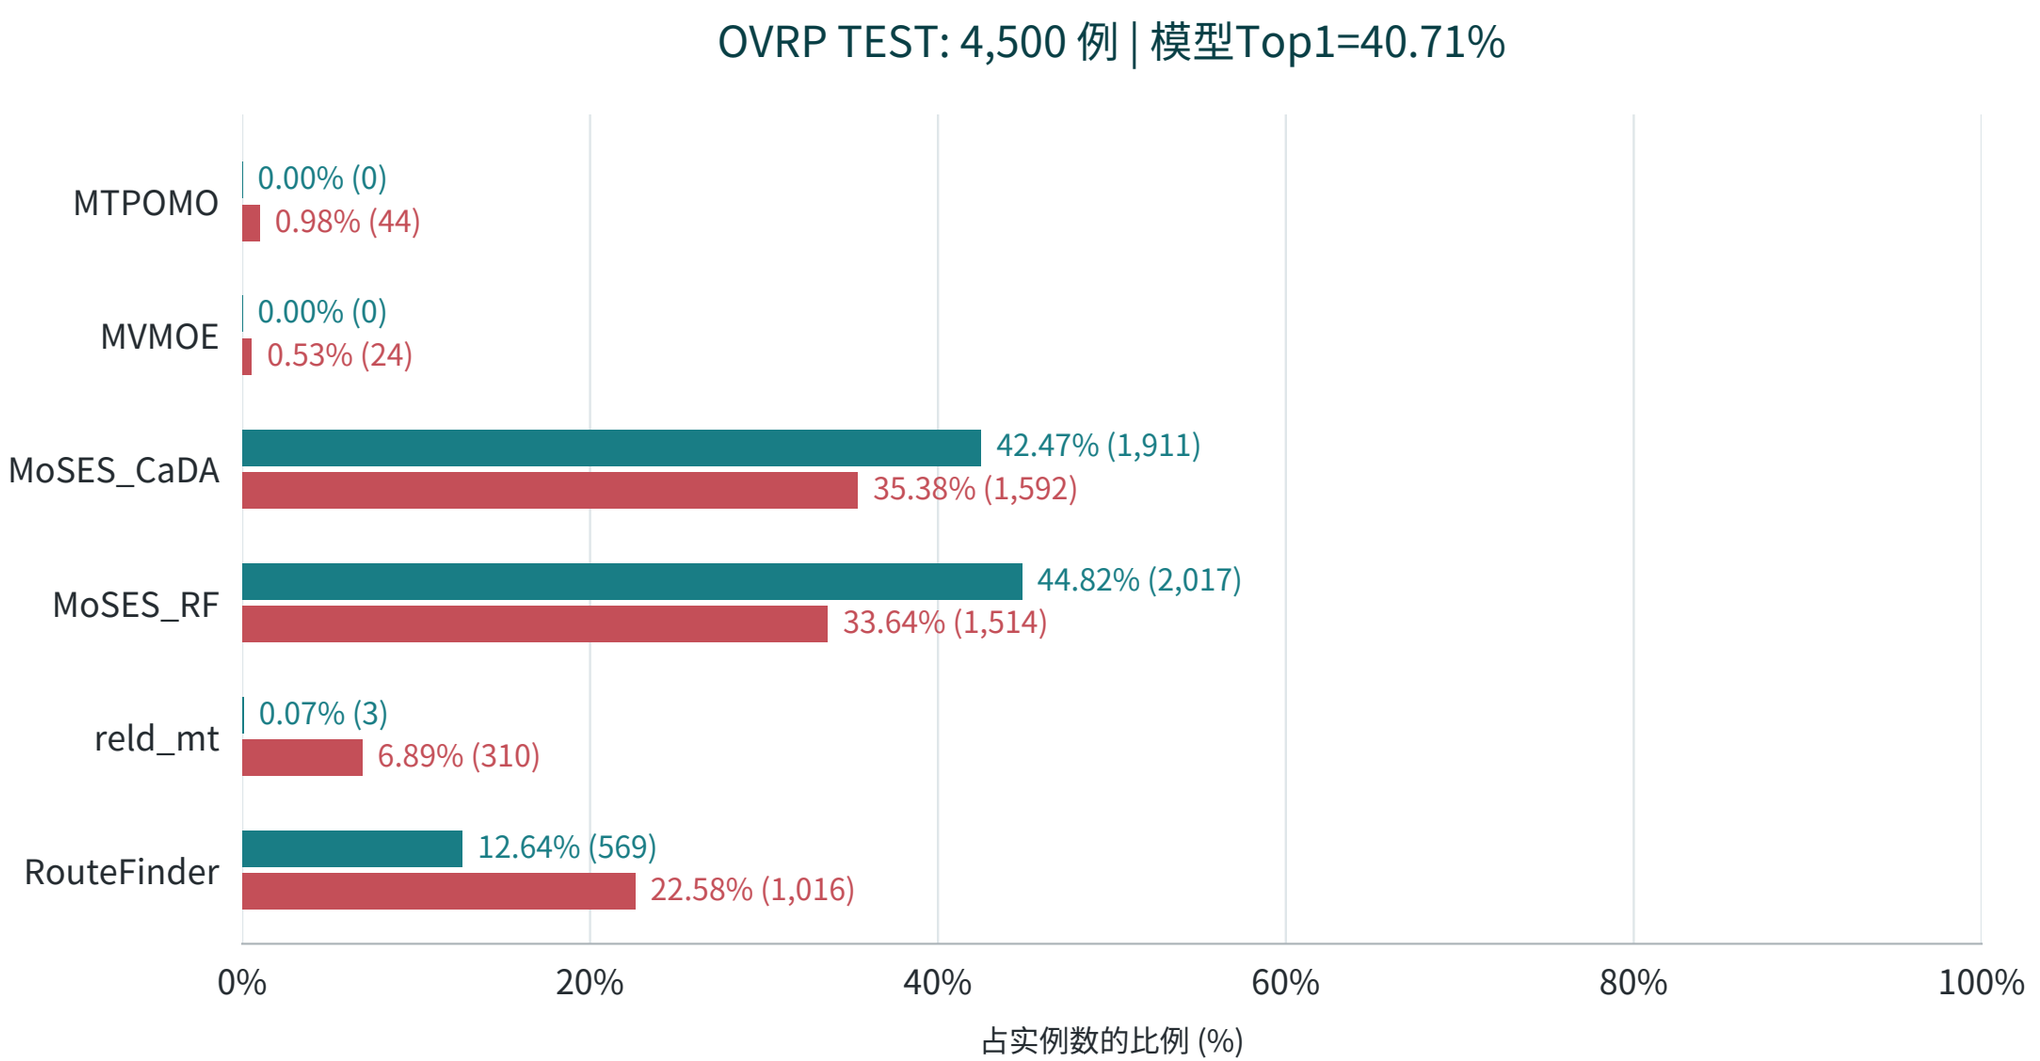


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

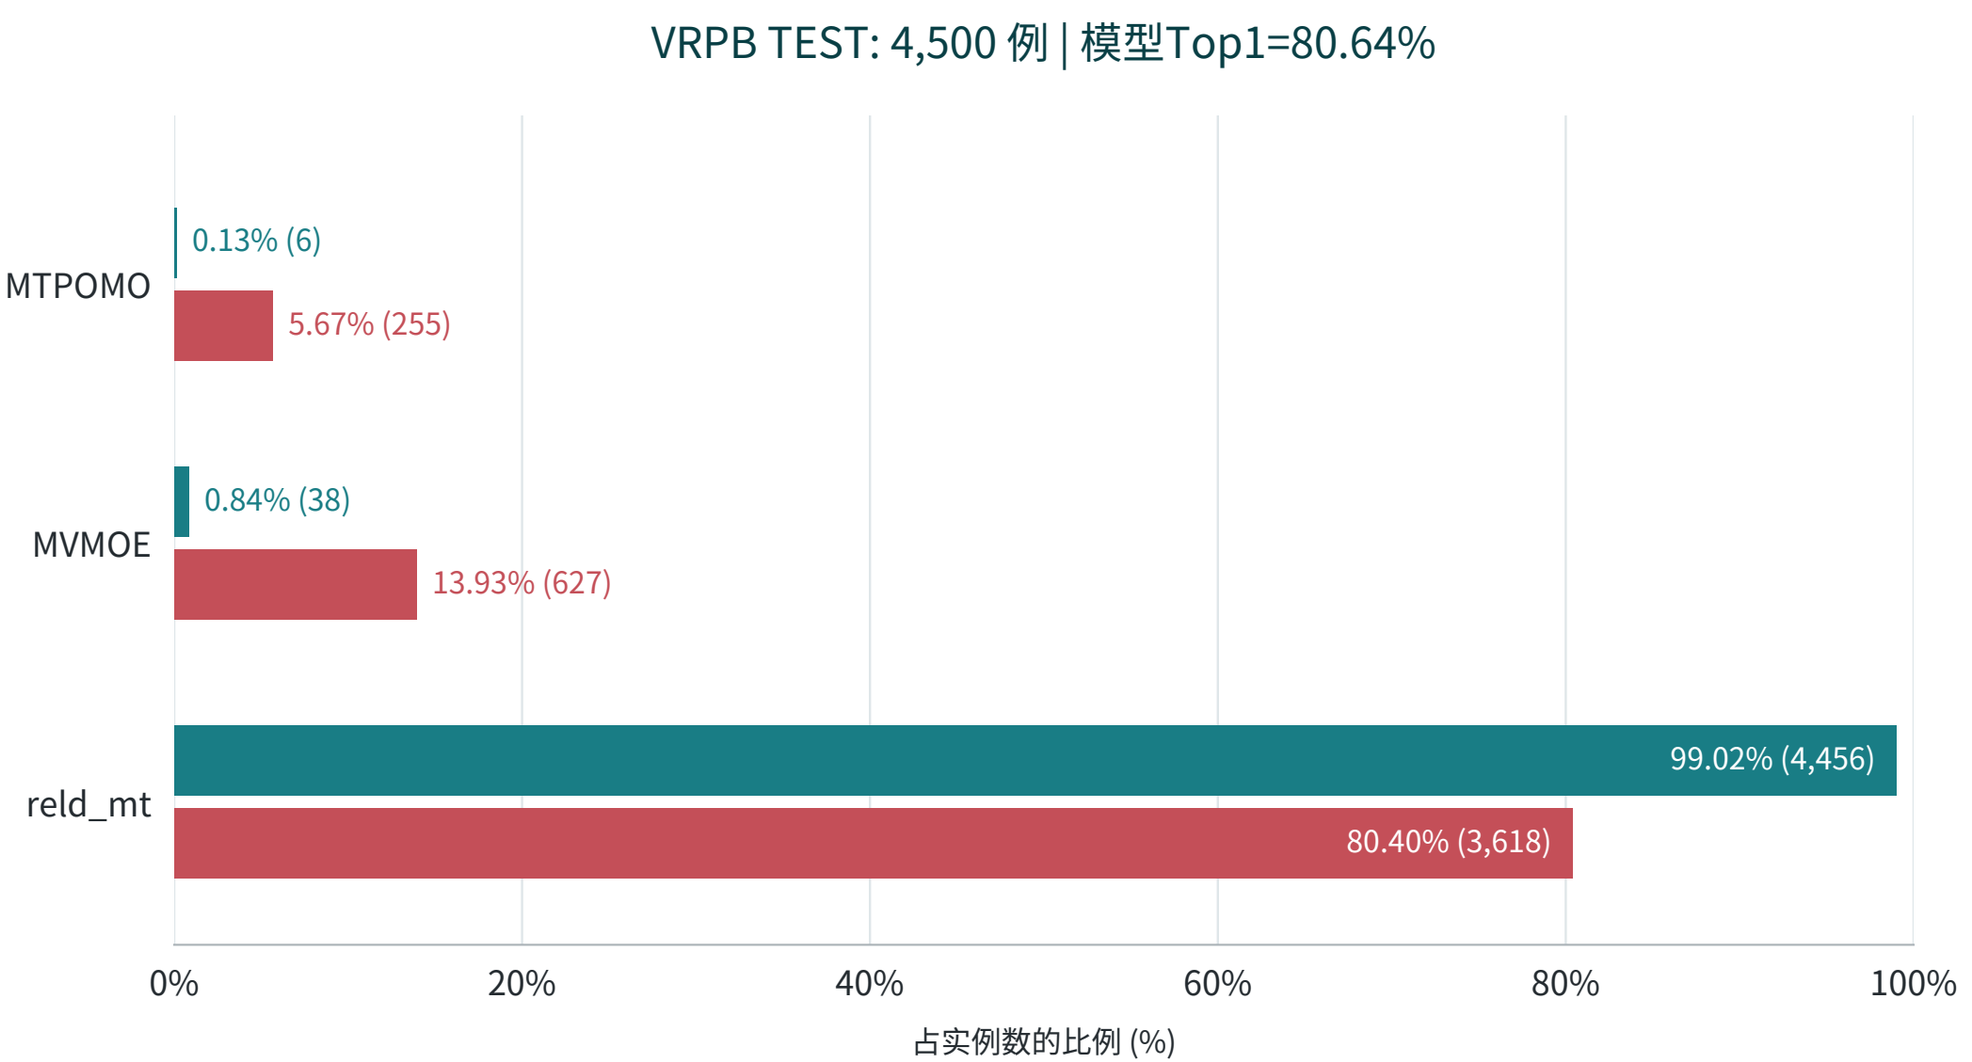


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

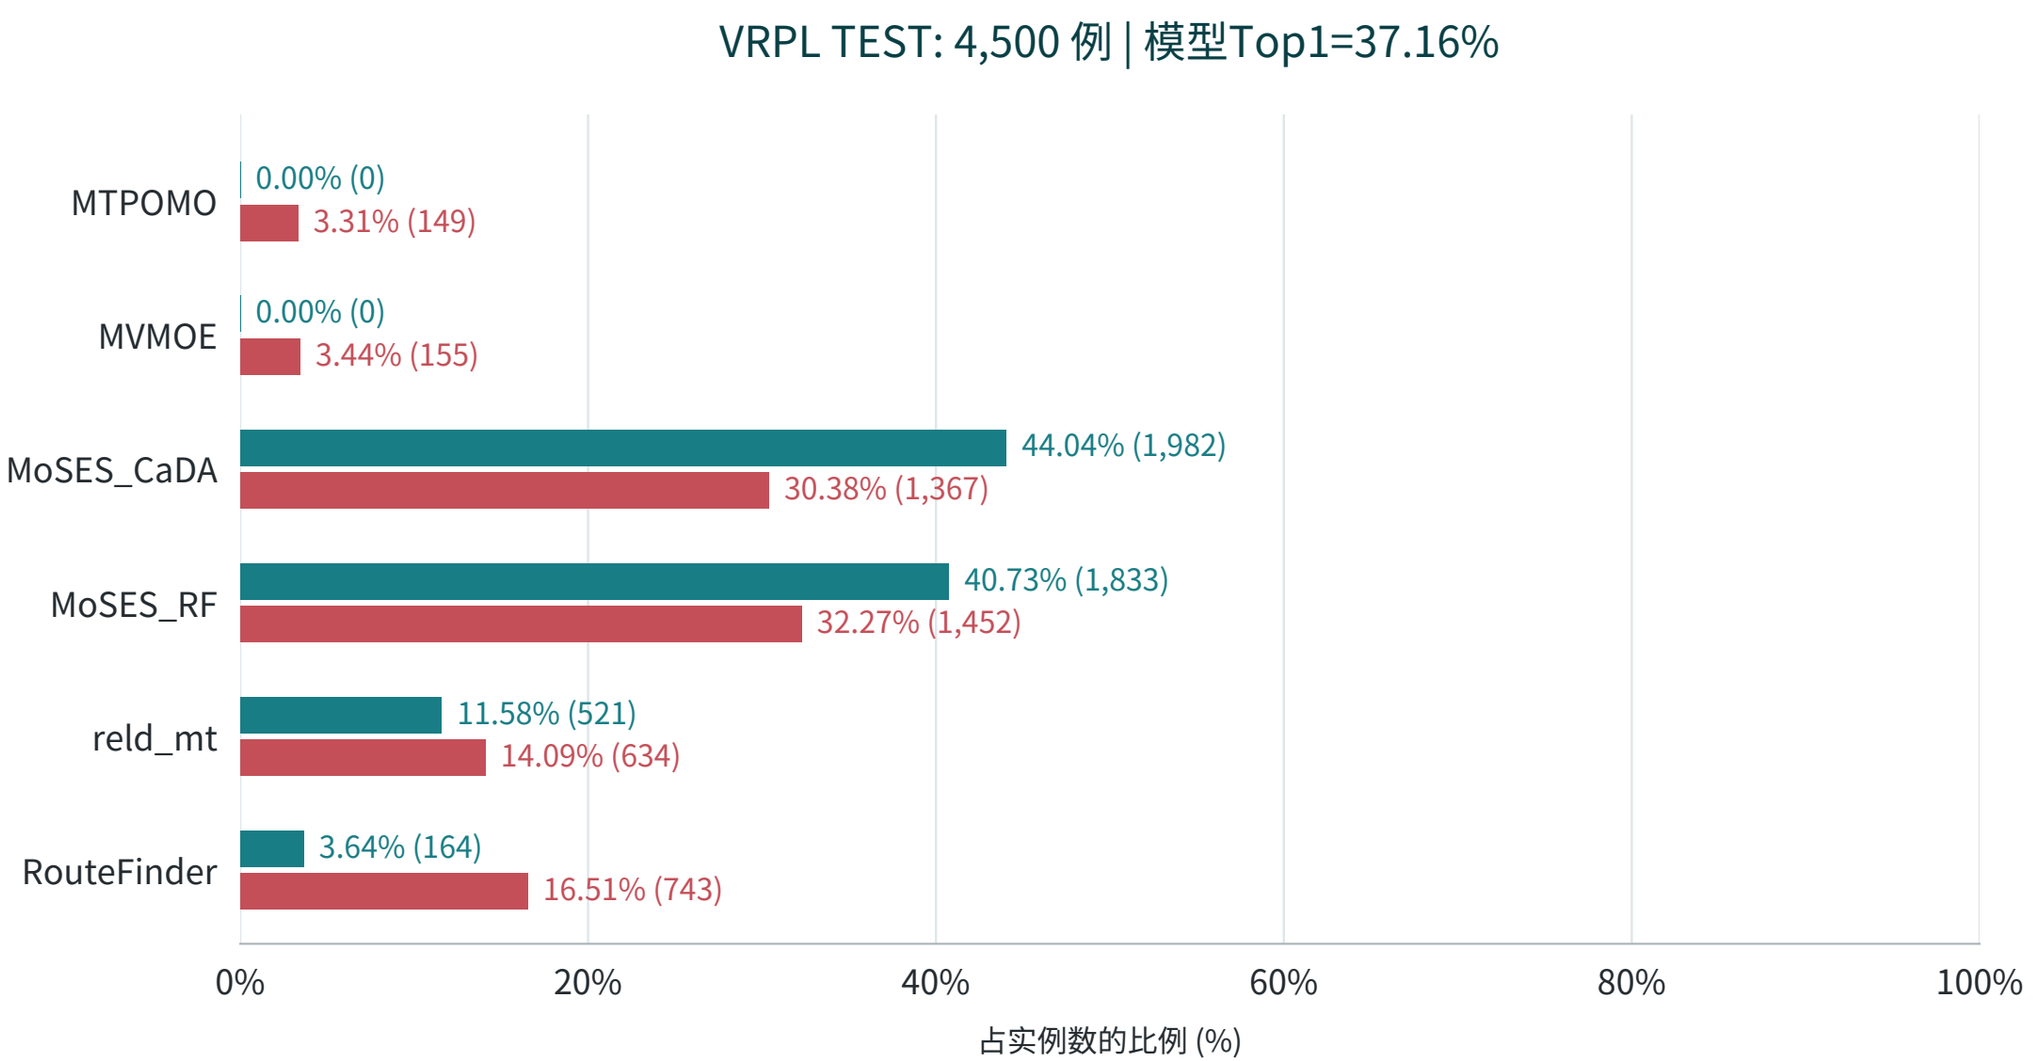


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

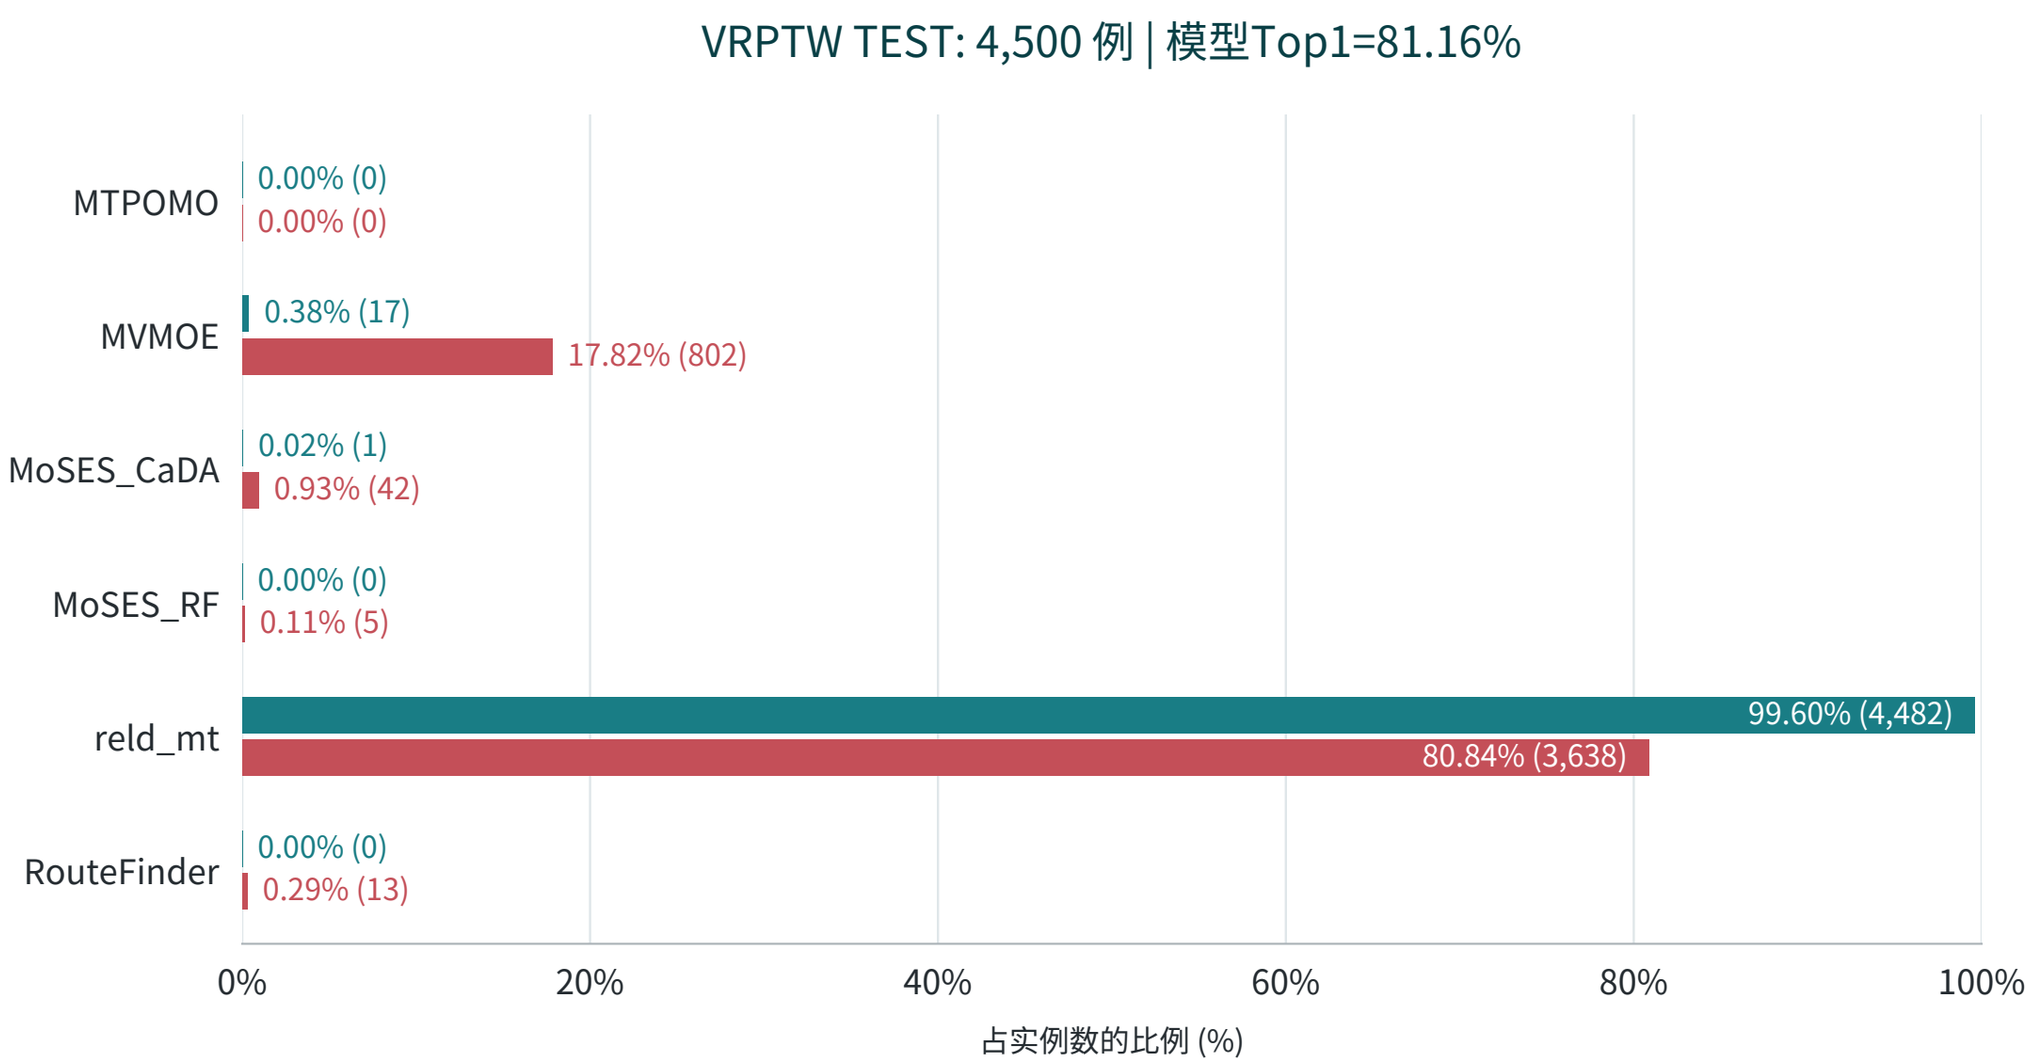


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

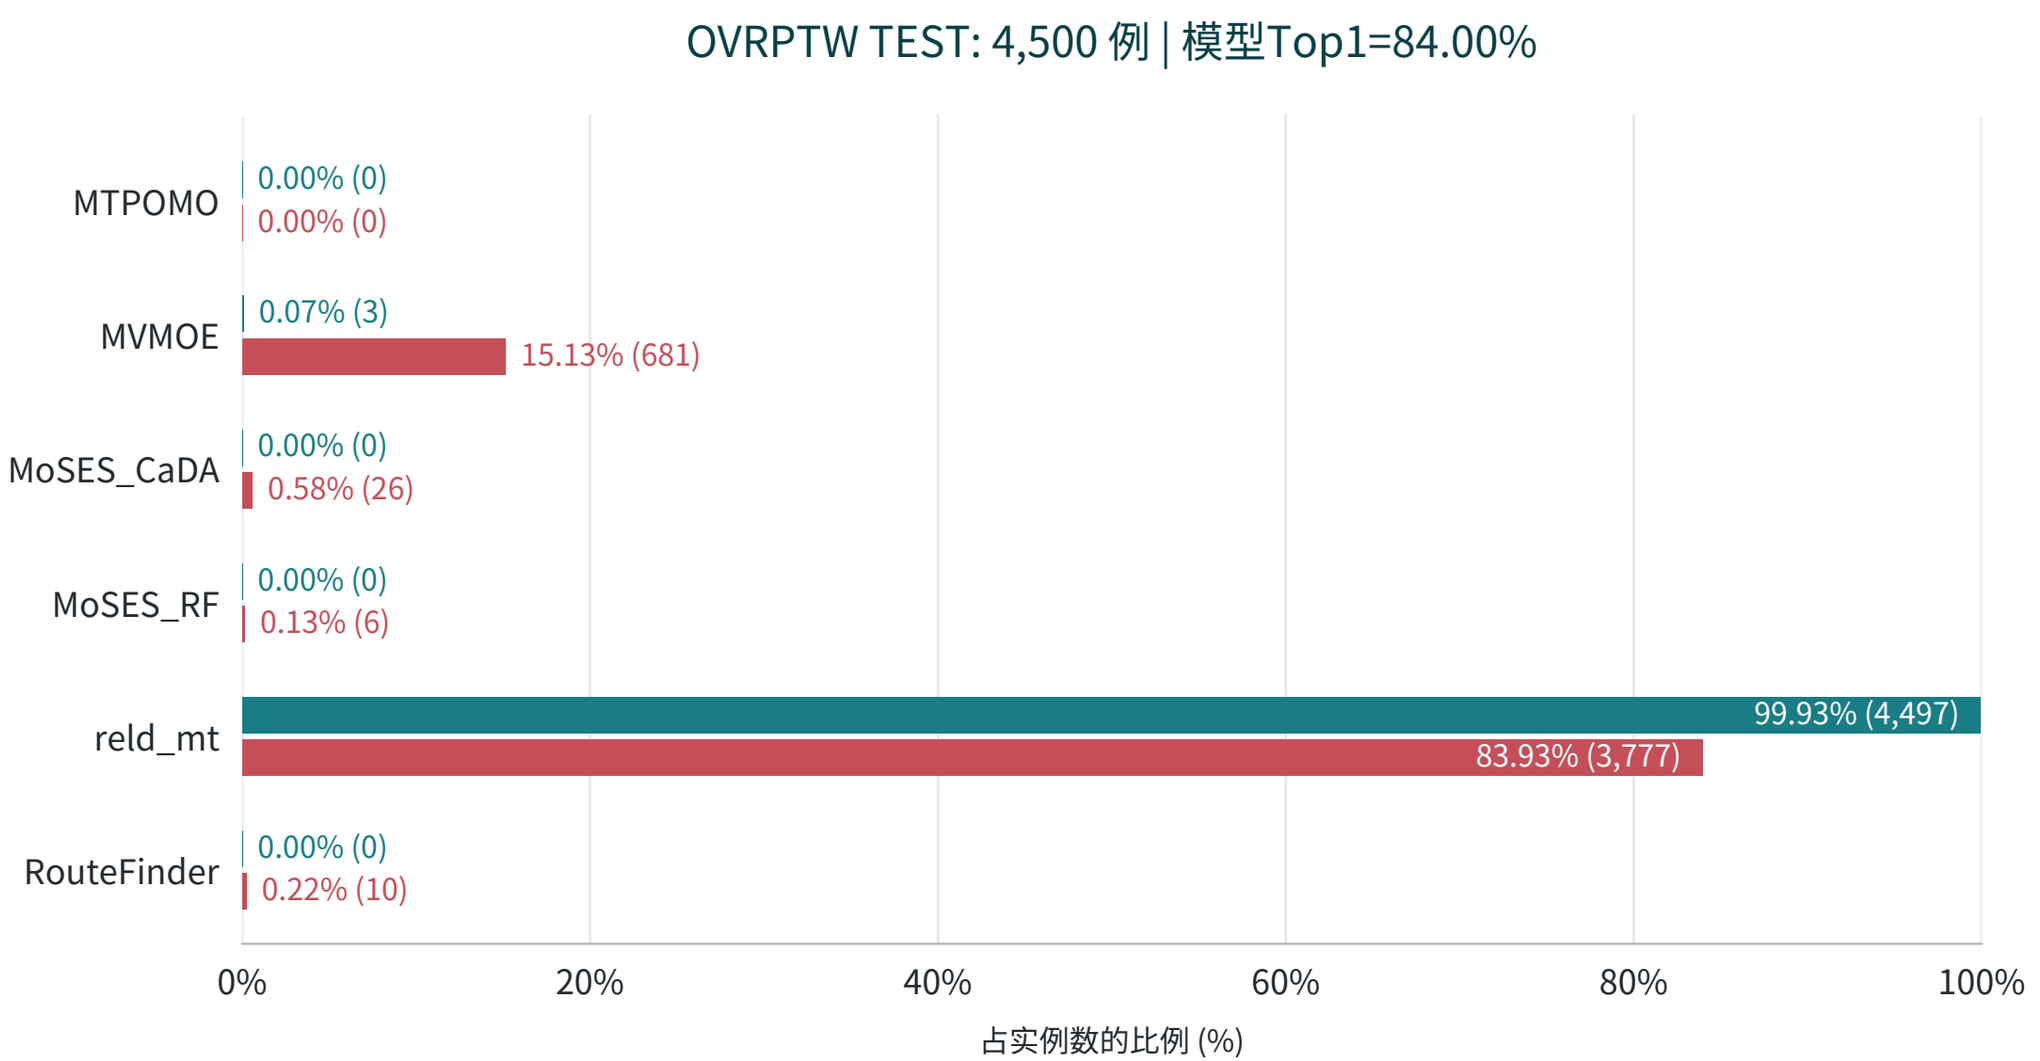


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

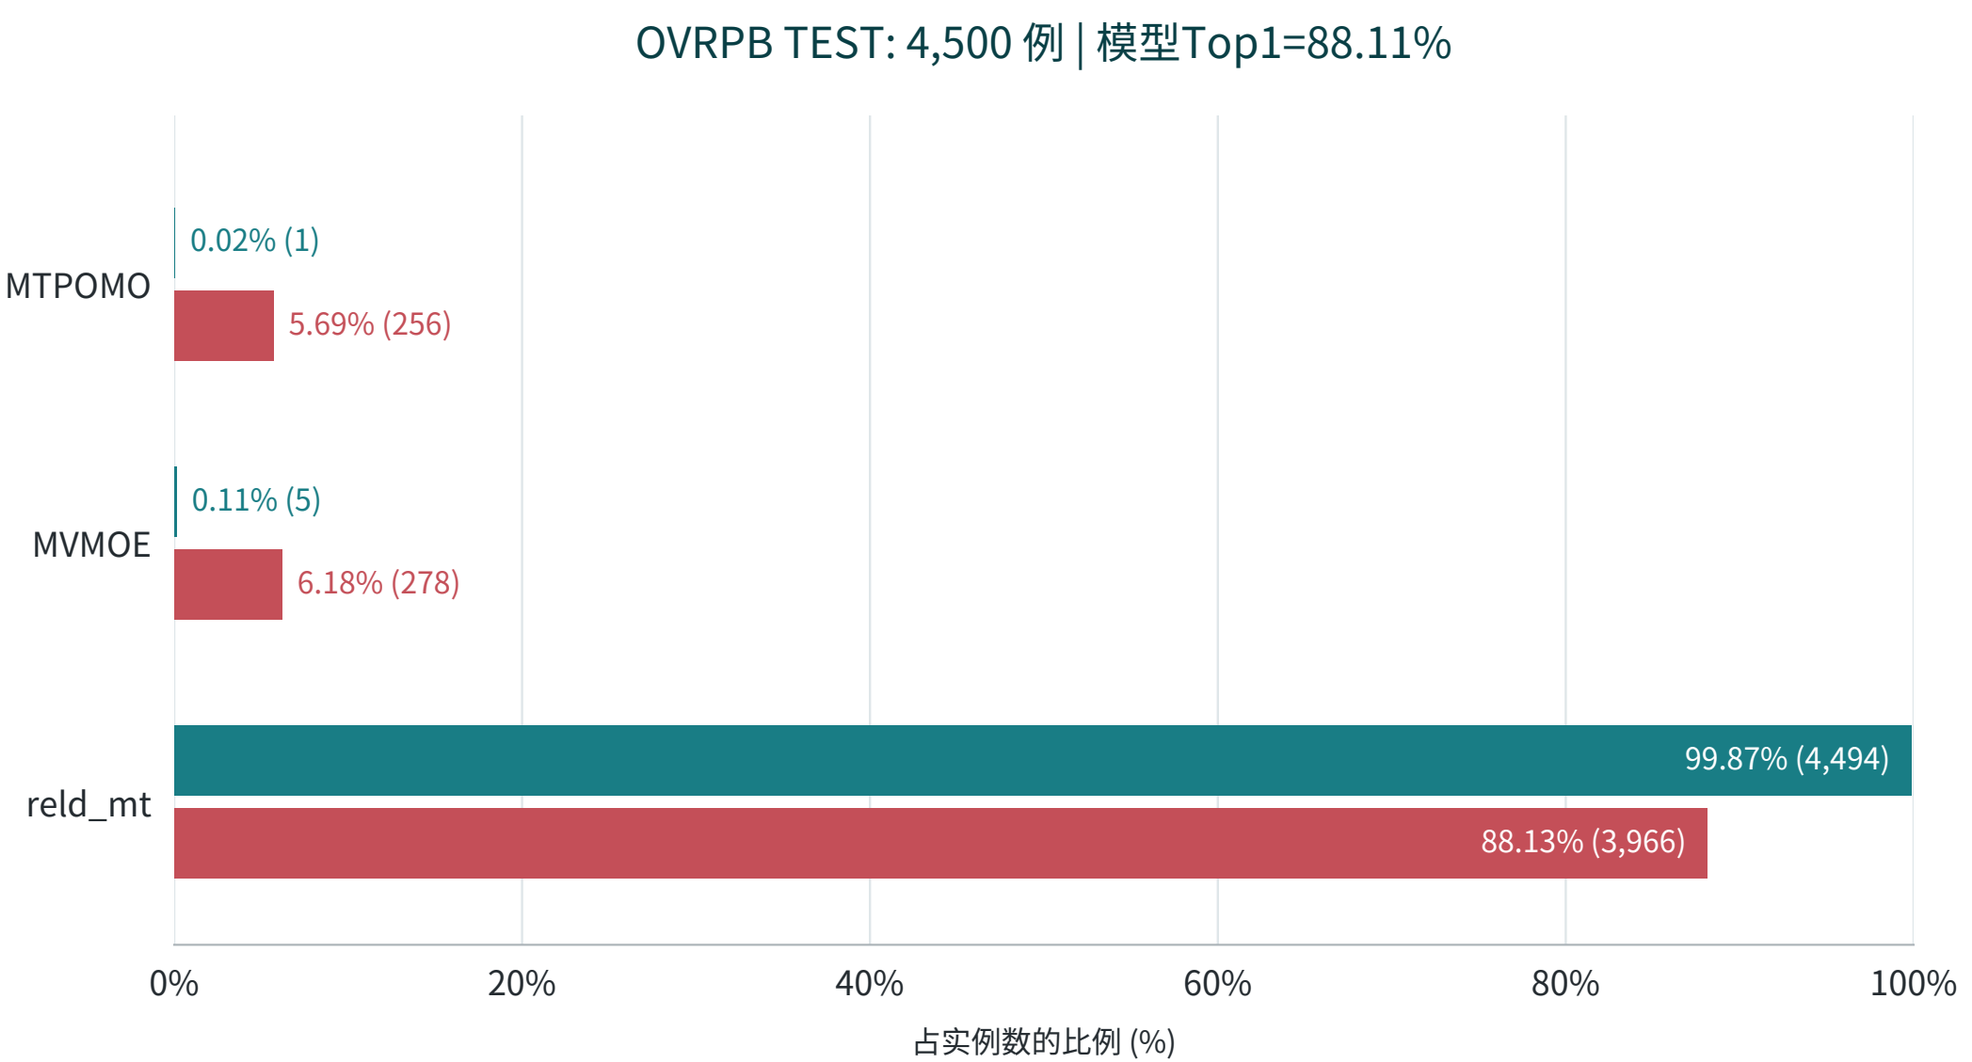


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

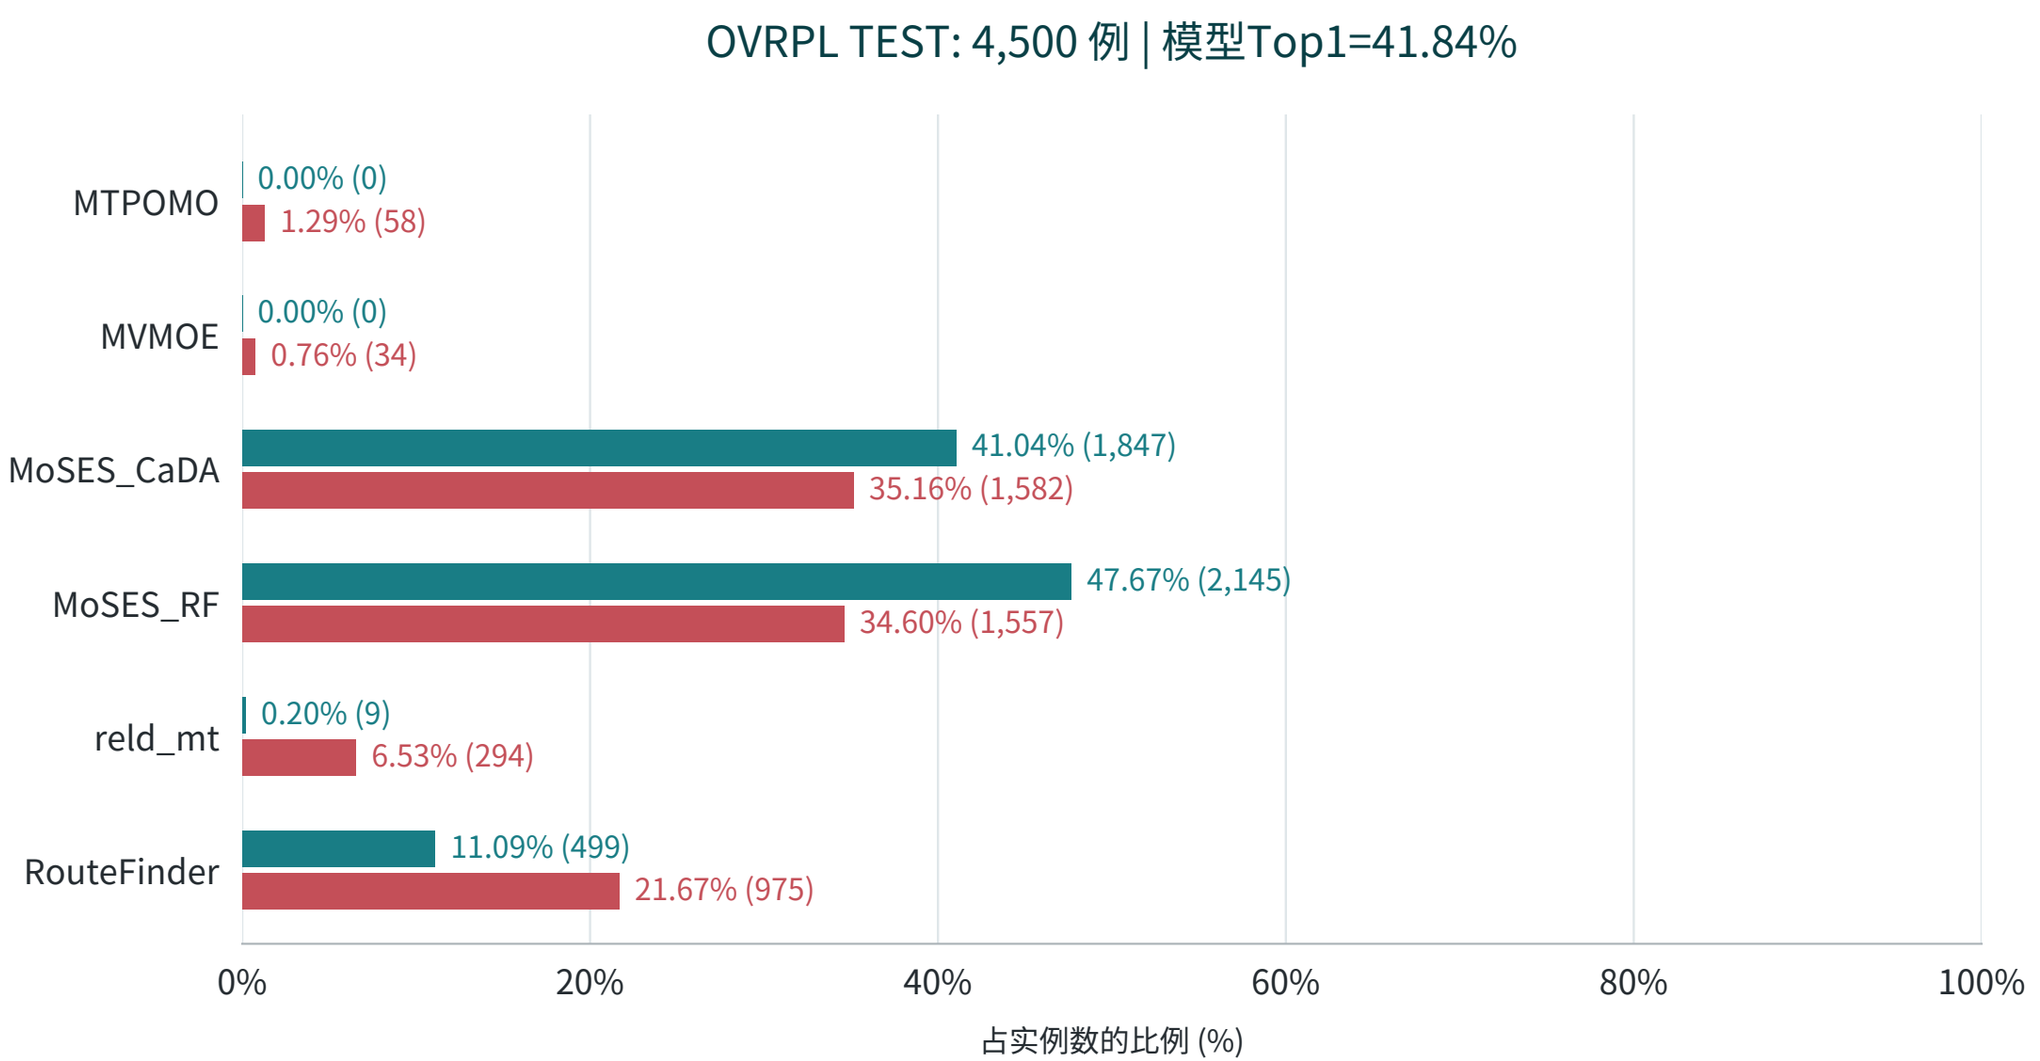


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

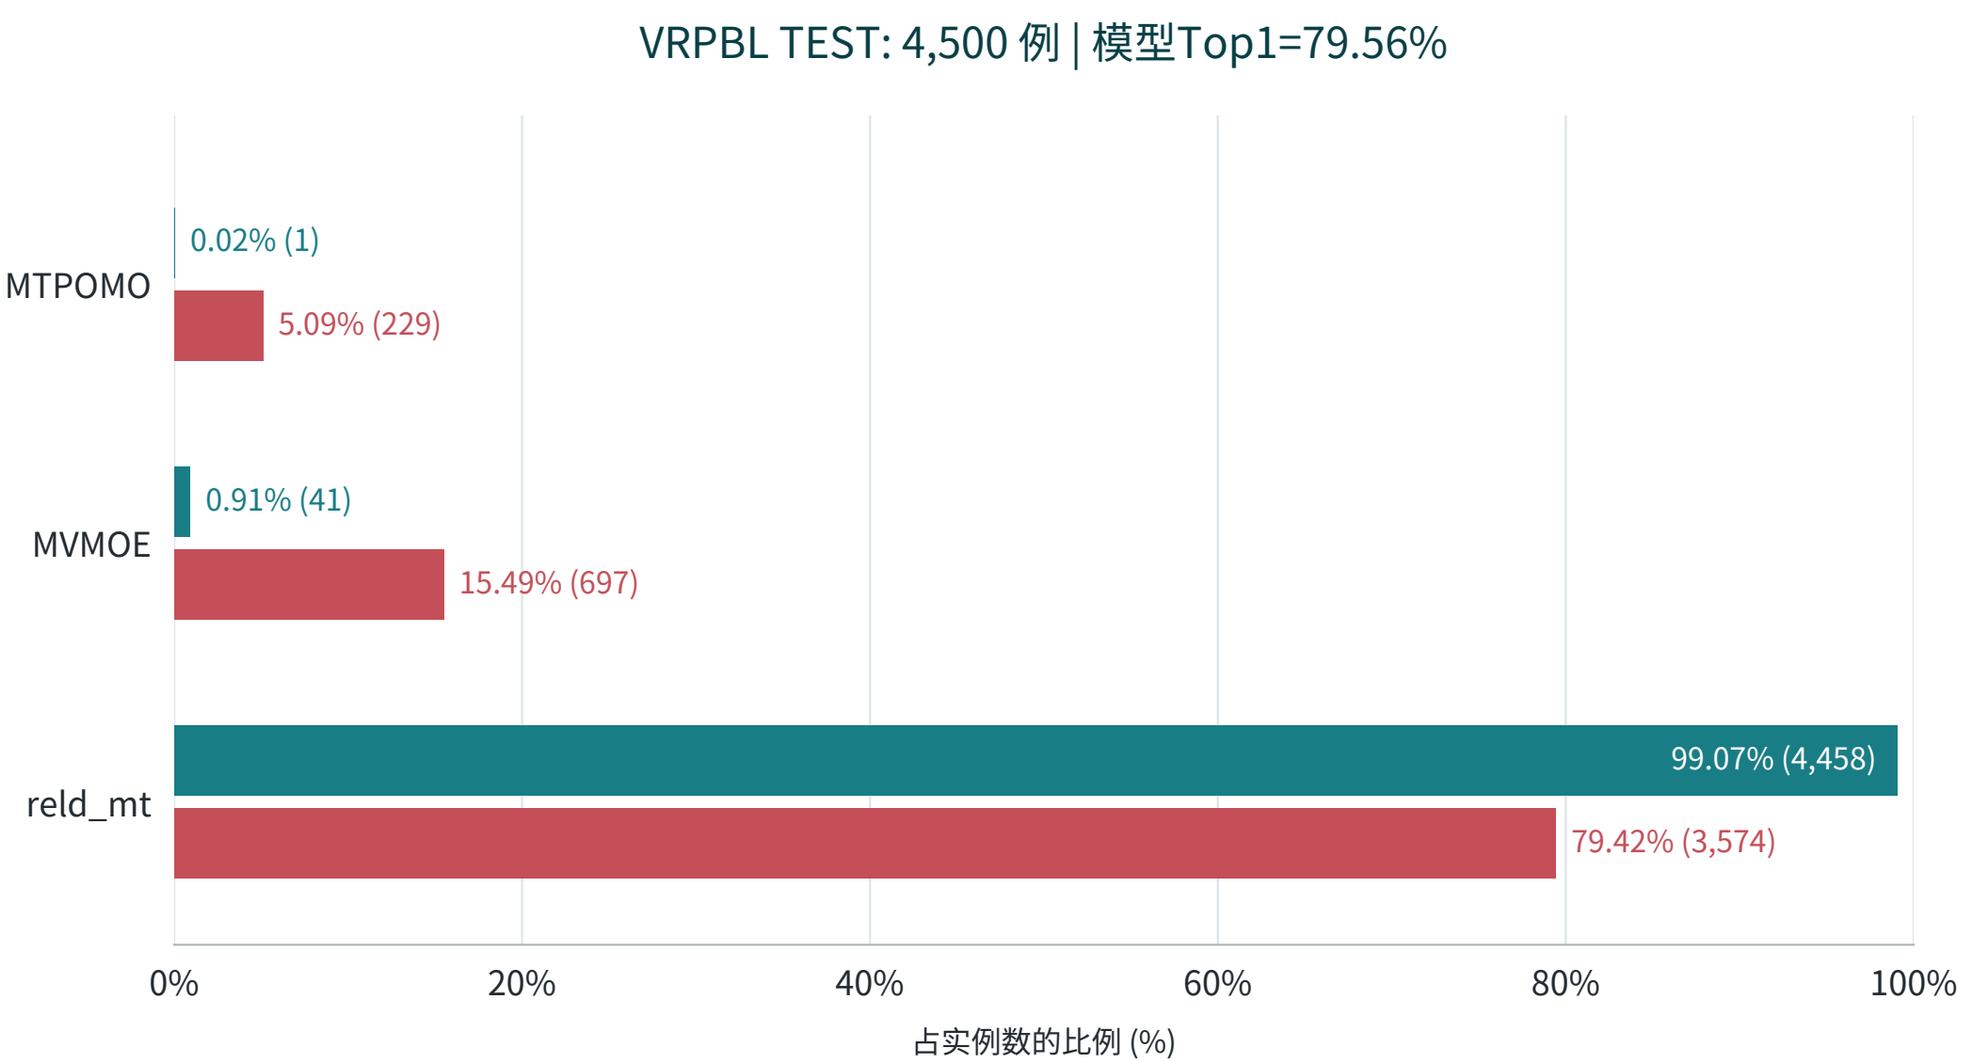


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

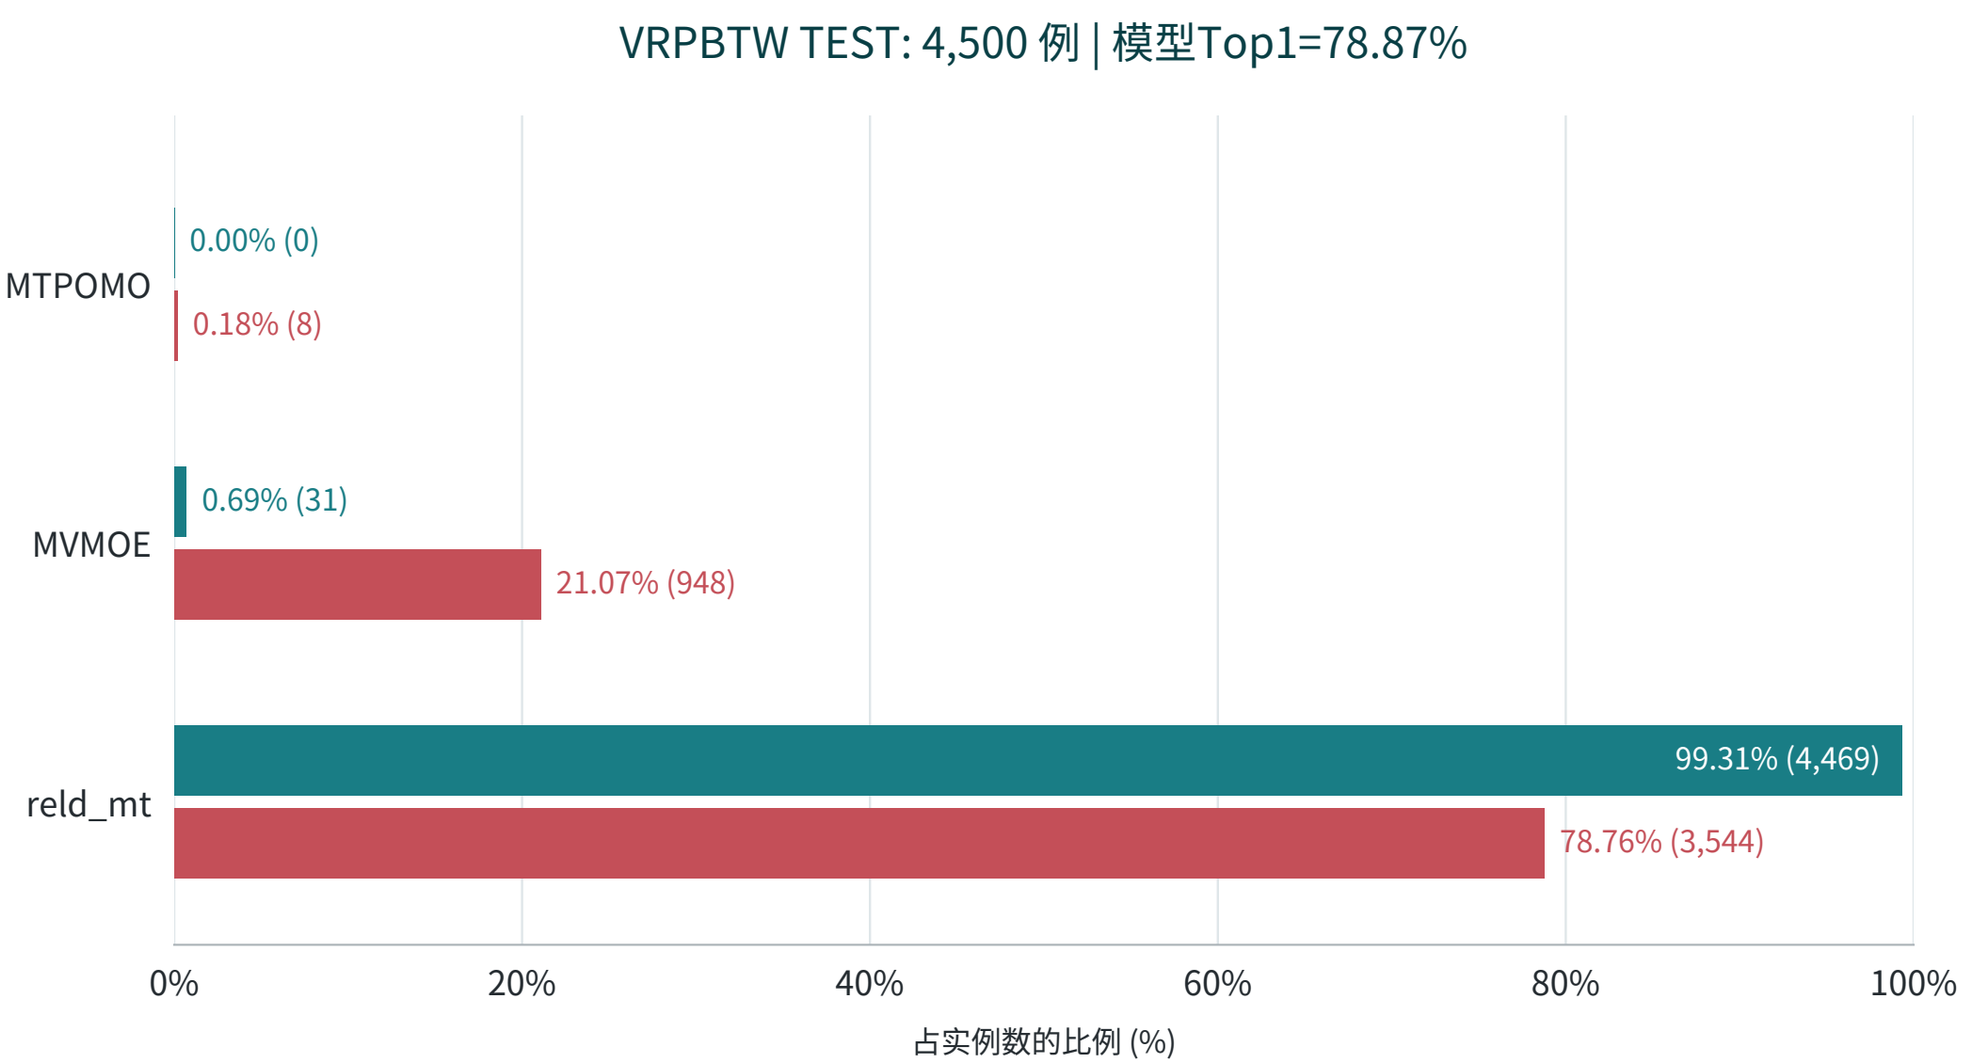


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

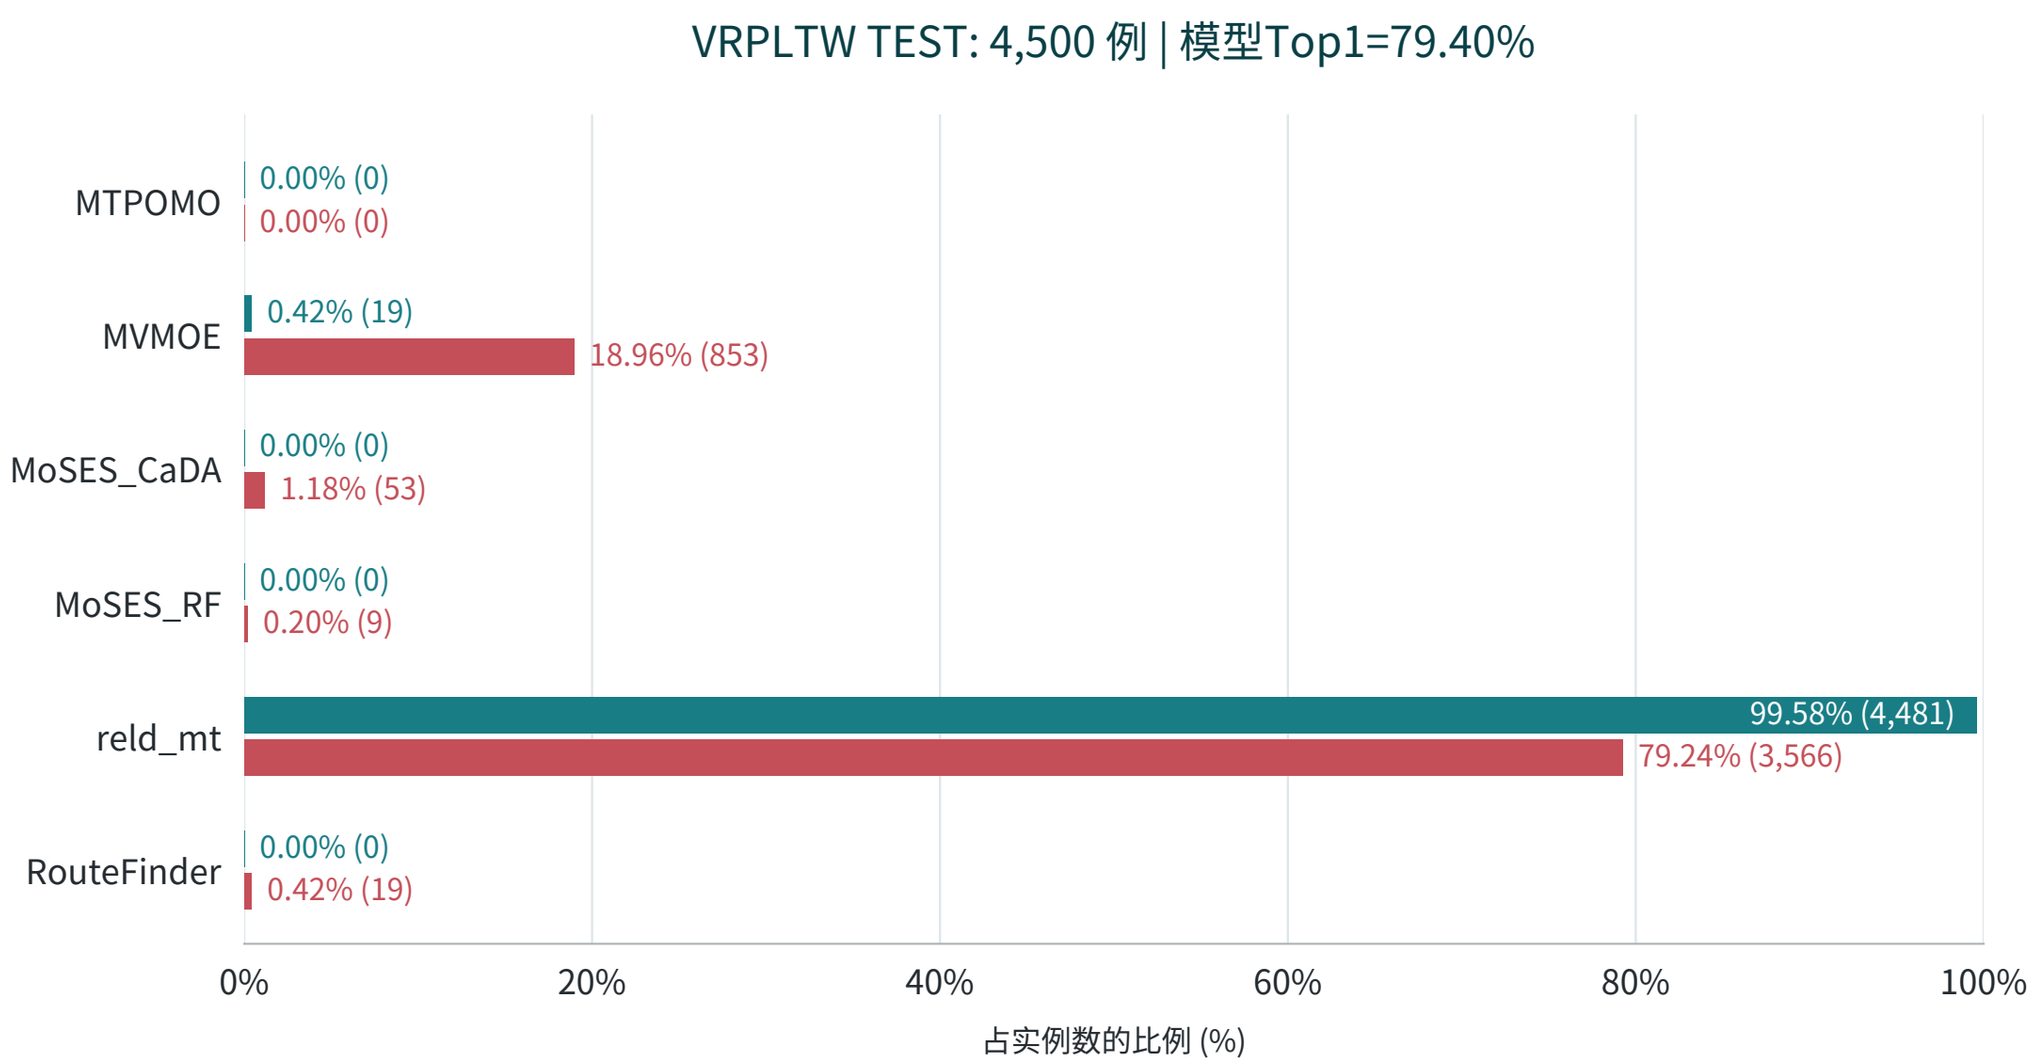


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

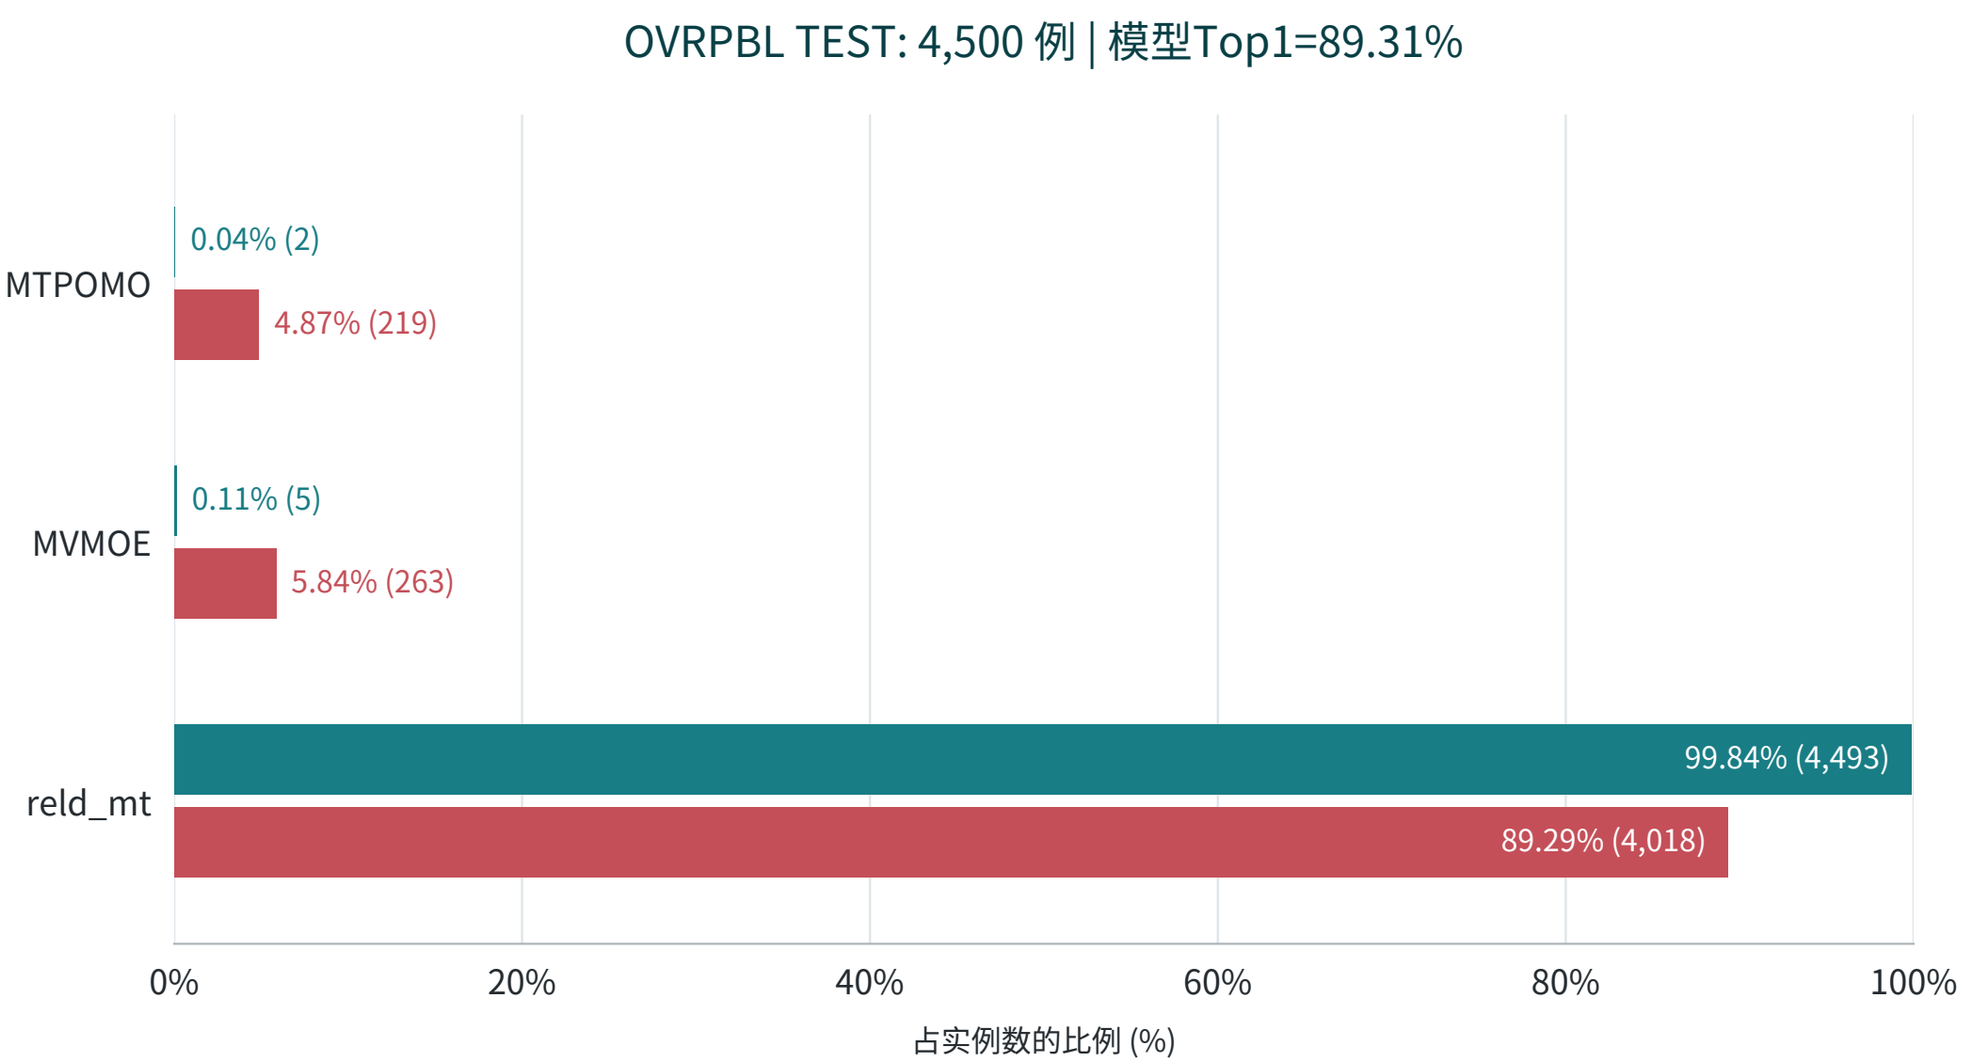


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

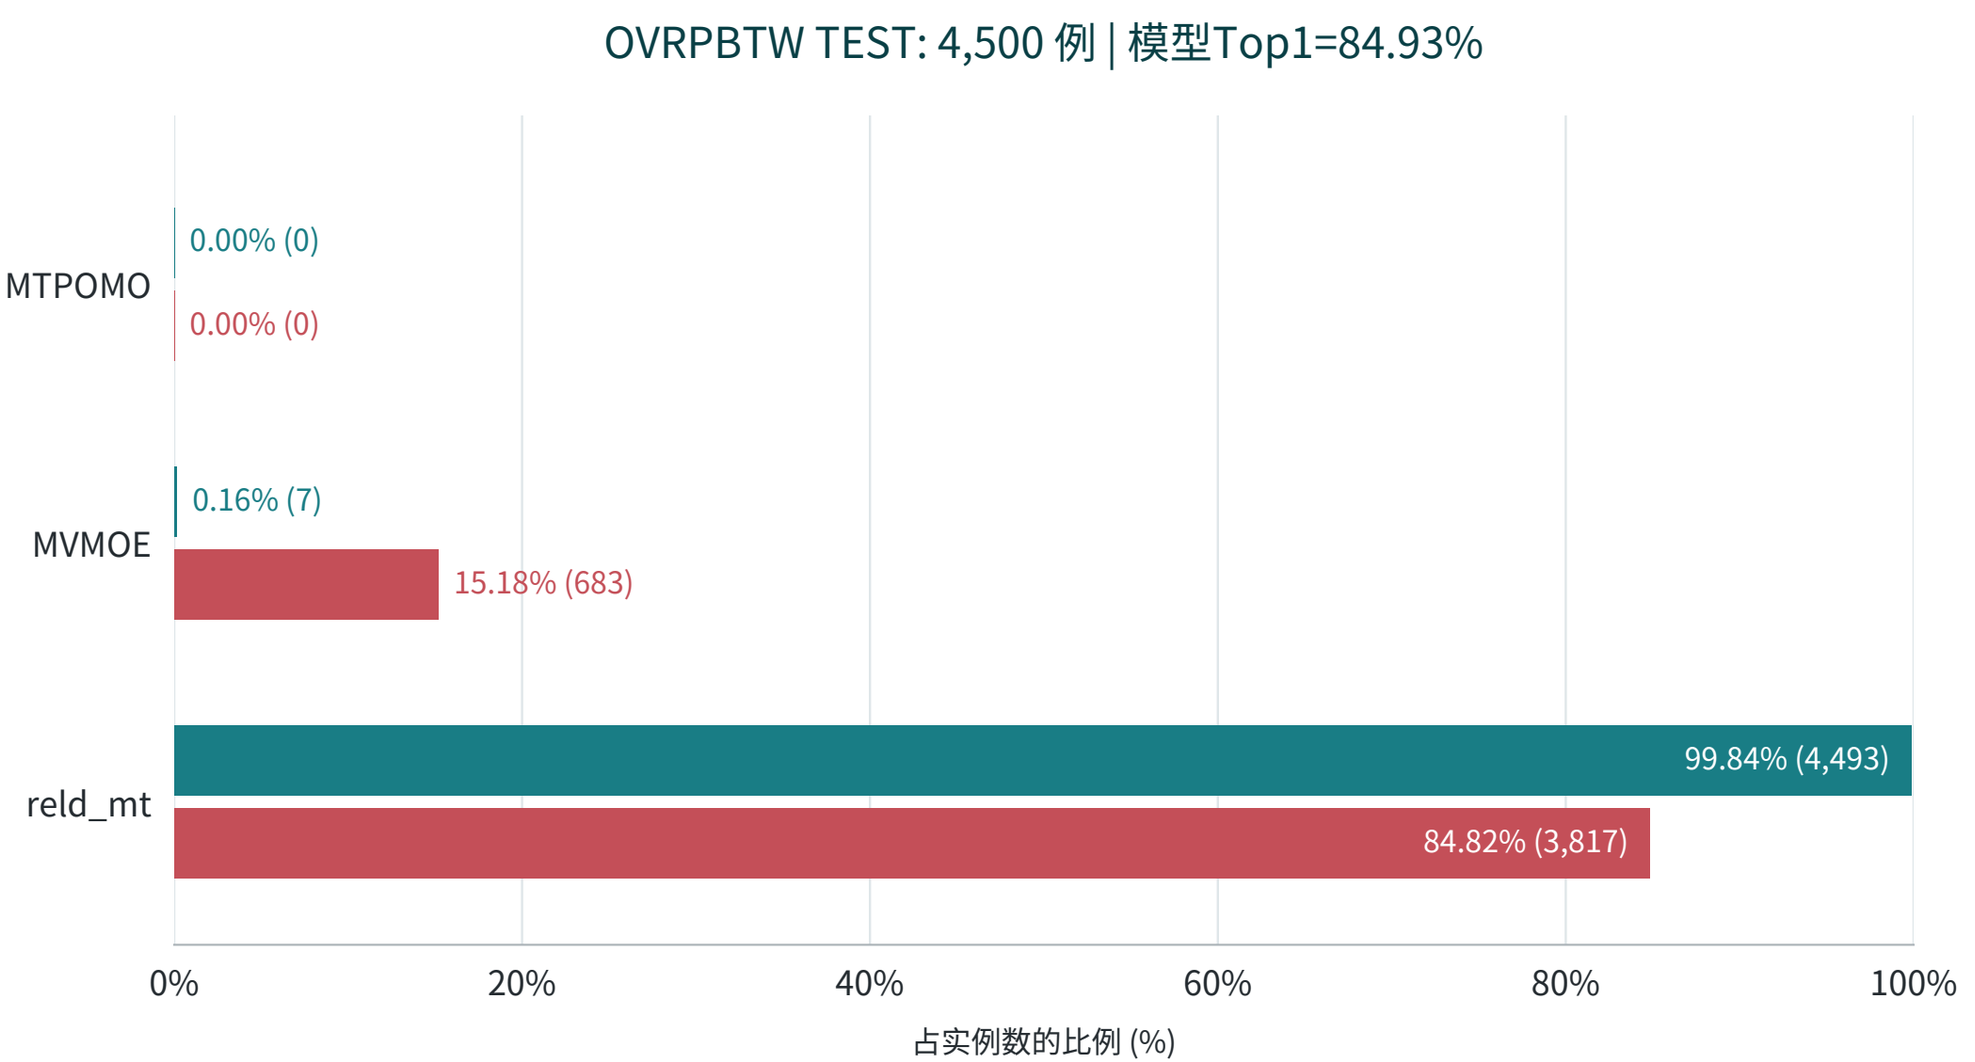


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

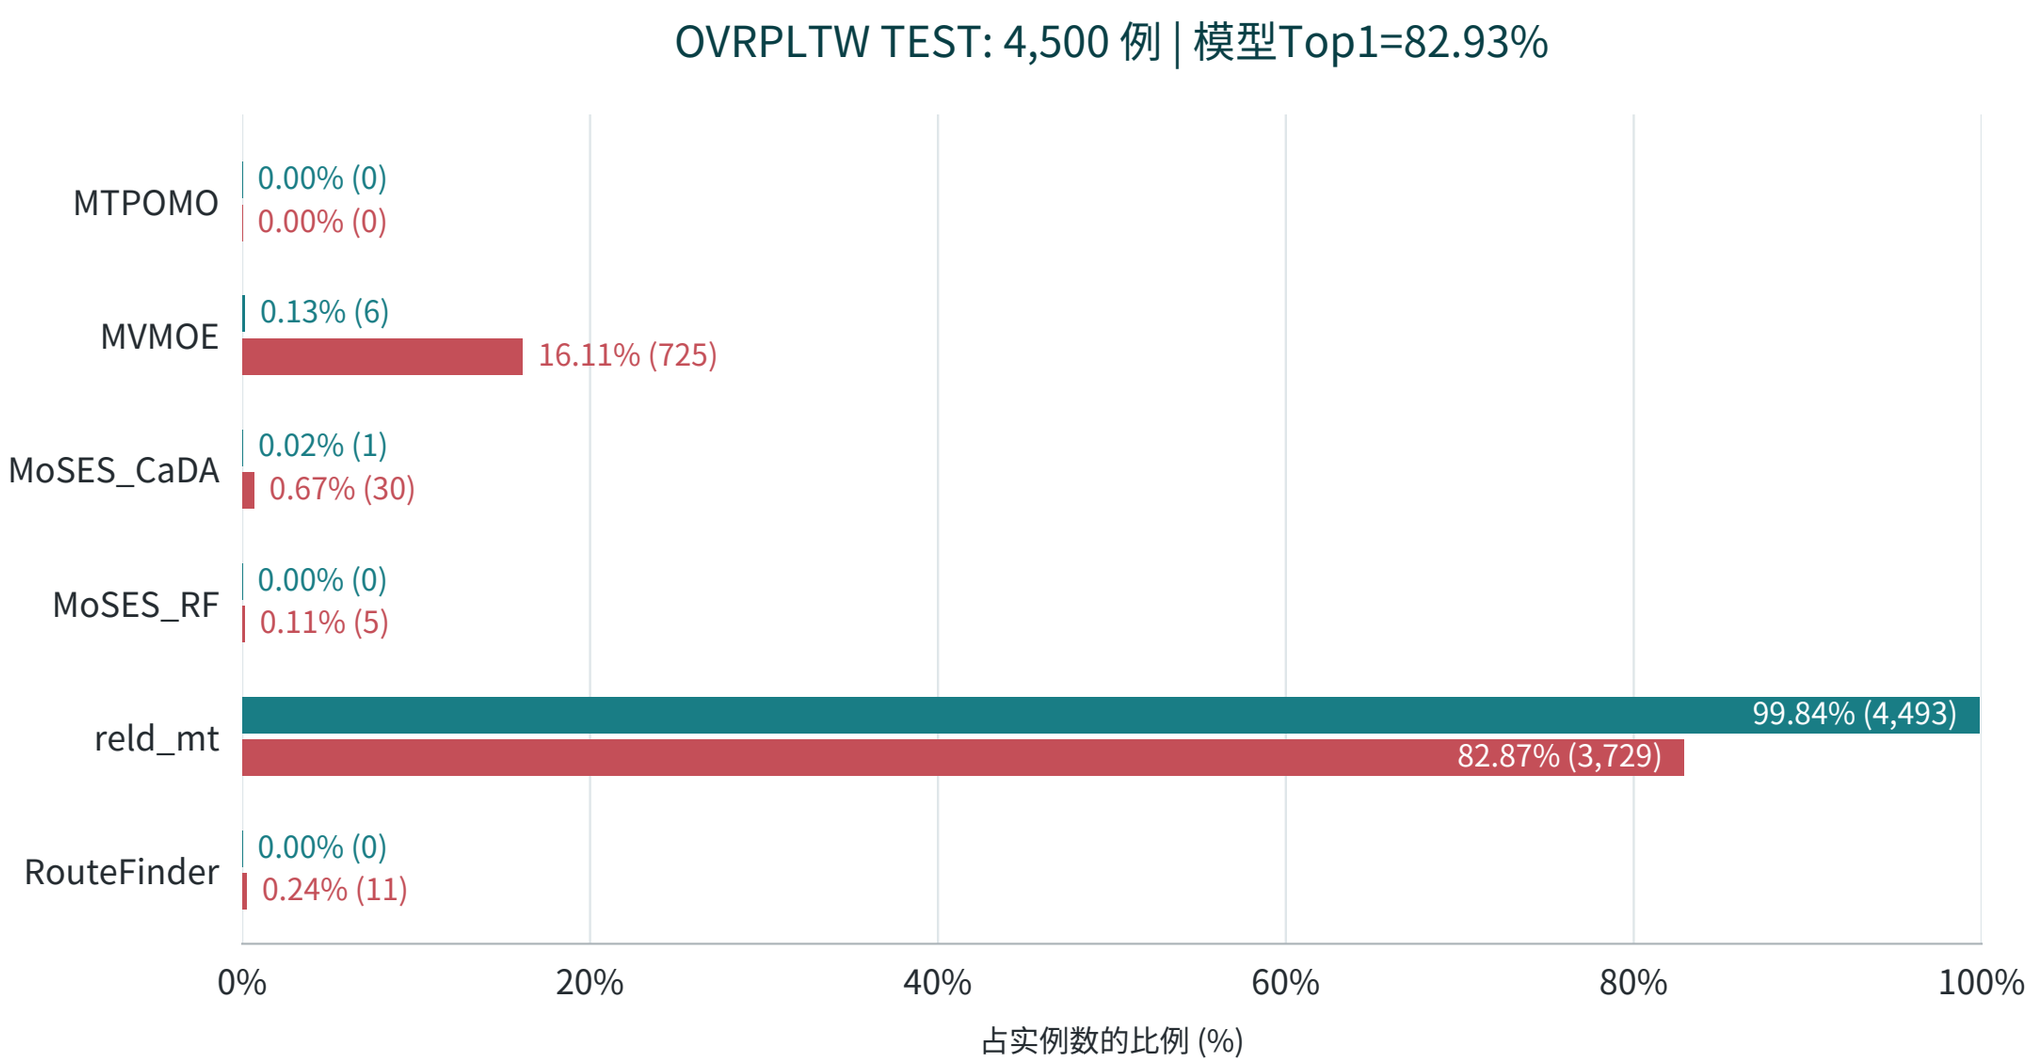


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

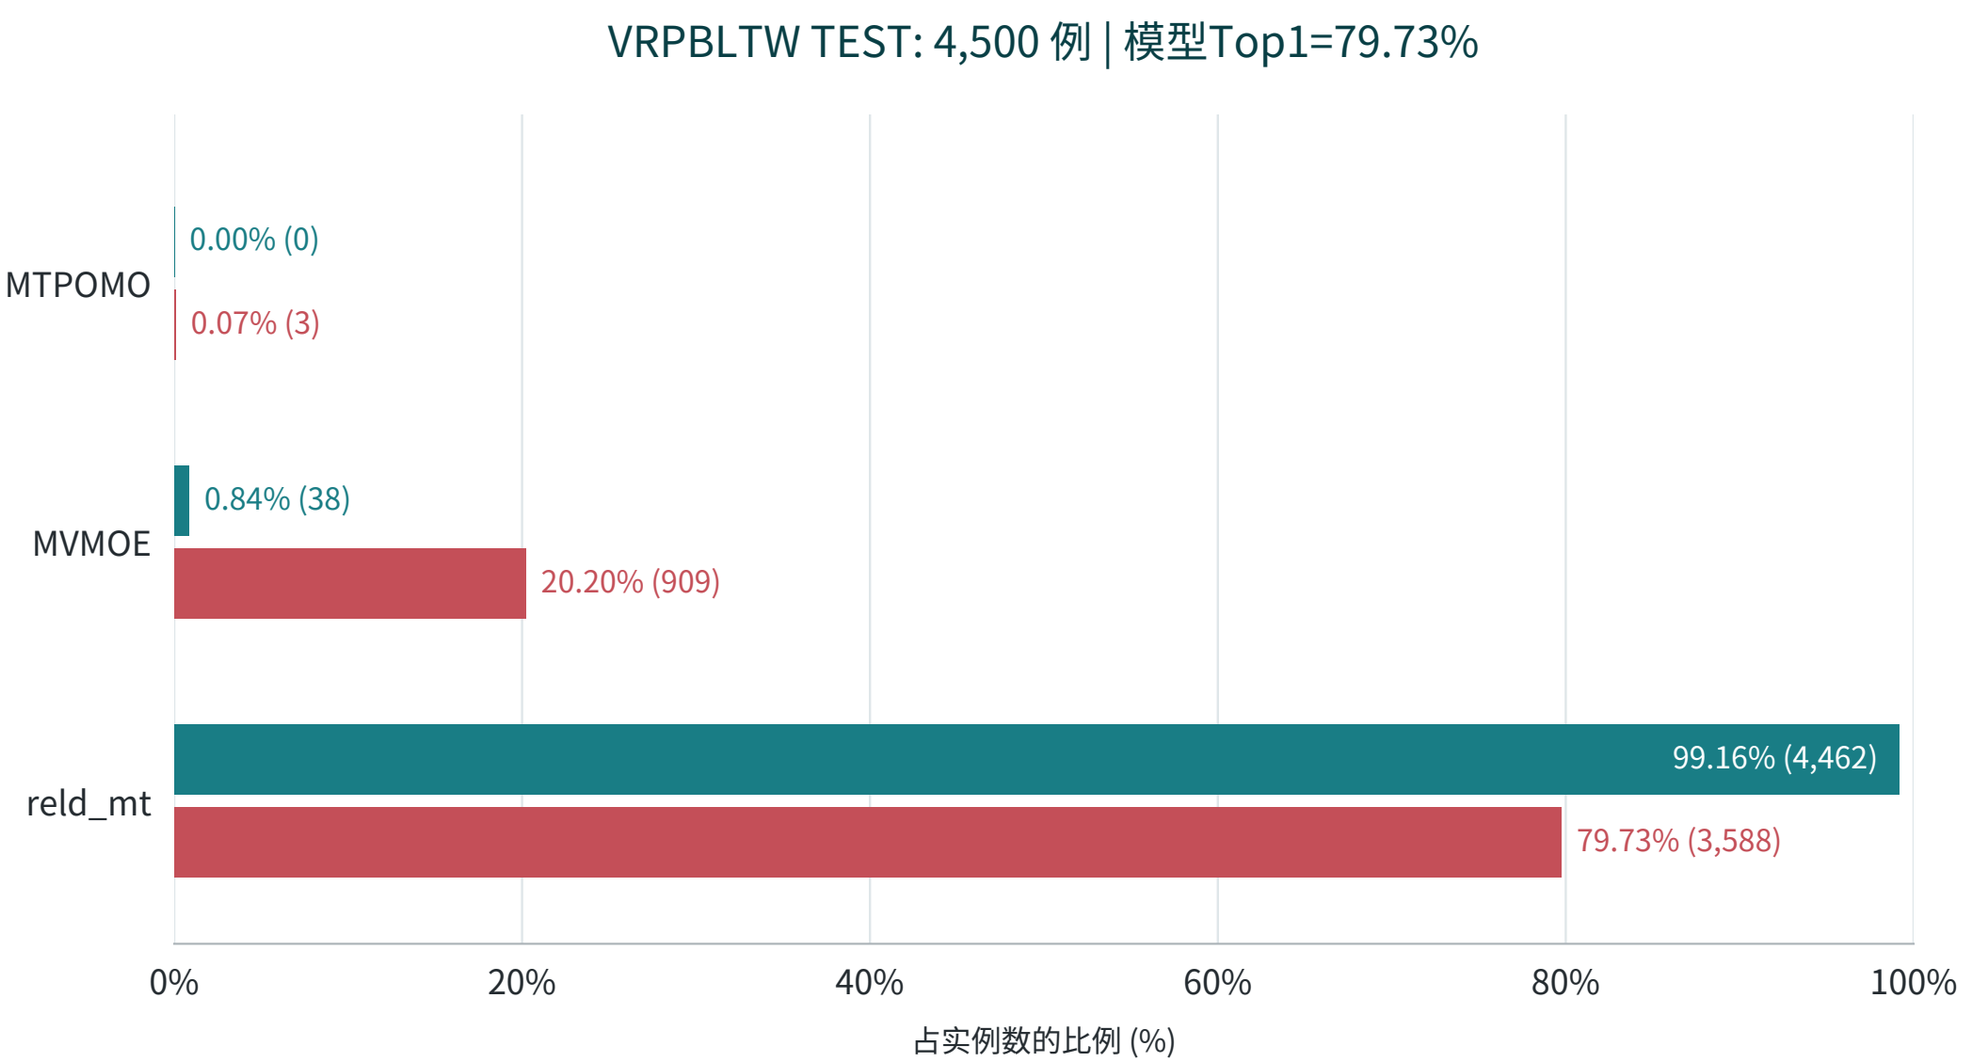


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

# R84/A_baseline | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 23fb9a5cf6210451

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

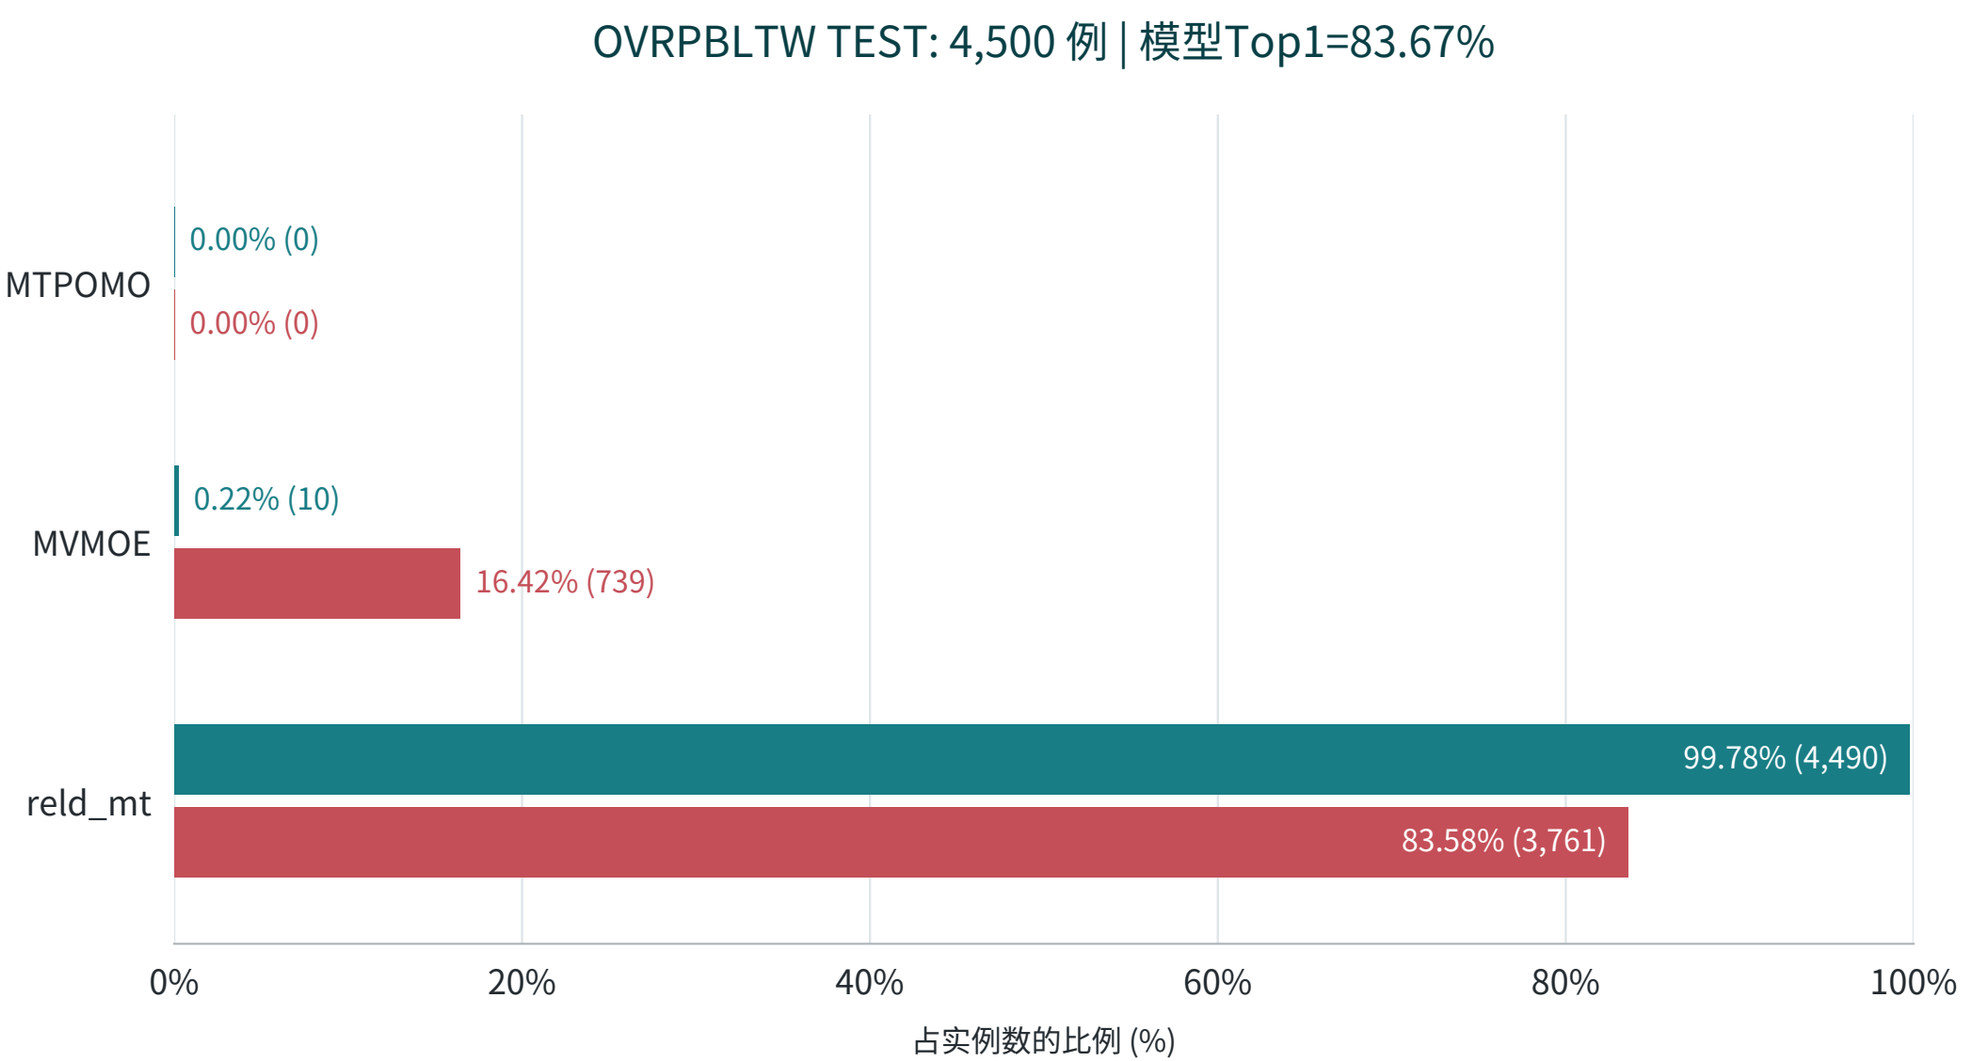


标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R84/A_baseline: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.