R84/C_focal | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 32 | update 46080 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0235	66.2037	11.417002	11.427978	11.371692	-0.1907	+0.3969	0.4083
TEST ALL	71.2716	66.1802	11.374011	11.385299	11.329932	-0.1957	+0.3876	0.3972

Dataset	n	NSS Top1 (%)	R84 Top1 (%)	NSS cost	R84 cost
TSP TEST	4500	45.888889	46.688889	7.970400719	7.971591330
CVRP TEST	4500	45.977778	47.911111	18.004802368	18.015212317
TSPLIB	49	20.408163	18.367347	8.217907074	8.215195216
CVRPLIB	100	70.000000	60.000000	67.101111717	67.286031027

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | focal extra: True

R84/C_focal | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0235	66.2037	11.417002	11.427978	11.371692	-0.1907	+0.3969	0.4083	per-problem TRAIN SBS
TSP	46.9556	33.1111	8.025340	8.045354	7.990533	-0.2488	+0.4356	0.4248	T2T
CVRP	46.6444	18.7111	18.162022	18.269377	18.064087	-0.5876	+0.5422	0.7256	RELD_CVRP
ATSP	76.8000	47.4889	1.638850	1.676905	1.632471	-2.2693	+0.3908	0.3873	UNICO_MatPOENet
OVRP	41.0667	35.7556	7.461286	7.469579	7.415777	-0.1110	+0.6137	0.6272	MoSES_RF
VRPB	81.0222	80.8444	9.354805	9.354876	9.318750	-0.0008	+0.3869	0.3969	reld_mt
VRPL	37.5333	33.0889	12.432213	12.437959	12.383444	-0.0462	+0.3938	0.4014	MoSES_RF
VRPTW	80.0444	79.9556	18.818646	18.819431	18.766139	-0.0042	+0.2798	0.2958	reld_mt
OVRPTW	83.8222	83.7778	10.143425	10.143730	10.116859	-0.0030	+0.2626	0.2605	reld_mt
OVRPB	88.4444	88.5111	6.357917	6.357254	6.341078	+0.0104	+0.2656	0.2785	reld_mt
OVRPL	40.6222	35.9111	7.438313	7.445709	7.390416	-0.0993	+0.6481	0.6648	MoSES_RF
VRPBL	78.9778	78.5111	9.367935	9.371523	9.328366	-0.0383	+0.4242	0.4275	reld_mt
VRPBTW	78.6444	78.4222	19.945690	19.950430	19.851084	-0.0238	+0.4766	0.4577	reld_mt
VRPLTW	78.8000	78.7556	18.765790	18.765871	18.707843	-0.0004	+0.3097	0.3269	reld_mt
OVRPBL	89.2889	89.2000	6.369211	6.370093	6.352824	-0.0138	+0.2580	0.2686	reld_mt
OVRPBTW	83.4889	83.4444	10.662208	10.661098	10.623245	+0.0104	+0.3668	0.3449	reld_mt
OVRPLTW	83.5333	83.4889	10.157568	10.157423	10.129818	+0.0014	+0.2739	0.2785	reld_mt
VRPBLTW	79.5333	79.4000	19.794377	19.797044	19.706420	-0.0135	+0.4463	0.4345	reld_mt
OVRPBLTW	83.2000	83.2889	10.610437	10.609955	10.571302	+0.0045	+0.3702	0.3479	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R84/C_focal | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2716	66.1802	11.374011	11.385299	11.329932	-0.1957	+0.3876	0.3972	per-problem TRAIN SBS
TSP	46.6889	34.5333	7.971591	7.989621	7.937593	-0.2257	+0.4283	0.4198	T2T
CVRP	47.9111	17.9333	18.015212	18.124983	17.918509	-0.6056	+0.5397	0.7212	RELD_CVRP
ATSP	76.3778	47.2444	1.635772	1.674207	1.629441	-2.2957	+0.3885	0.3875	UNICO_MatPOENet
OVRP	41.3333	33.6444	7.445592	7.455750	7.400487	-0.1362	+0.6095	0.6200	MoSES_RF
VRPB	80.7778	80.4000	9.350003	9.351810	9.315298	-0.0193	+0.3726	0.3761	reld_mt
VRPL	37.1556	32.2667	12.349530	12.356138	12.300958	-0.0535	+0.3949	0.4031	MoSES_RF
VRPTW	81.1778	80.8444	18.688383	18.690545	18.637408	-0.0116	+0.2735	0.2849	reld_mt
OVRPTW	84.0222	83.9333	10.092627	10.093063	10.068135	-0.0043	+0.2433	0.2341	reld_mt
OVRPB	88.1333	88.1333	6.370587	6.370826	6.352225	-0.0037	+0.2891	0.2958	reld_mt
OVRPL	41.2000	34.6000	7.463948	7.472542	7.418033	-0.1150	+0.6190	0.6311	MoSES_RF
VRPBL	79.5778	79.4222	9.394525	9.396379	9.355967	-0.0197	+0.4121	0.4103	reld_mt
VRPBTW	78.6889	78.7556	19.664435	19.665725	19.577666	-0.0066	+0.4432	0.4410	reld_mt
VRPLTW	79.2889	79.2444	18.803808	18.803136	18.745143	+0.0036	+0.3130	0.3325	reld_mt
OVRPBL	89.2667	89.2889	6.375505	6.375741	6.359310	-0.0037	+0.2547	0.2657	reld_mt
OVRPBTW	84.8667	84.8222	10.659638	10.659591	10.624748	+0.0004	+0.3284	0.3013	reld_mt
OVRPLTW	83.0000	82.8667	10.085609	10.086112	10.059001	-0.0050	+0.2645	0.2650	reld_mt
VRPBLTW	79.7778	79.7333	19.703494	19.707068	19.613284	-0.0181	+0.4599	0.4407	reld_mt
OVRPBLTW	83.6444	83.5778	10.661943	10.662149	10.625574	-0.0019	+0.3423	0.3192	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R84/C_focal | LIB and locked provenance

Current R84 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	18.3673	10.2041	8.215195	8.240435	8.142167	-0.3063	+0.8969	0.9135
CVRPLIB	60.0000	45.0000	67.286031	67.245364	66.945093	+0.0605	+0.5093	0.6291

SHA256: a7f7626caa770d0dce67c43630e224b965e4015976c8956587d35a1a51a56d77

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original R77 maximin logits, stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R84/C_focal | TSP | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

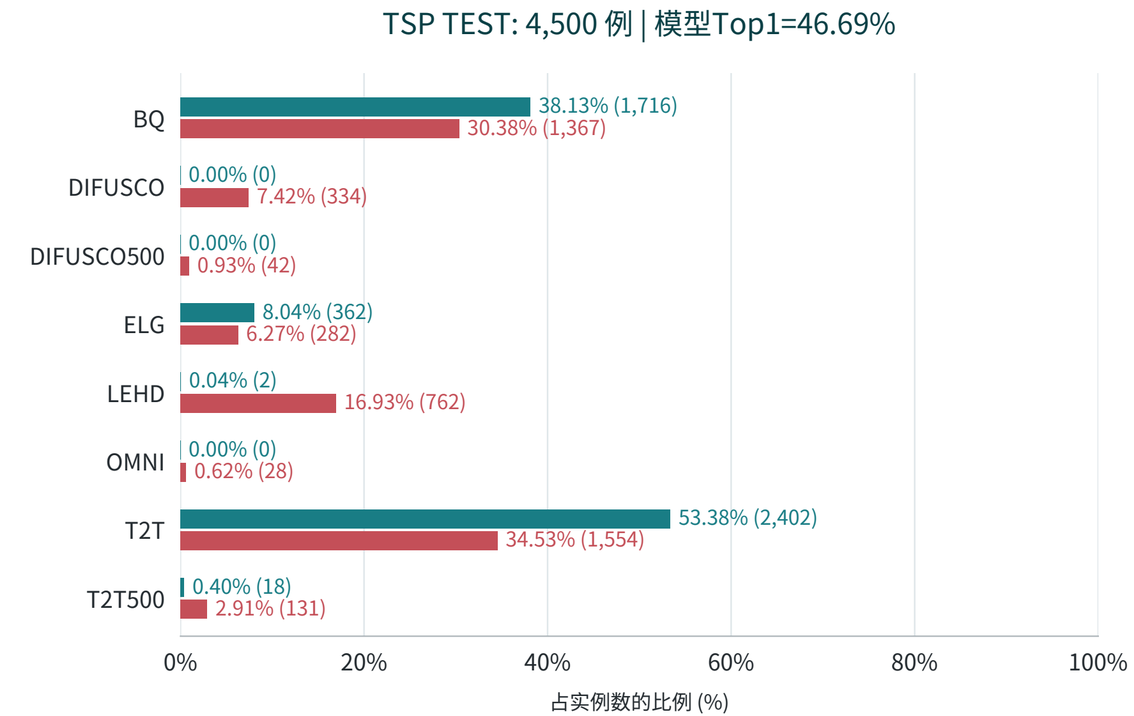

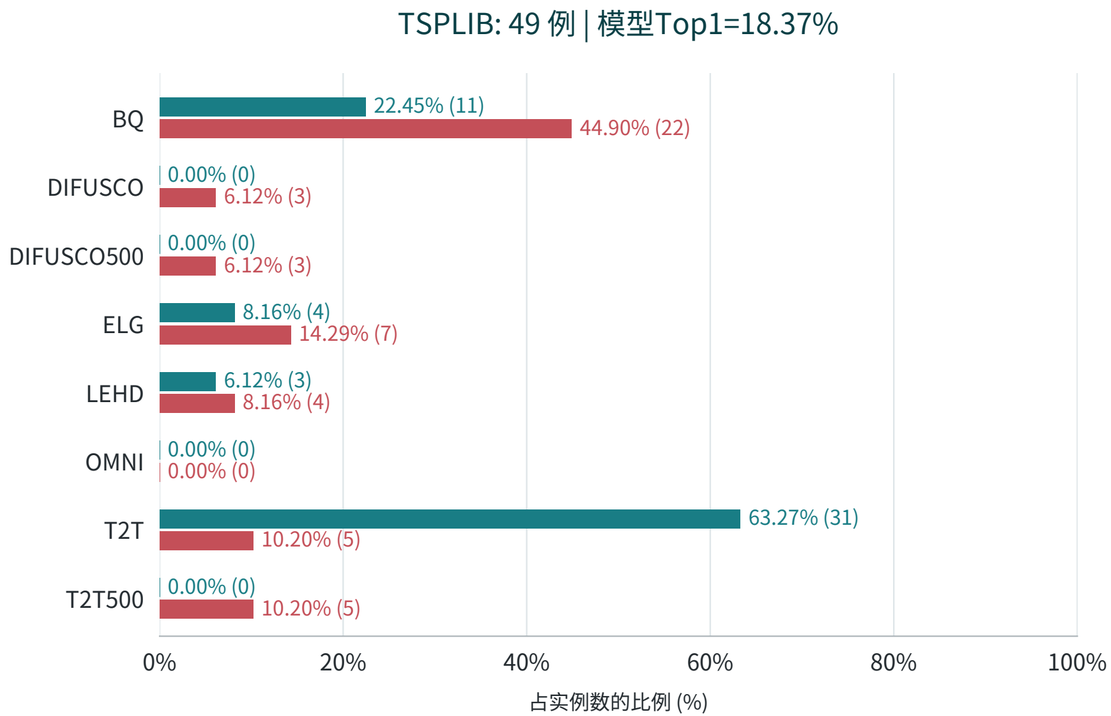

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.


R84/C_focal | CVRP | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

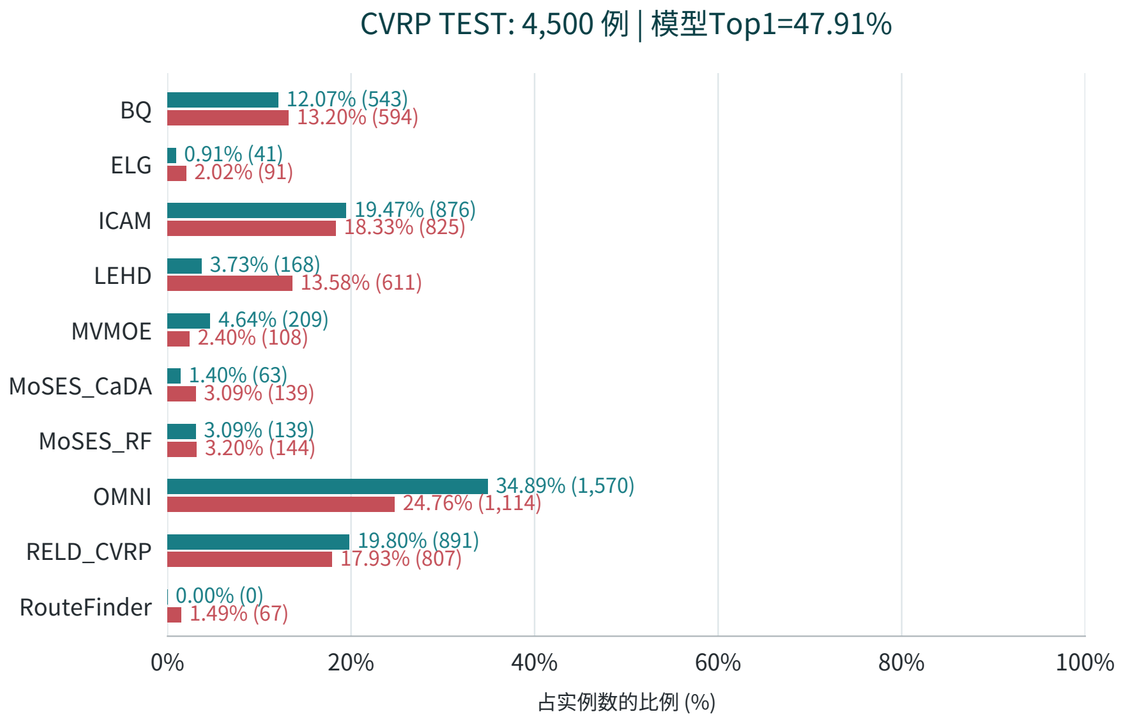

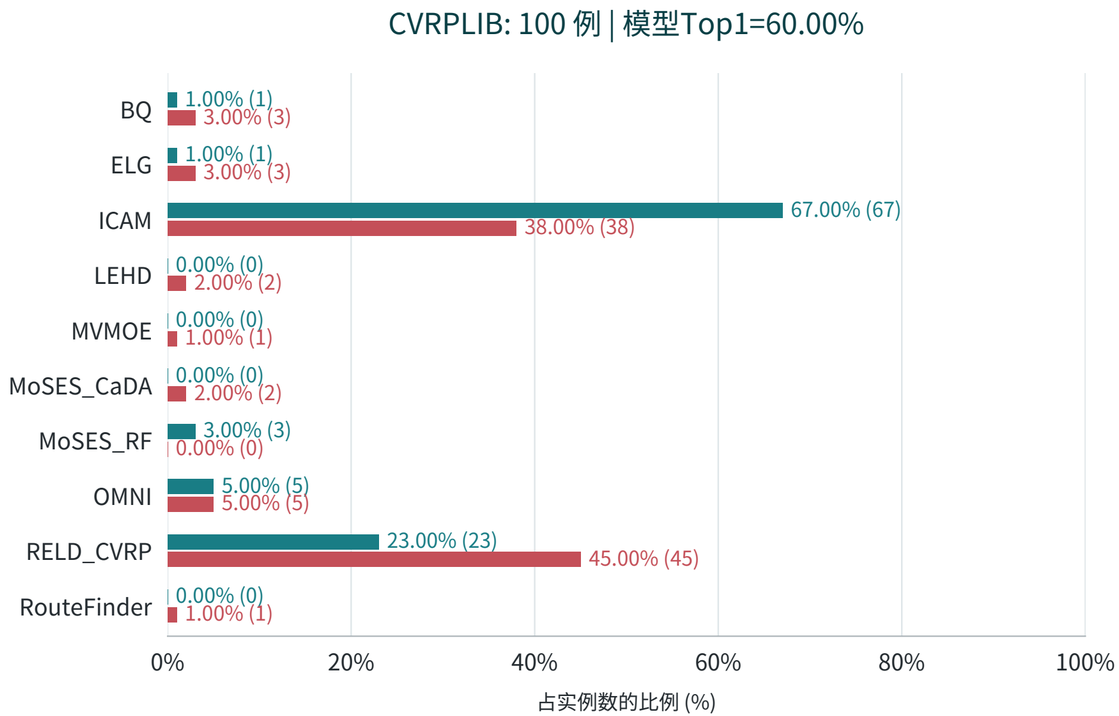

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | ATSP | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

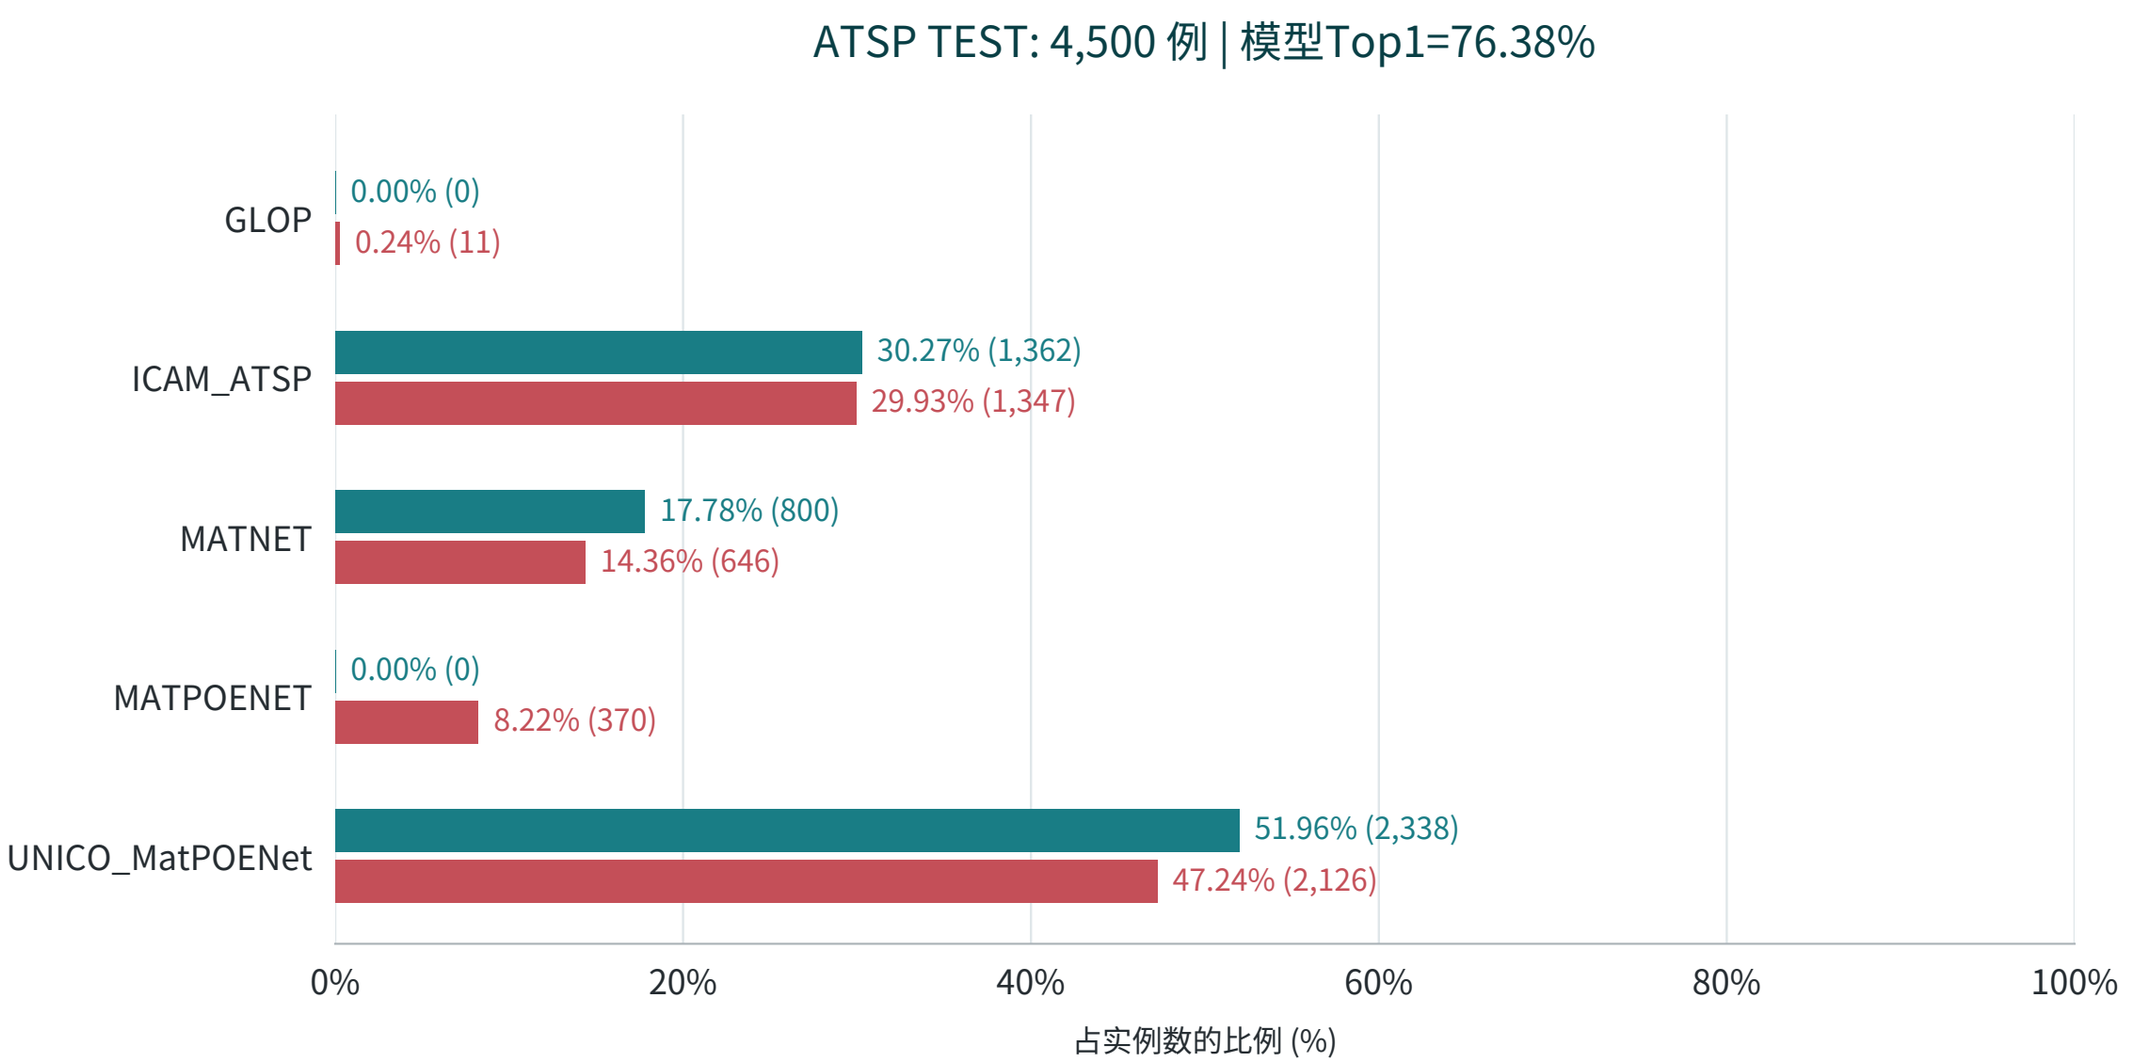

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRP | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

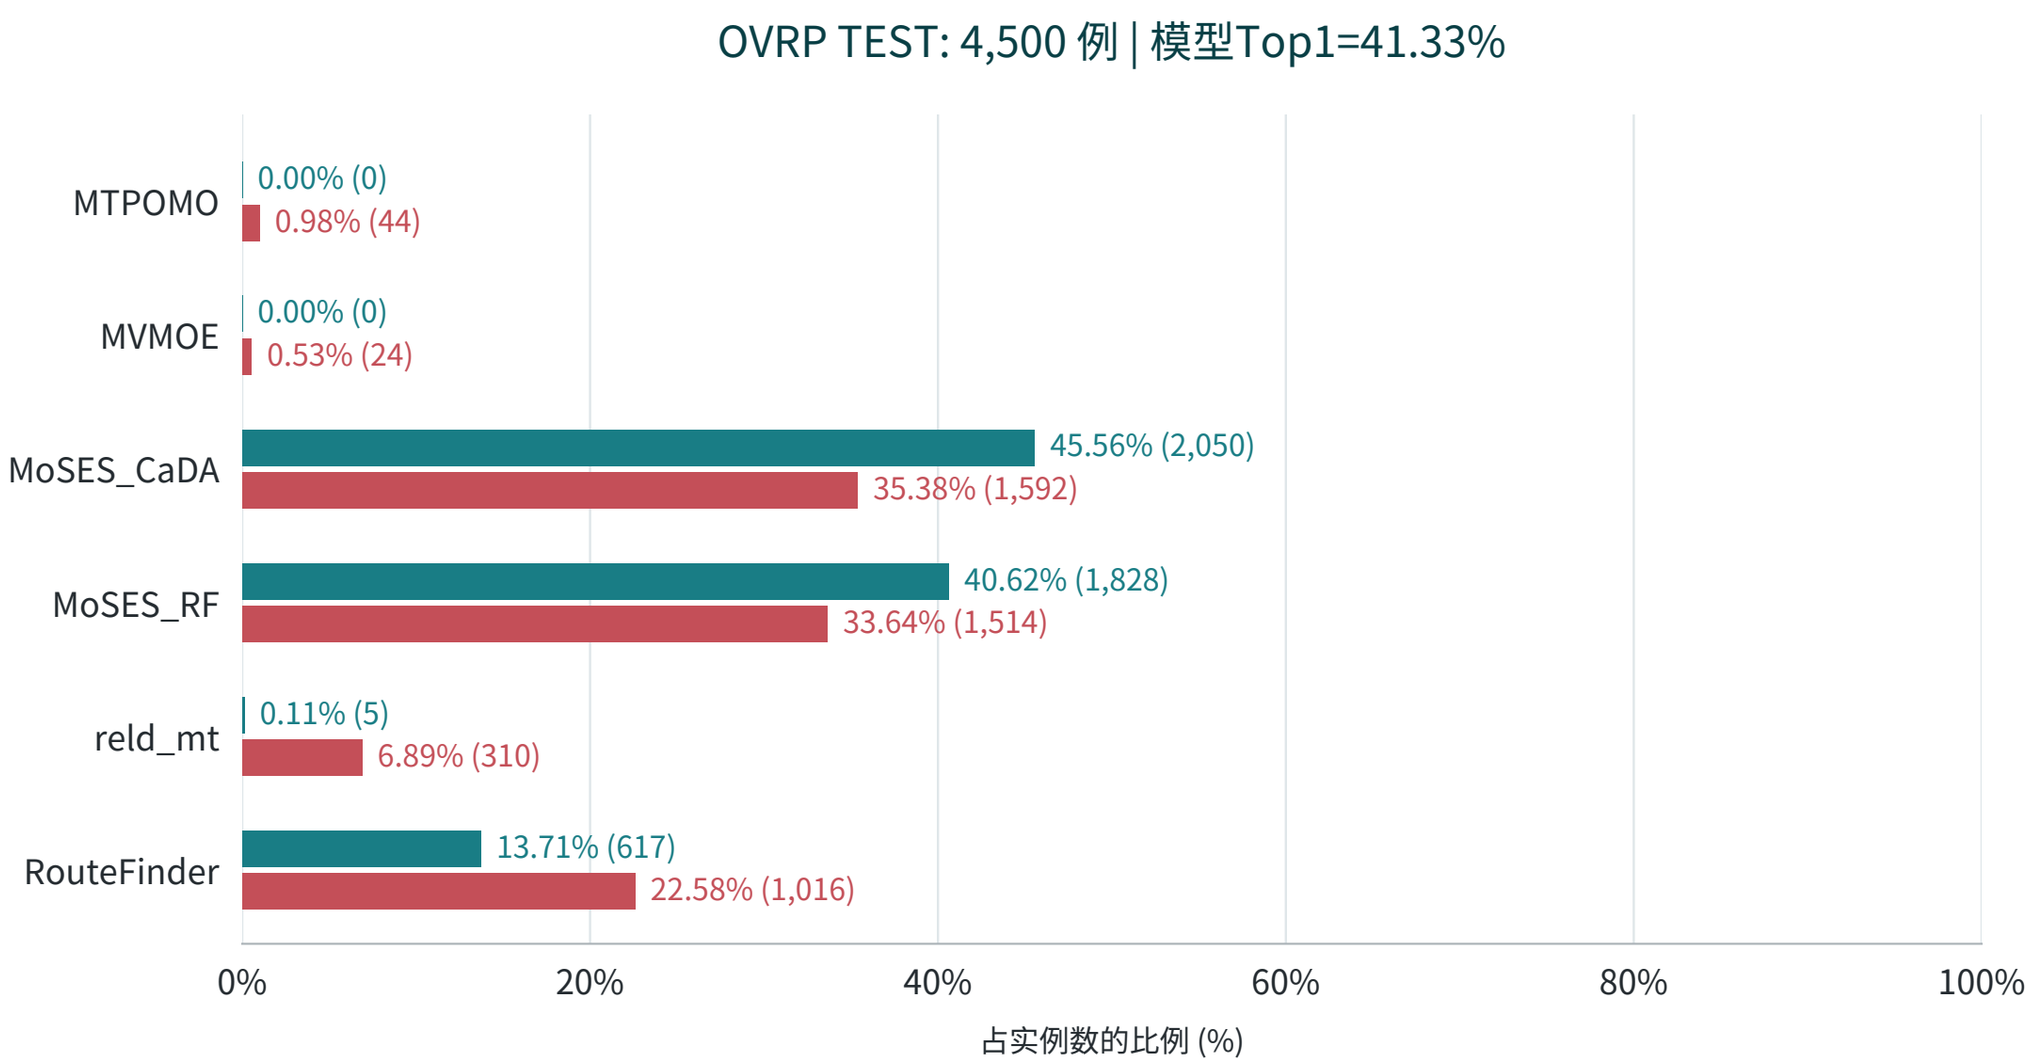

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPB | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

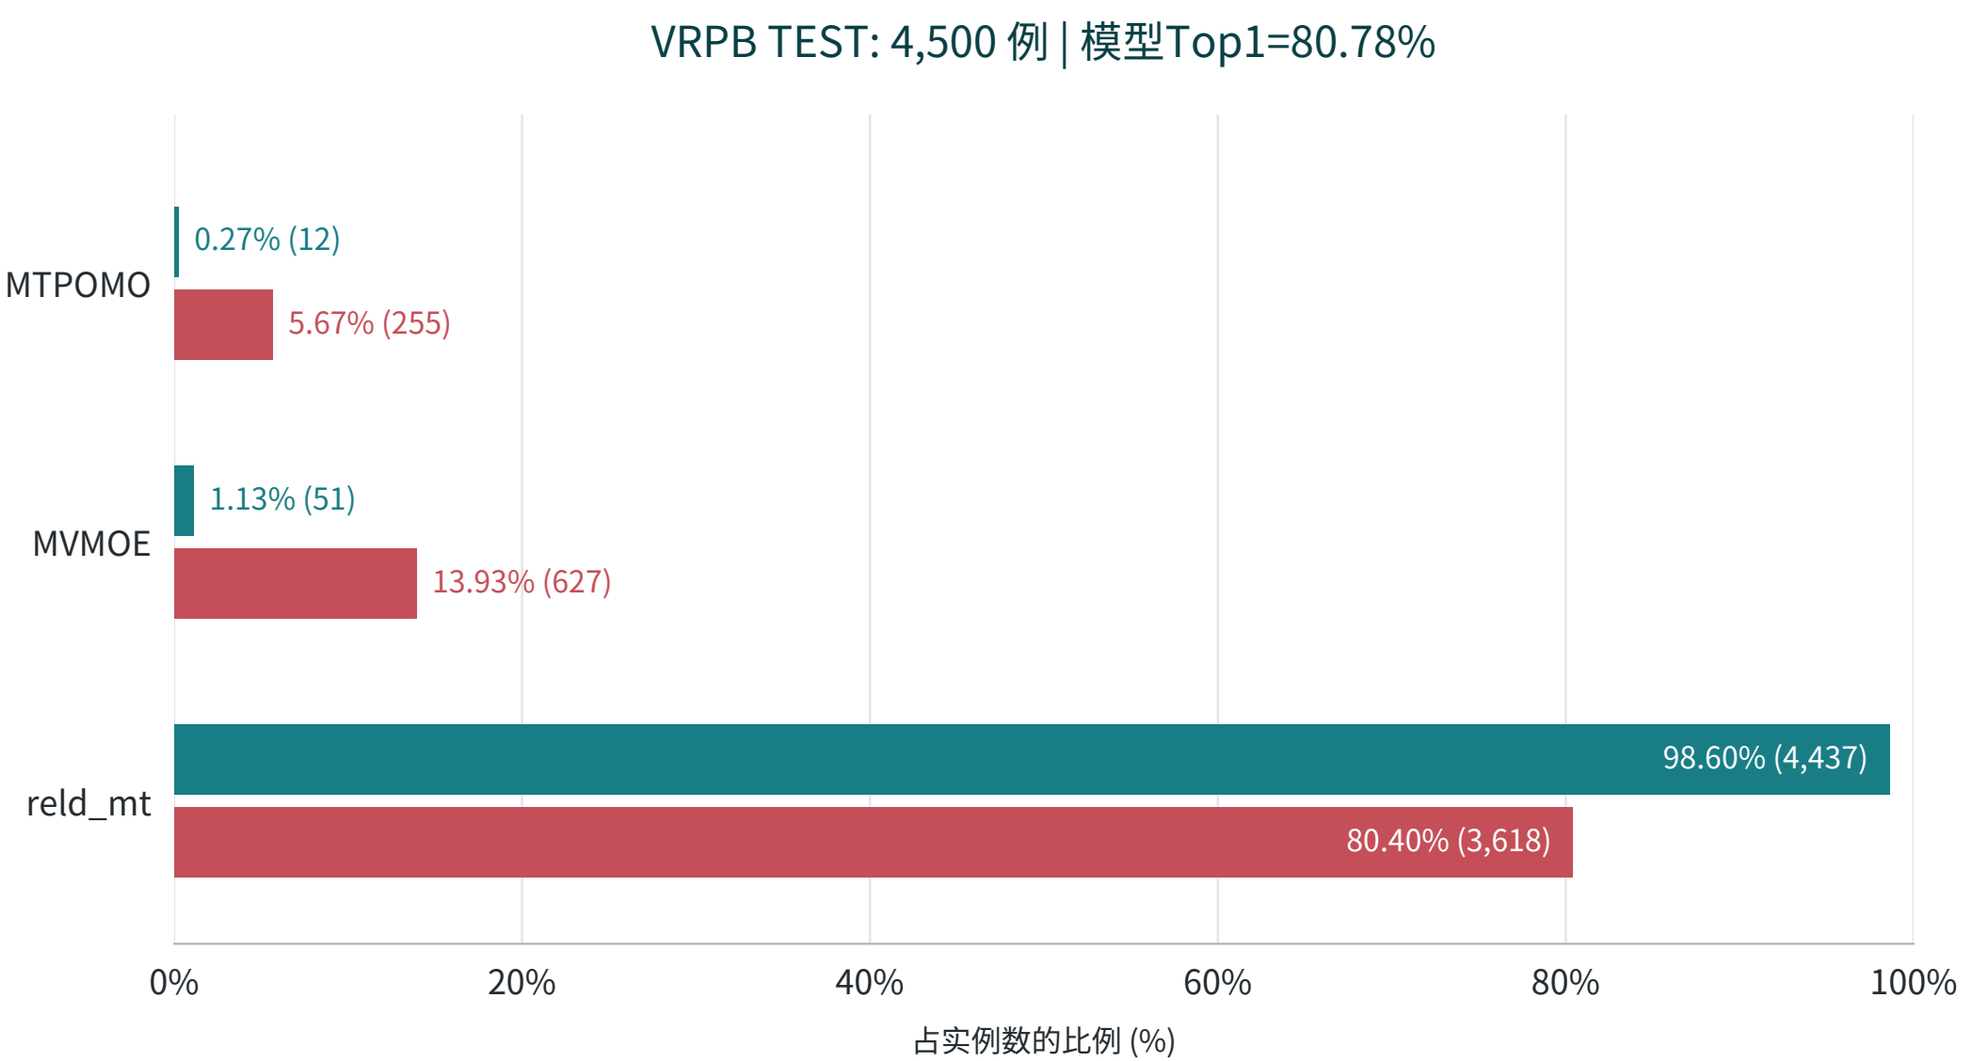

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPL | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

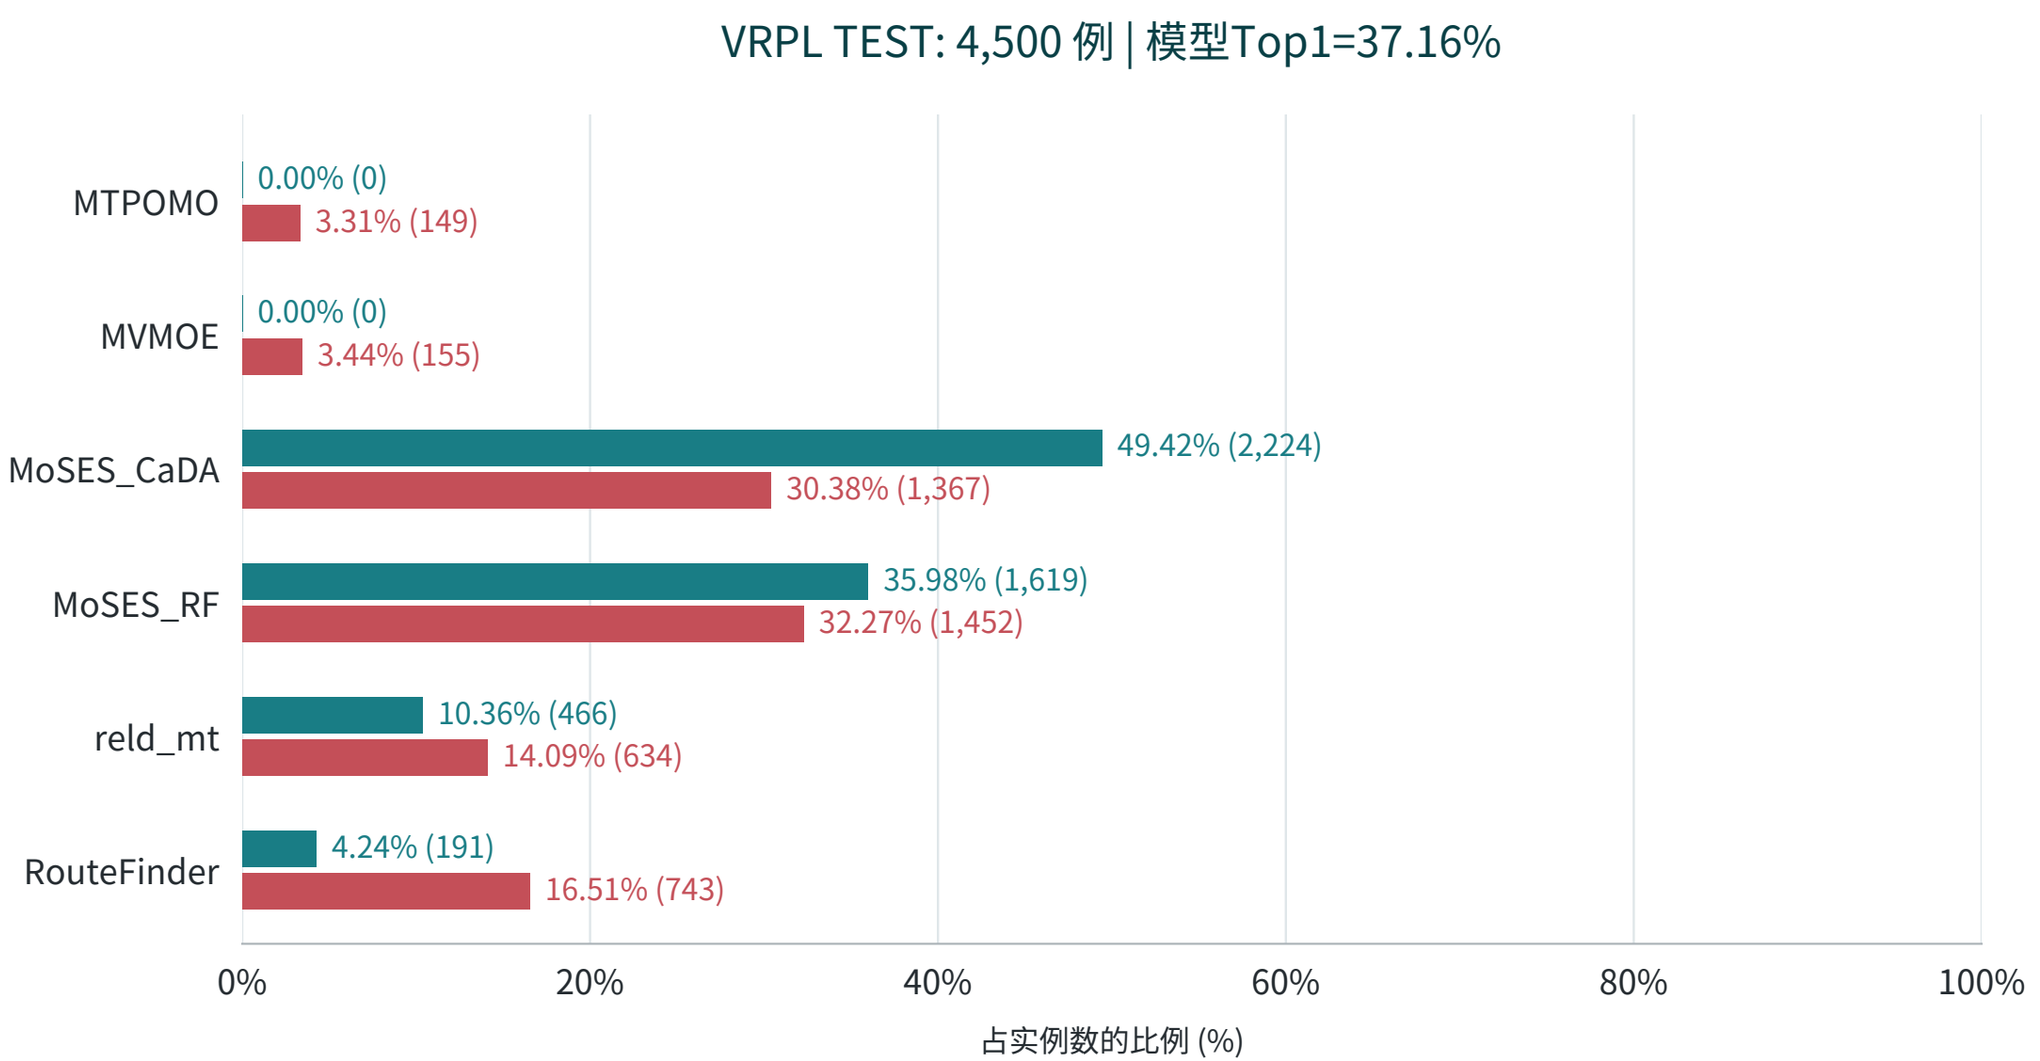

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

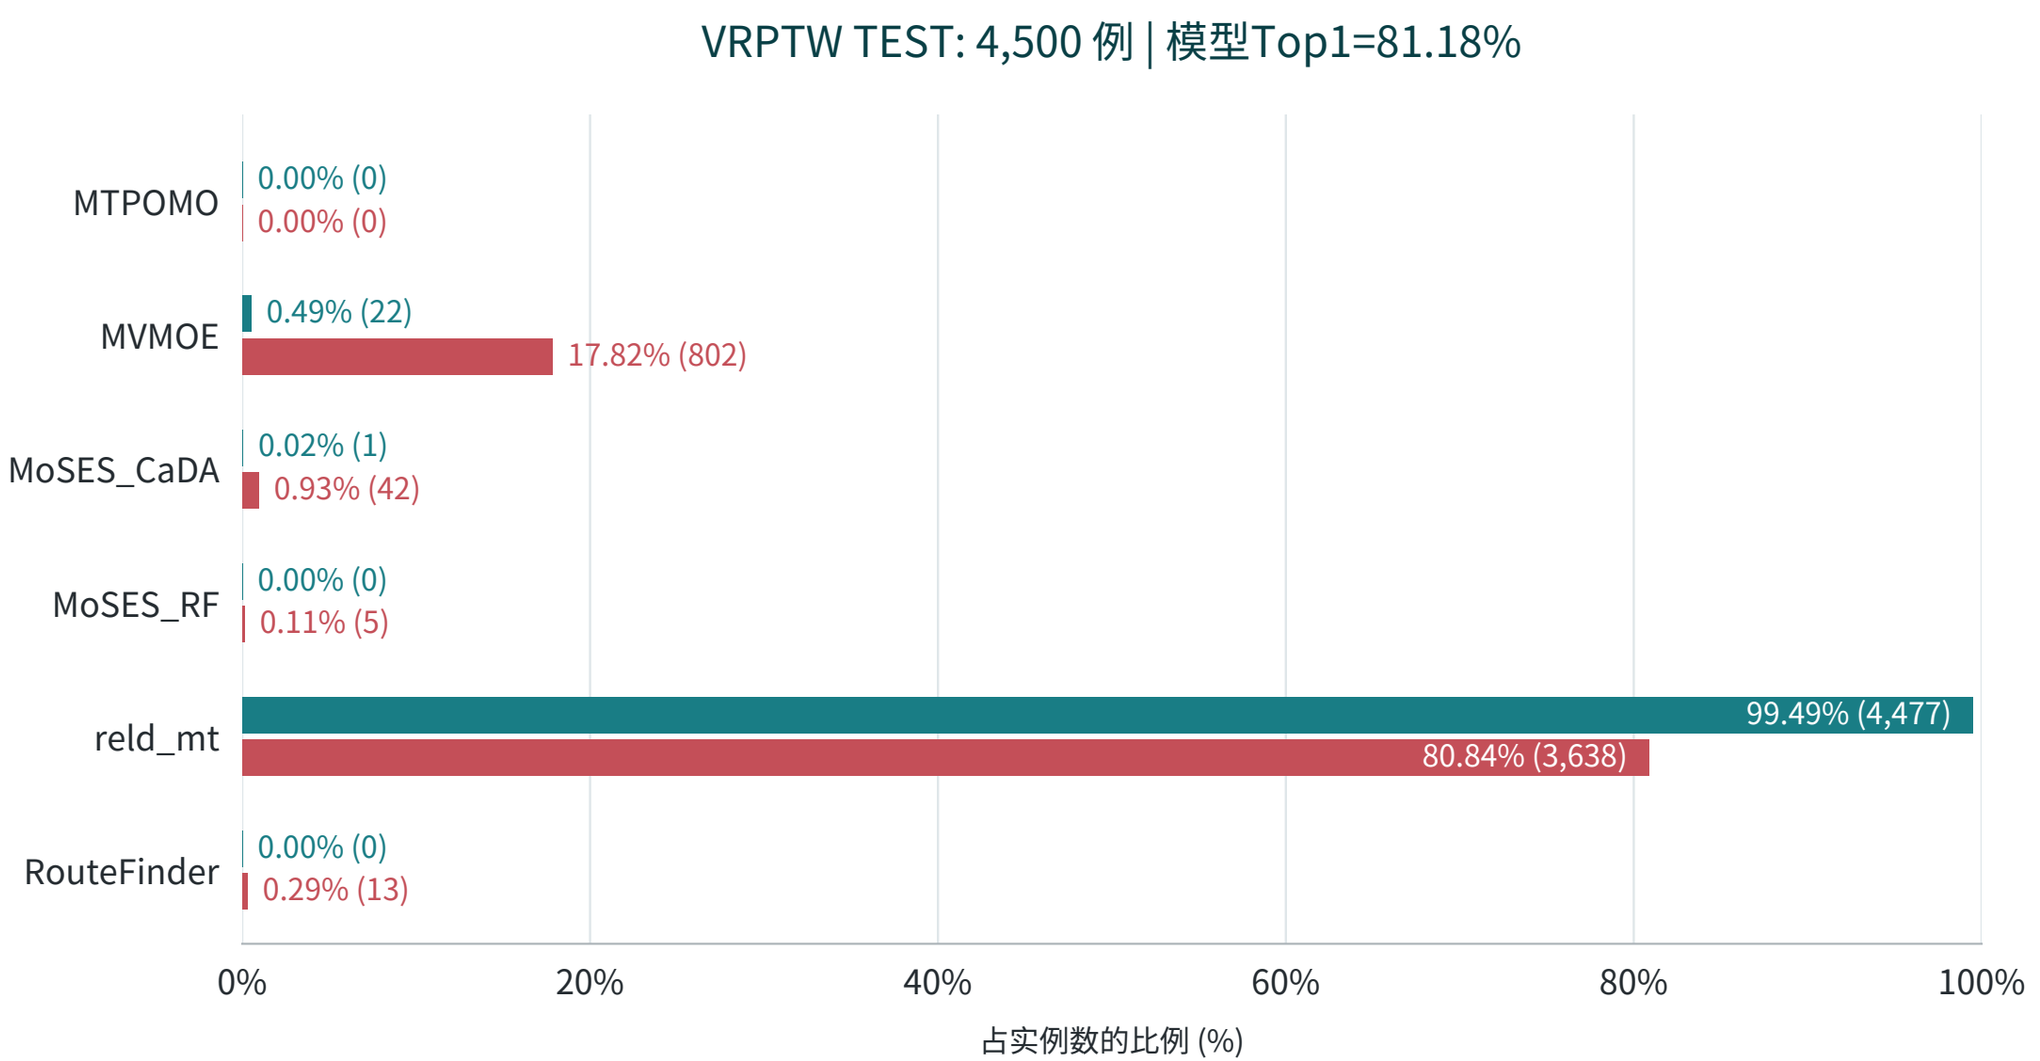

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

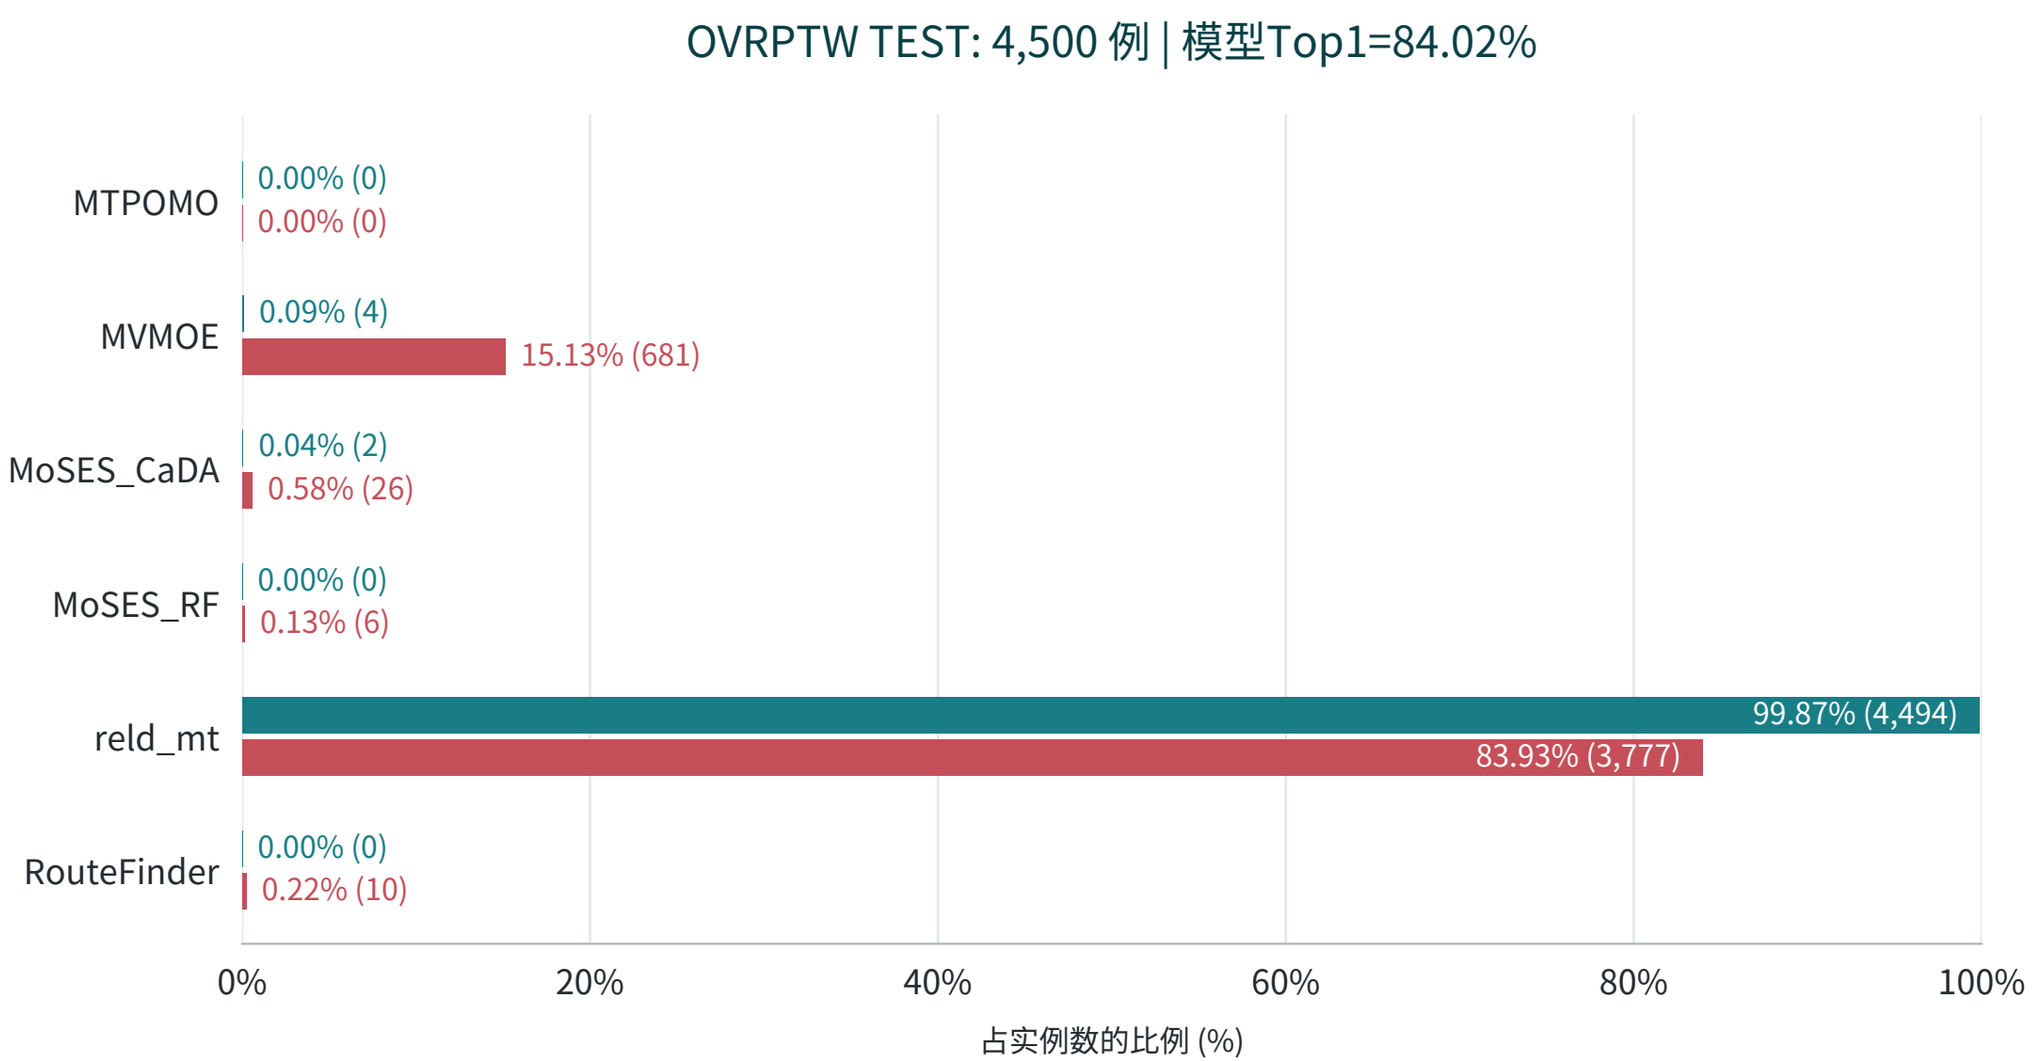

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPB | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

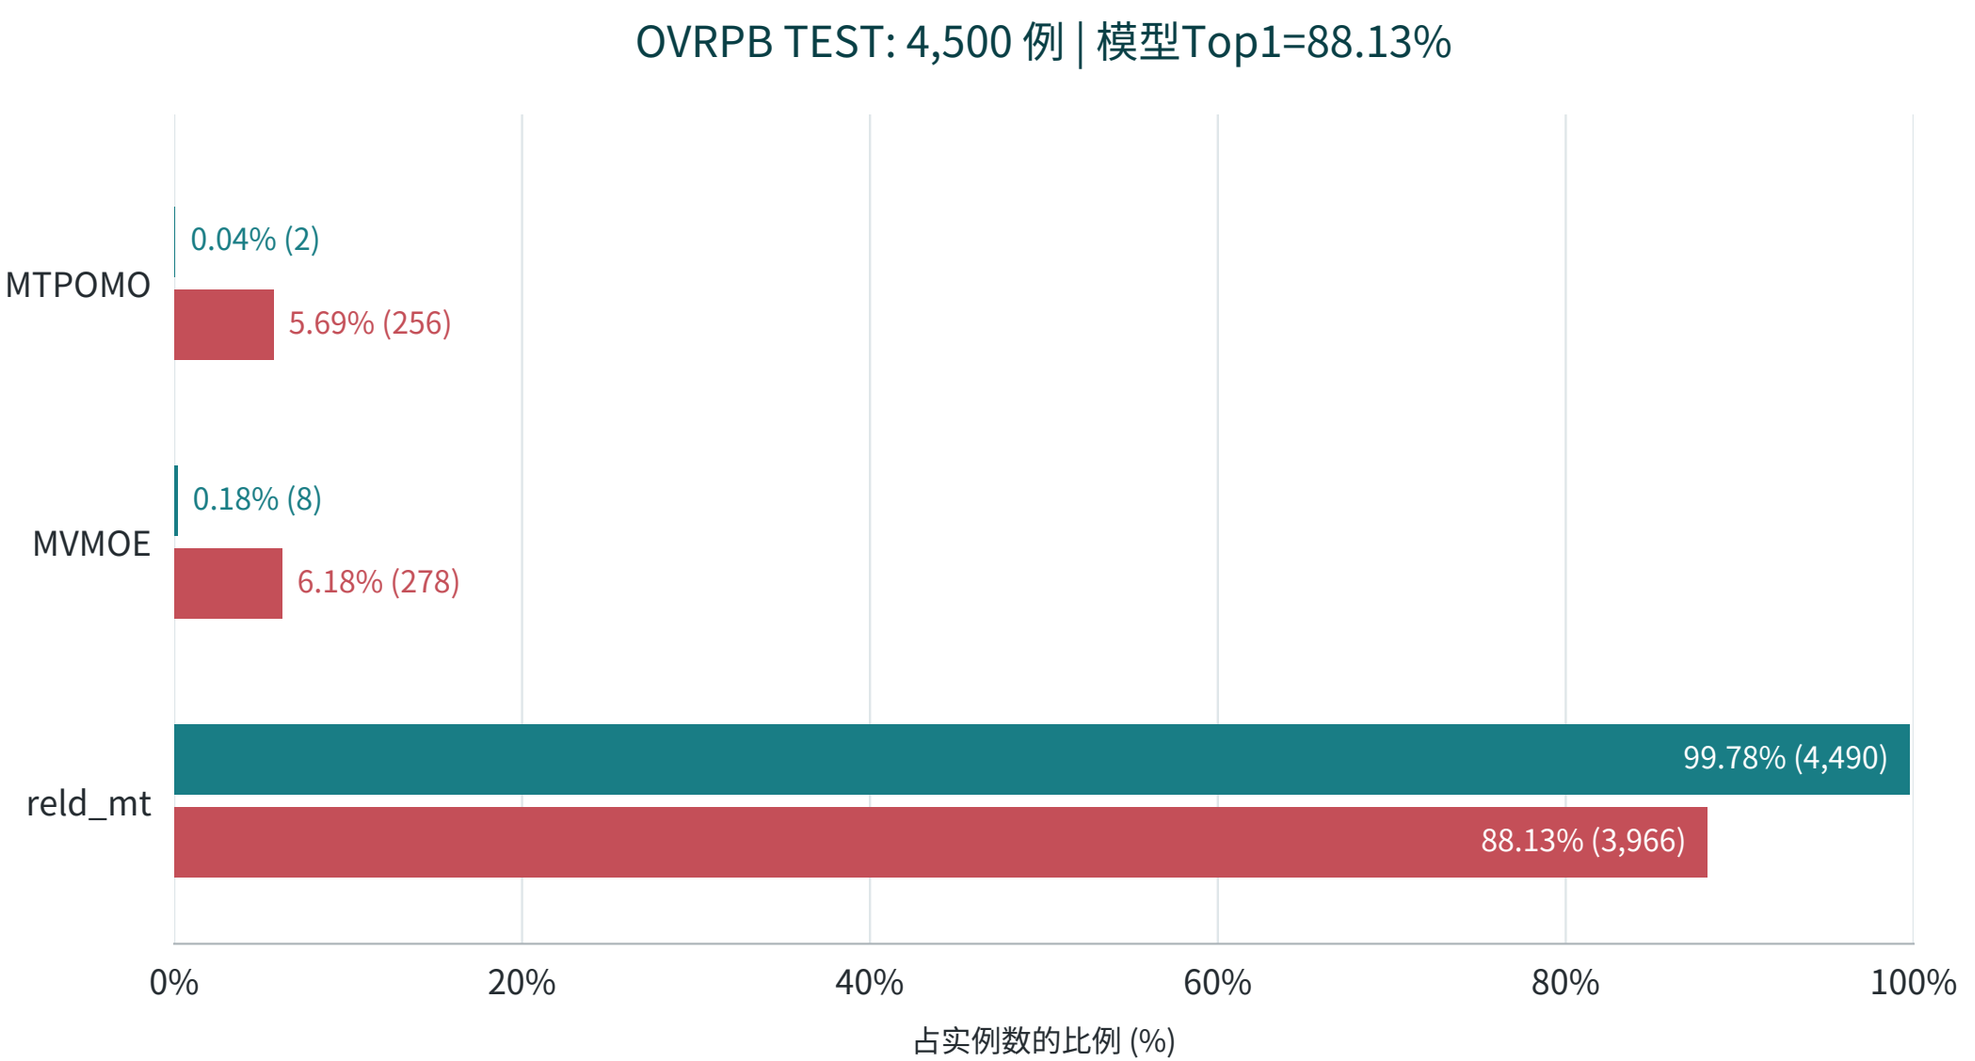

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPL | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

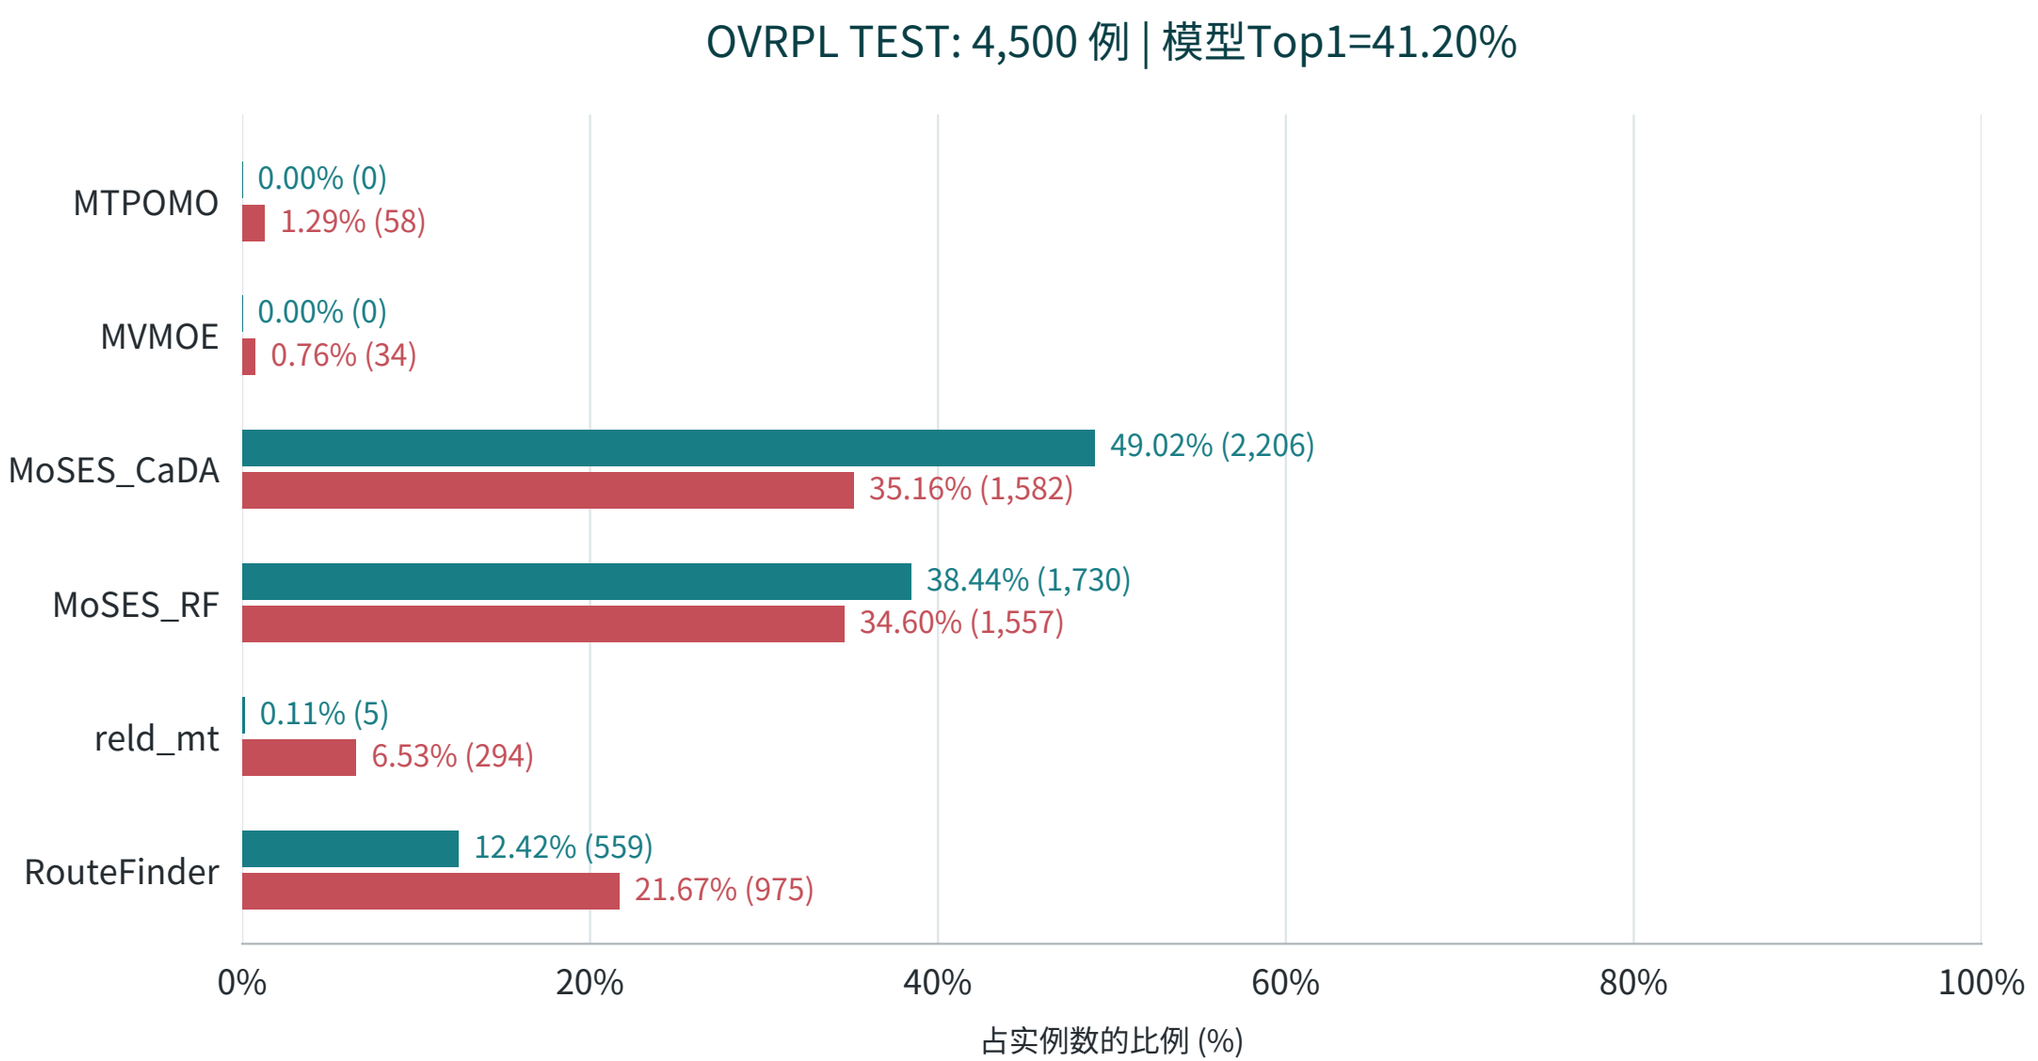

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPBL | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

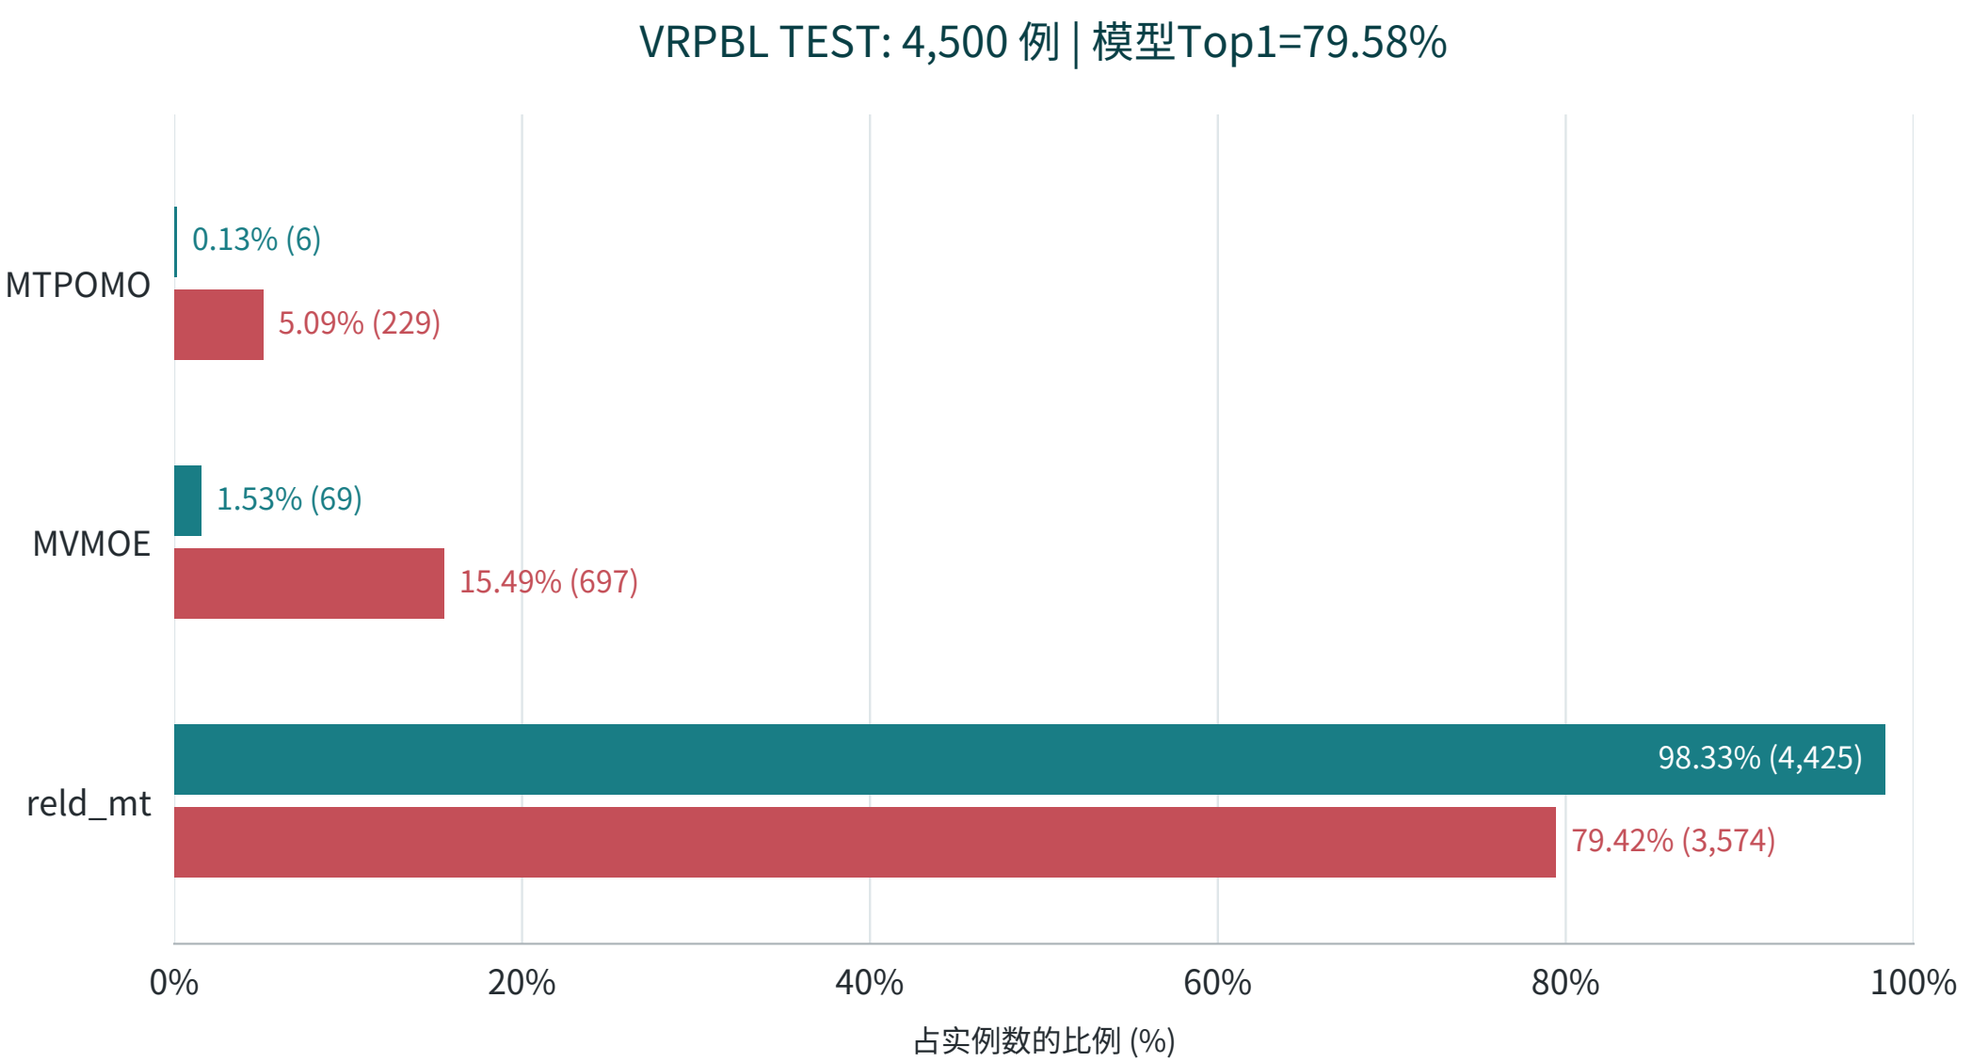

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPBTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

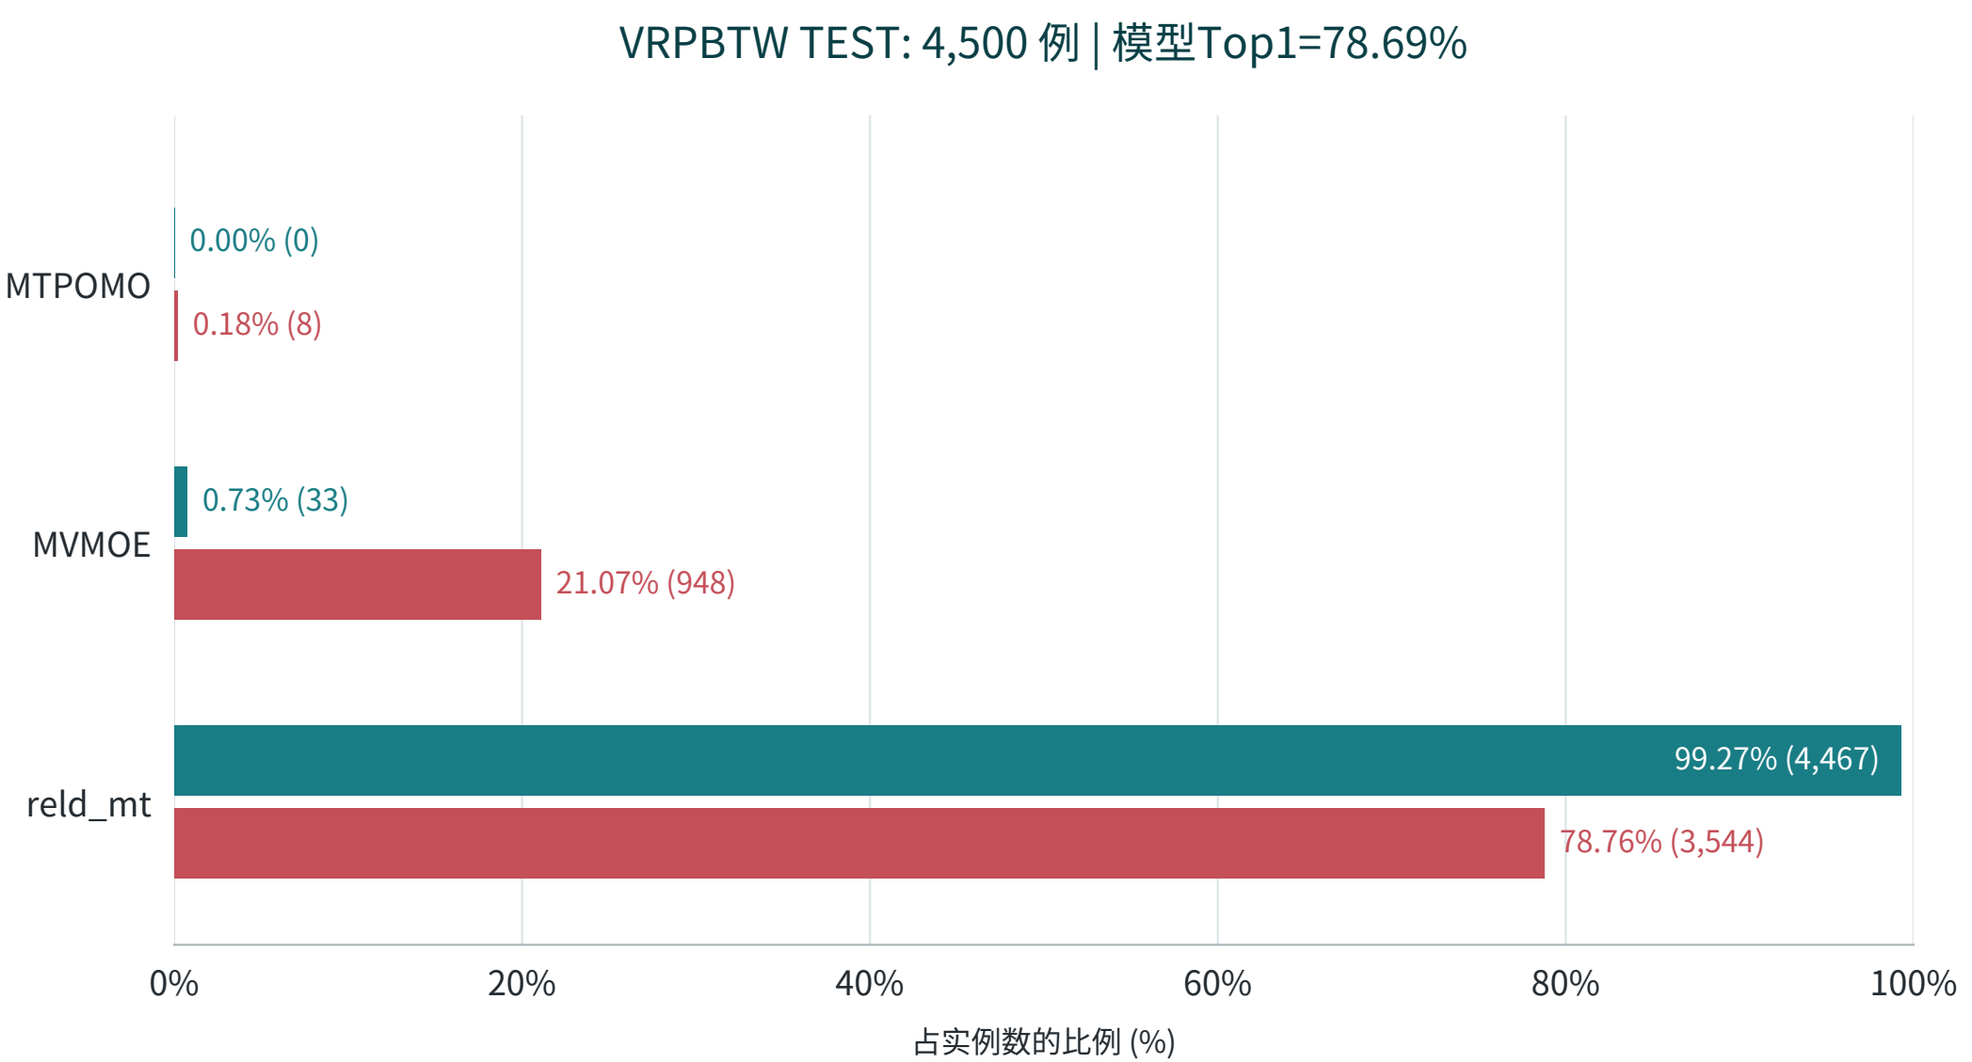

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPLTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

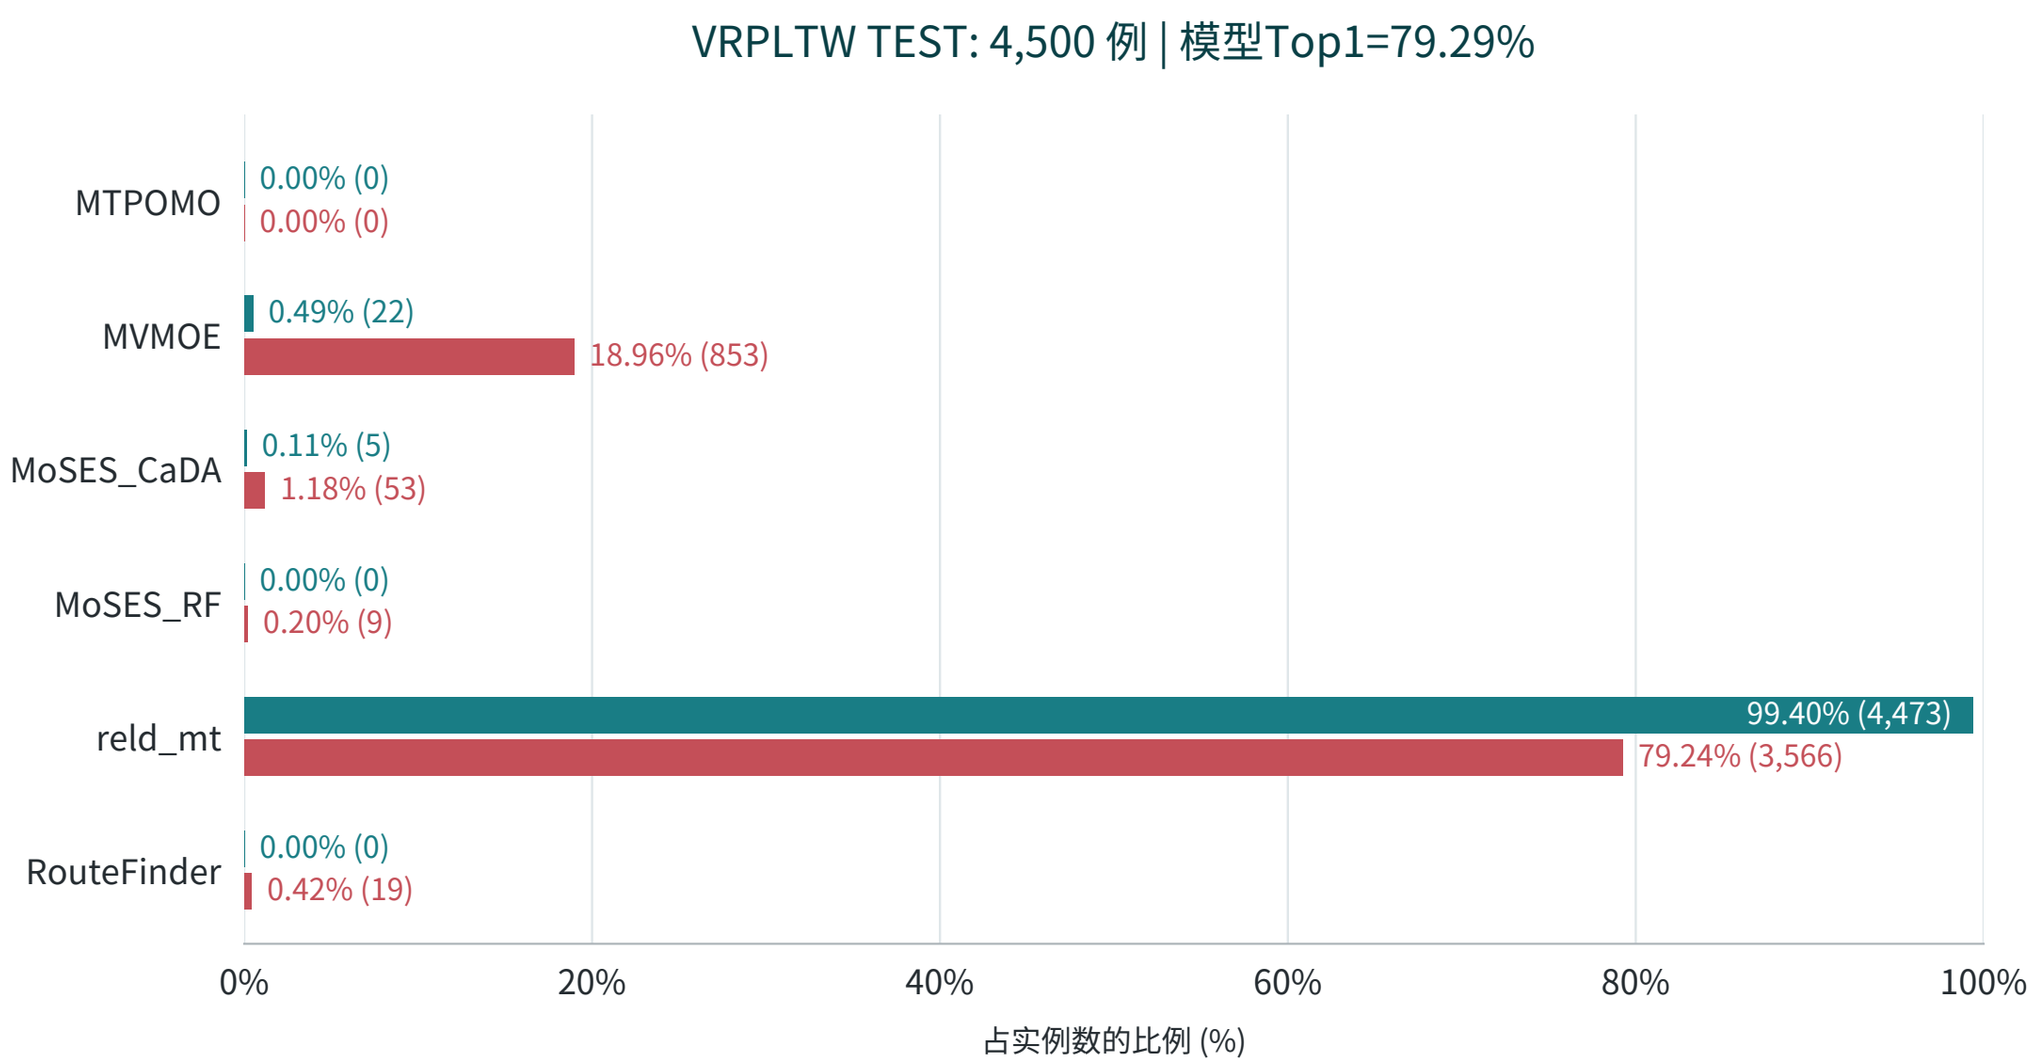

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPBL | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

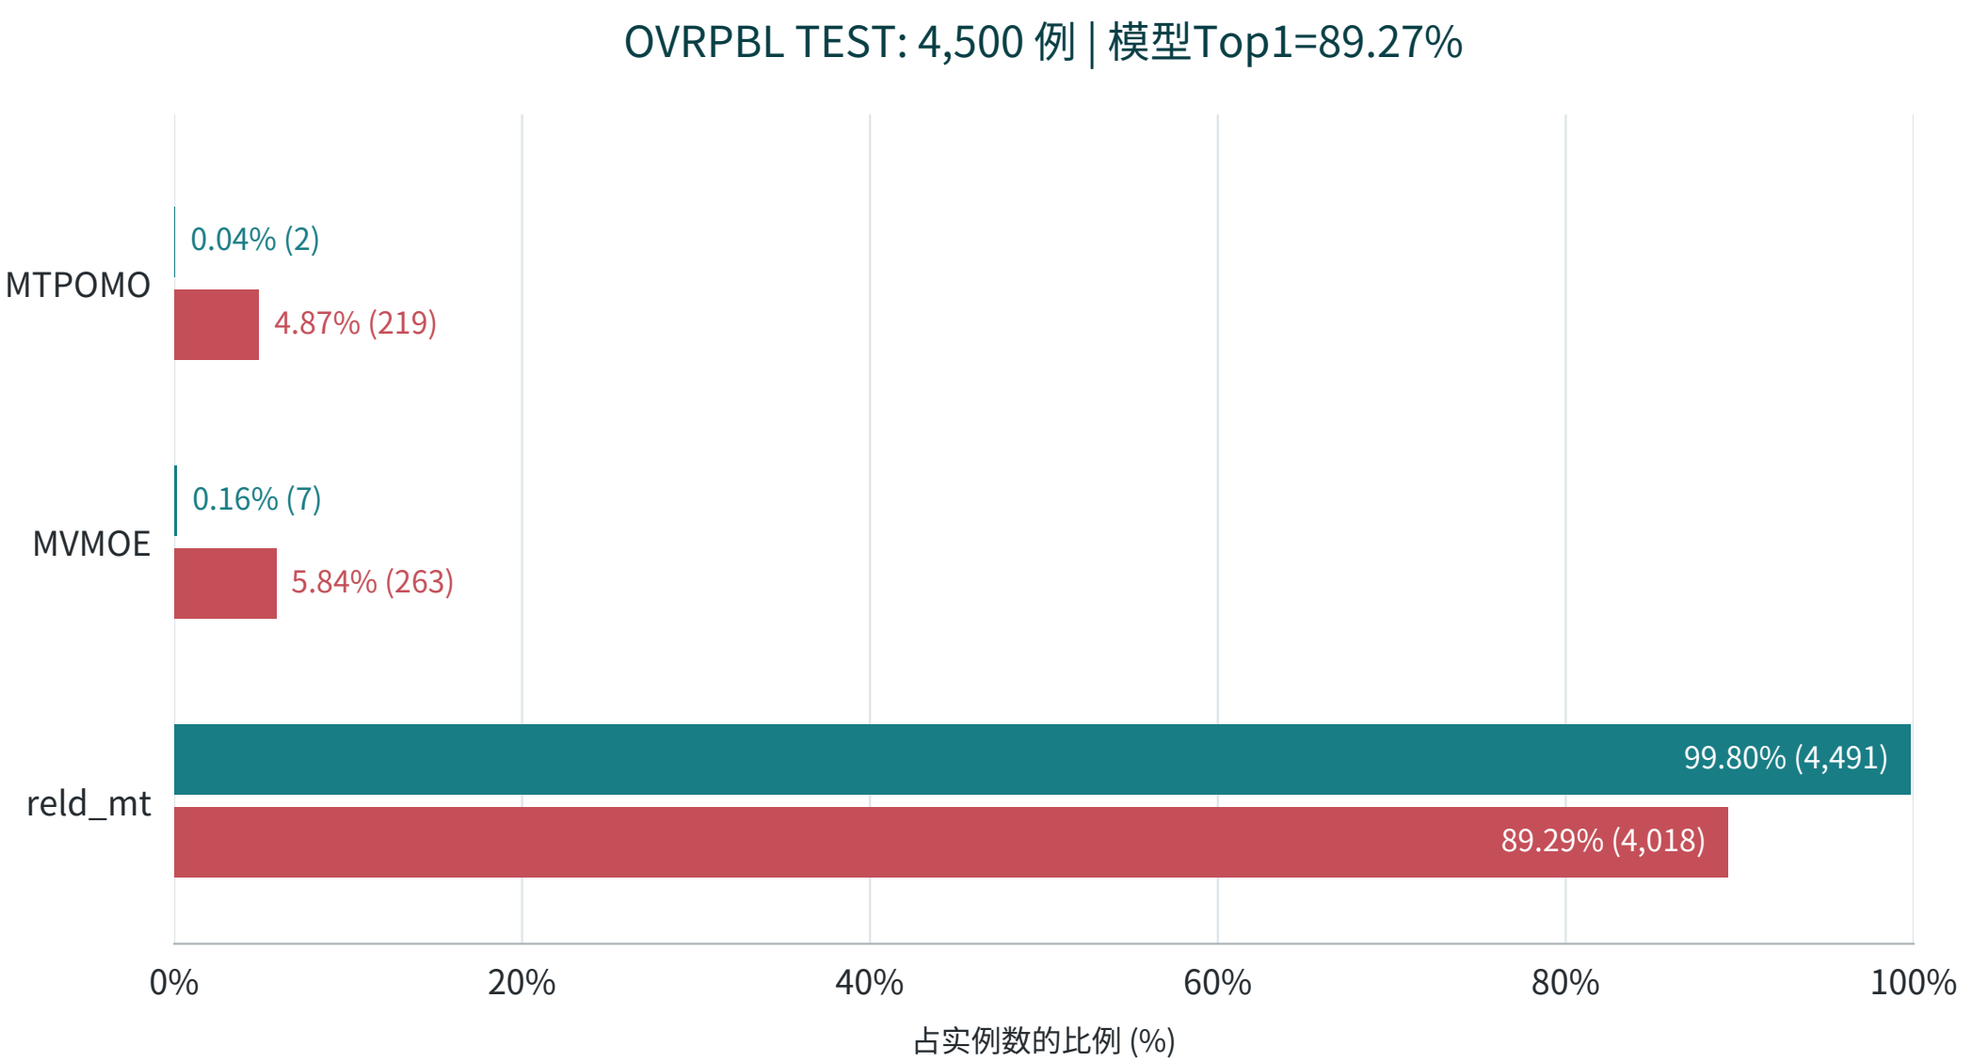

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPBTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

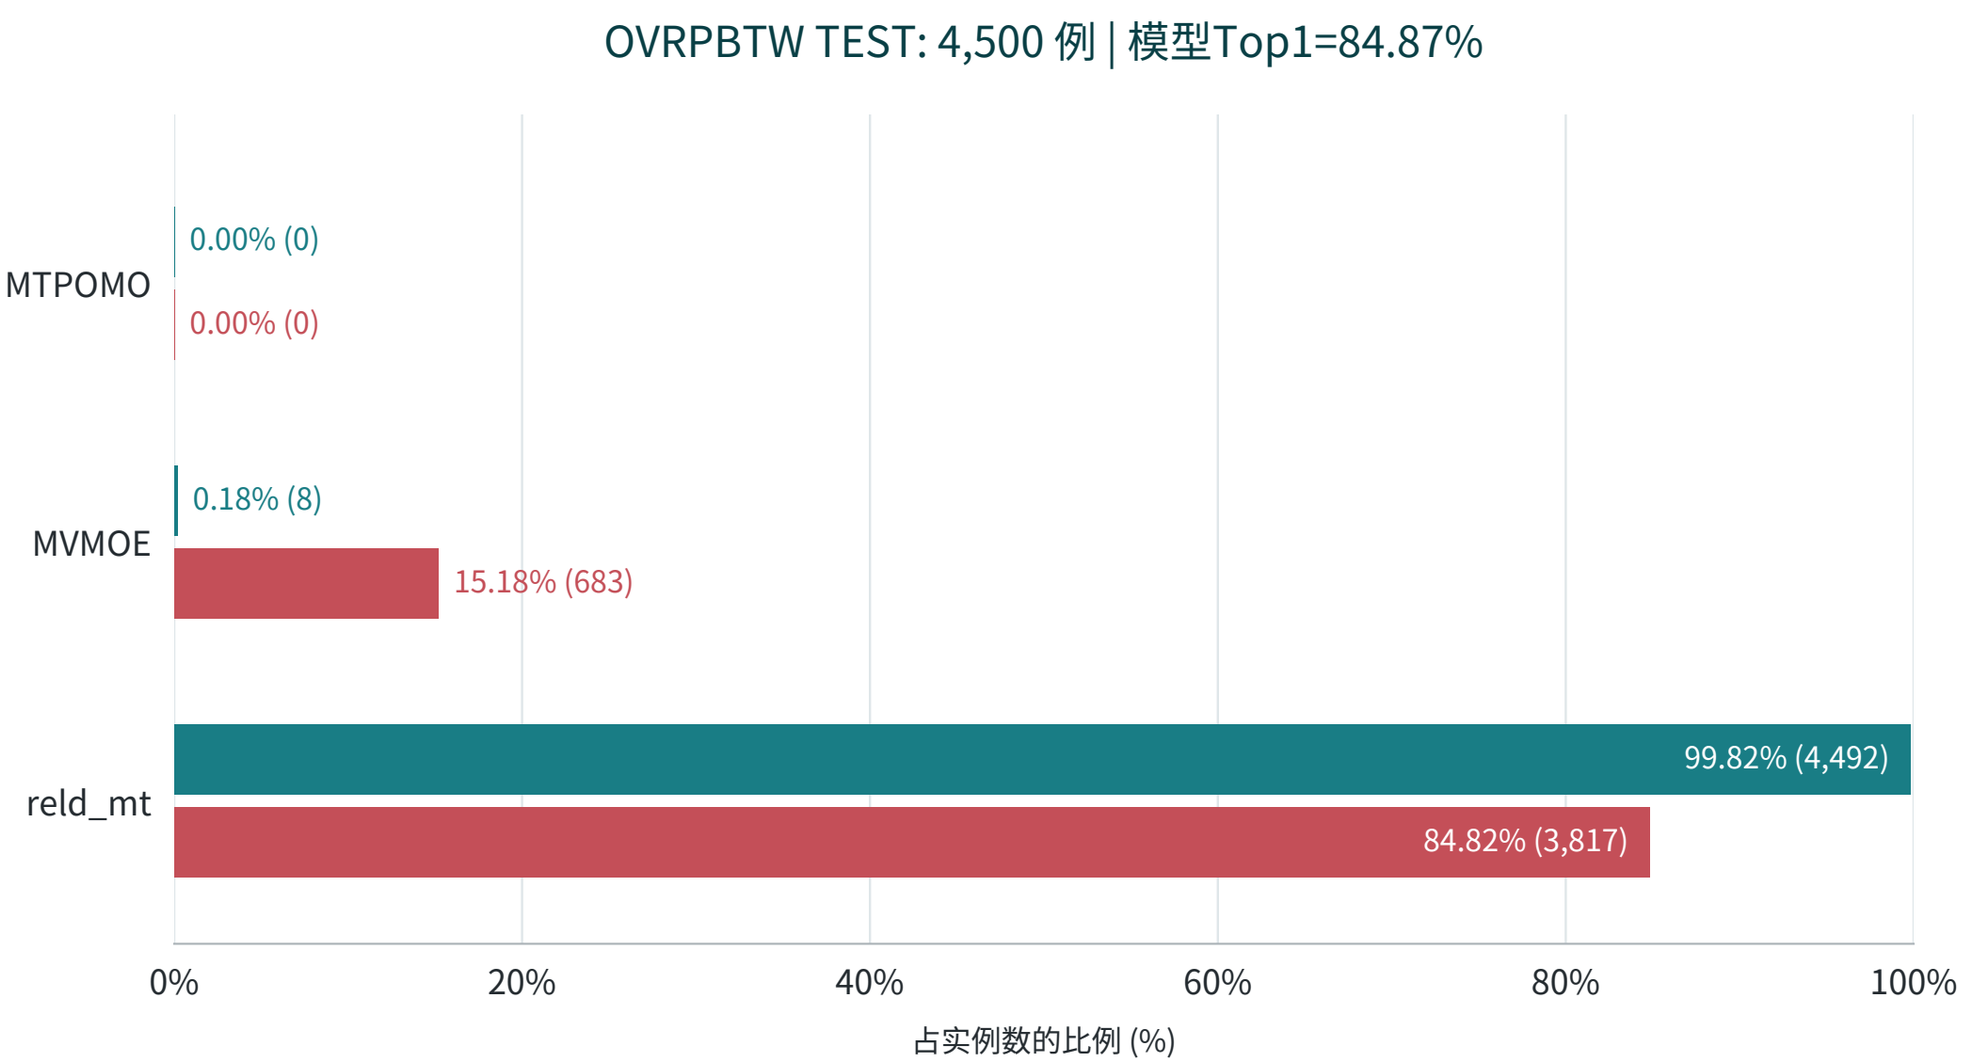

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPLTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

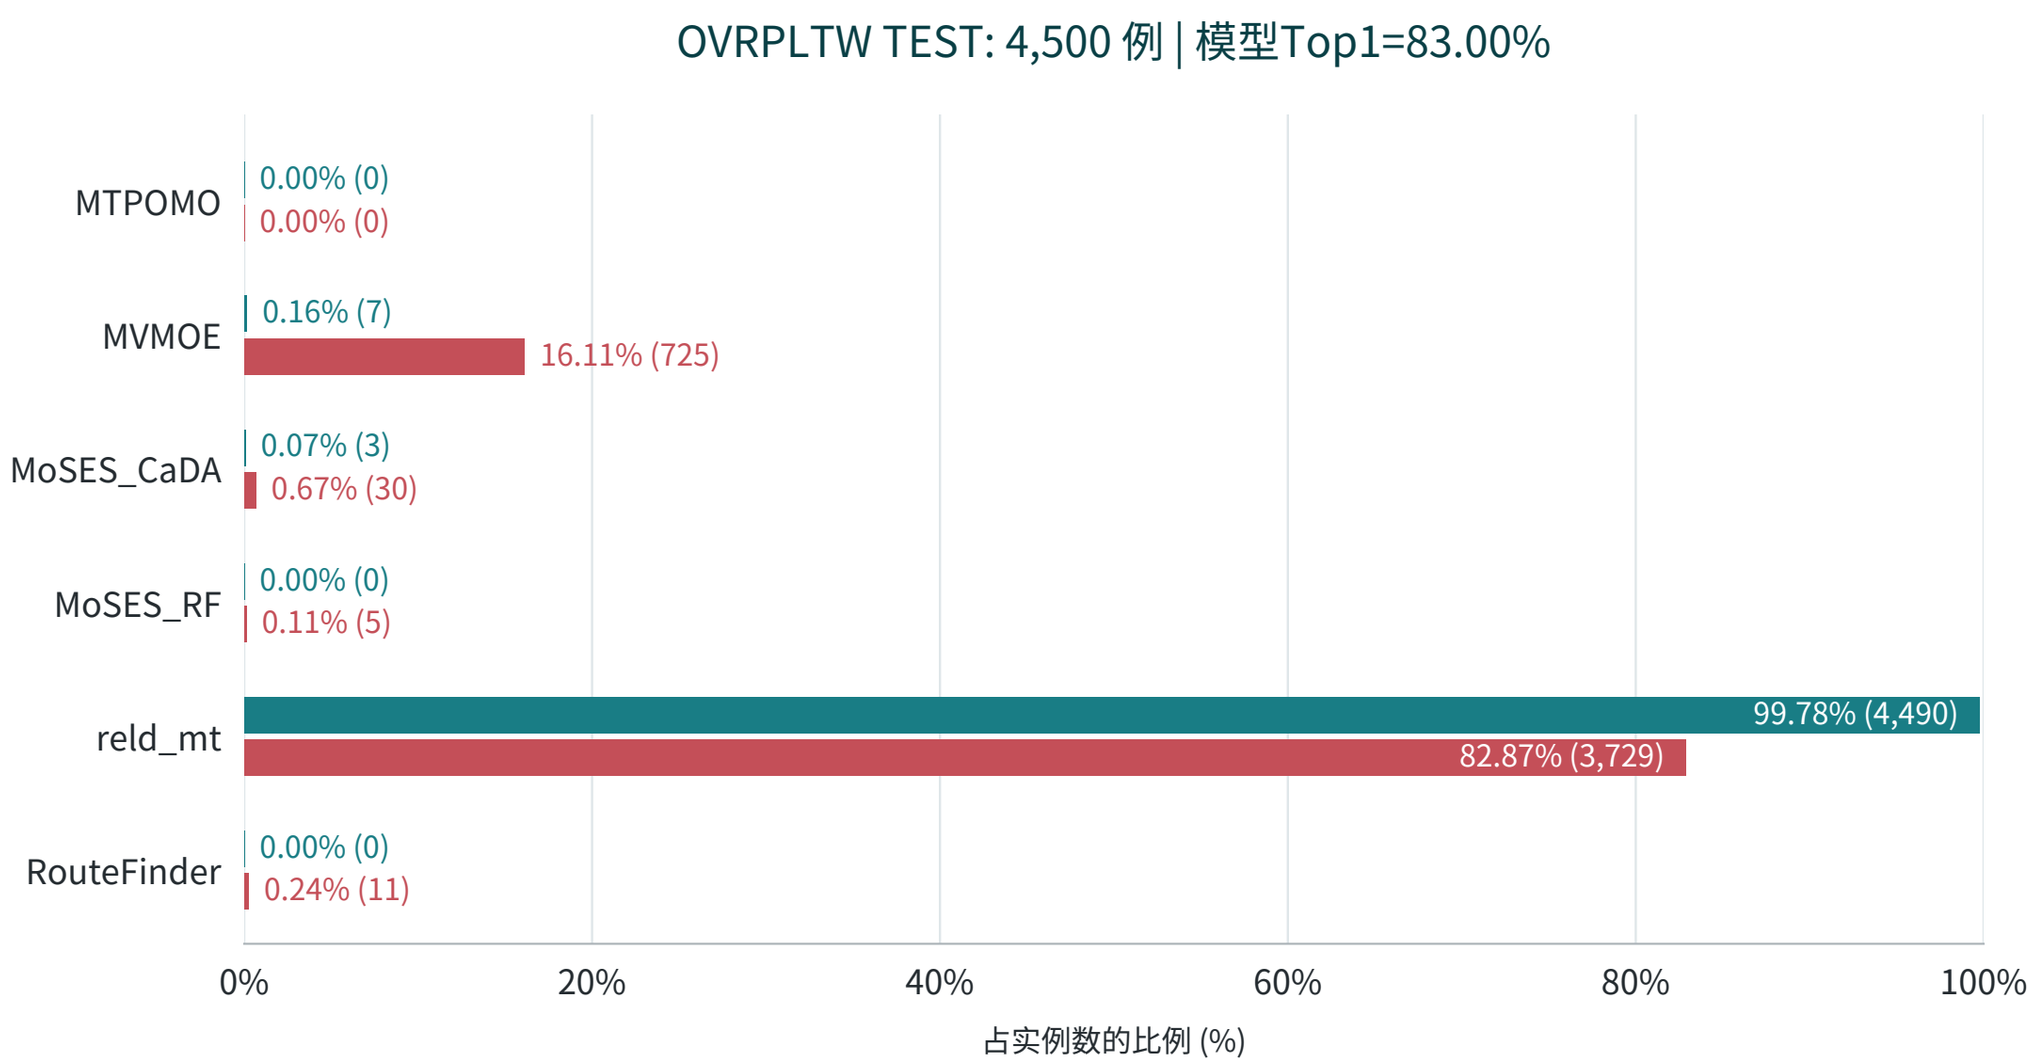

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | VRPBLTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

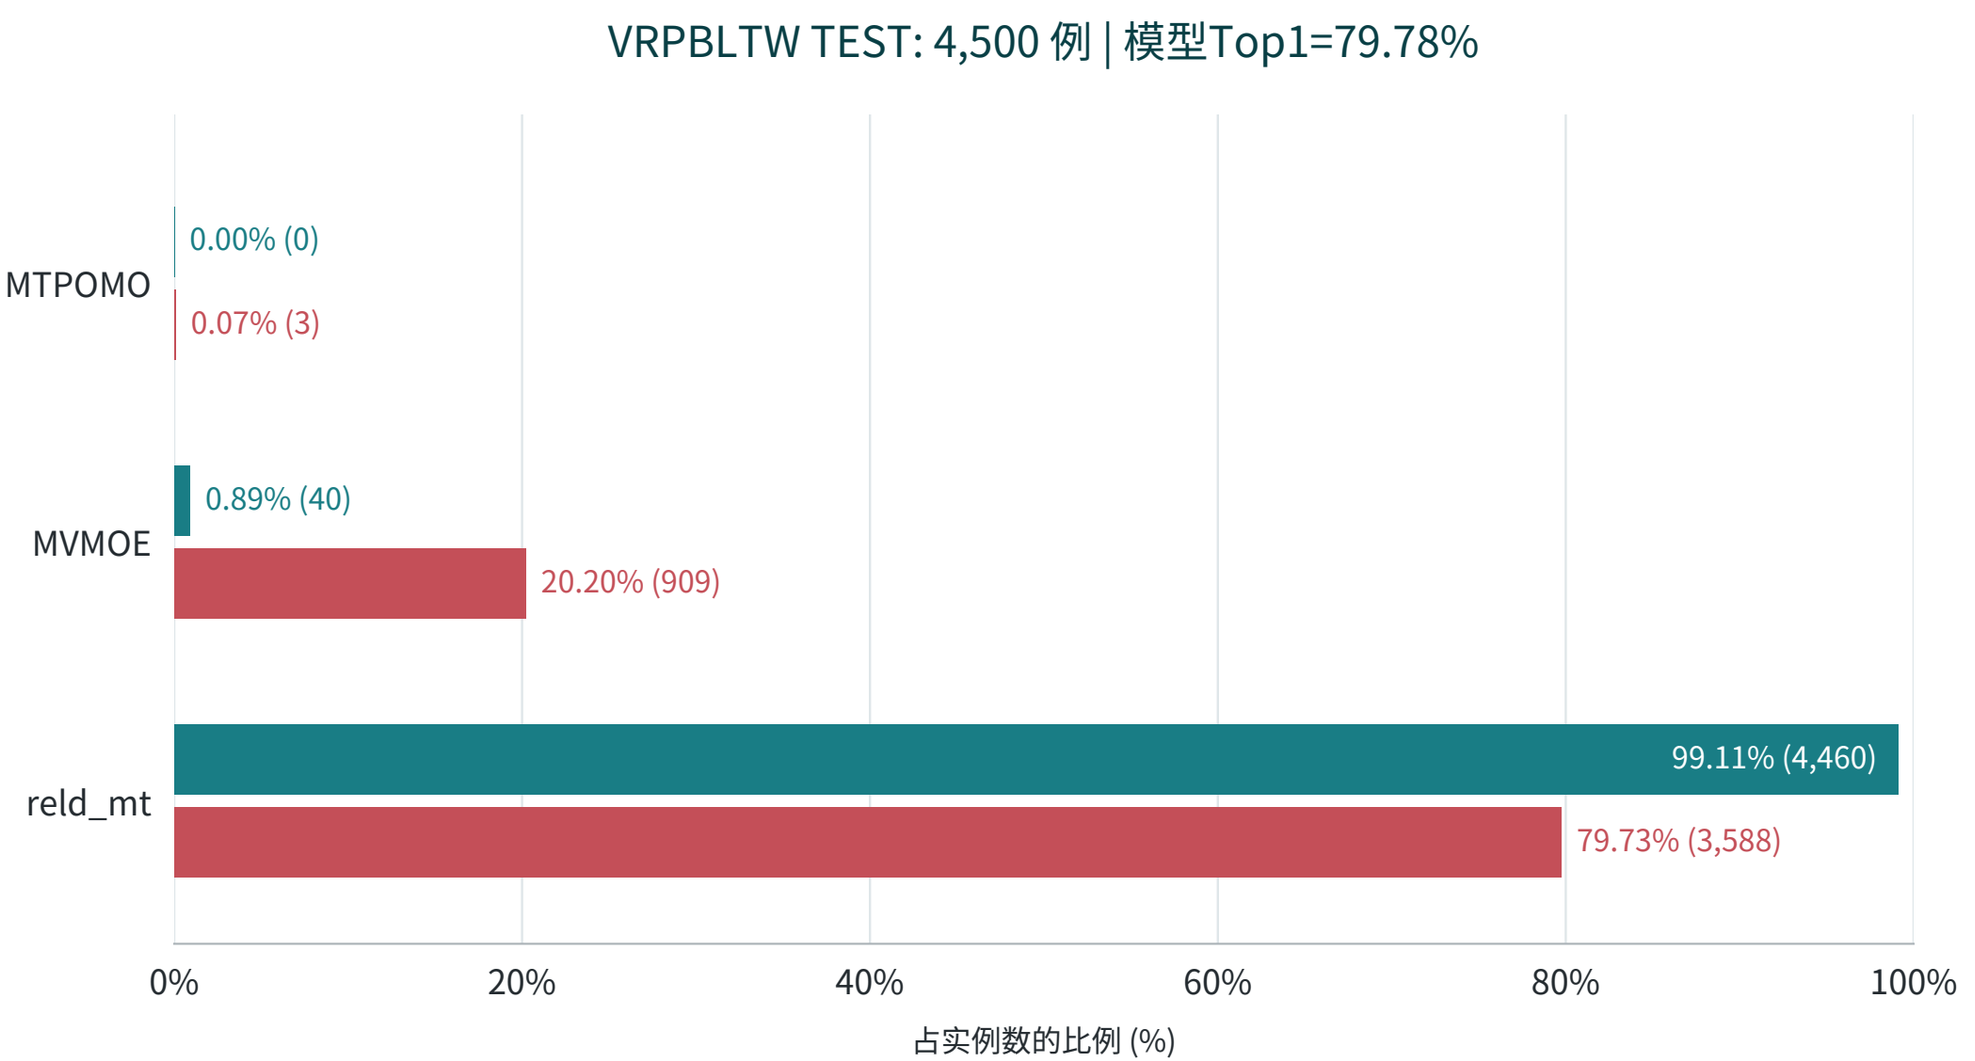

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.

R84/C_focal | OVRPBLTW | 方法分布

同一锁定模型: epoch 32 / update 46080 / SHA256 a7f7626caa770d0d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

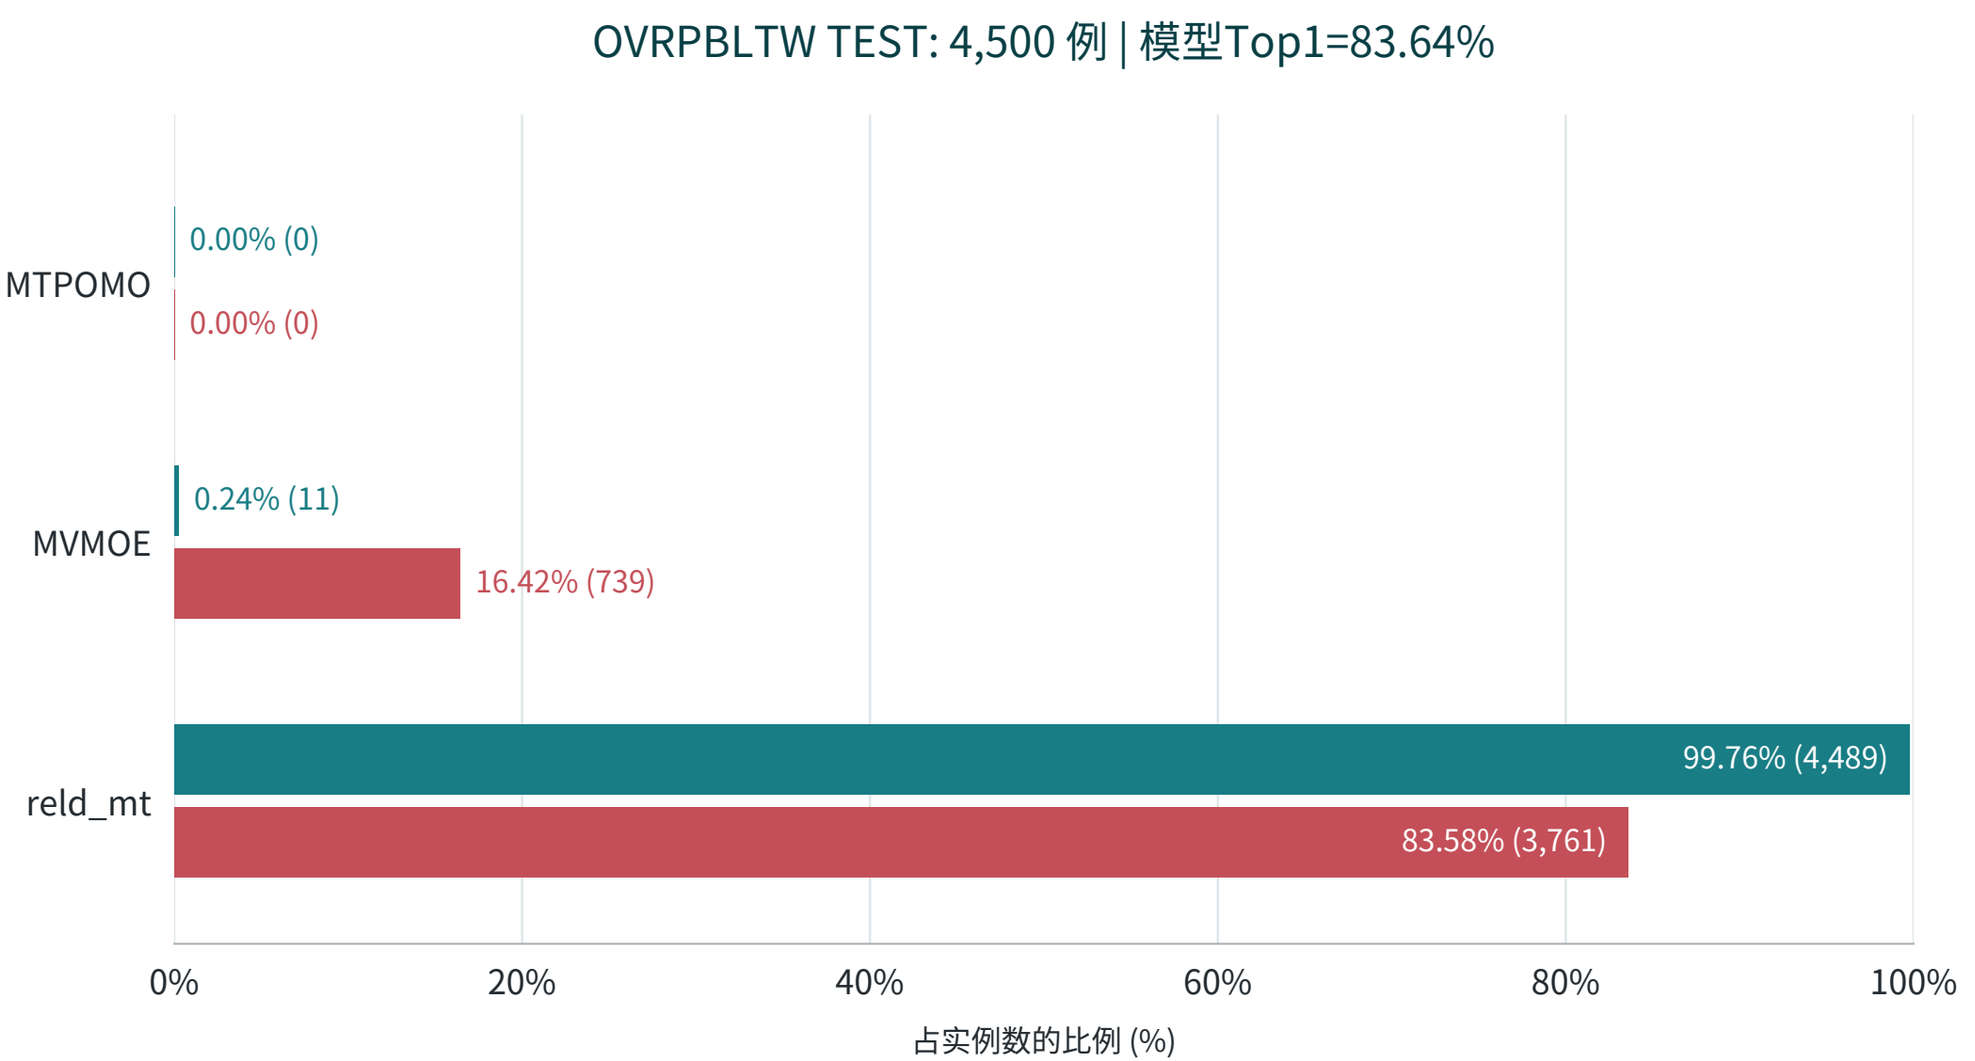

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R84/C_focal: stable global solver-ID score ties. Same R84 lock; LIB inference only; no training/reselection/Rxx mixing.