R85/C_cost_profile | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 25 | update 36000 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0086	66.2037	11.416207	11.427978	11.371692	-0.1978	+0.3898	0.3980
TEST ALL	71.3111	66.1802	11.373421	11.385299	11.329932	-0.2007	+0.3824	0.3897

Dataset	n	NSS Top1 (%)	R85 Top1 (%)	NSS cost	R85 cost
TSP TEST	4500	45.888889	46.911111	7.970400719	7.971632759
CVRP TEST	4500	45.977778	47.177778	18.004802368	18.007626368
TSPLIB	49	20.408163	18.367347	8.217907074	8.215885069
CVRPLIB	100	70.000000	63.000000	67.101111717	67.274507074

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original native CE

R85/C_cost_profile | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0086	66.2037	11.416207	11.427978	11.371692	-0.1978	+0.3898	0.3980	per-problem TRAIN SBS
TSP	46.5111	33.1111	8.025390	8.045354	7.990533	-0.2481	+0.4362	0.4238	T2T
CVRP	45.7111	18.7111	18.155630	18.269377	18.064087	-0.6226	+0.5068	0.6540	RELD_CVRP
ATSP	77.0667	47.4889	1.638658	1.676905	1.632471	-2.2808	+0.3790	0.3743	UNICO_MatPOENet
OVRP	41.4667	35.7556	7.461426	7.469579	7.415777	-0.1092	+0.6156	0.6274	MoSES_RF
VRPB	80.8889	80.8444	9.354071	9.354876	9.318750	-0.0086	+0.3790	0.3877	reld_mt
VRPL	38.0000	33.0889	12.430873	12.437959	12.383444	-0.0570	+0.3830	0.3905	MoSES_RF
VRPTW	80.0222	79.9556	18.818661	18.819431	18.766139	-0.0041	+0.2799	0.2956	reld_mt
OVRPTW	83.8444	83.7778	10.143049	10.143730	10.116859	-0.0067	+0.2589	0.2551	reld_mt
OVRPB	88.4889	88.5111	6.357252	6.357254	6.341078	-0.0000	+0.2551	0.2649	reld_mt
OVRPL	40.6444	35.9111	7.436944	7.445709	7.390416	-0.1177	+0.6296	0.6455	MoSES_RF
VRPBL	78.8667	78.5111	9.368018	9.371523	9.328366	-0.0374	+0.4251	0.4278	reld_mt
VRPBTW	78.5556	78.4222	19.946891	19.950430	19.851084	-0.0177	+0.4826	0.4612	reld_mt
VRPLTW	78.9111	78.7556	18.763691	18.765871	18.707843	-0.0116	+0.2985	0.3144	reld_mt
OVRPBL	89.3333	89.2000	6.369083	6.370093	6.352824	-0.0159	+0.2559	0.2654	reld_mt
OVRPBTW	83.6222	83.4444	10.660180	10.661098	10.623245	-0.0086	+0.3477	0.3199	reld_mt
OVRPLTW	83.5556	83.4889	10.157095	10.157423	10.129818	-0.0032	+0.2693	0.2734	reld_mt
VRPBLTW	79.4667	79.4000	19.794849	19.797044	19.706420	-0.0111	+0.4487	0.4381	reld_mt
OVRPBLTW	83.2000	83.2889	10.609956	10.609955	10.571302	+0.0000	+0.3657	0.3443	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R85/C_cost_profile | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.3111	66.1802	11.373421	11.385299	11.329932	-0.2007	+0.3824	0.3897	per-problem TRAIN SBS
TSP	46.9111	34.5333	7.971633	7.989621	7.937593	-0.2251	+0.4288	0.4187	T2T
CVRP	47.1778	17.9333	18.007626	18.124983	17.918509	-0.6475	+0.4973	0.6413	RELD_CVRP
ATSP	76.7778	47.2444	1.635411	1.674207	1.629441	-2.3173	+0.3663	0.3648	UNICO_MatPOENet
OVRP	40.6222	33.6444	7.445657	7.455750	7.400487	-0.1354	+0.6104	0.6188	MoSES_RF
VRPB	80.6889	80.4000	9.349266	9.351810	9.315298	-0.0272	+0.3646	0.3672	reld_mt
VRPL	37.7111	32.2667	12.349290	12.356138	12.300958	-0.0554	+0.3929	0.4003	MoSES_RF
VRPTW	81.2222	80.8444	18.688538	18.690545	18.637408	-0.0107	+0.2743	0.2863	reld_mt
OVRPTW	83.9333	83.9333	10.092790	10.093063	10.068135	-0.0027	+0.2449	0.2360	reld_mt
OVRPB	88.1556	88.1333	6.370628	6.370826	6.352225	-0.0031	+0.2897	0.2974	reld_mt
OVRPL	42.3556	34.6000	7.462735	7.472542	7.418033	-0.1312	+0.6026	0.6114	MoSES_RF
VRPBL	79.5333	79.4222	9.395284	9.396379	9.355967	-0.0117	+0.4202	0.4243	reld_mt
VRPBTW	78.8222	78.7556	19.663688	19.665725	19.577666	-0.0104	+0.4394	0.4370	reld_mt
VRPLTW	79.1778	79.2444	18.802512	18.803136	18.745143	-0.0033	+0.3061	0.3239	reld_mt
OVRPBL	89.3778	89.2889	6.375544	6.375741	6.359310	-0.0031	+0.2553	0.2667	reld_mt
OVRPBTW	84.8667	84.8222	10.659251	10.659591	10.624748	-0.0032	+0.3247	0.2966	reld_mt
OVRPLTW	82.9333	82.8667	10.084866	10.086112	10.059001	-0.0123	+0.2571	0.2567	reld_mt
VRPBLTW	79.7111	79.7333	19.705039	19.707068	19.613284	-0.0103	+0.4678	0.4498	reld_mt
OVRPBLTW	83.6222	83.5778	10.661820	10.662149	10.625574	-0.0031	+0.3411	0.3178	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R85/C_cost_profile | LIB and locked provenance

Current R85 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	18.3673	10.2041	8.215885	8.240435	8.142167	-0.2979	+0.9054	0.9390
CVRPLIB	63.0000	45.0000	67.274507	67.245364	66.945093	+0.0433	+0.4921	0.5916

SHA256: fb9fd6437cb9459b476c241148fc8eebe494b5afc13639f1784a34a3777ec138

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original R77 maximin logits, stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R85/C_cost_profile | TSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

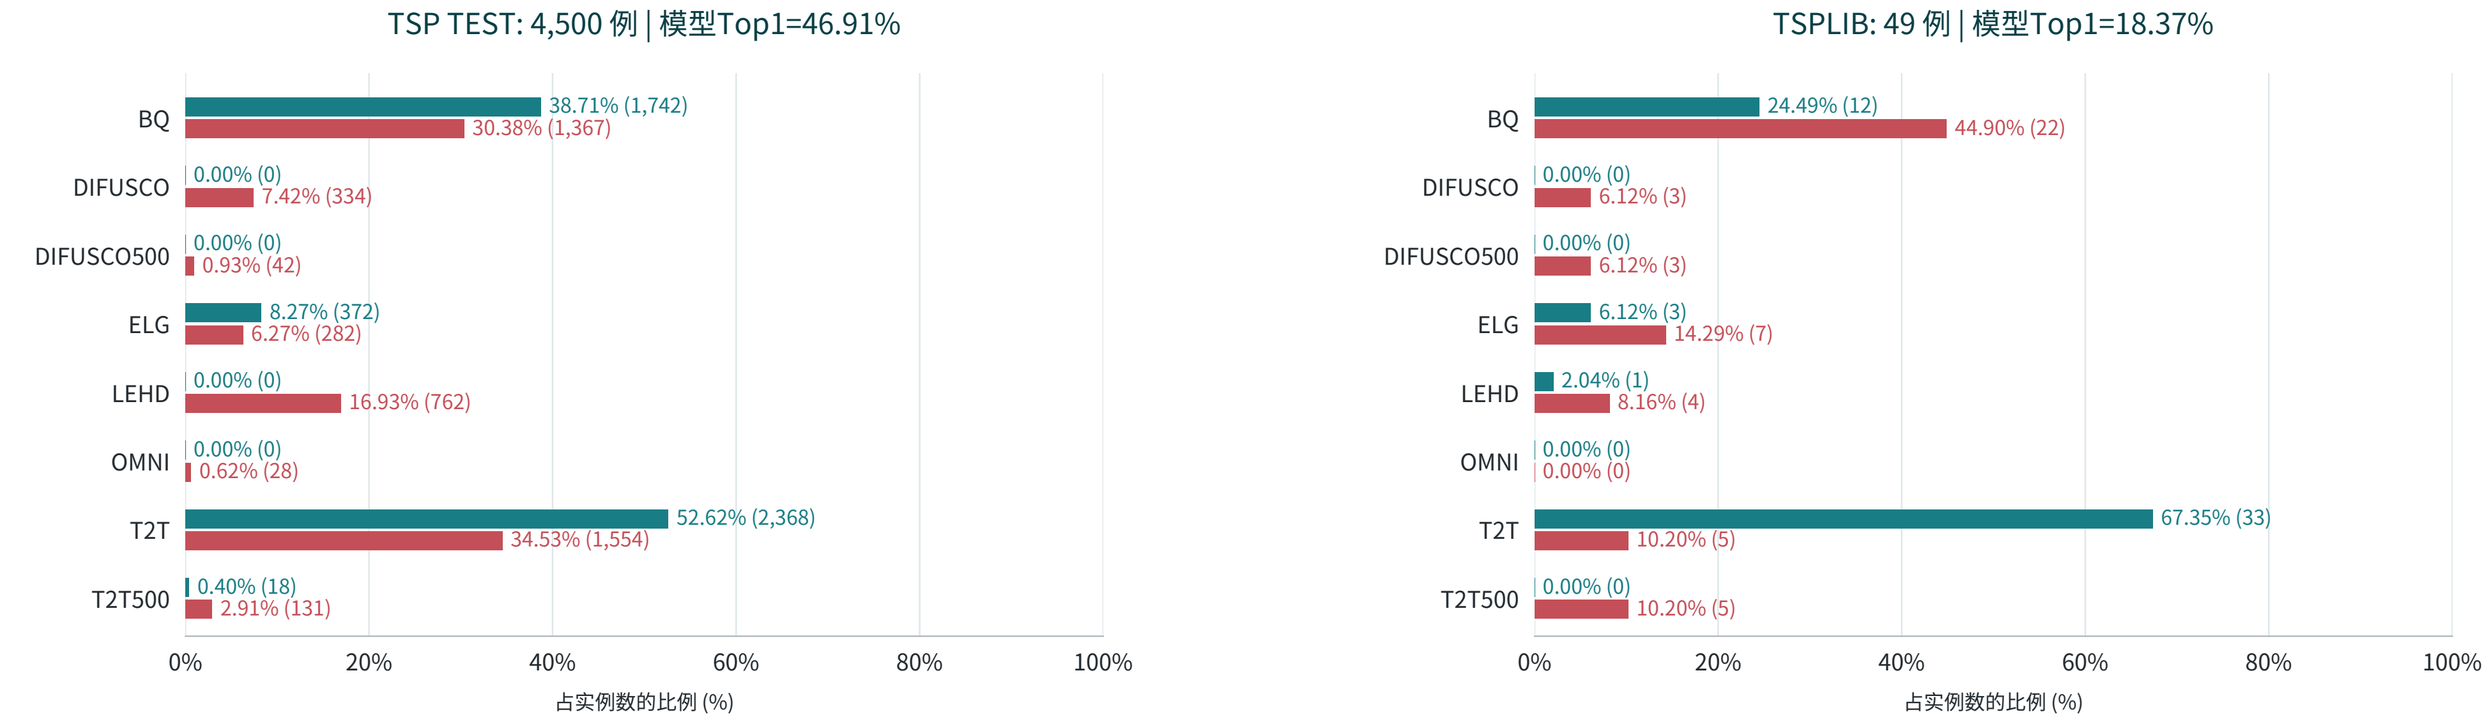

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.


R85/C_cost_profile | CVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

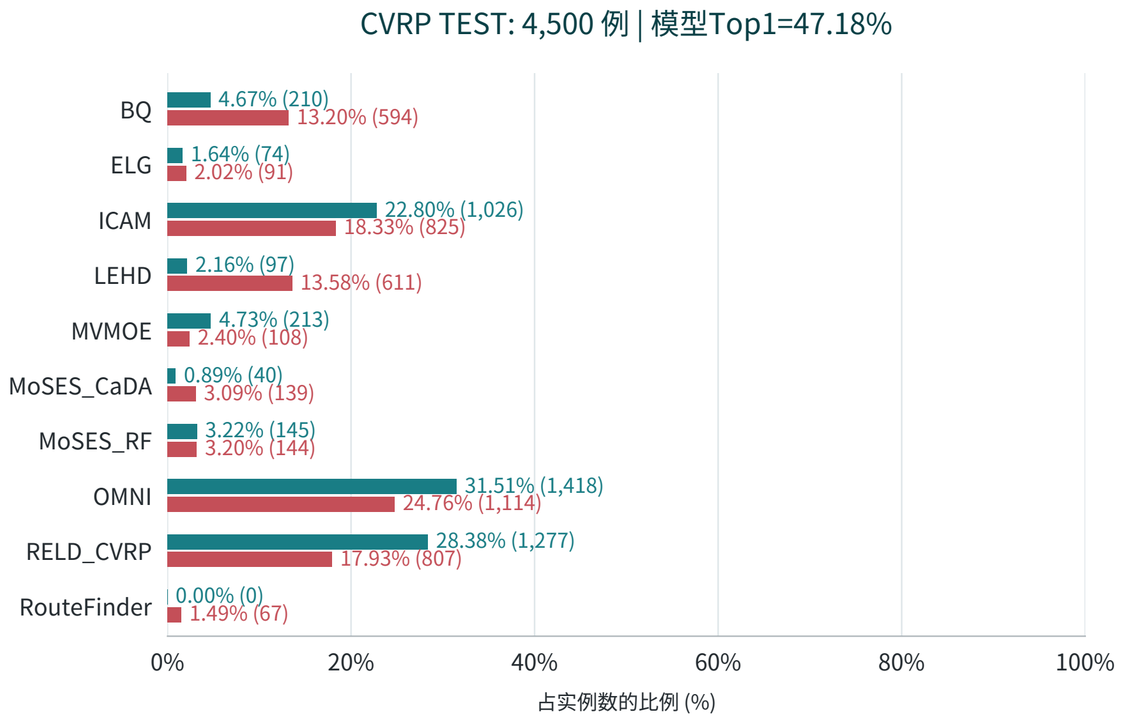

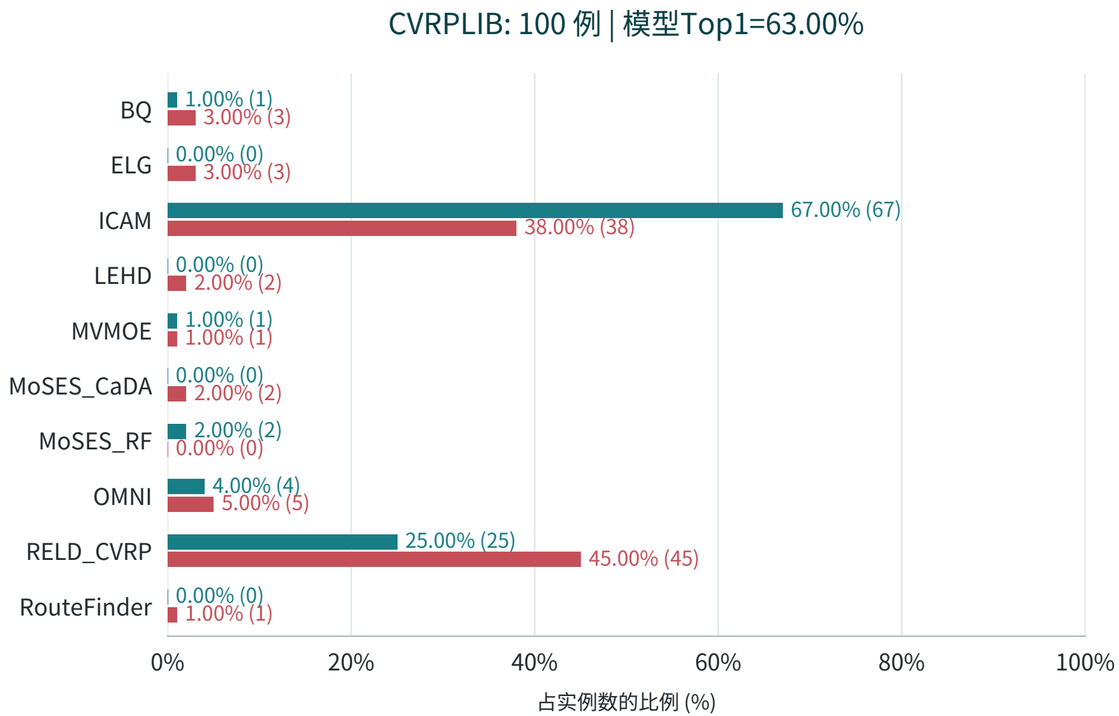

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | ATSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

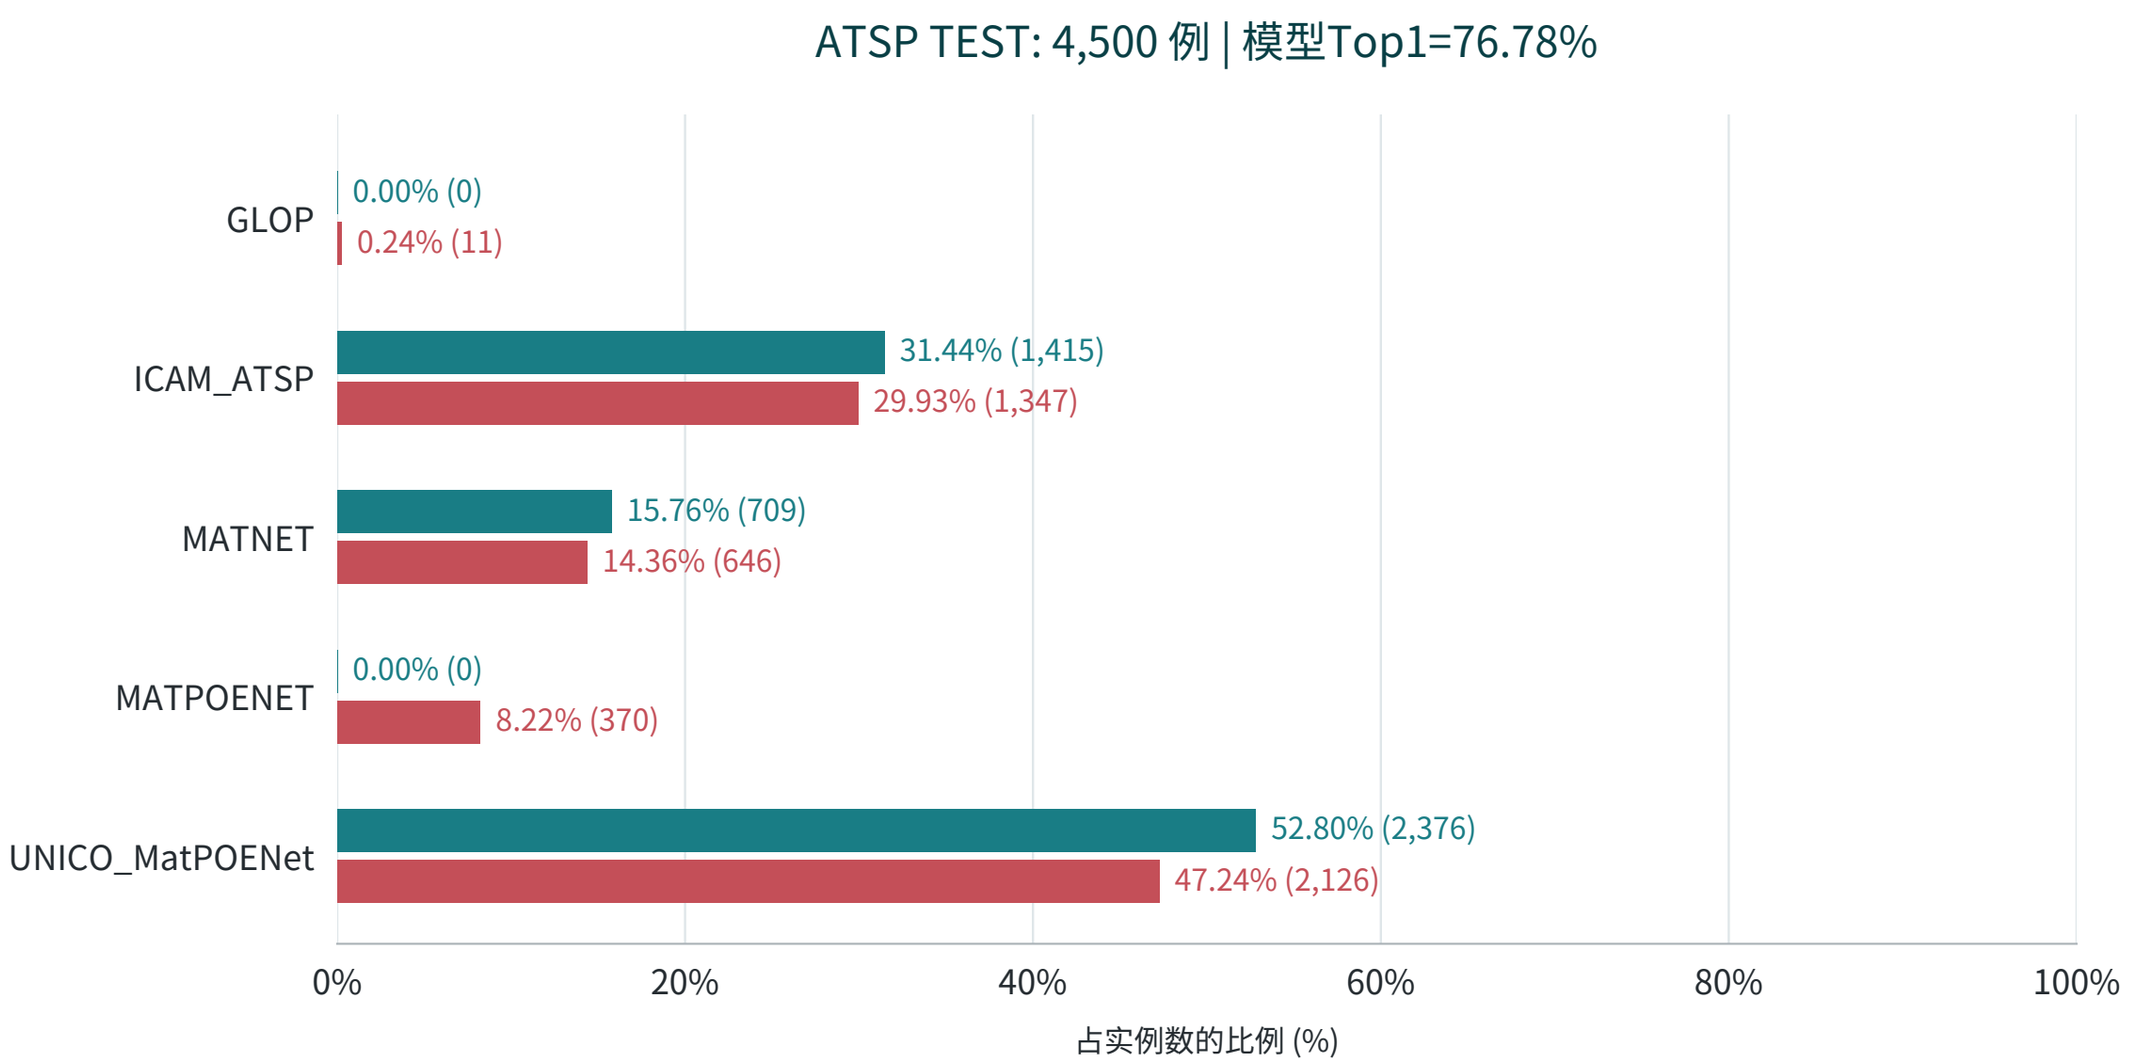

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

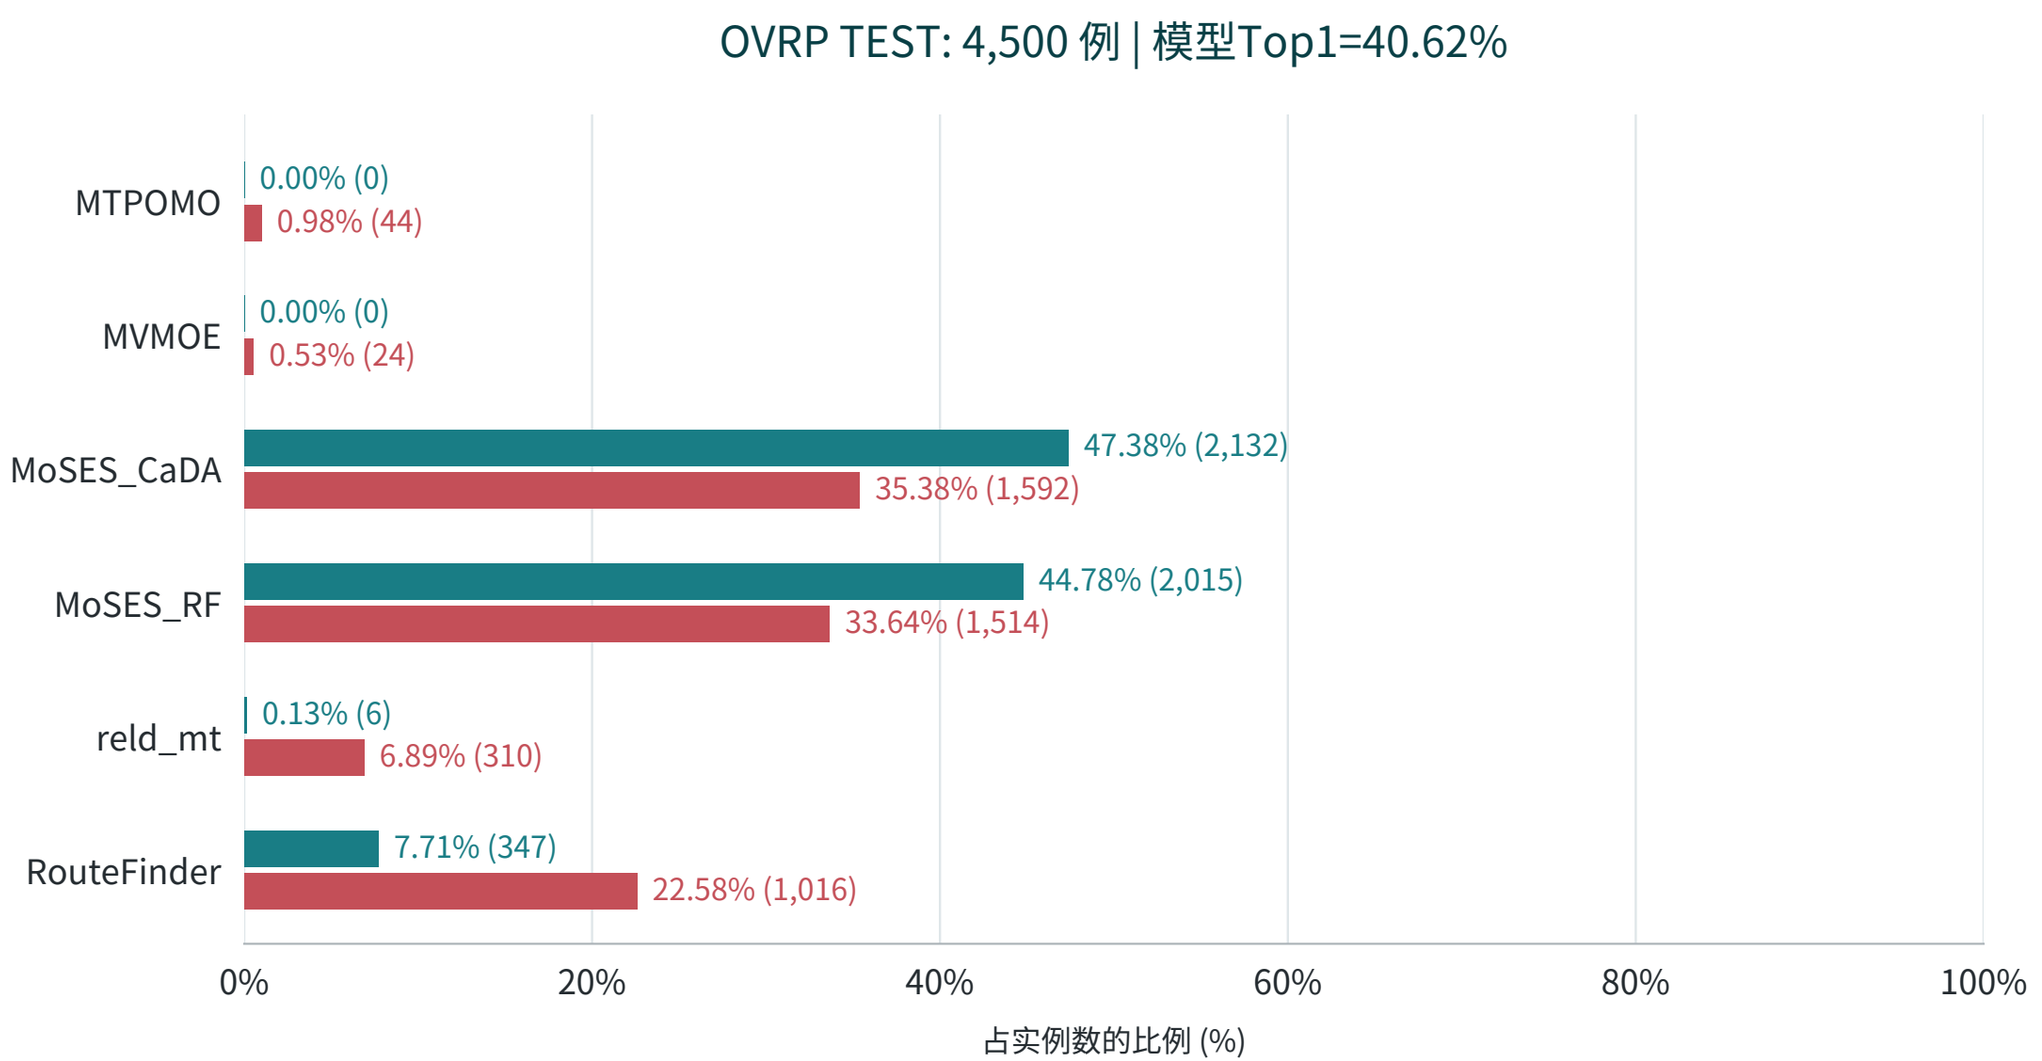

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

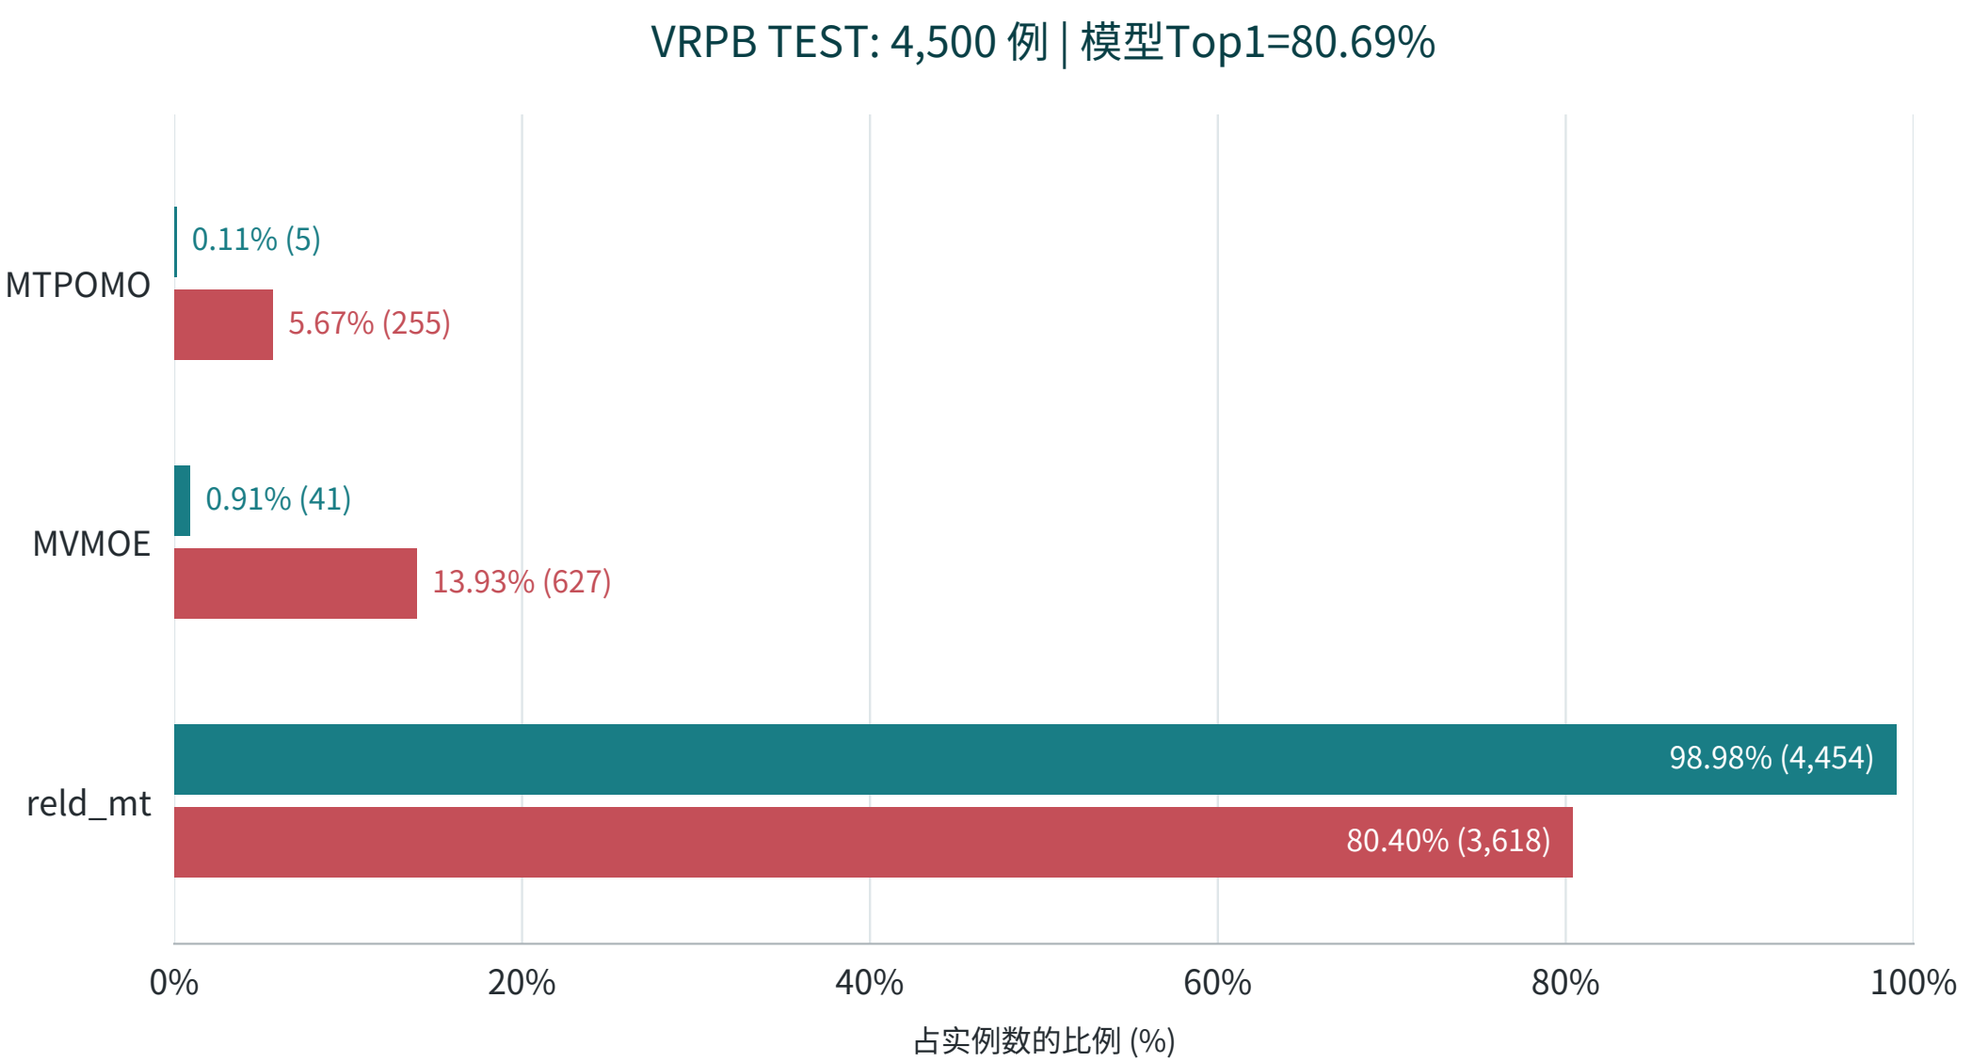

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

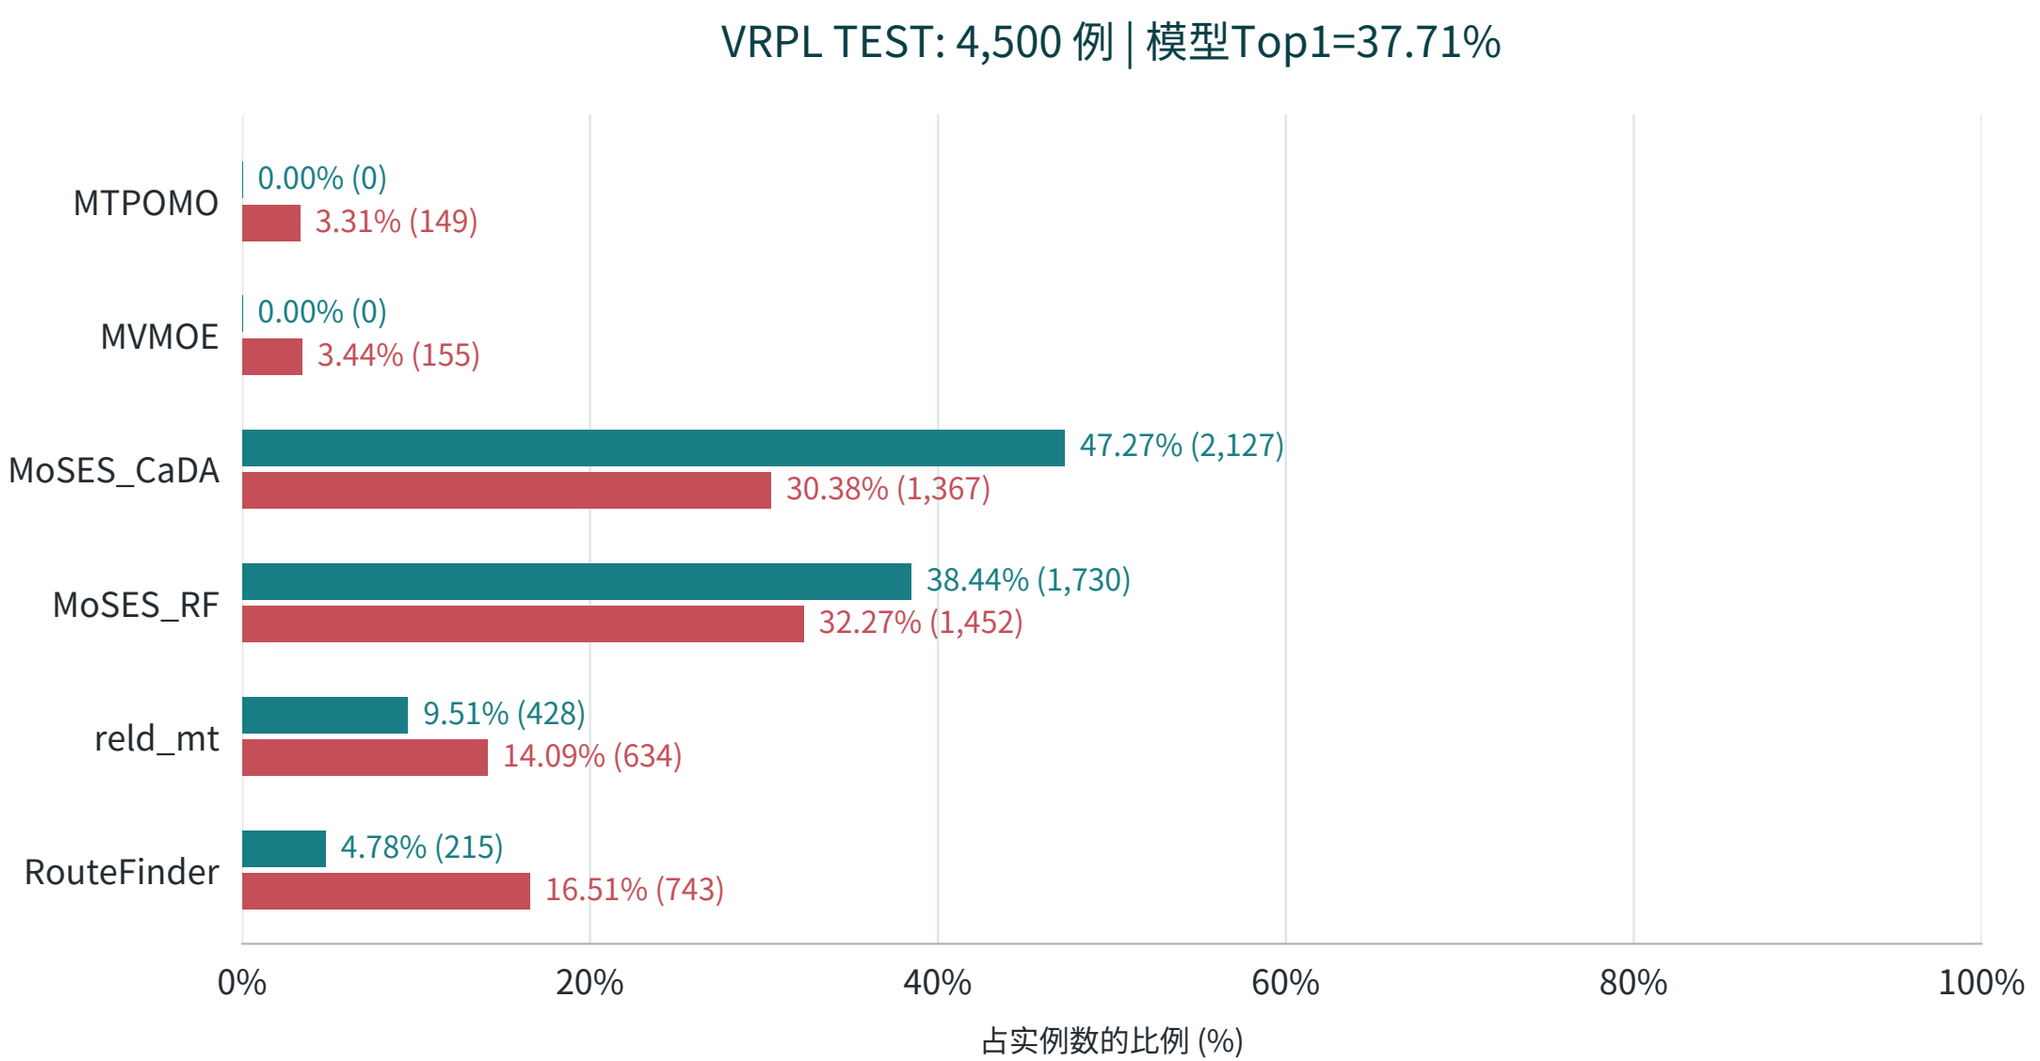

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

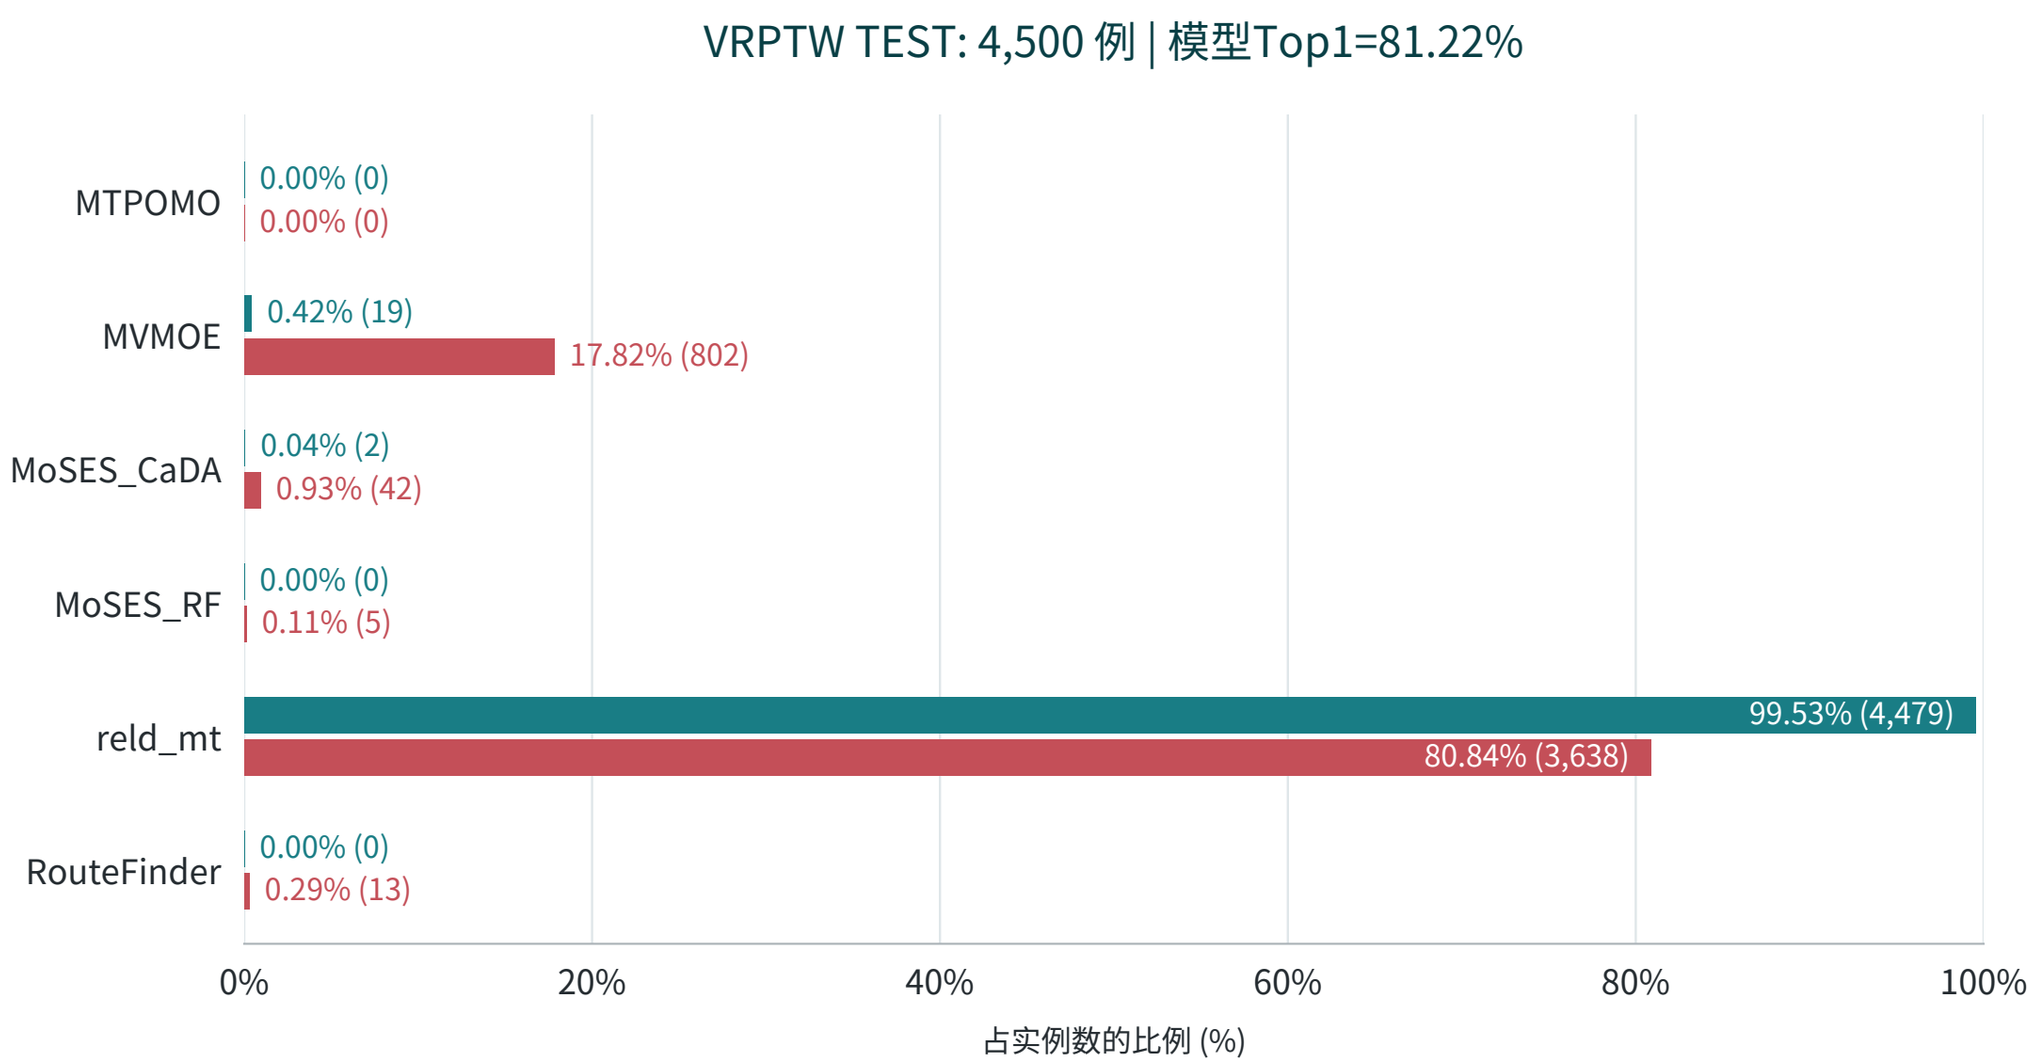

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

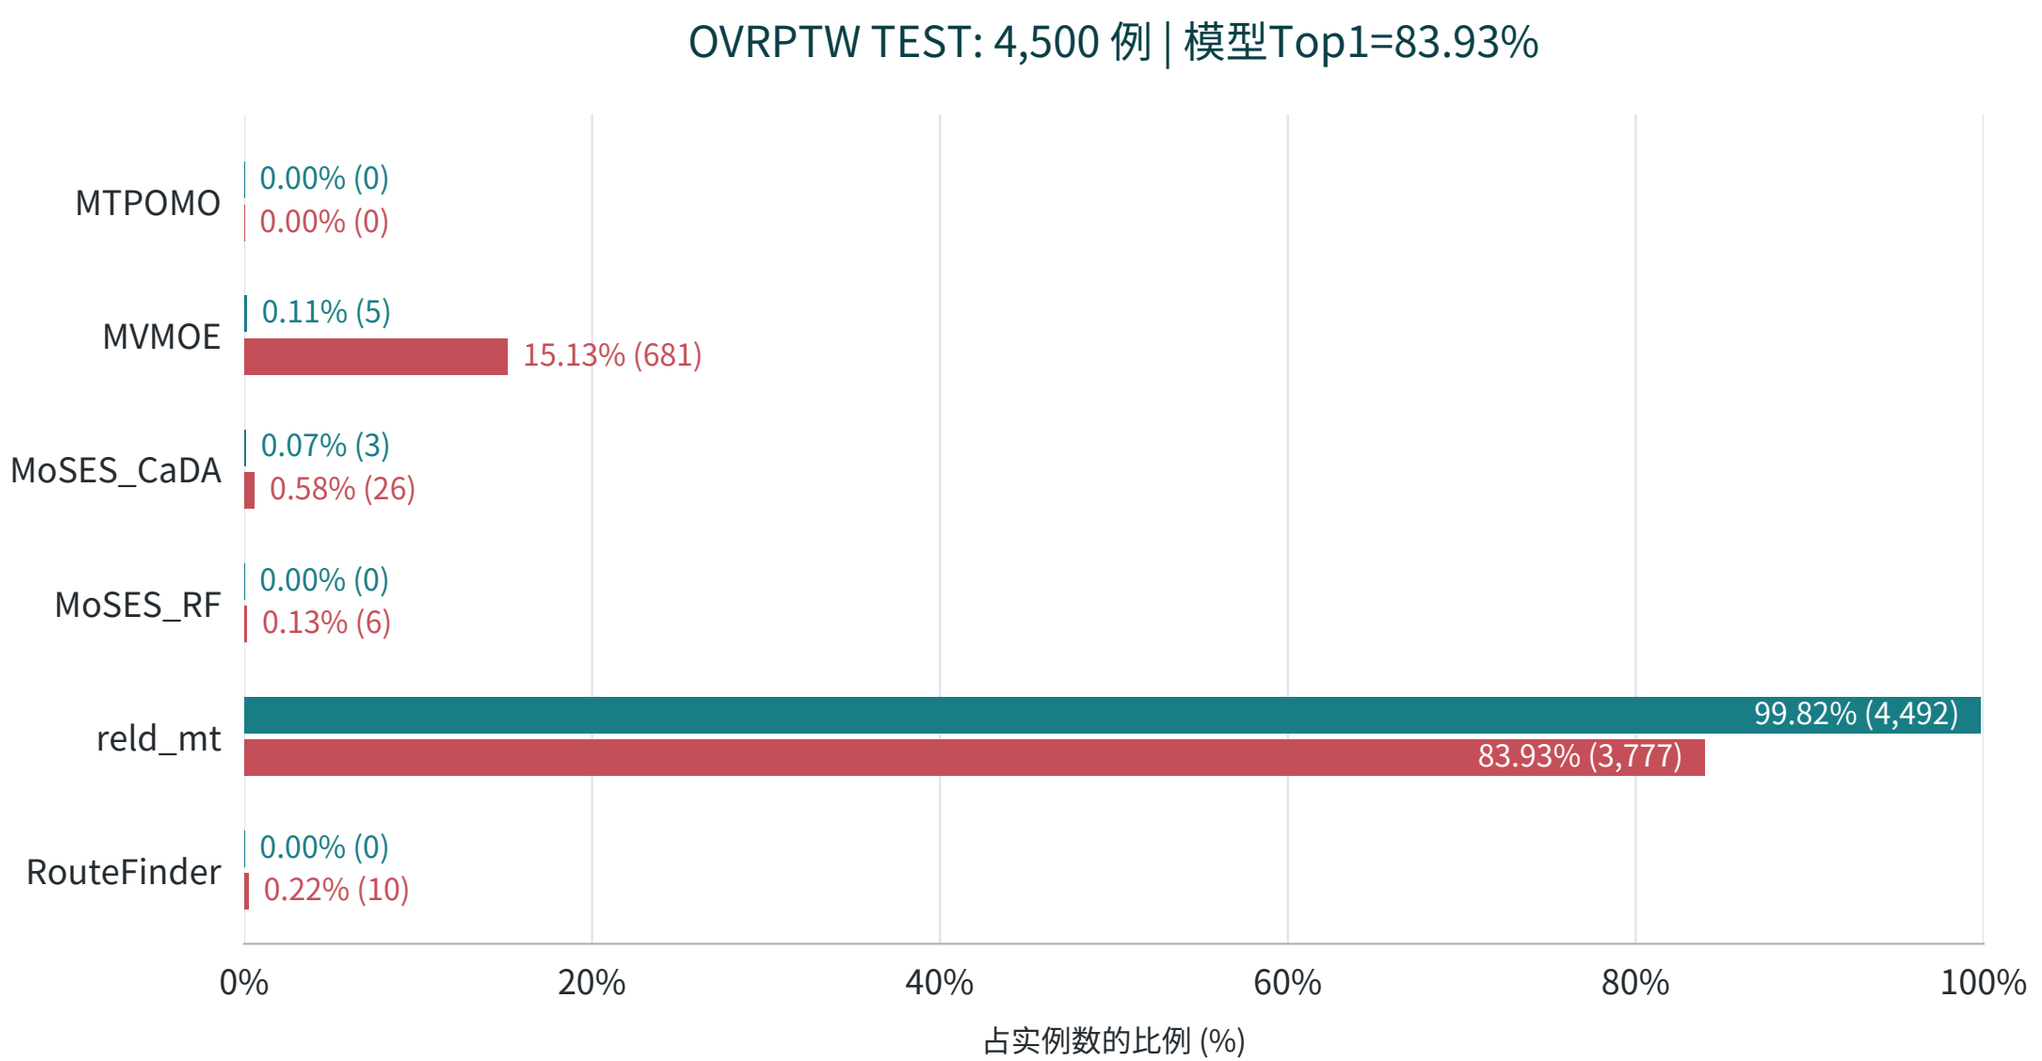

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

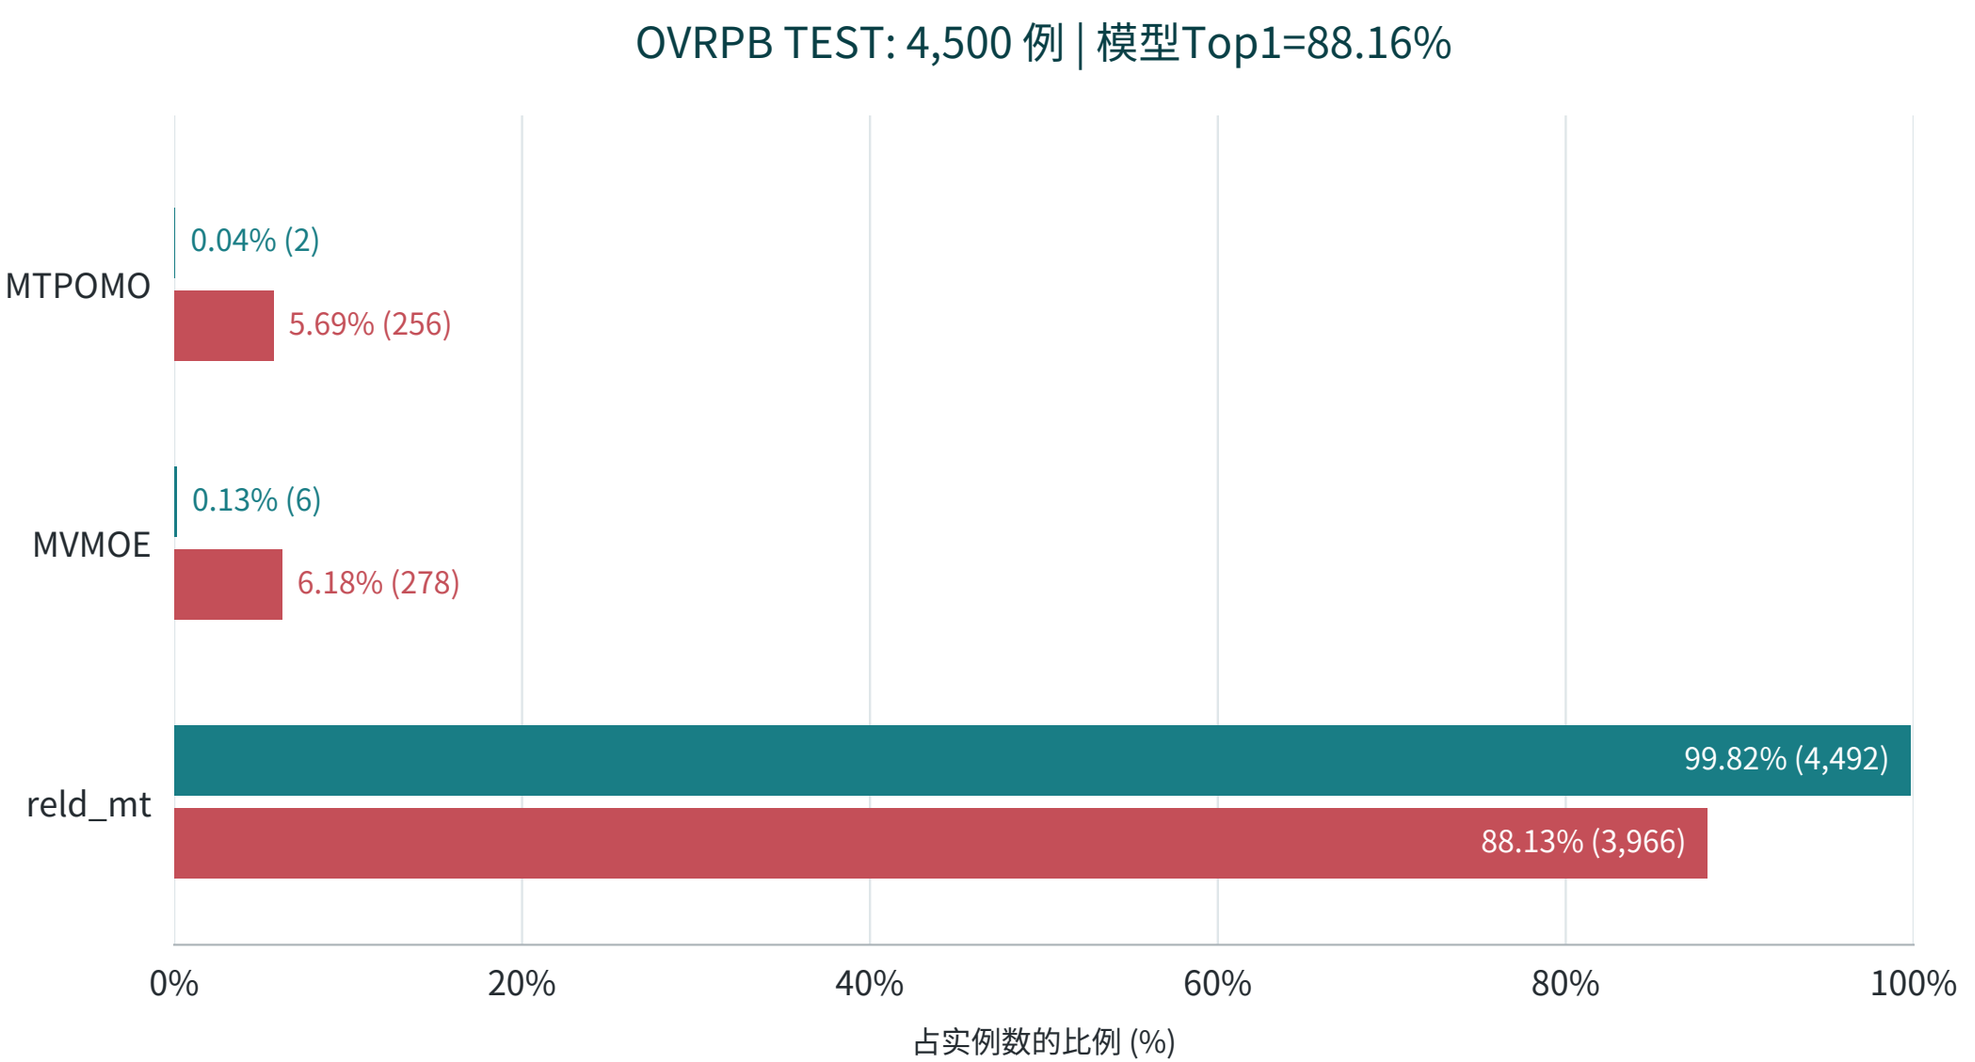

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

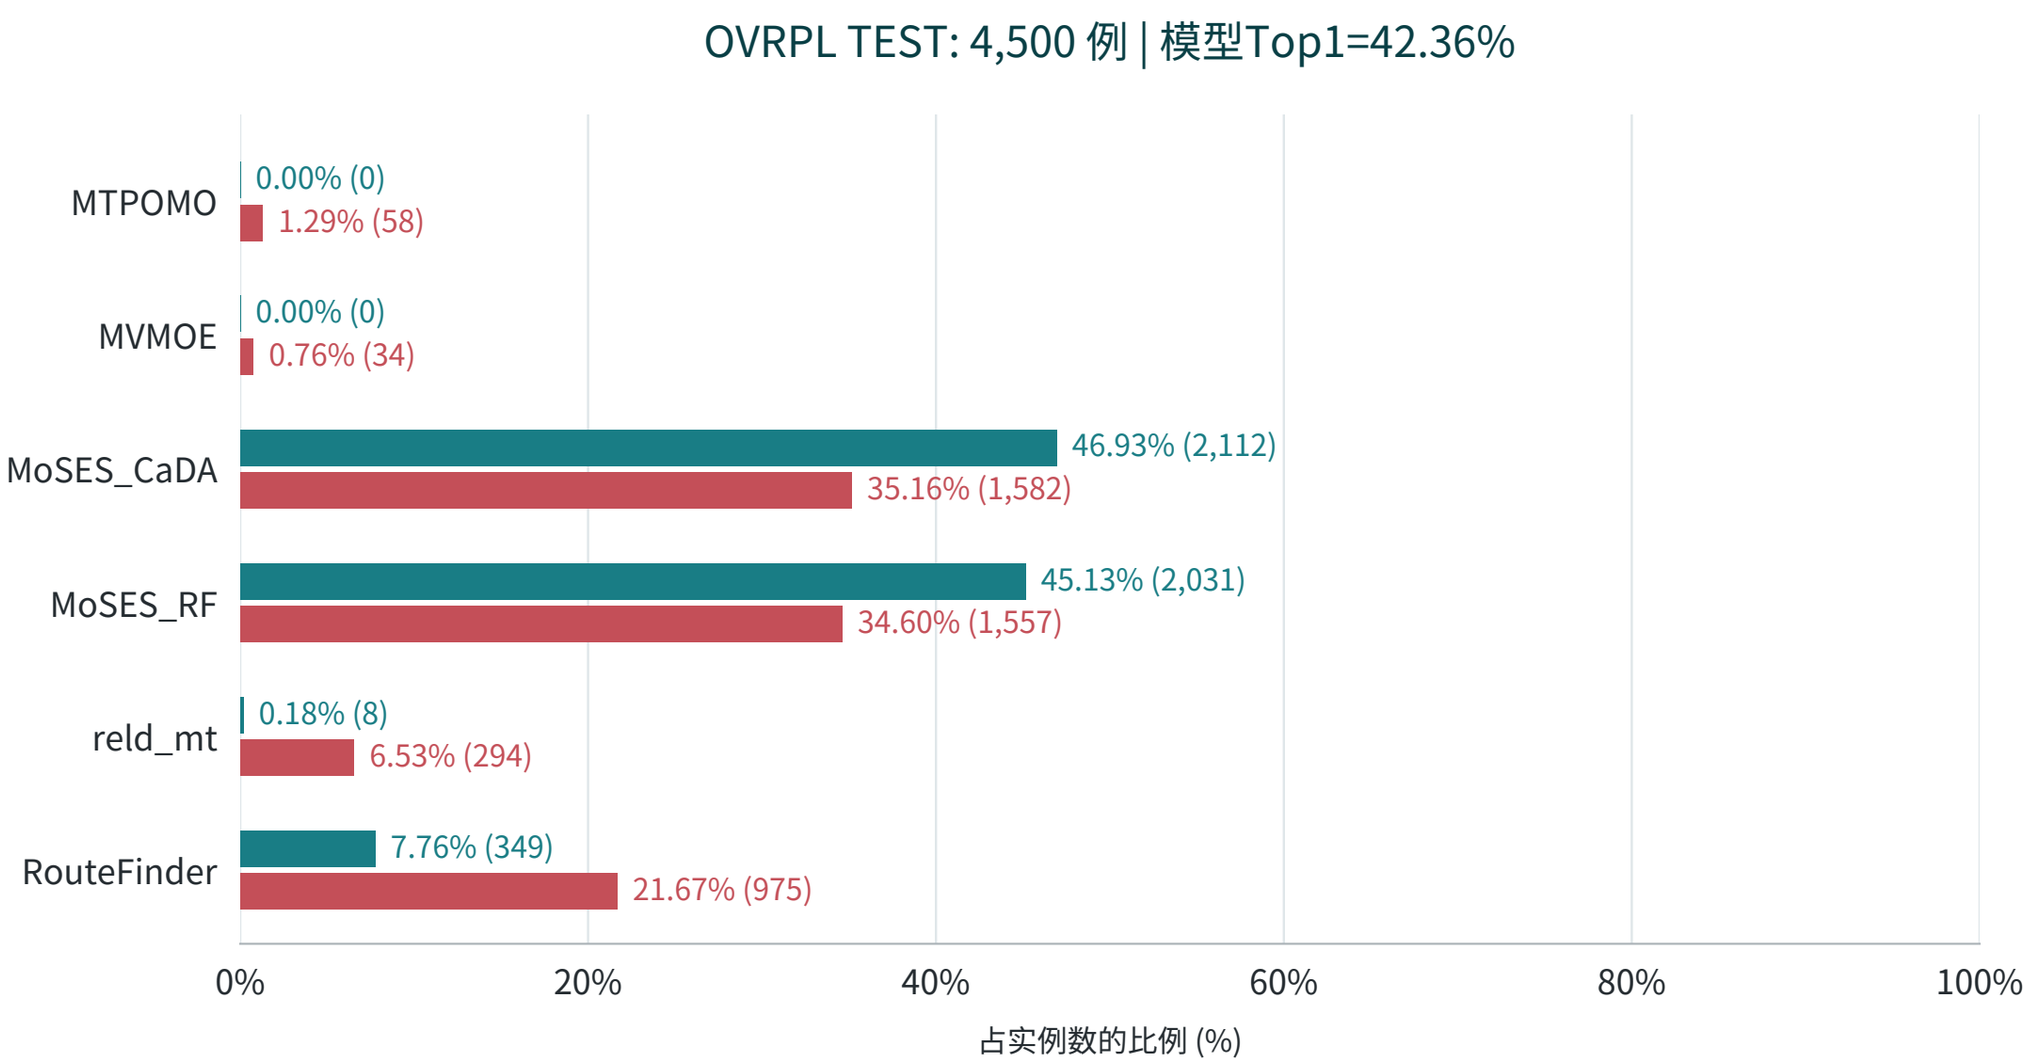

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

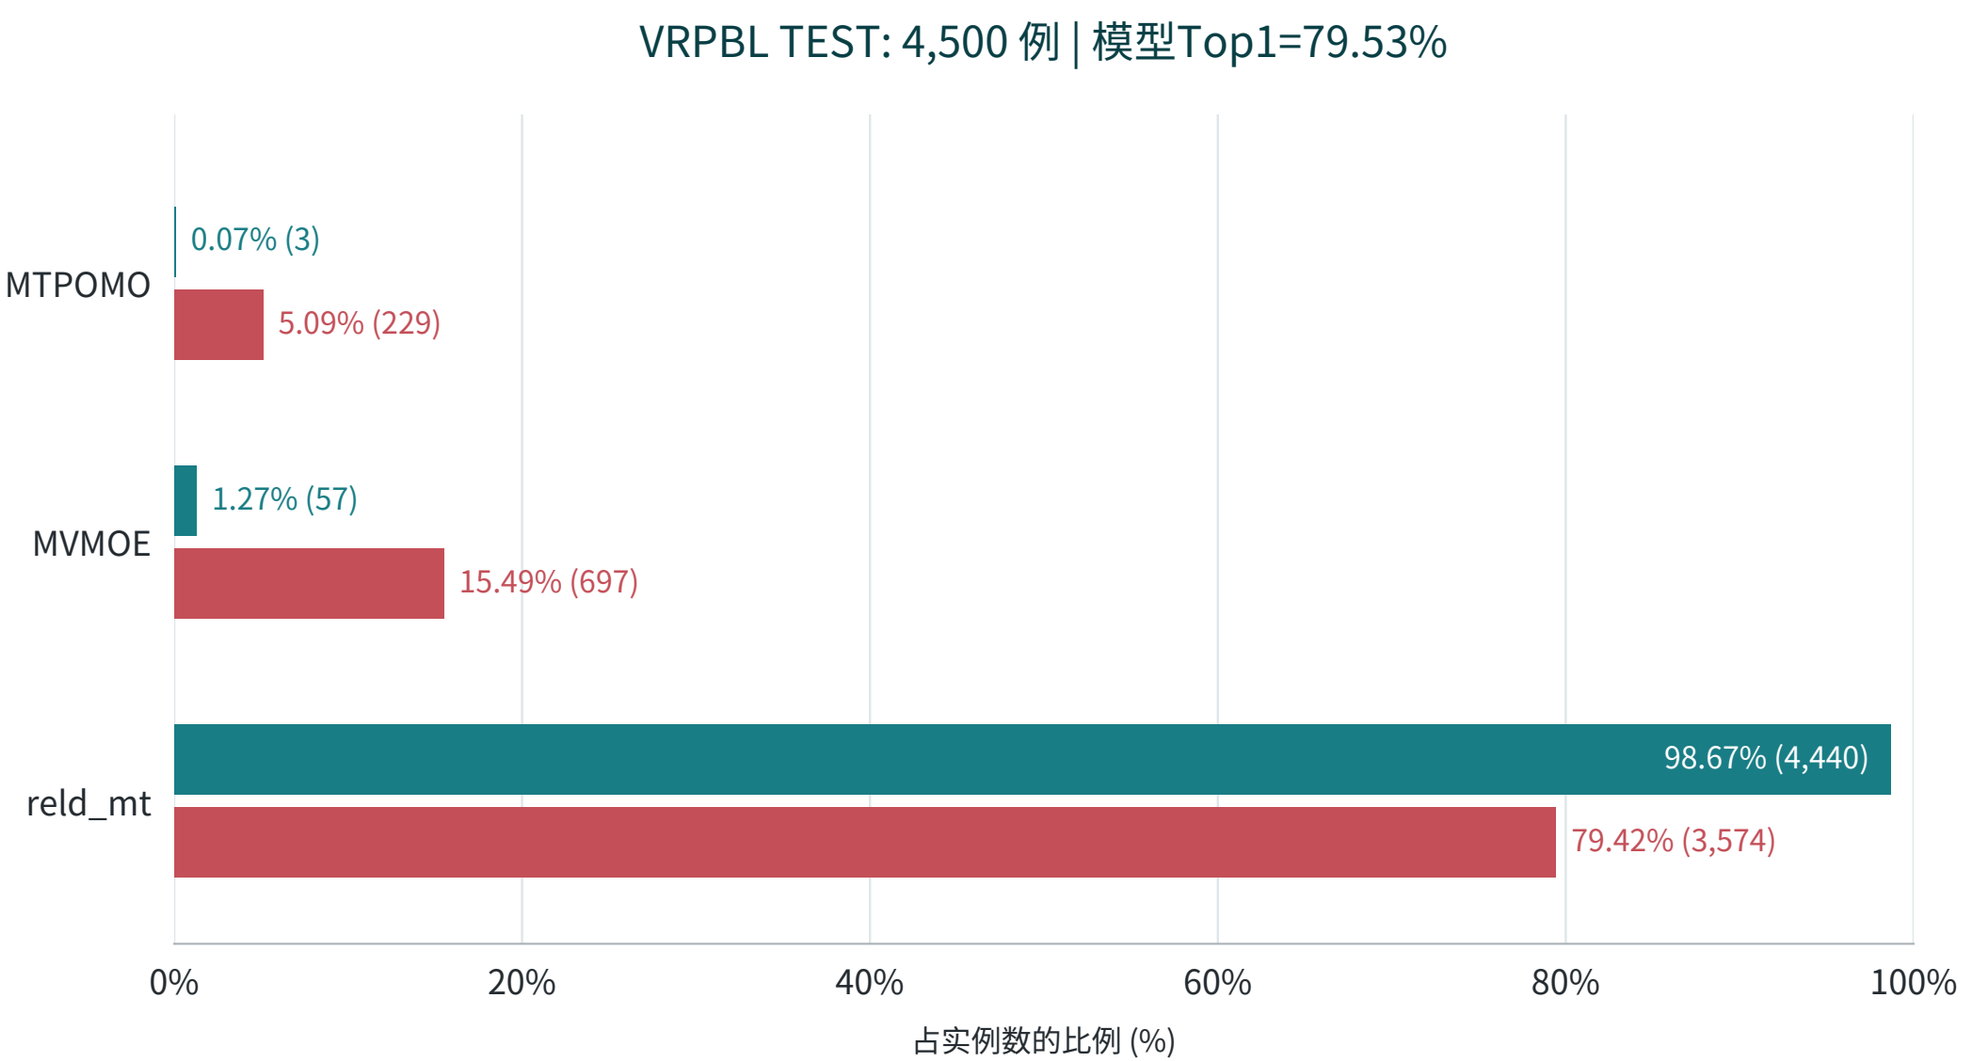

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

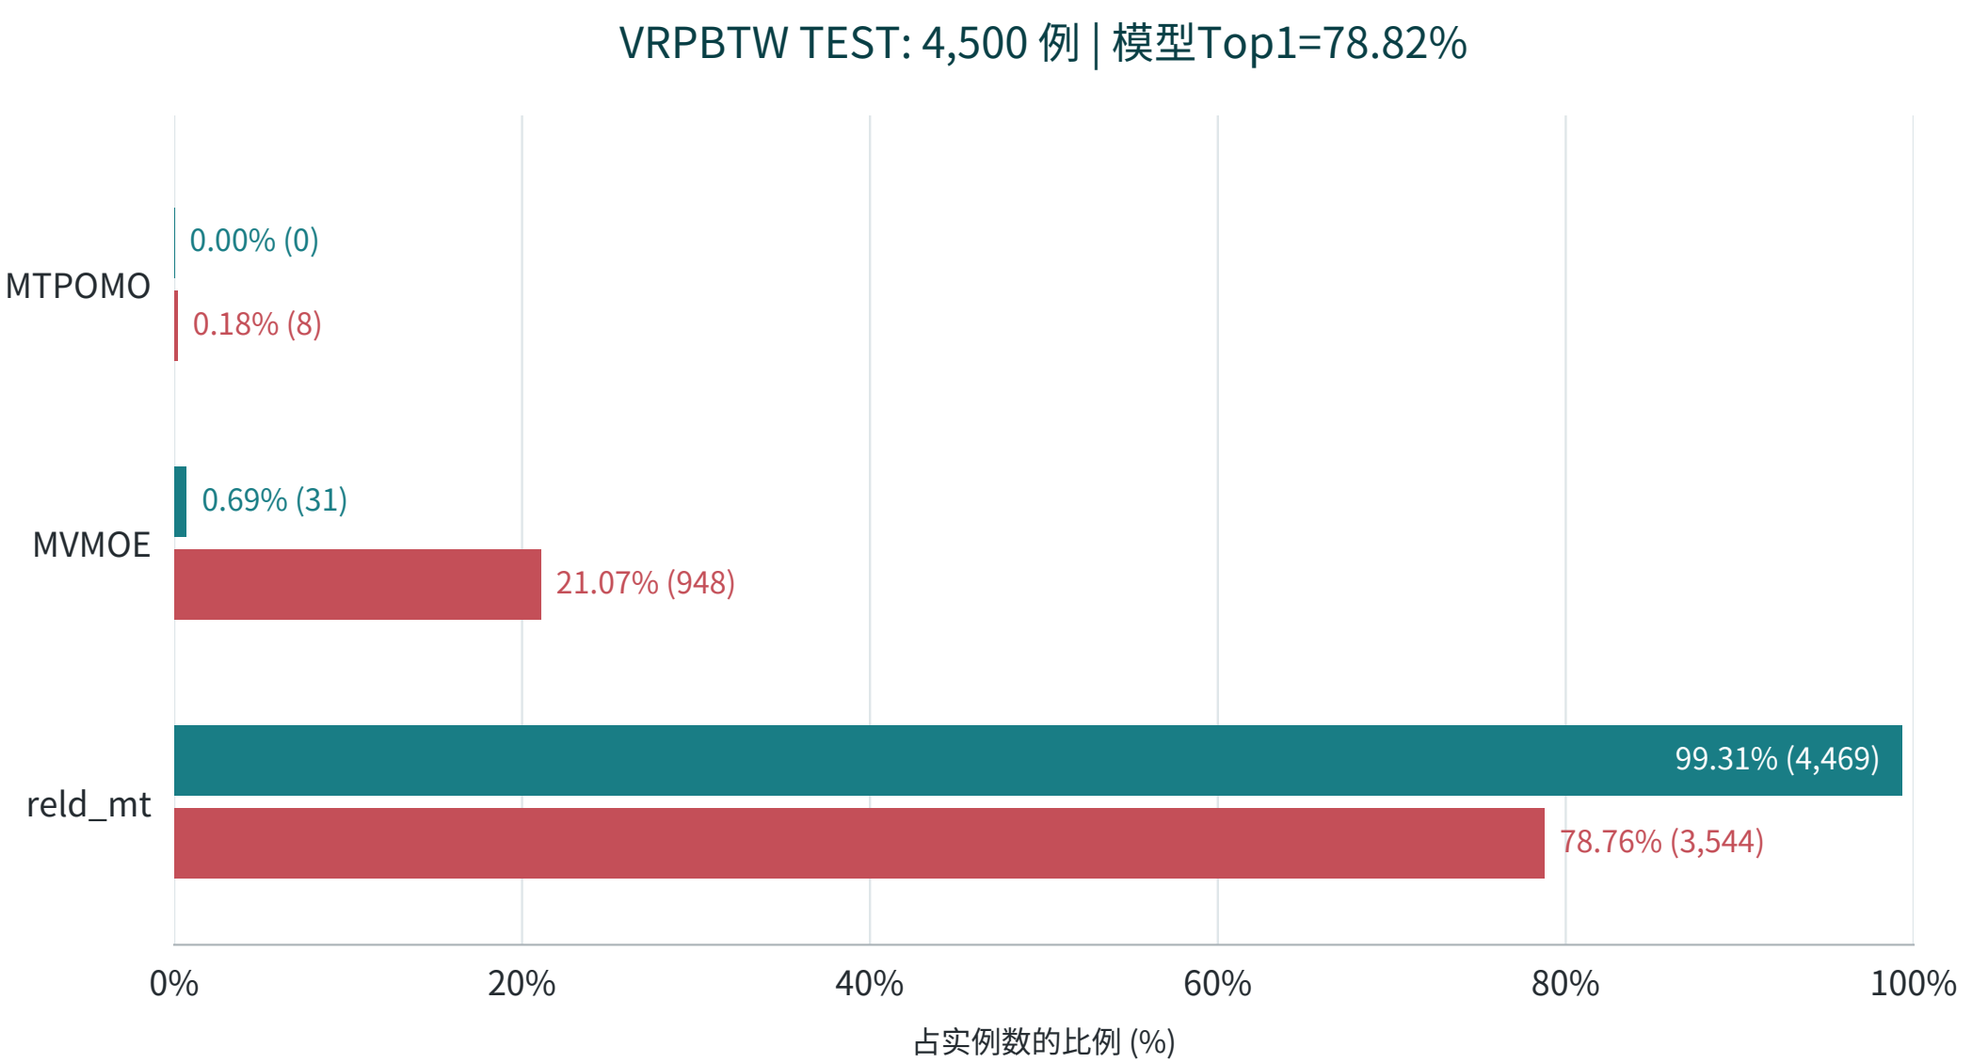

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

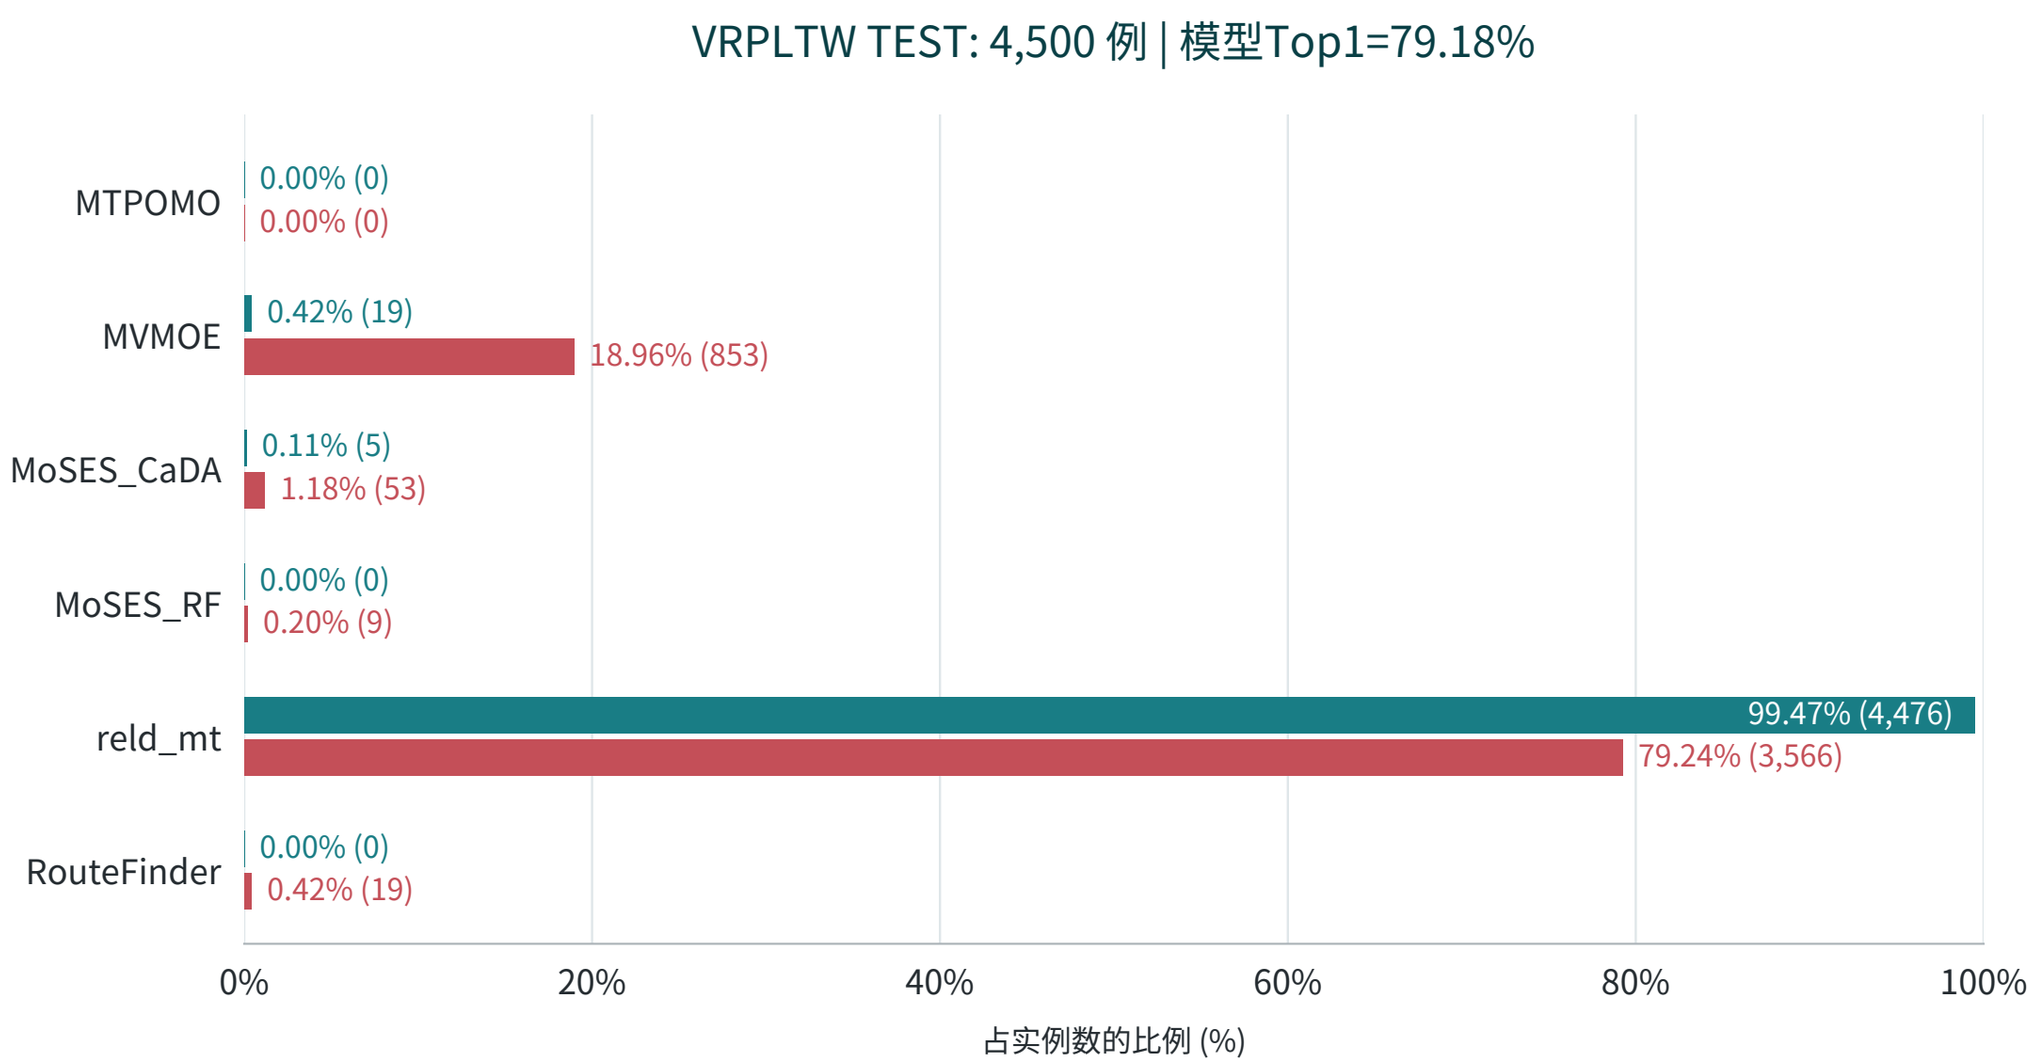

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

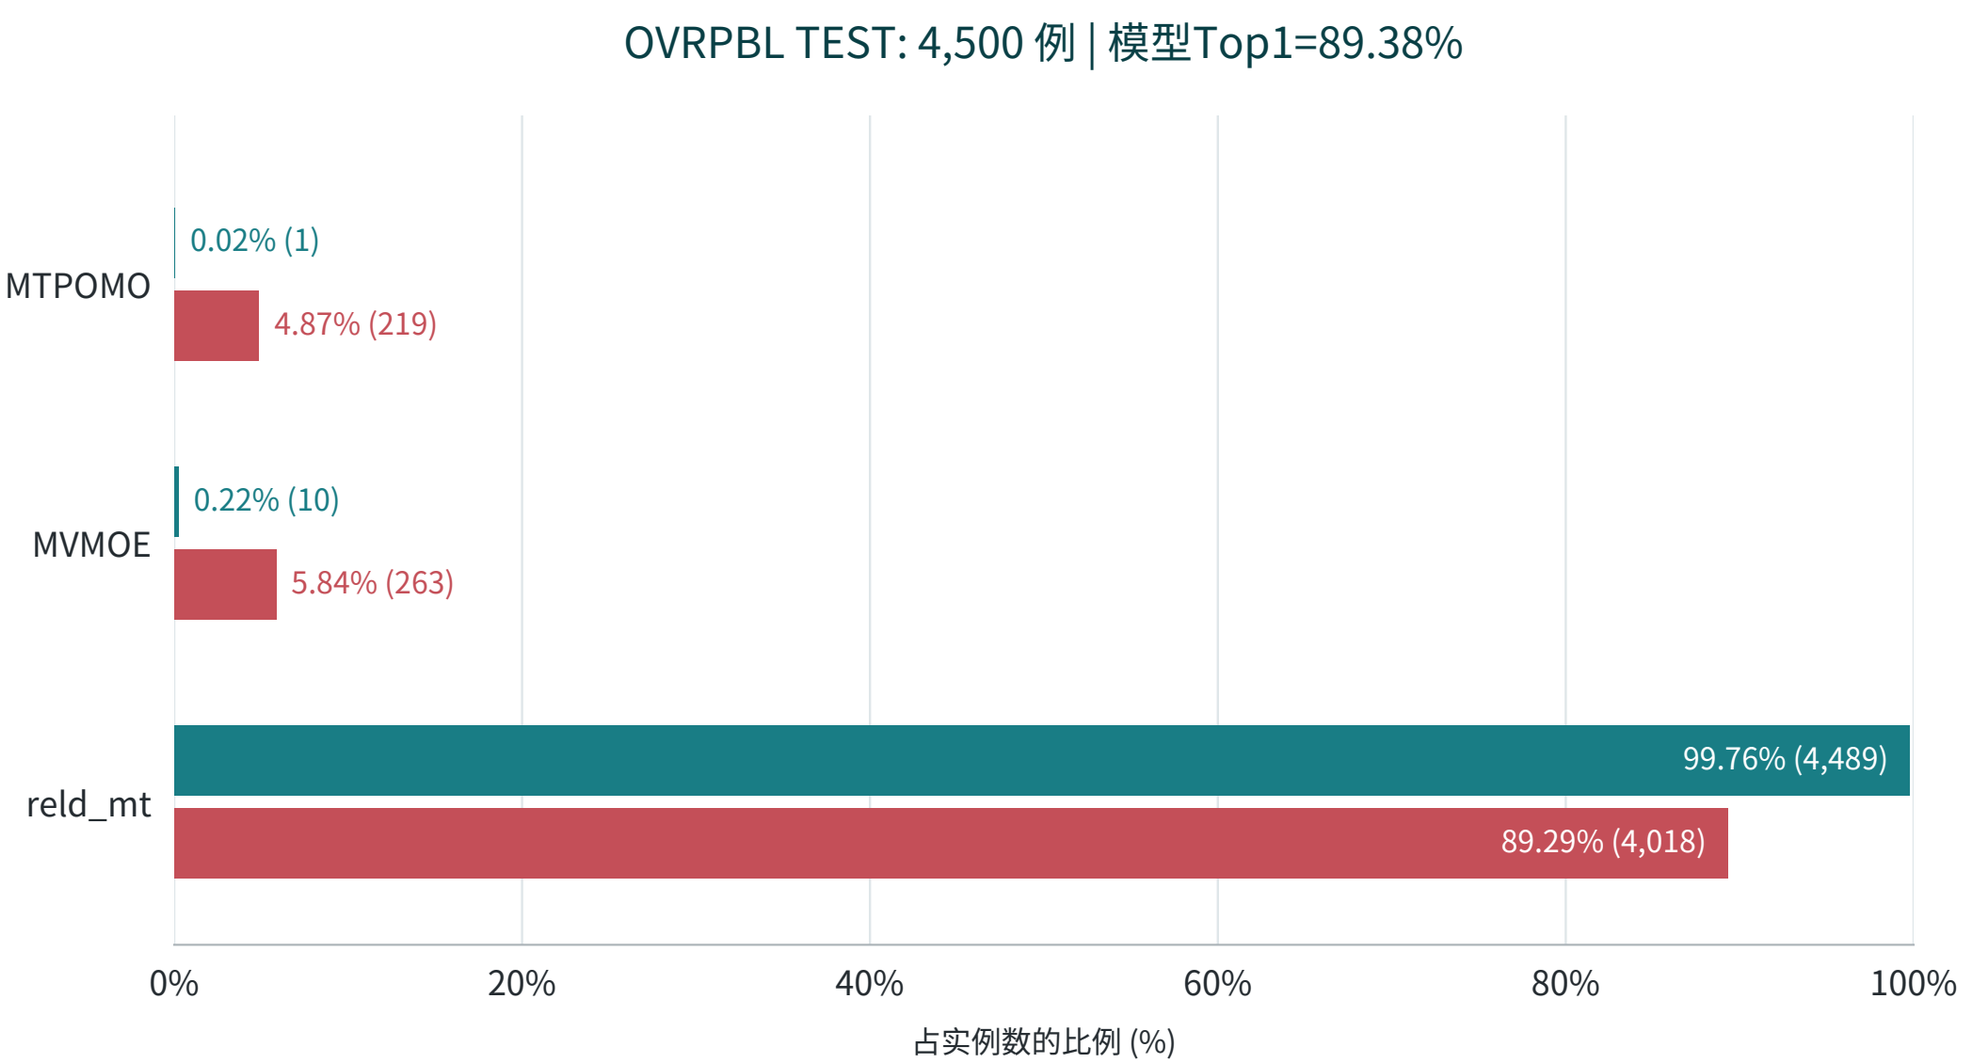

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

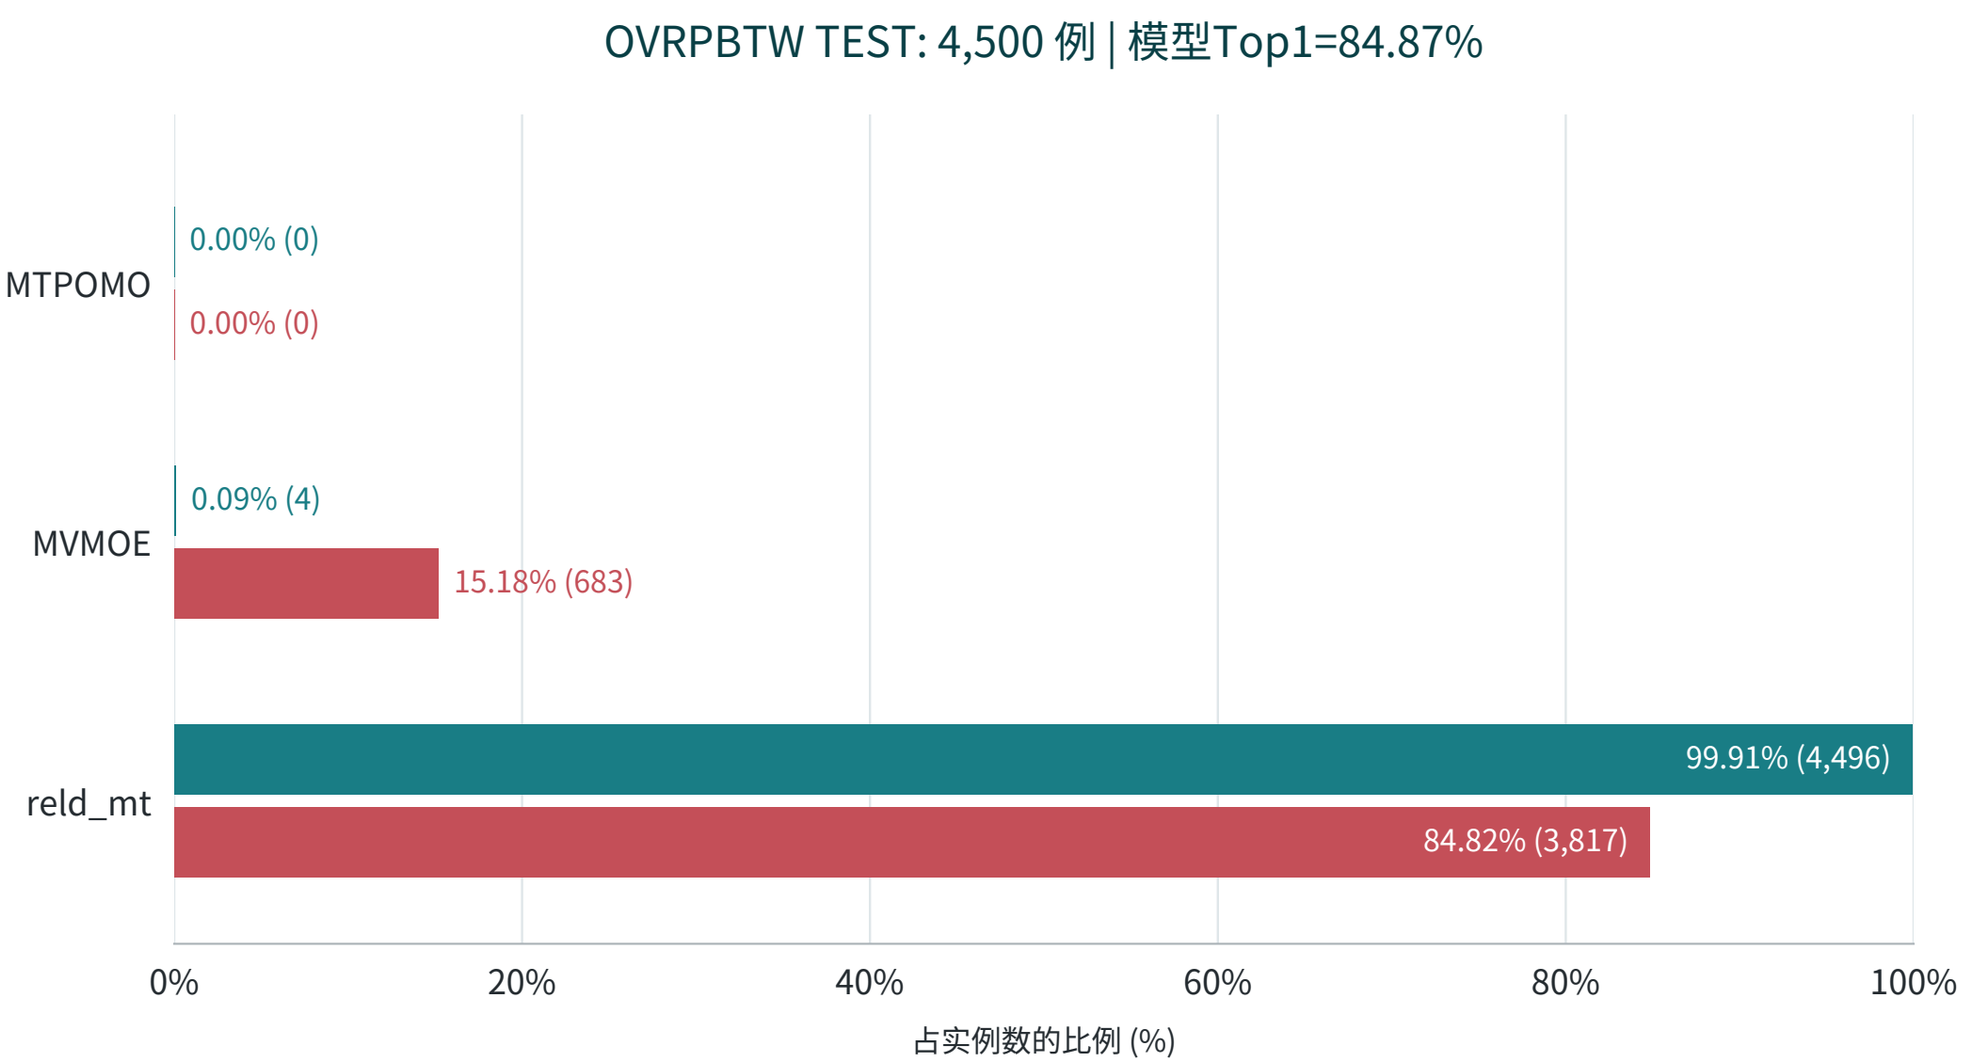

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

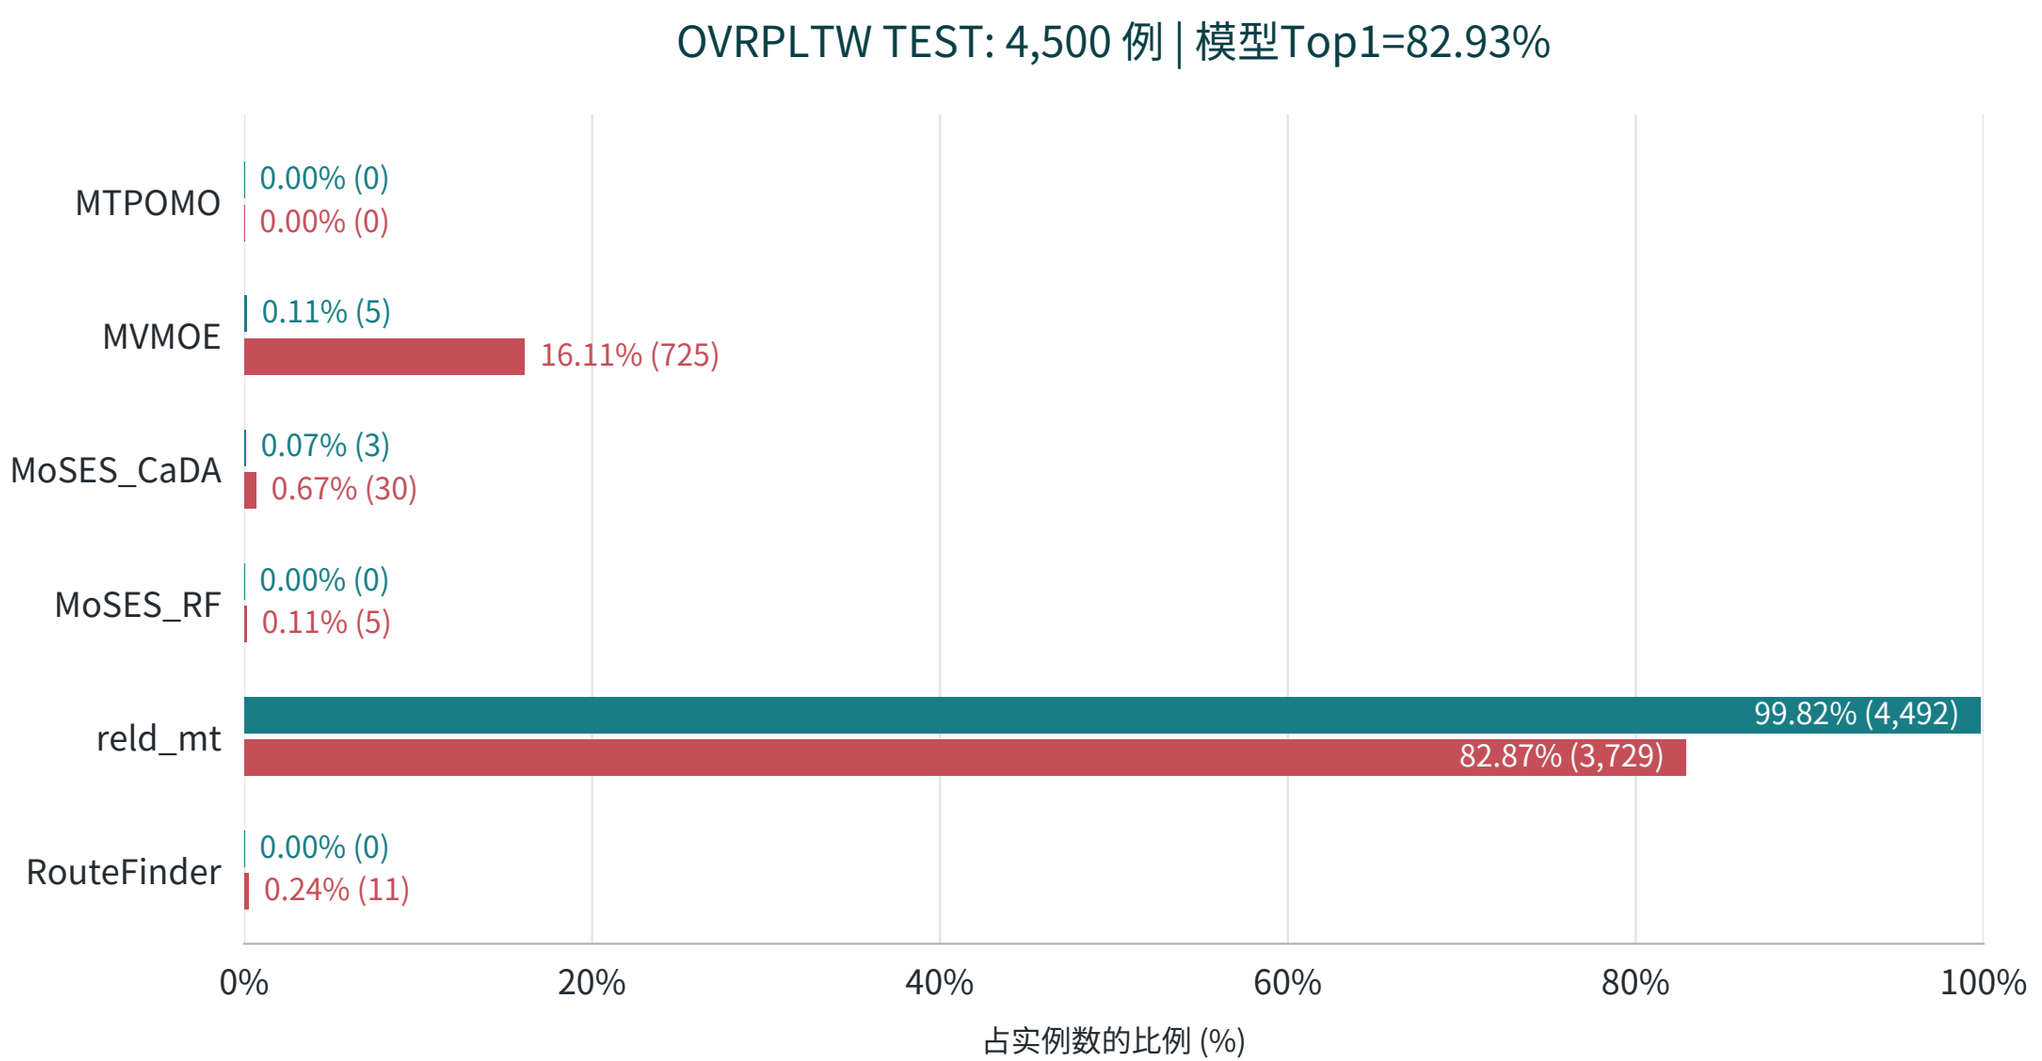

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | VRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

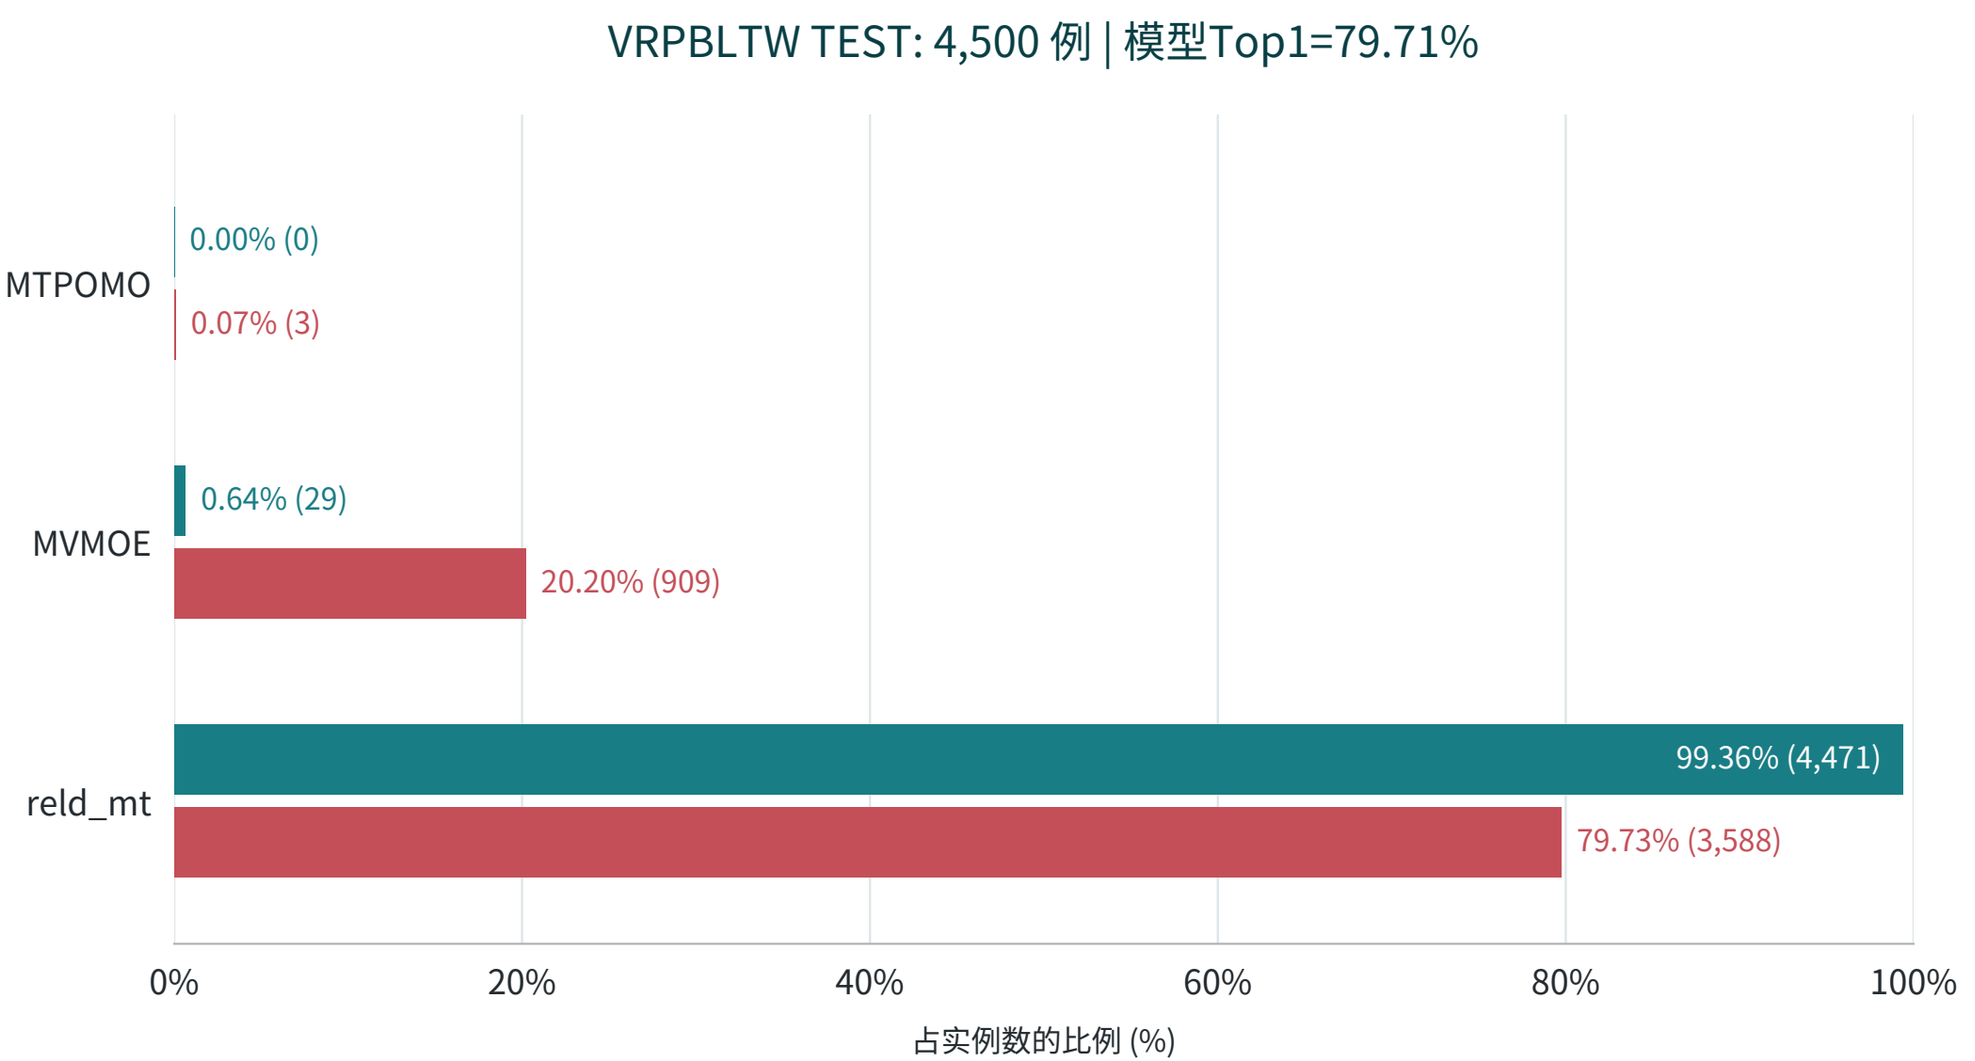

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/C_cost_profile | OVRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 fb9fd6437cb9459b

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

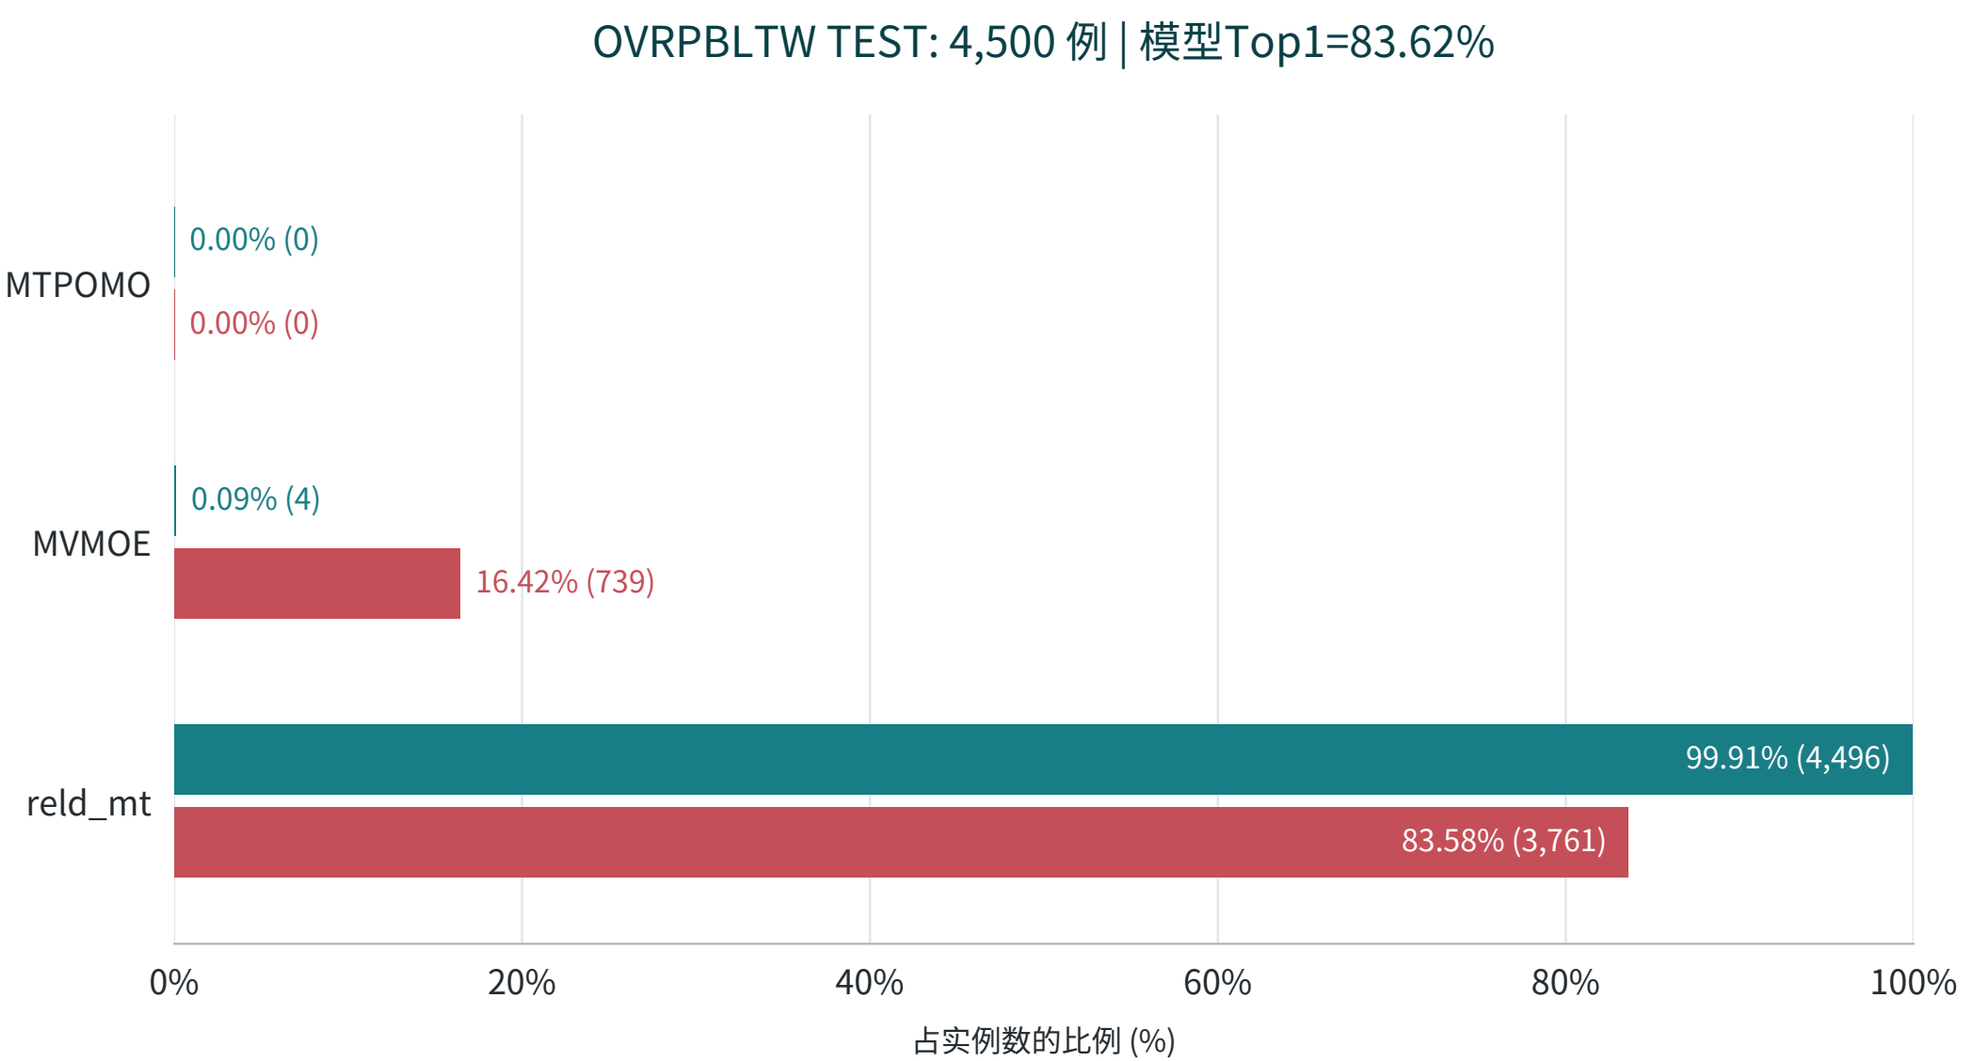

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R85/C_cost_profile: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.