



# R85/C_cost_profile | Saved Training History

Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.

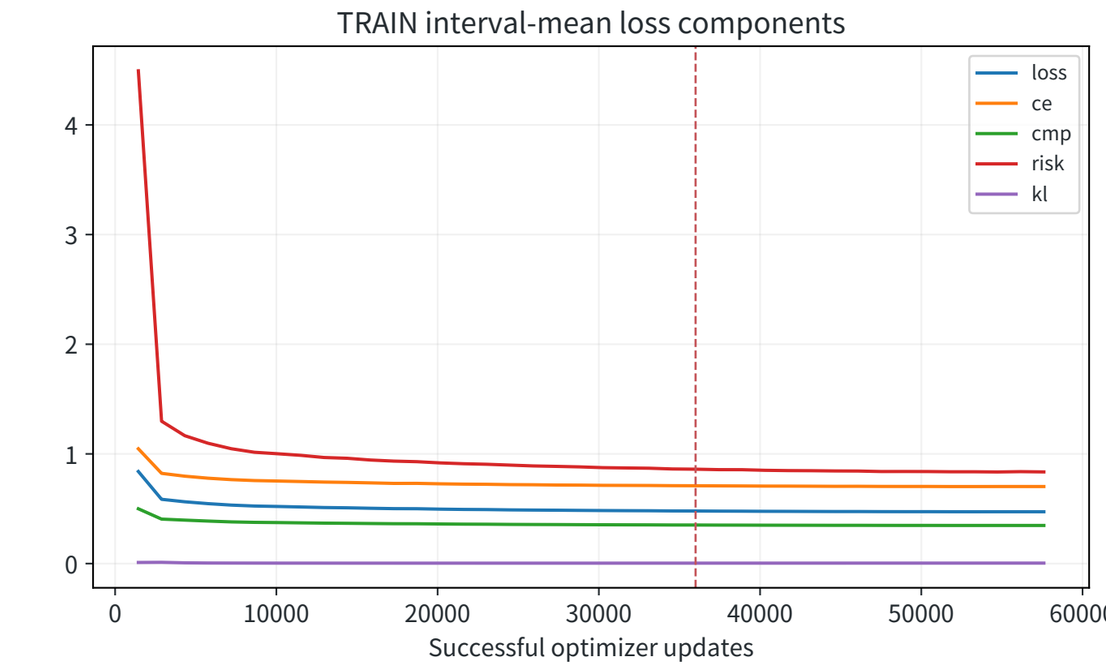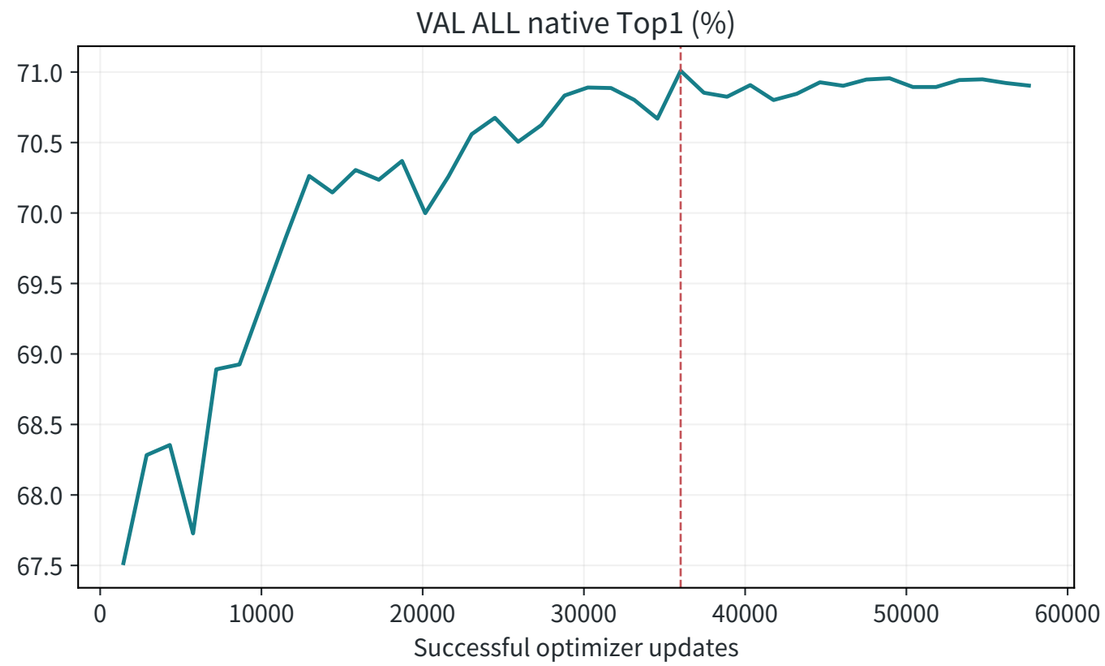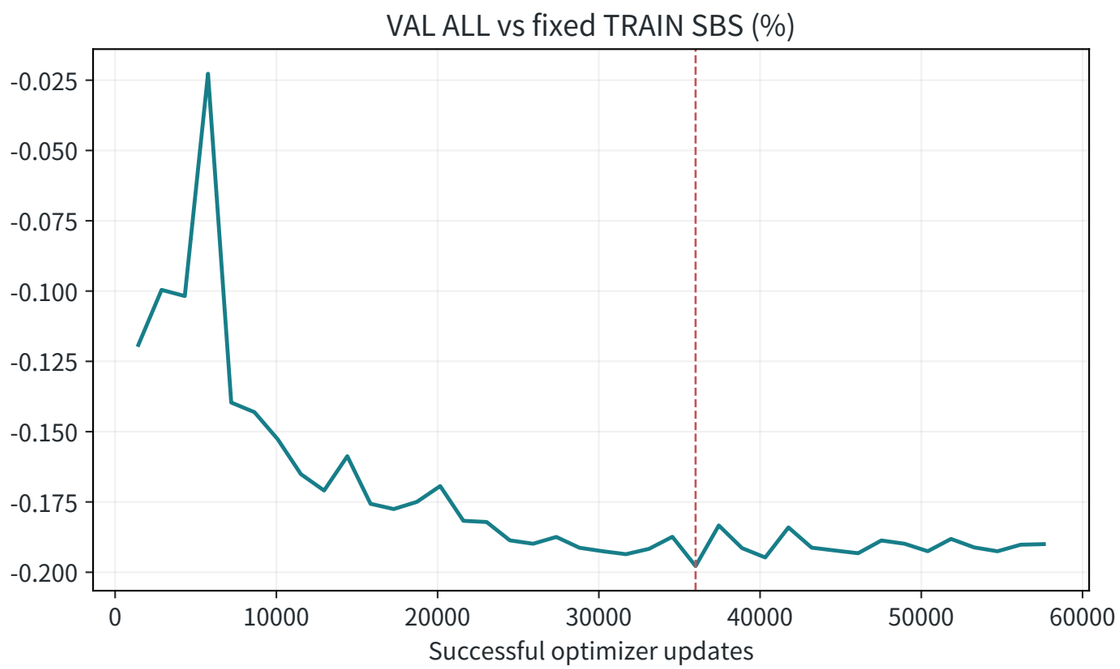

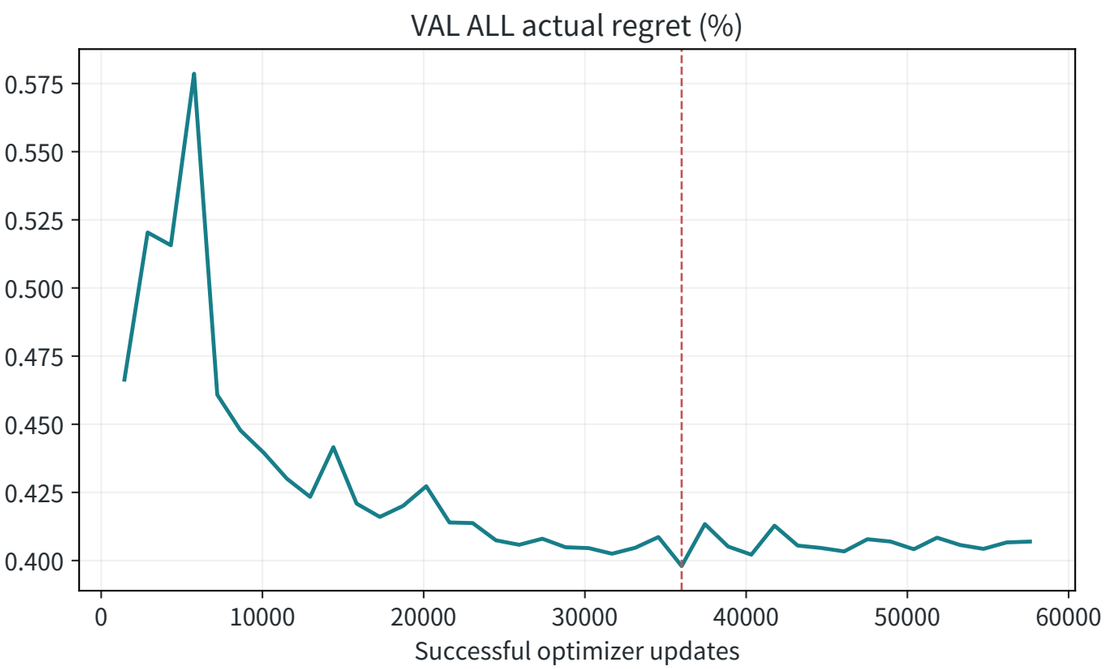



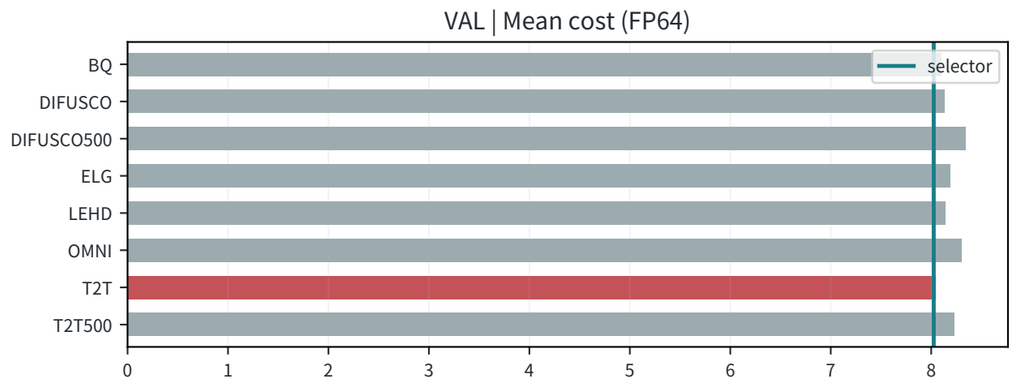



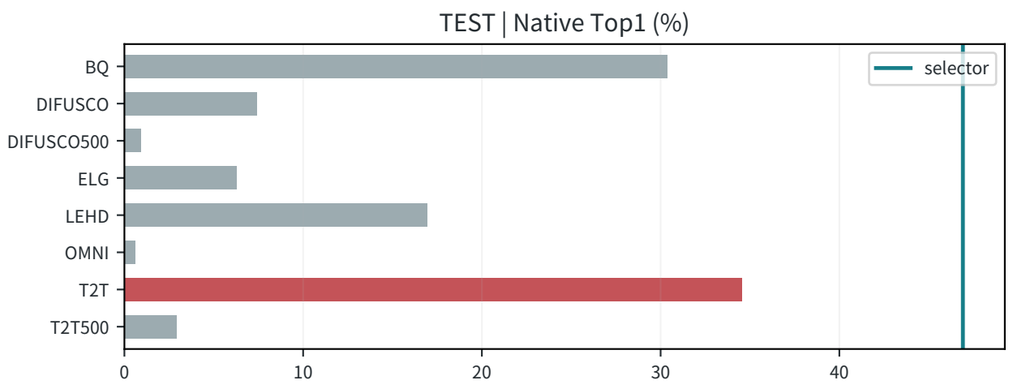



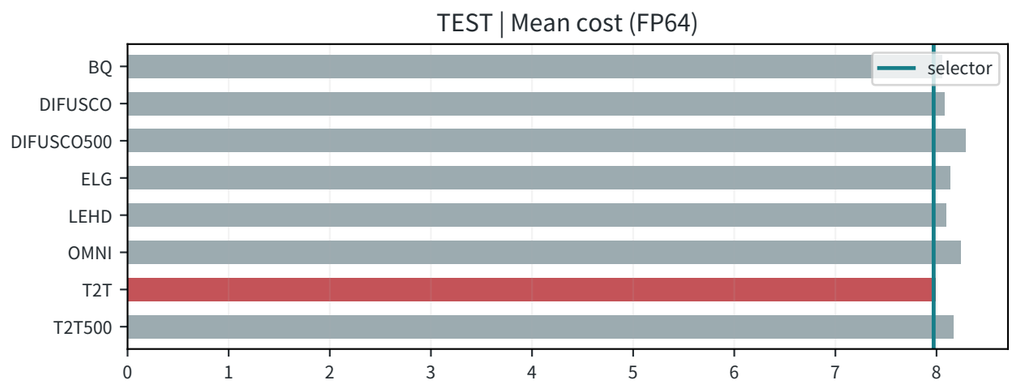
# R85/C_cost_profile | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

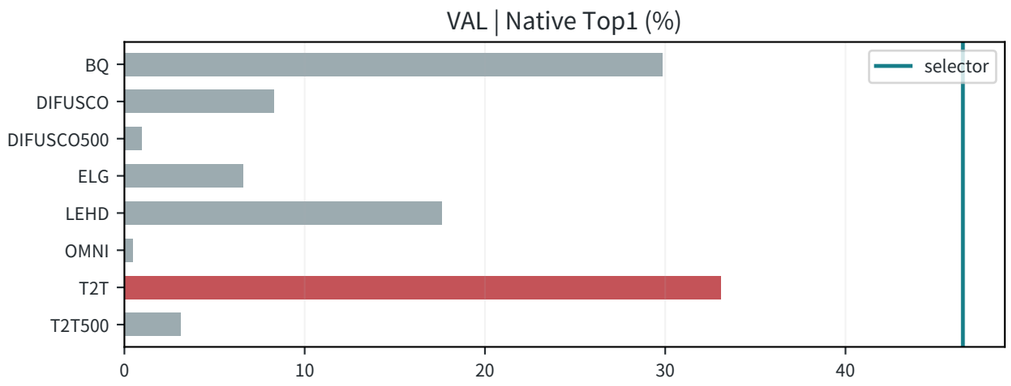






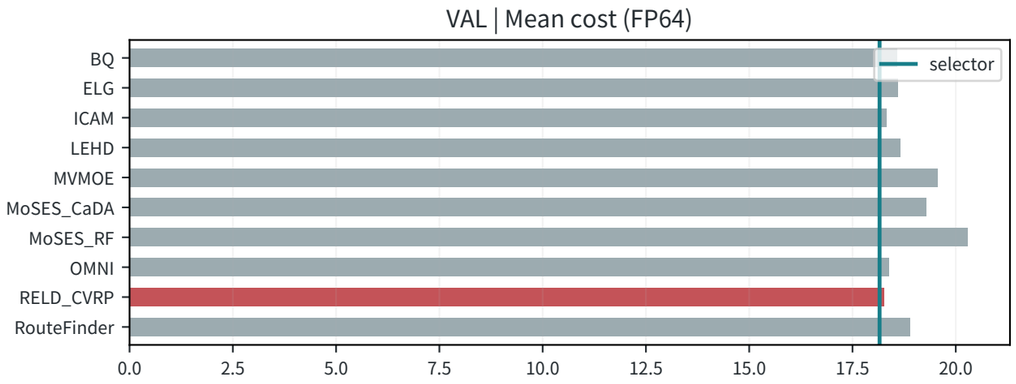



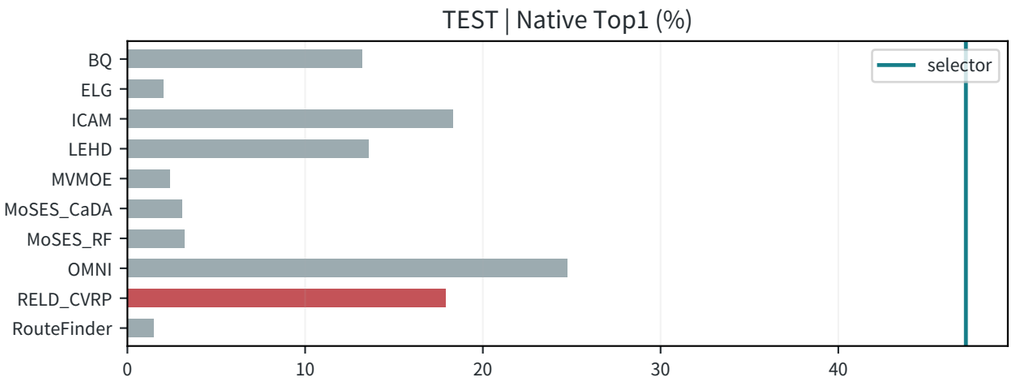


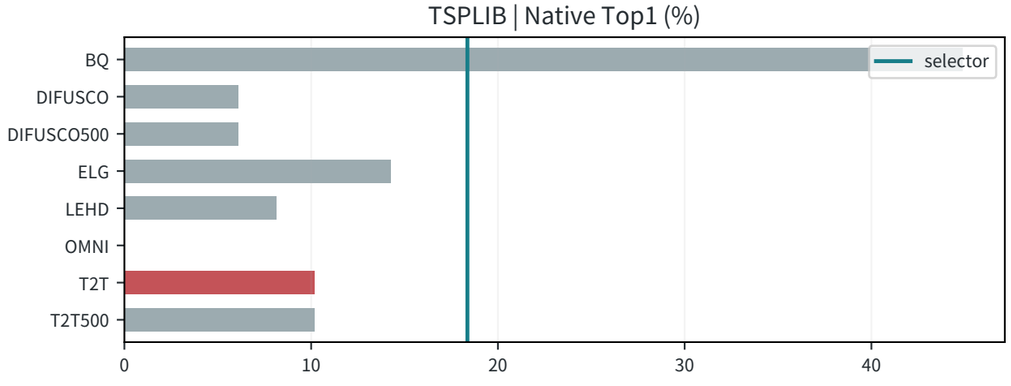
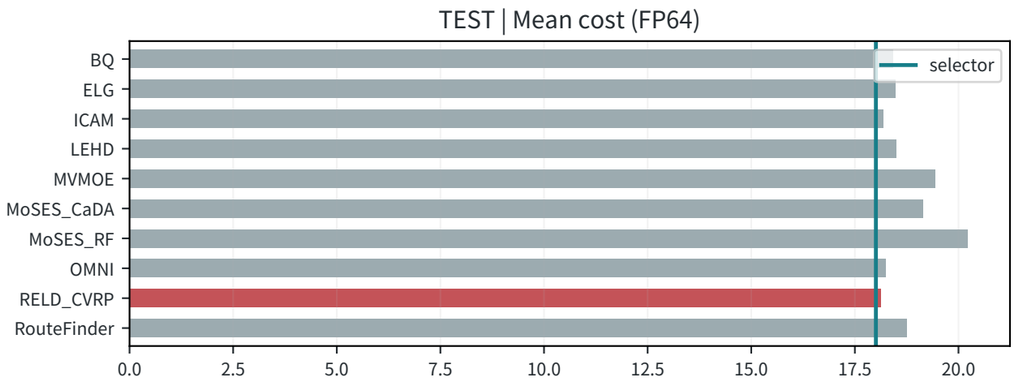
# R85/C_cost_profile | CVRP: Selector vs Single Methods

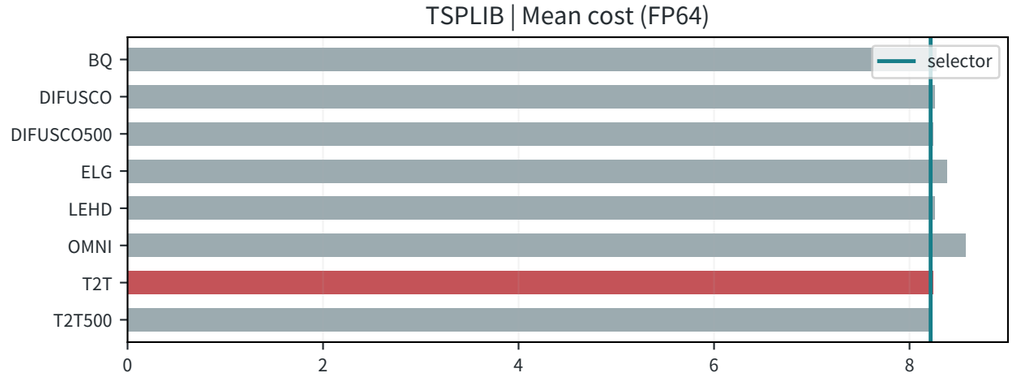
Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

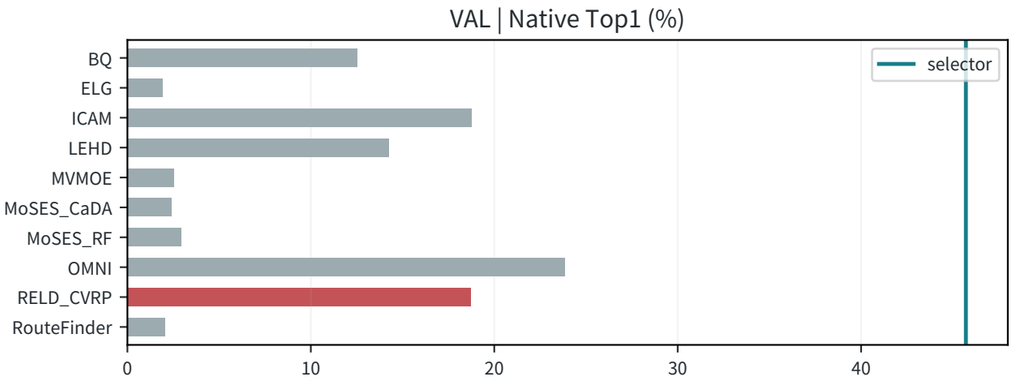






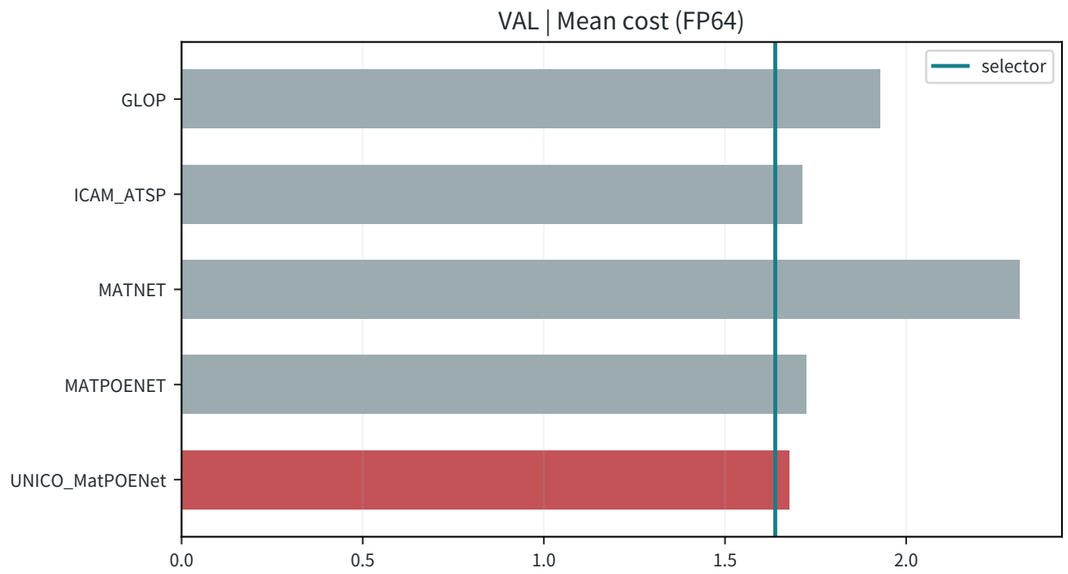



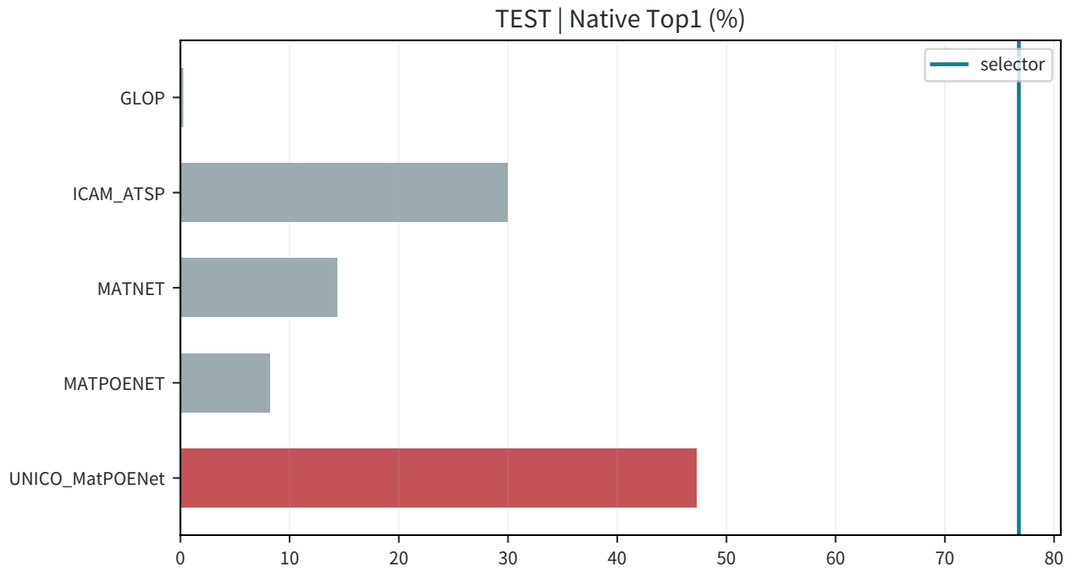


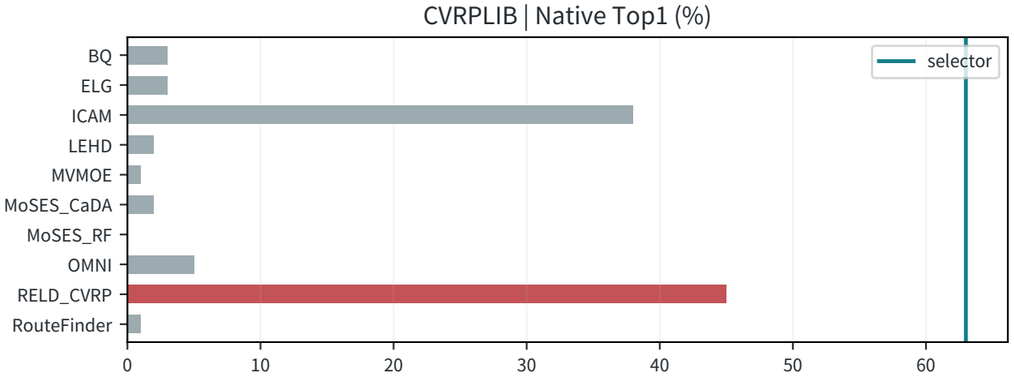
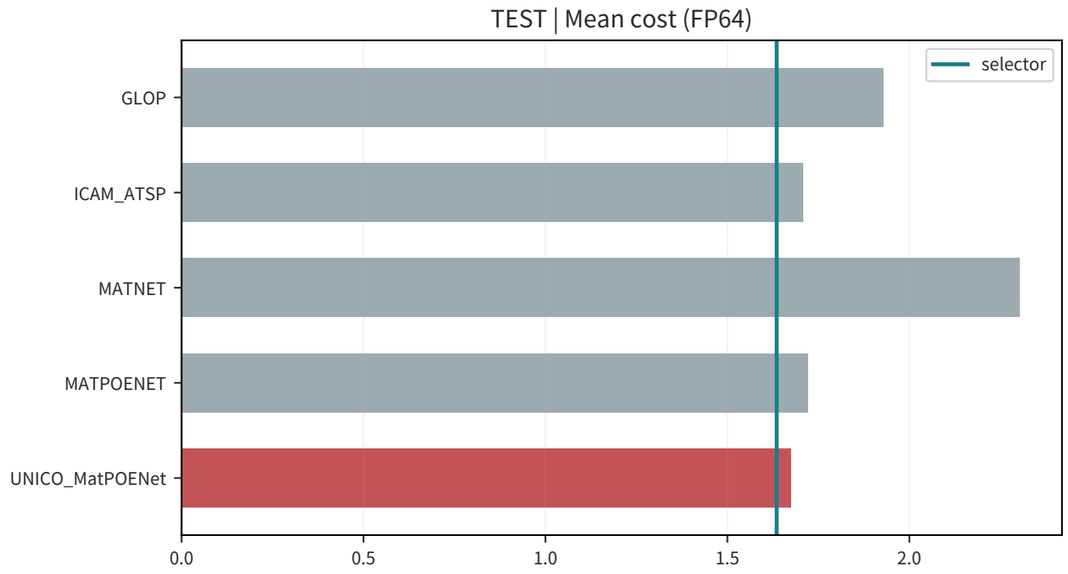
# R85/C_cost_profile | ATSP: Selector vs Single Methods

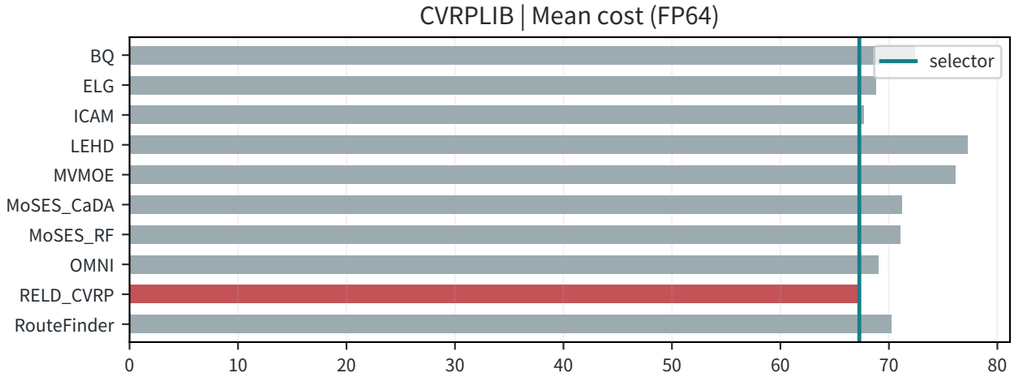Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

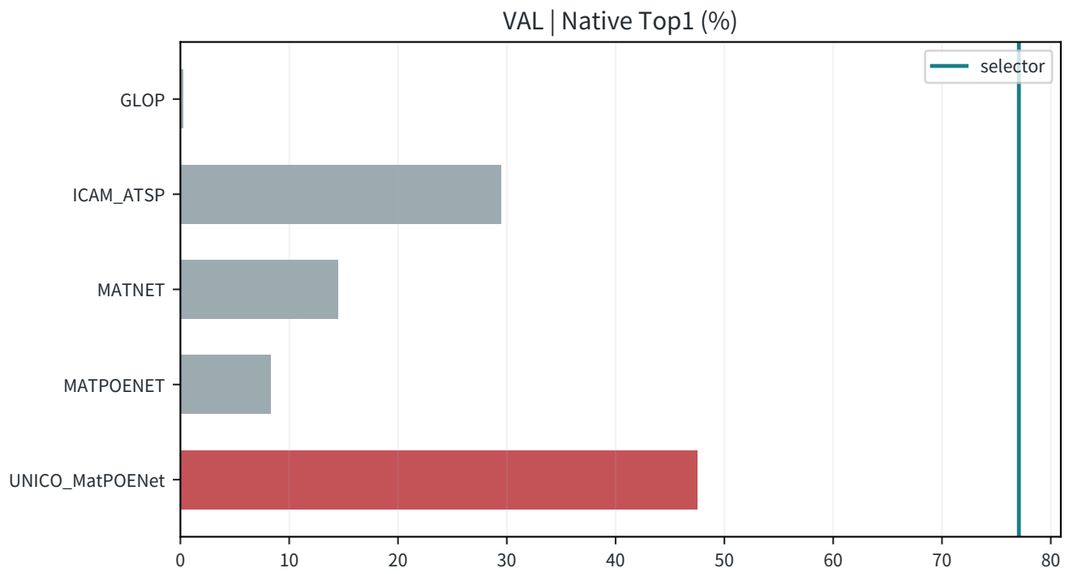





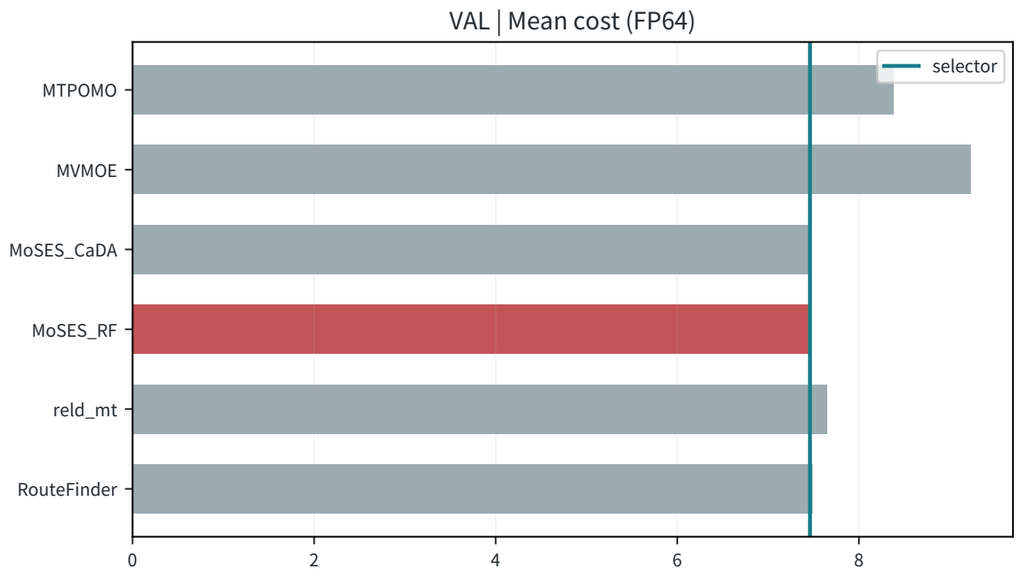



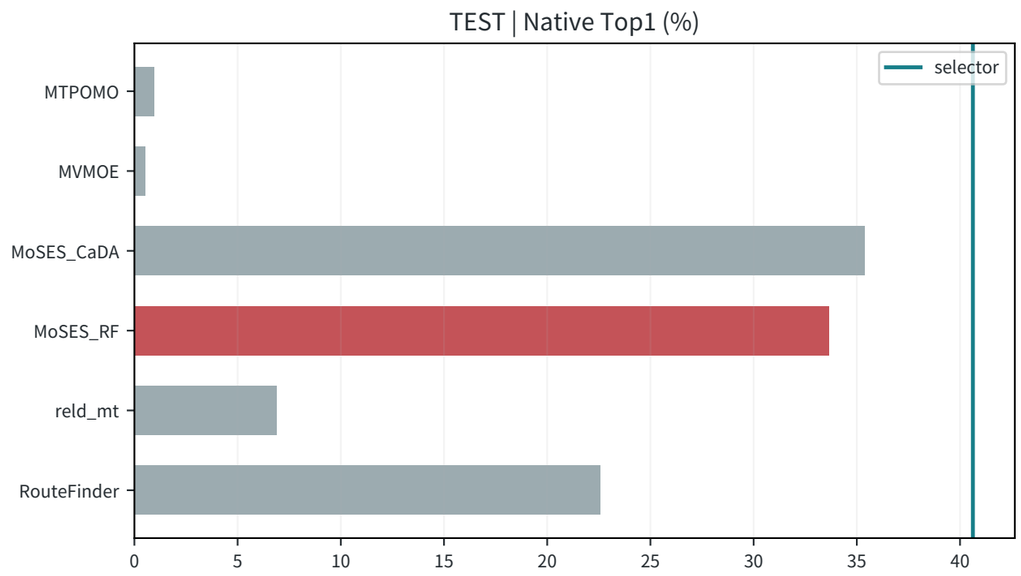



# R85/C_cost_profile | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

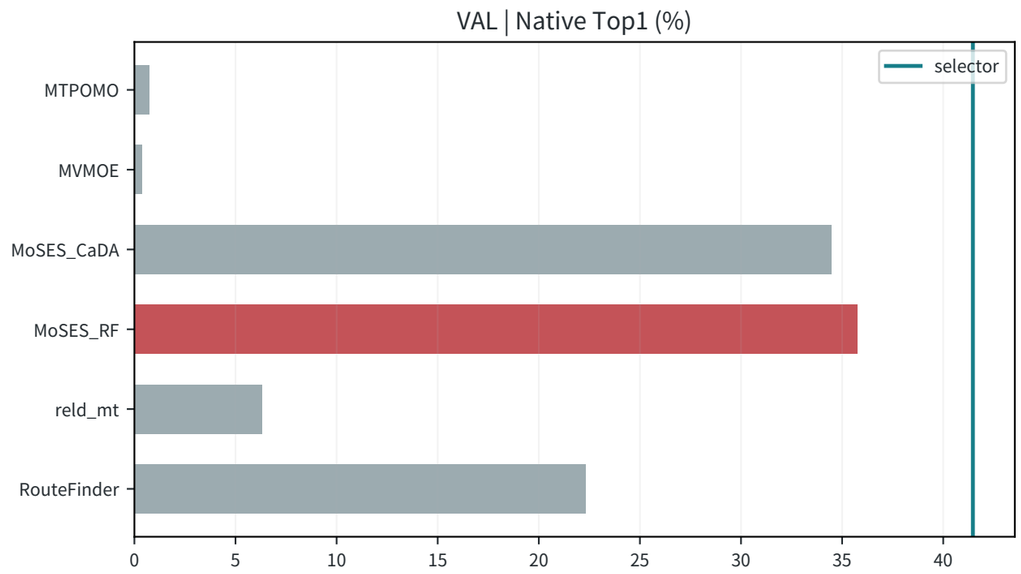





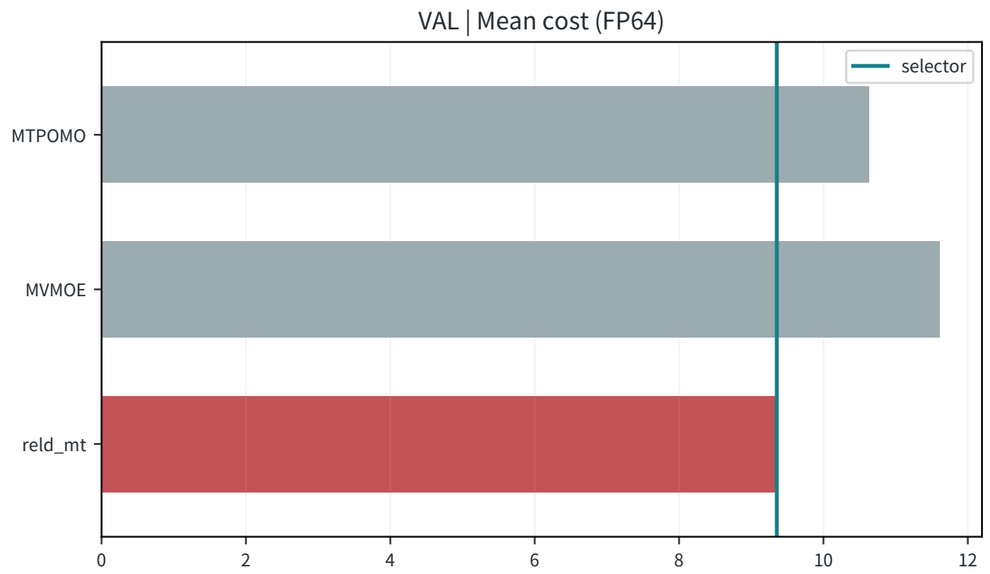



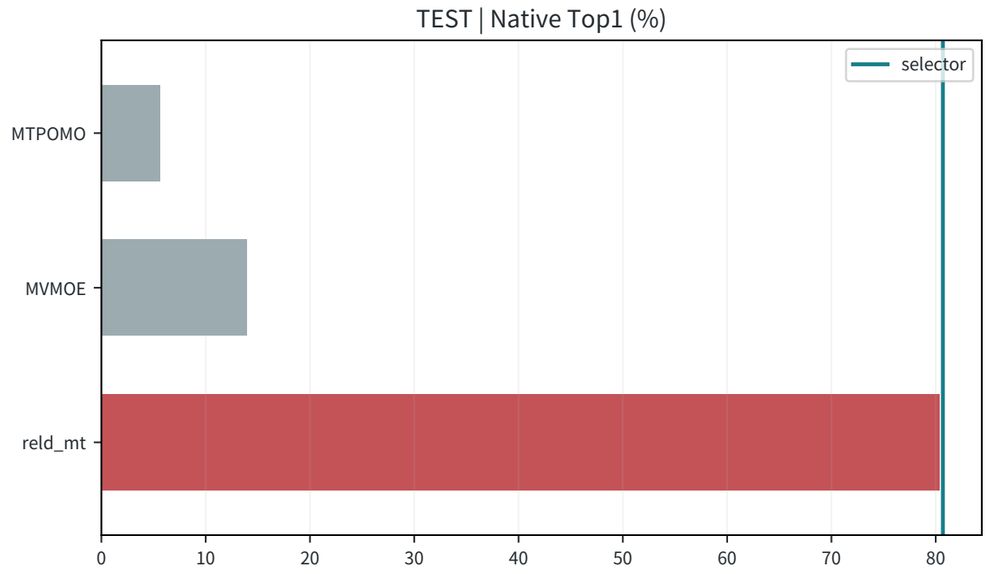




# R85/C_cost_profile | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

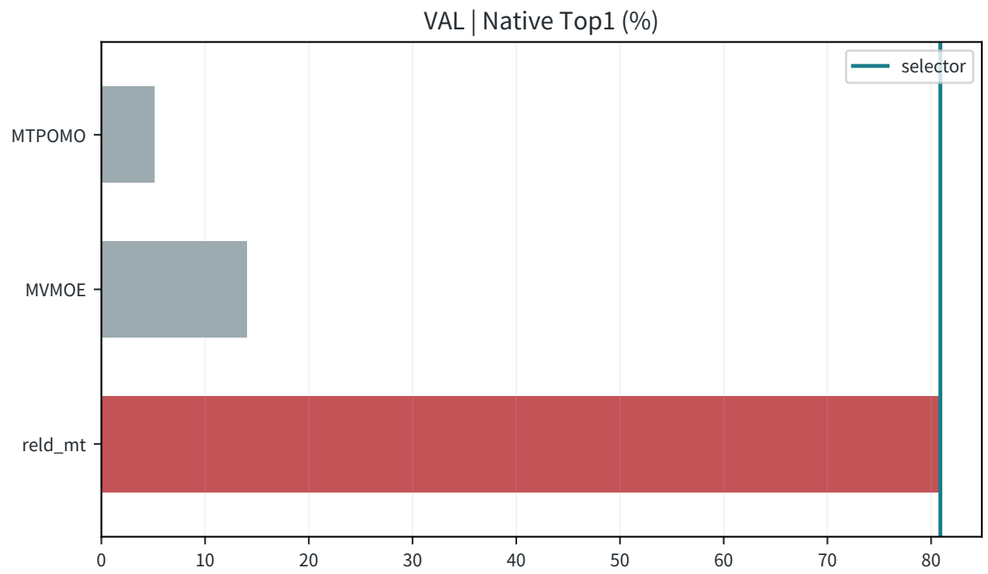





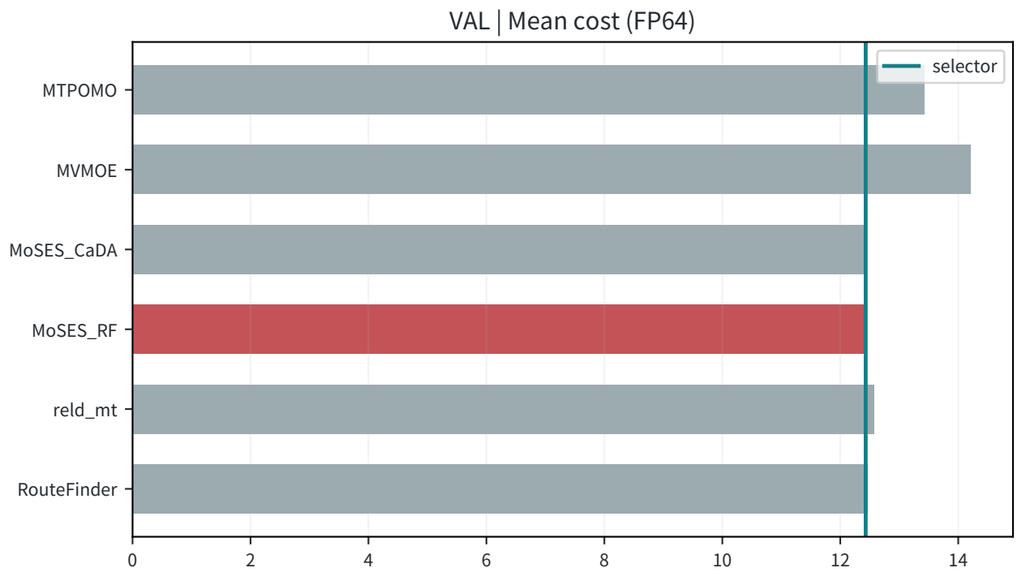


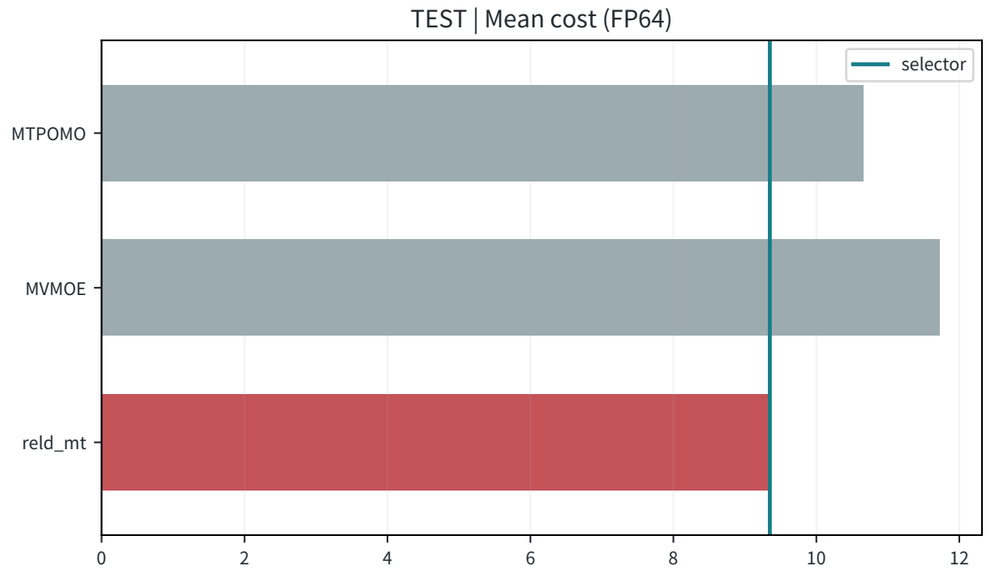
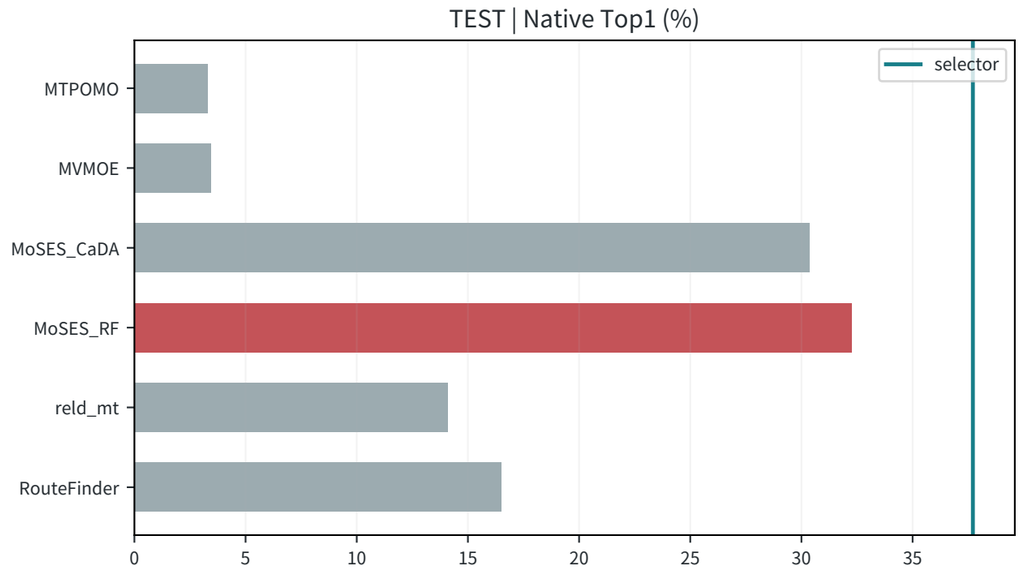



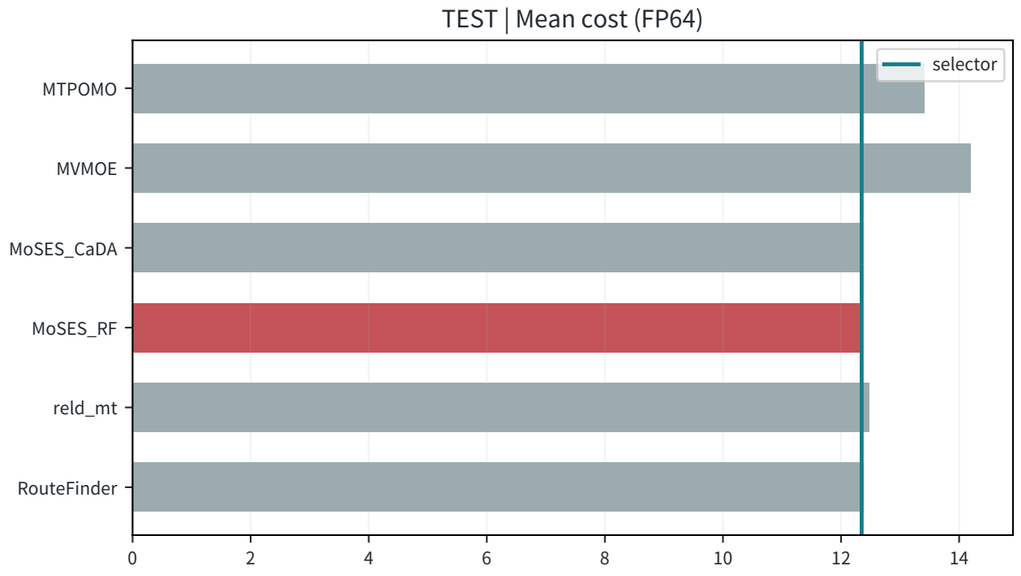
# R85/C_cost_profile | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

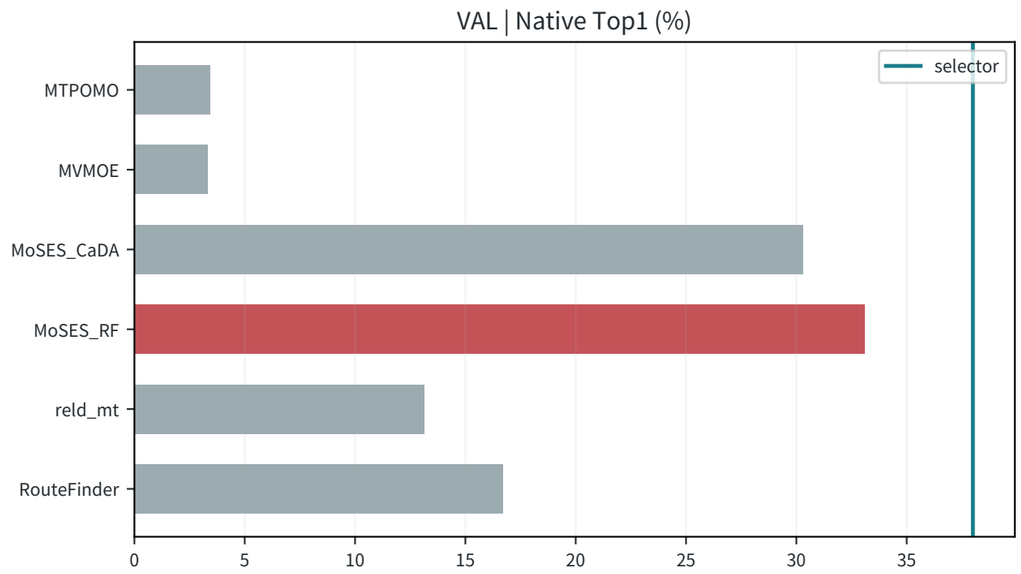





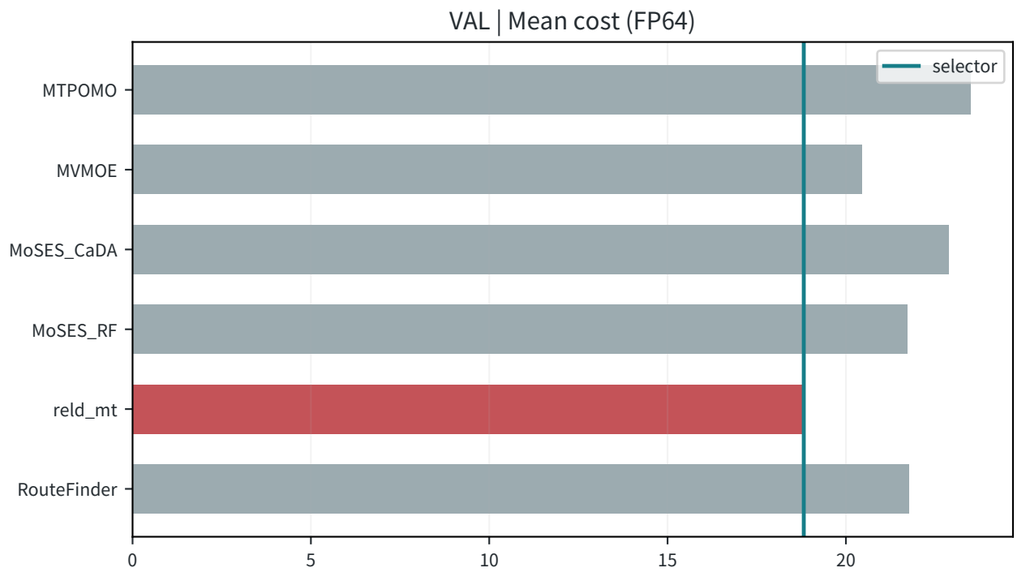



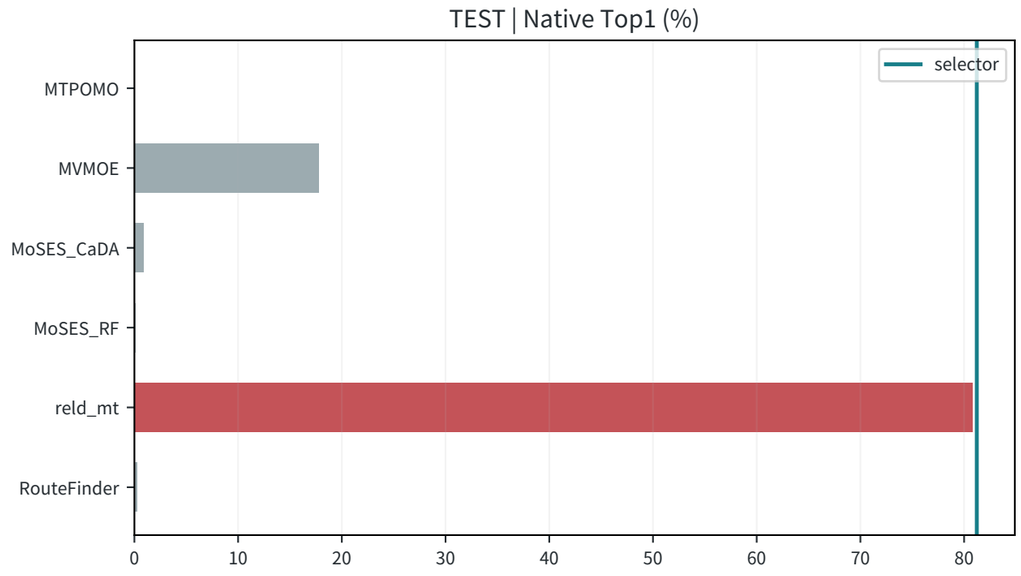



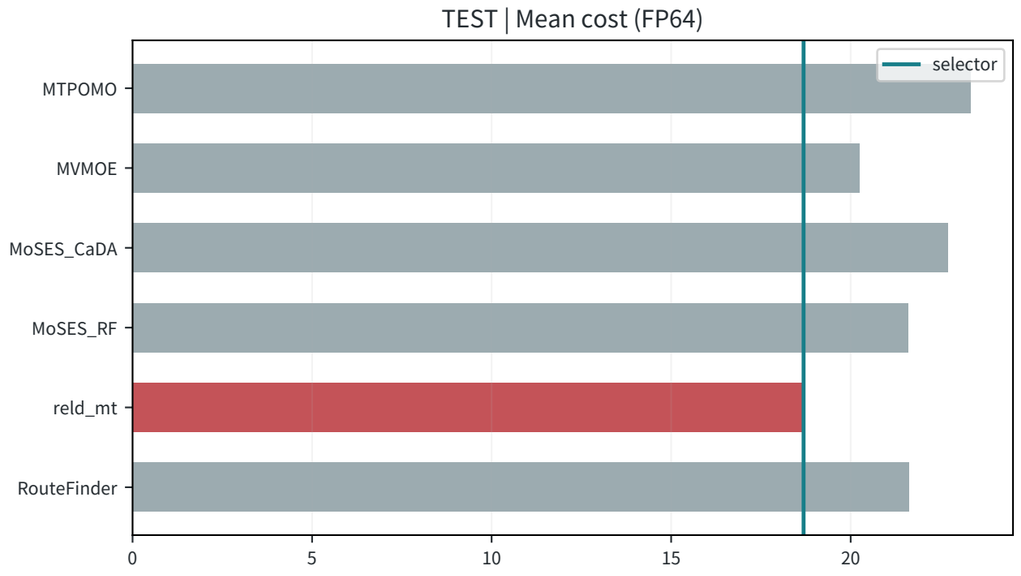
# R85/C_cost_profile | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

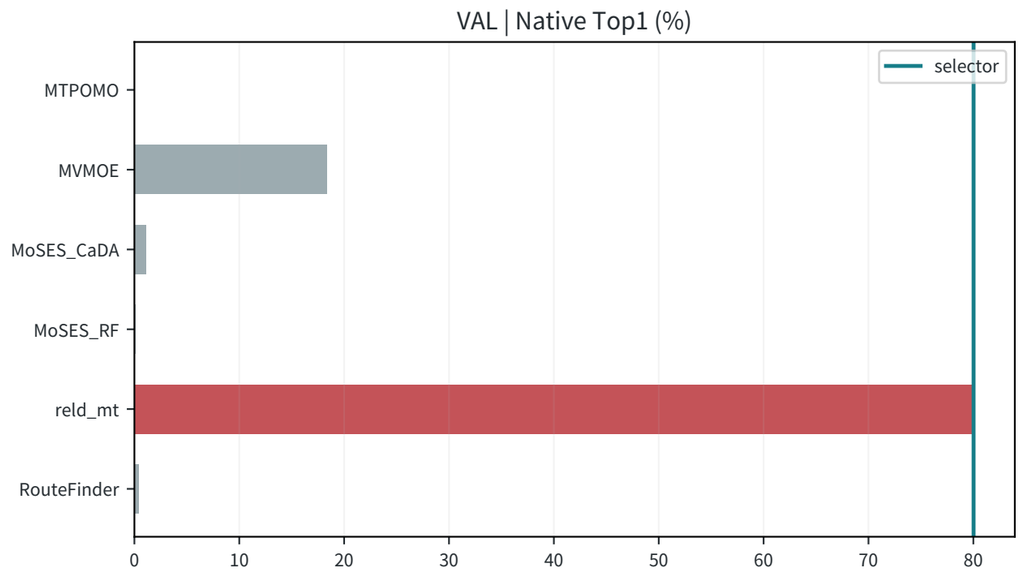





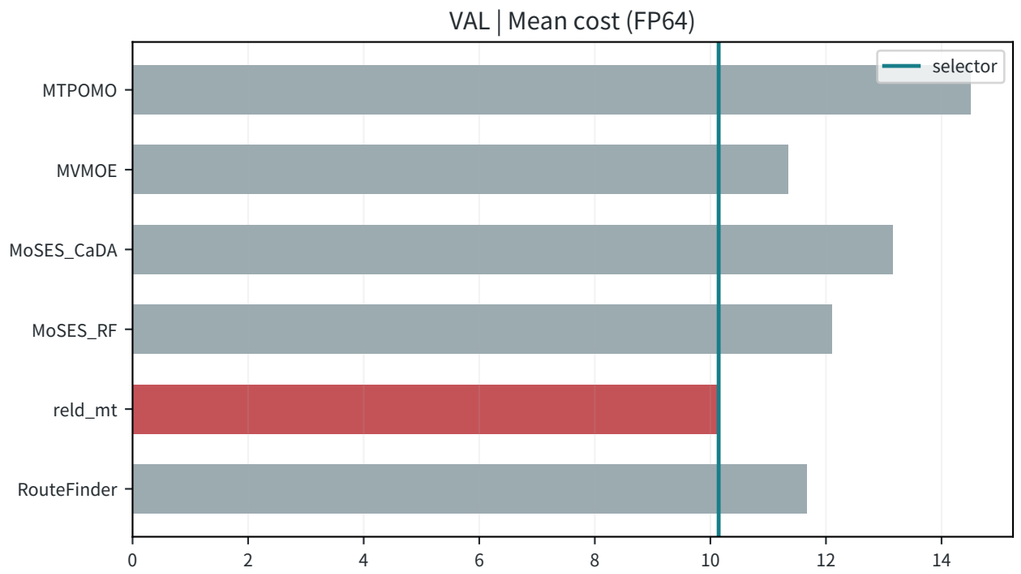



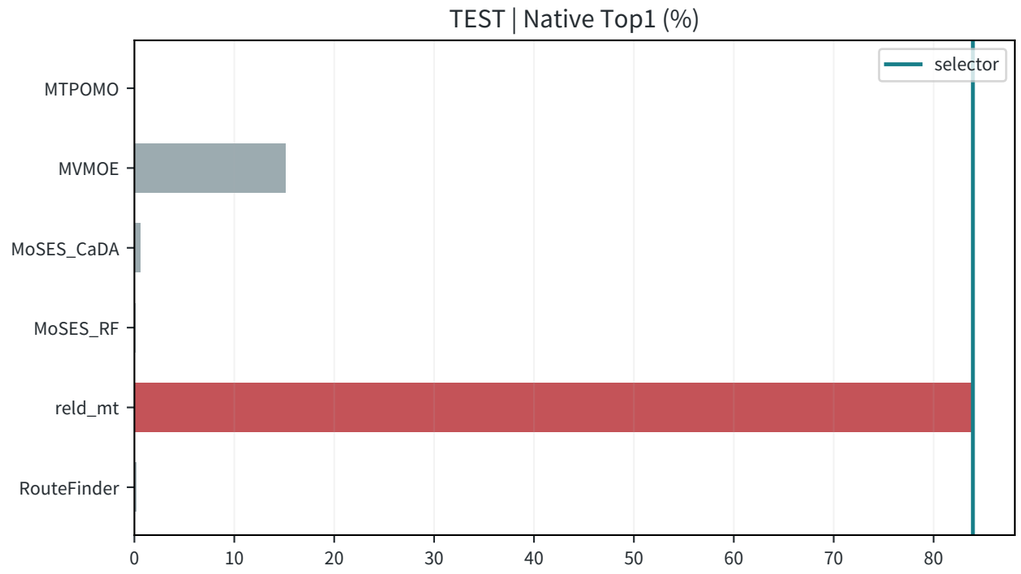



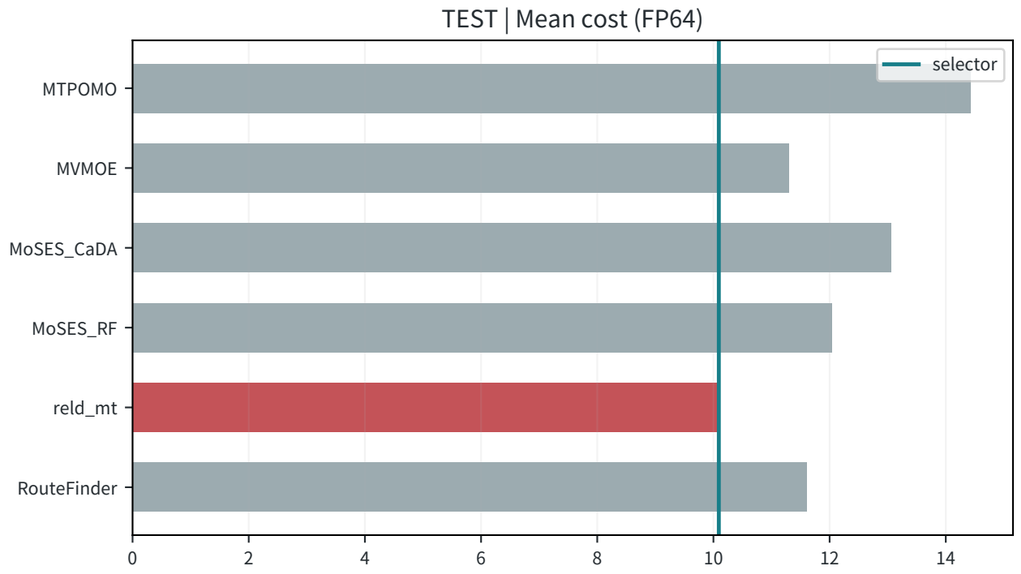
# R85/C_cost_profile | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

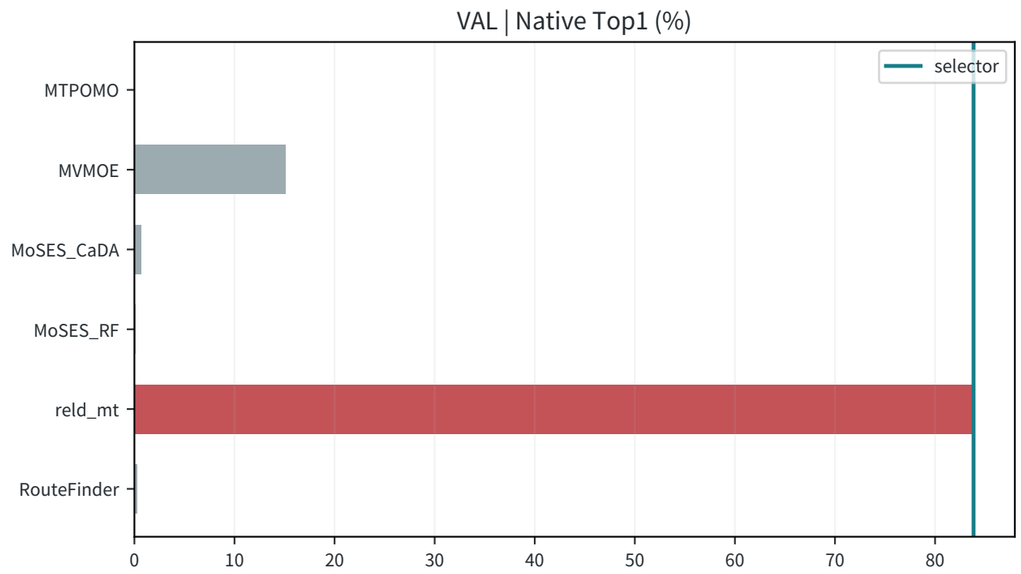





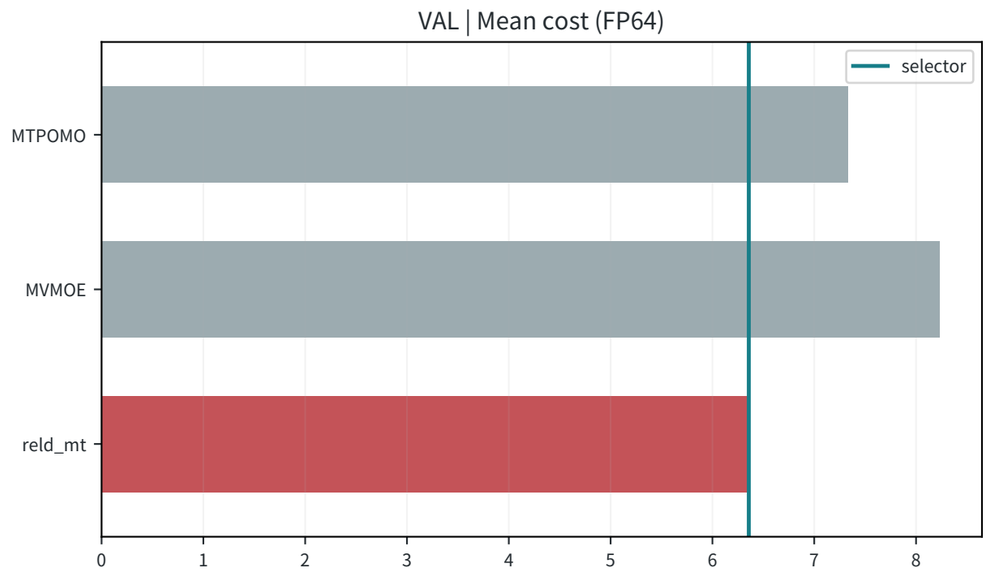



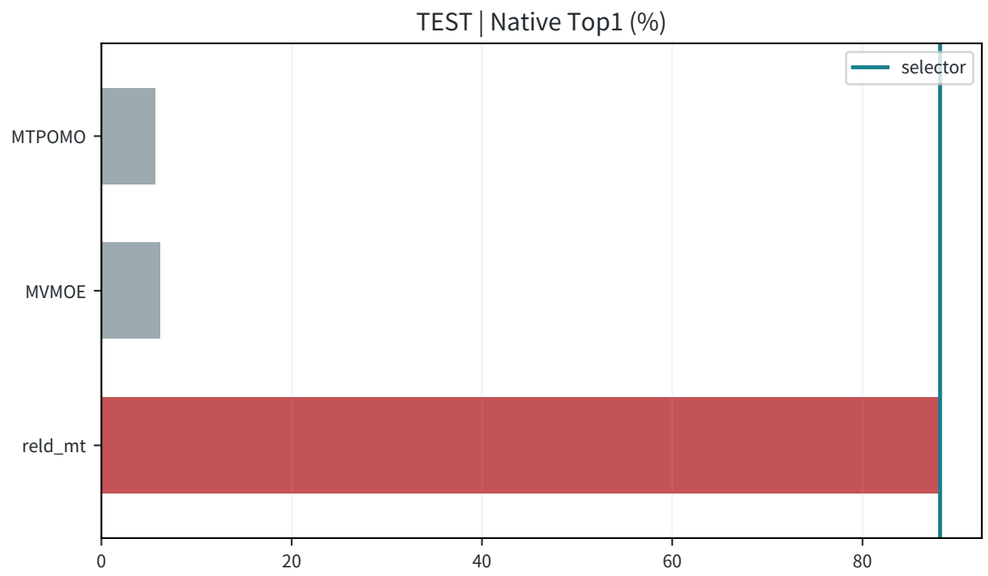



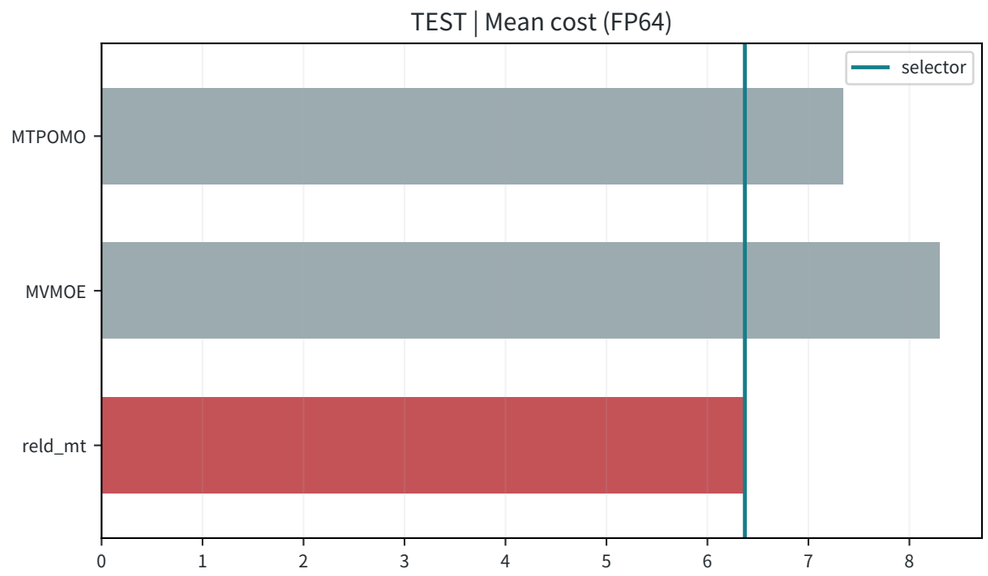
# R85/C_cost_profile | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

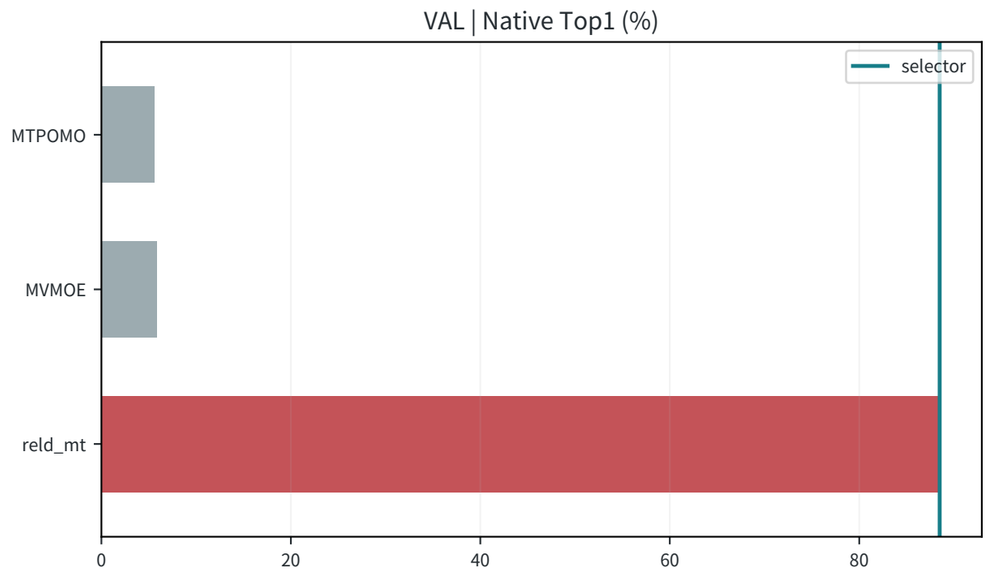





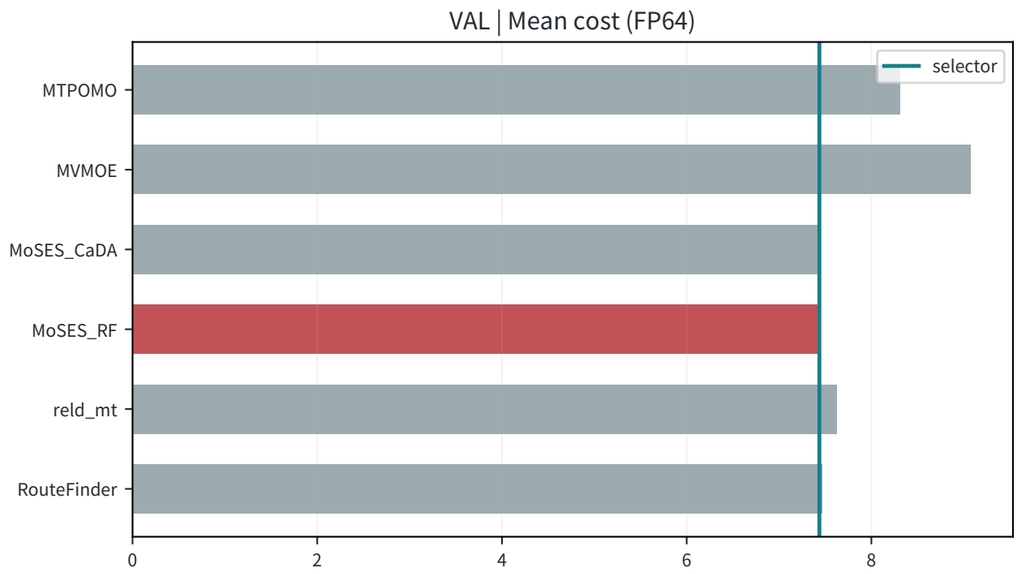



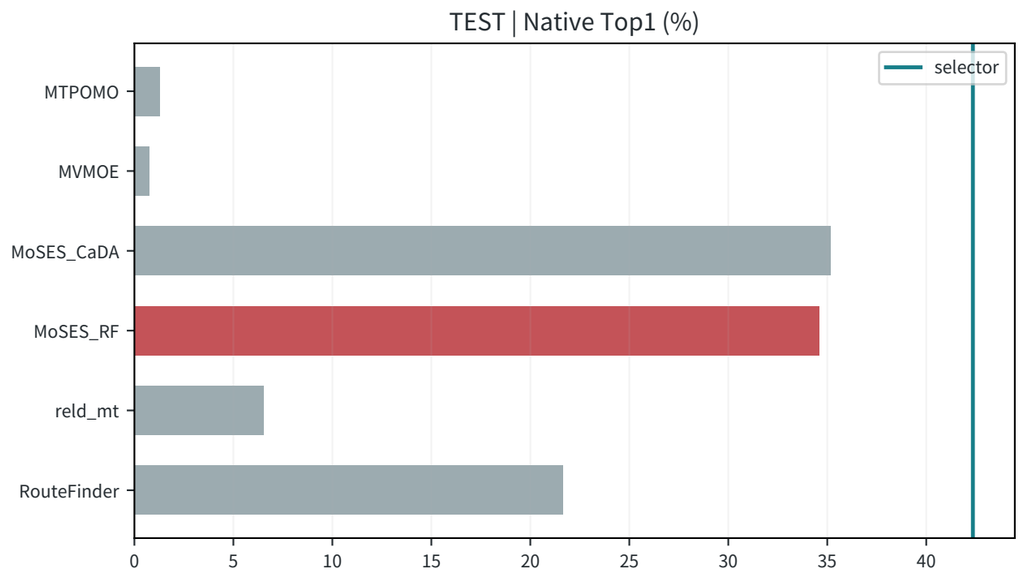



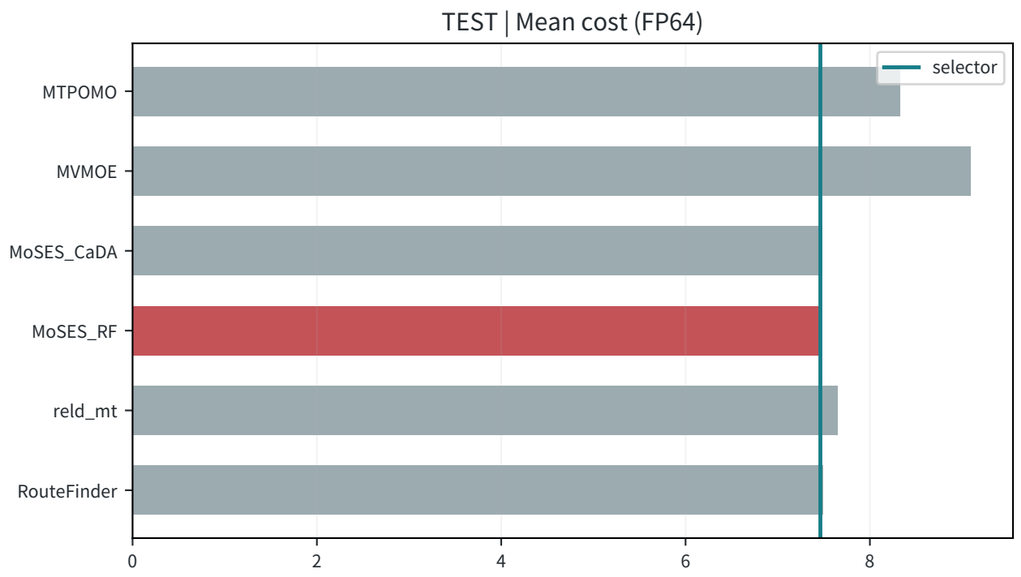
# R85/C_cost_profile | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

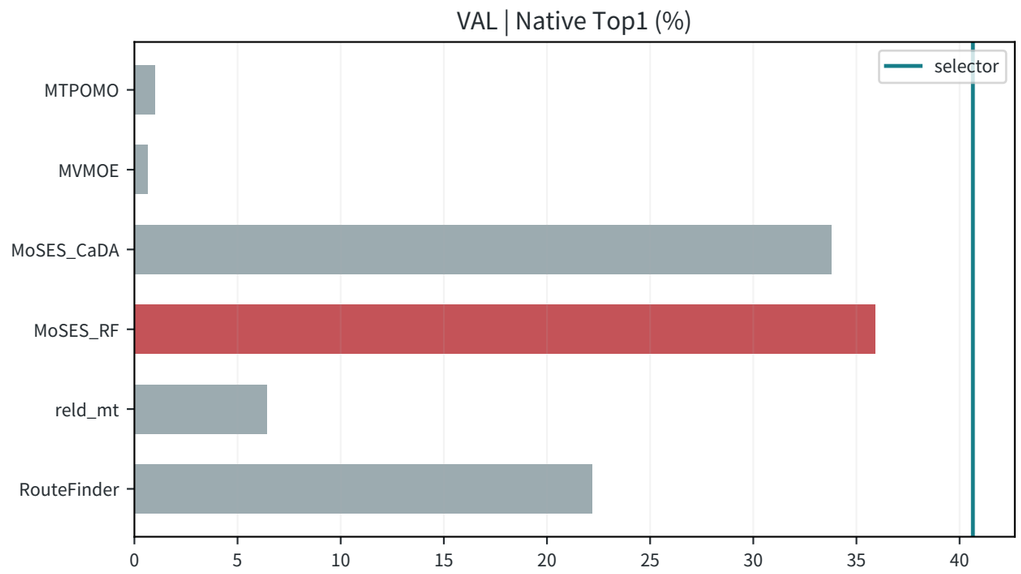





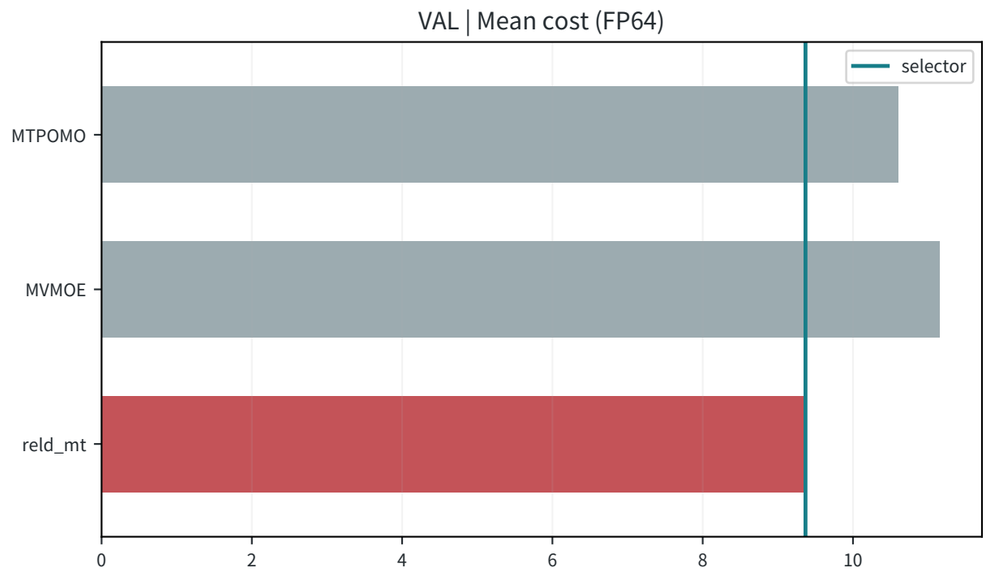



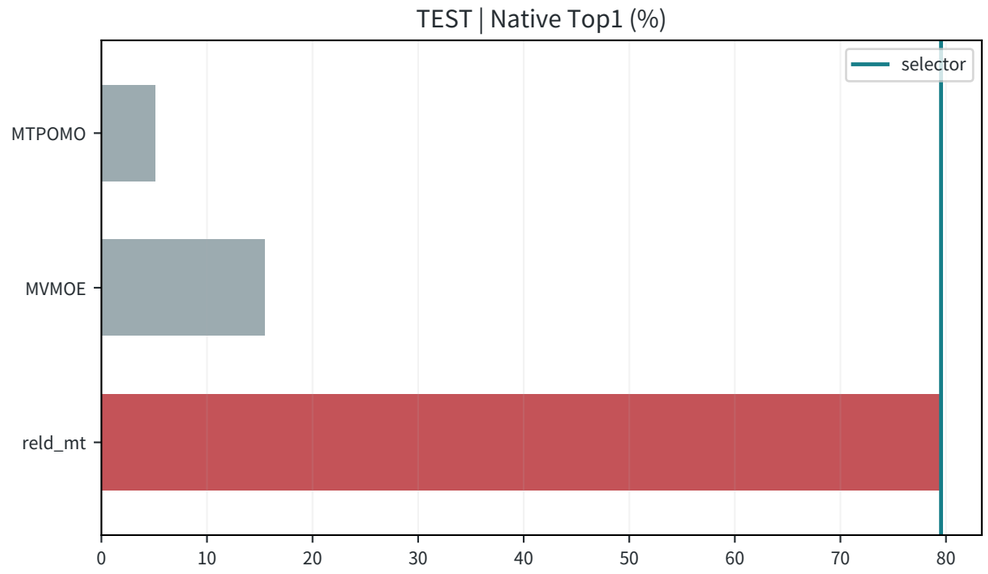



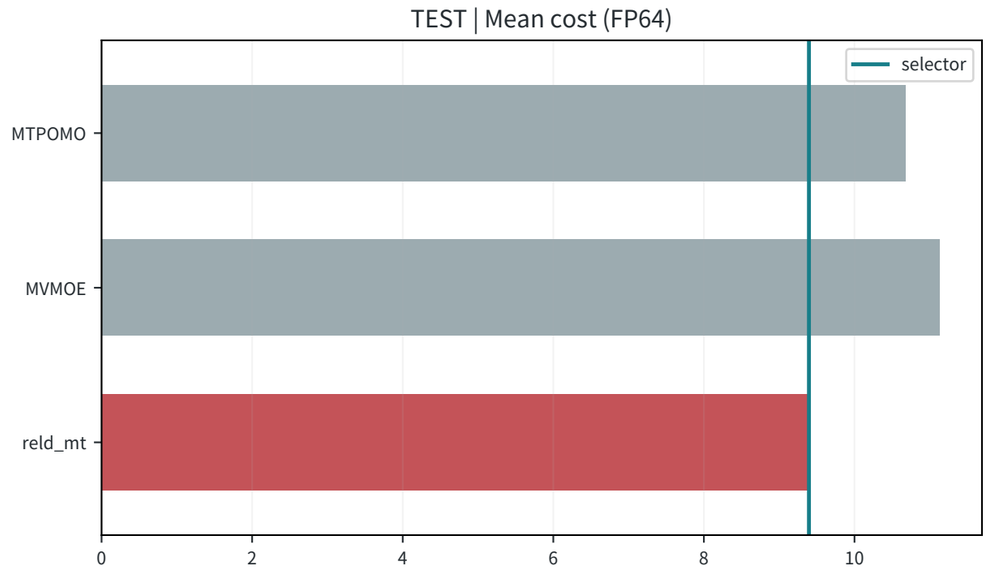
# R85/C_cost_profile | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

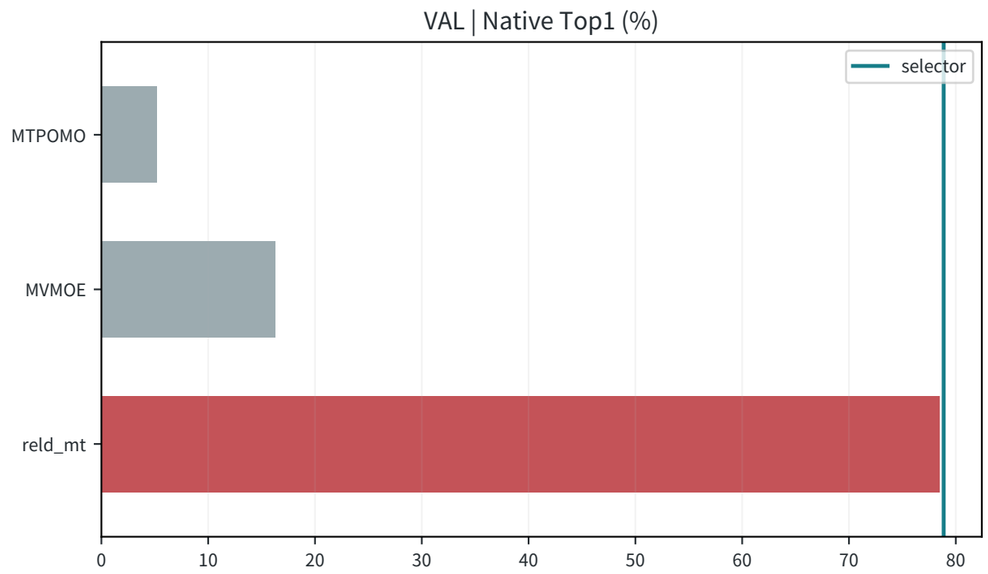





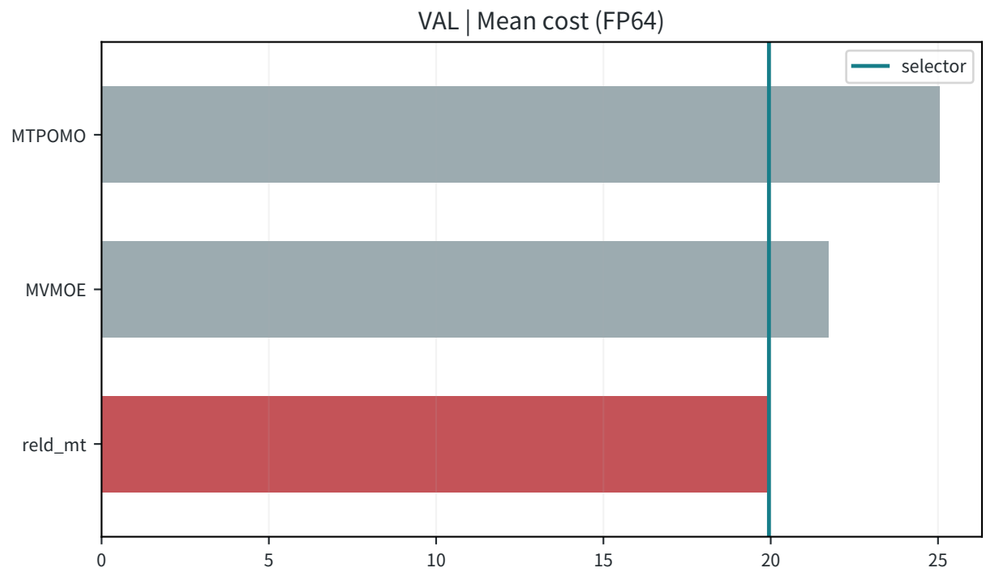



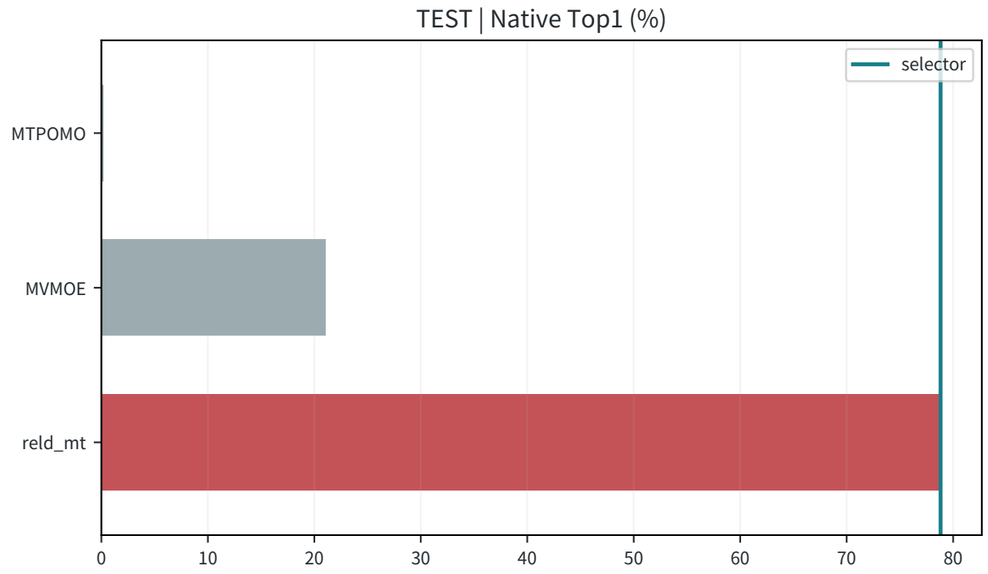



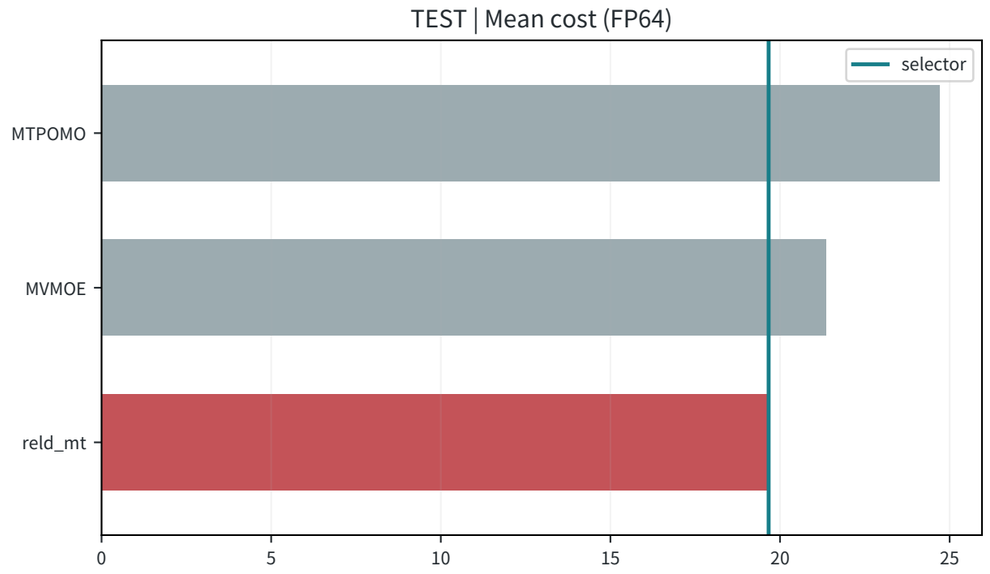
# R85/C_cost_profile | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

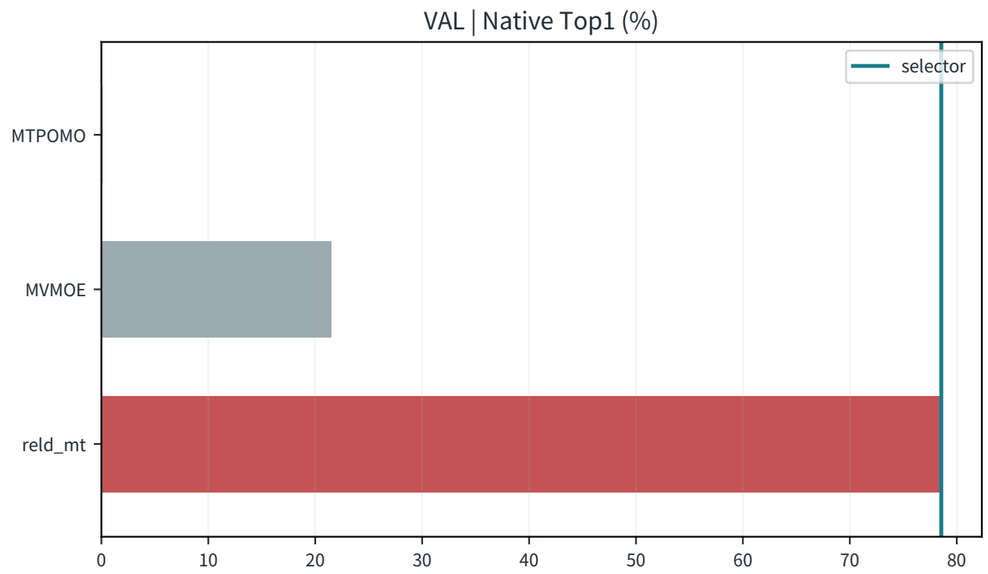





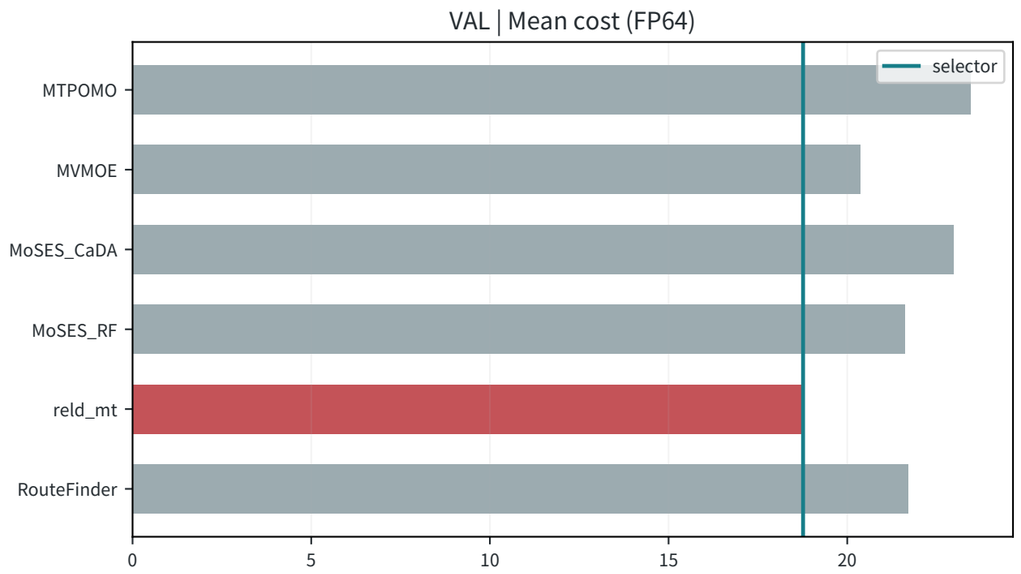



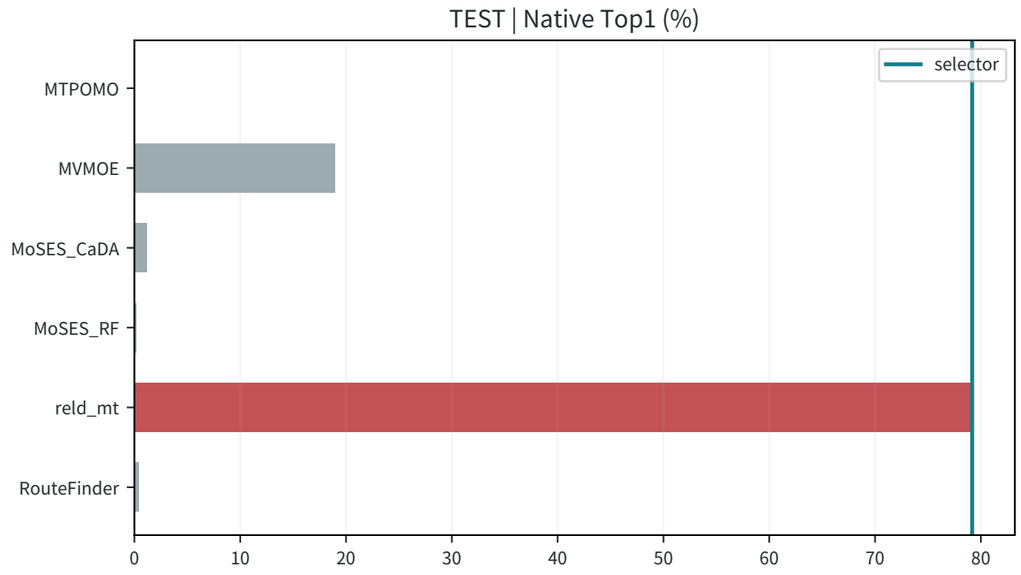



# R85/C_cost_profile | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

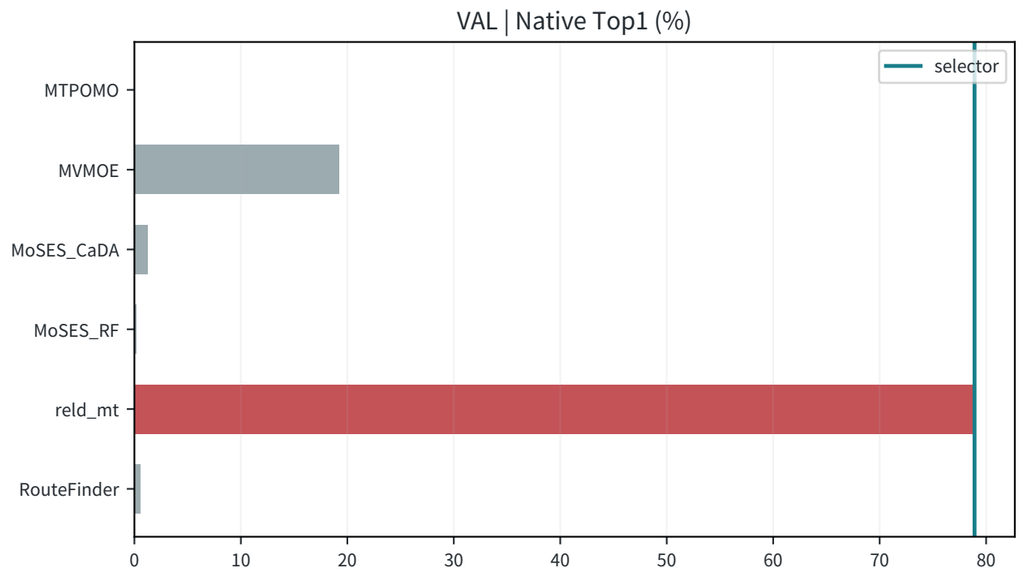





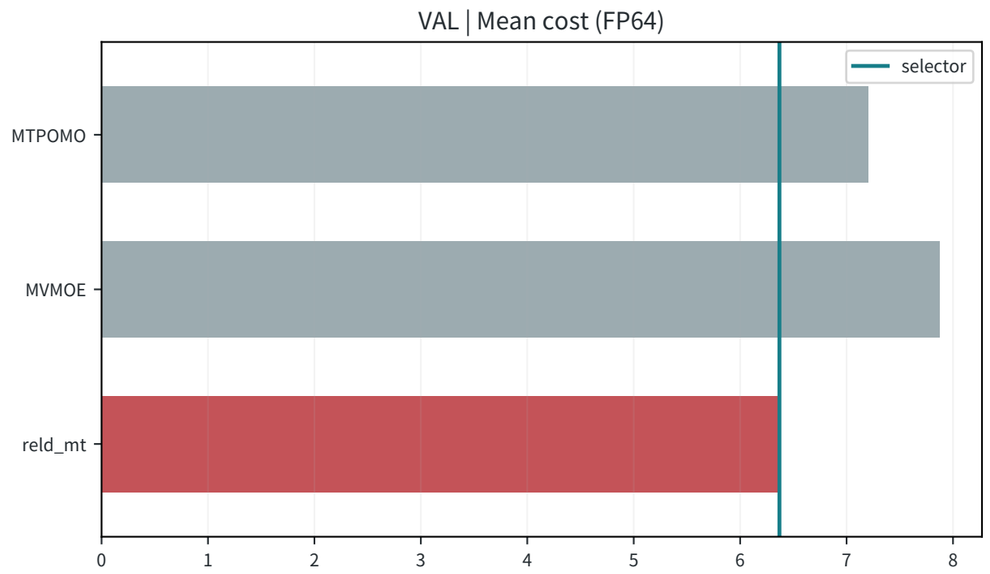



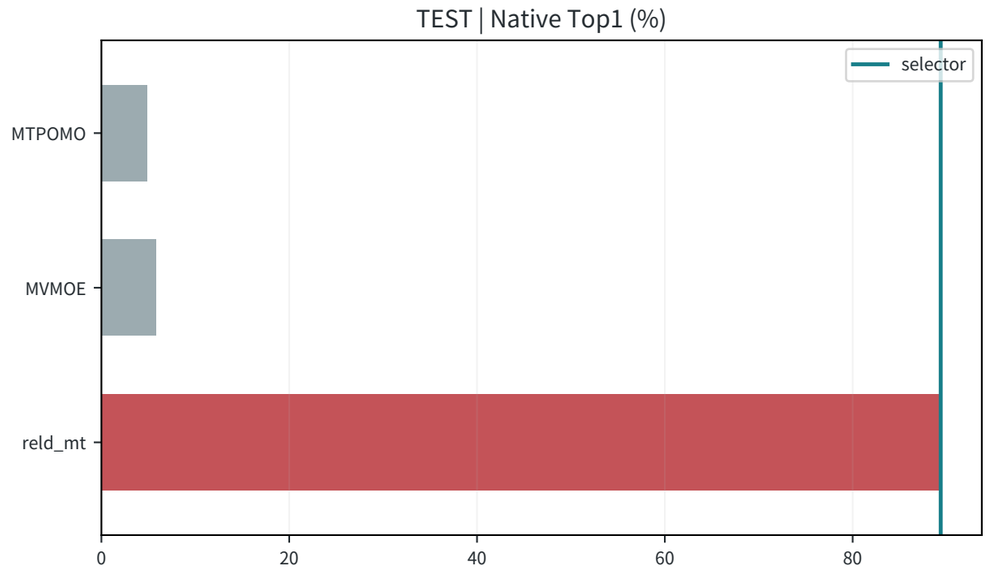




# R85/C_cost_profile | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

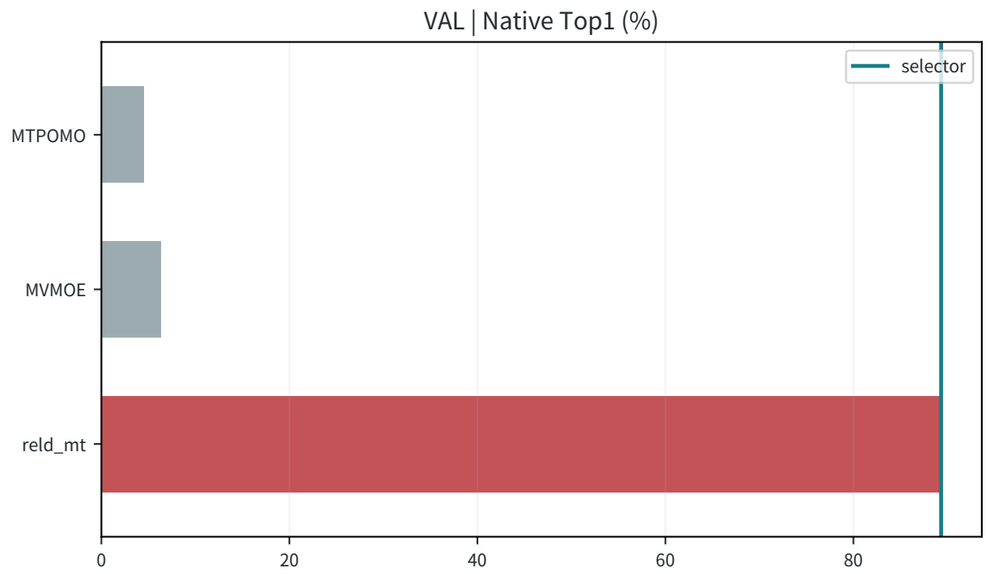





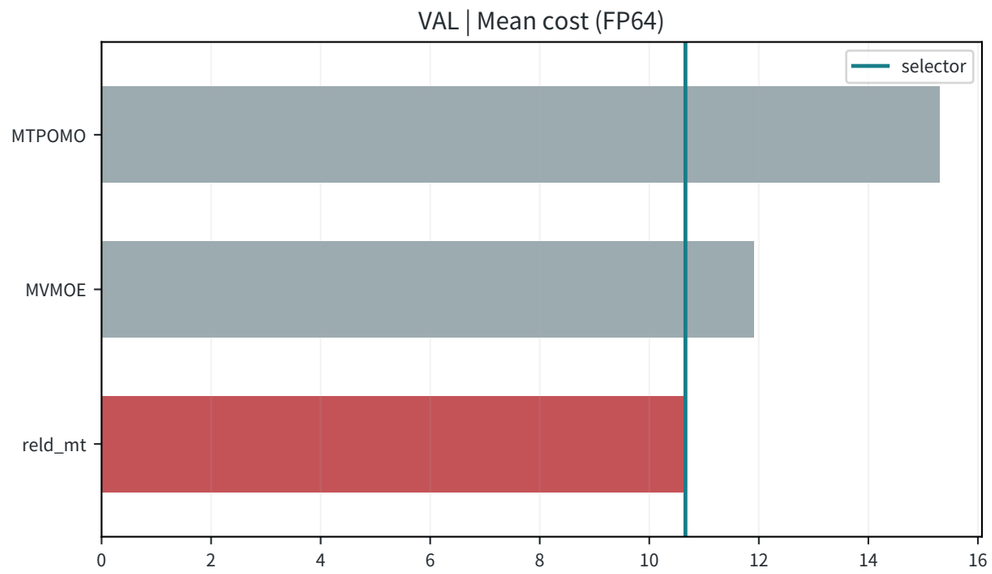


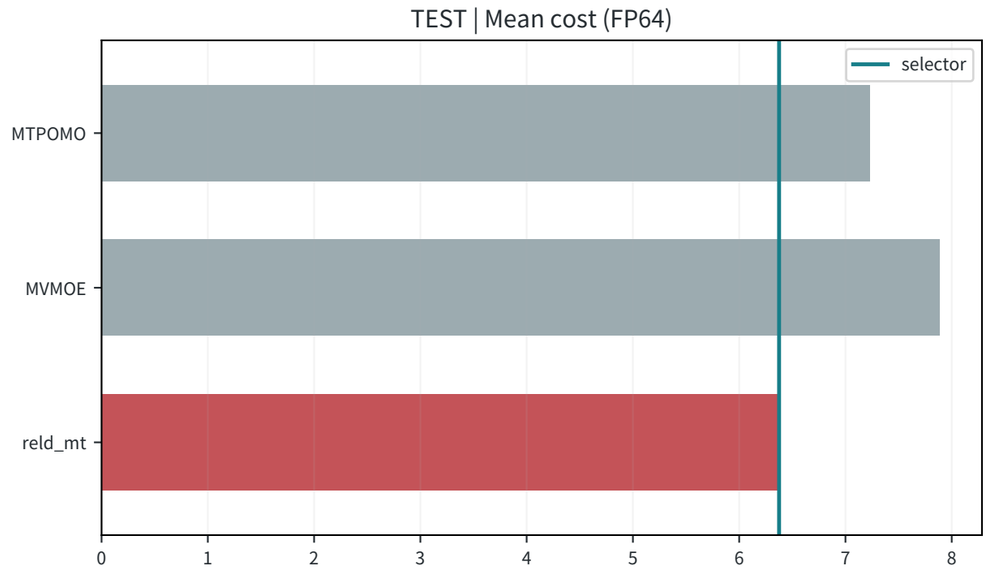
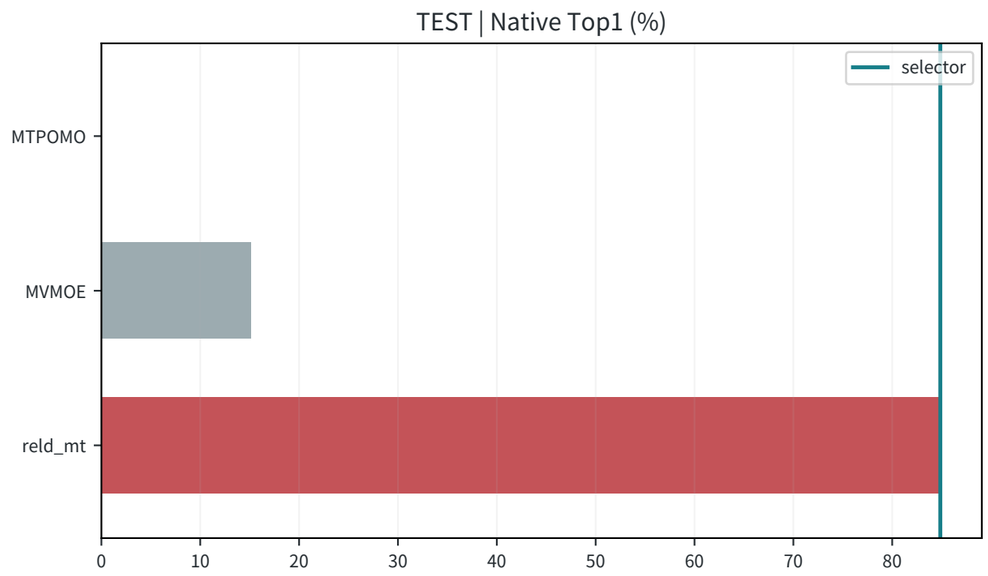



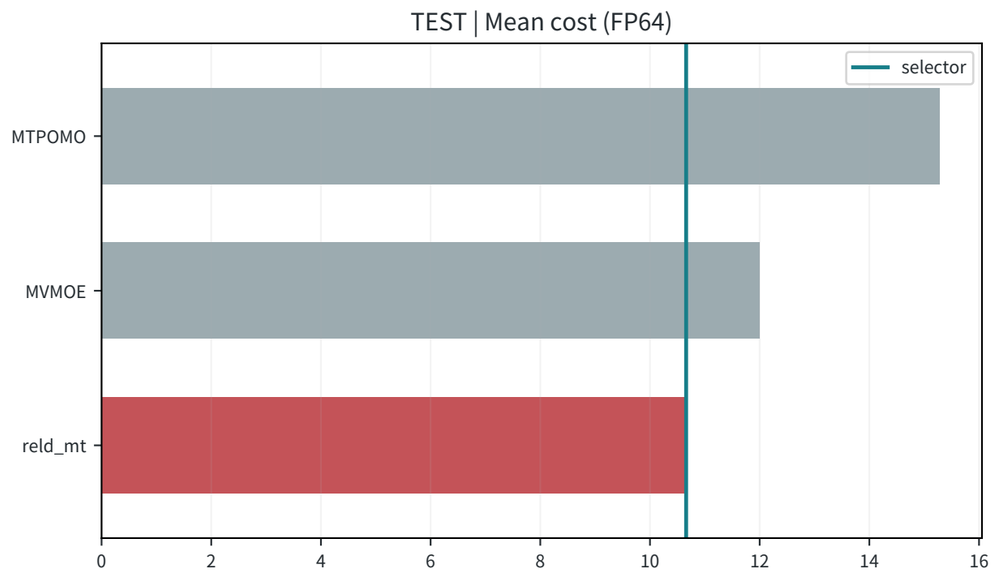
# R85/C_cost_profile | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

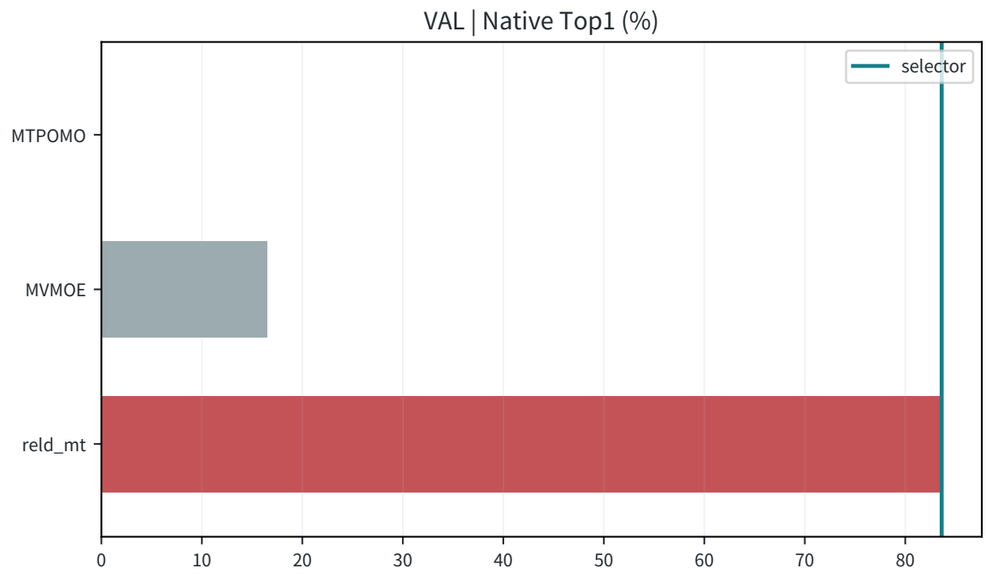





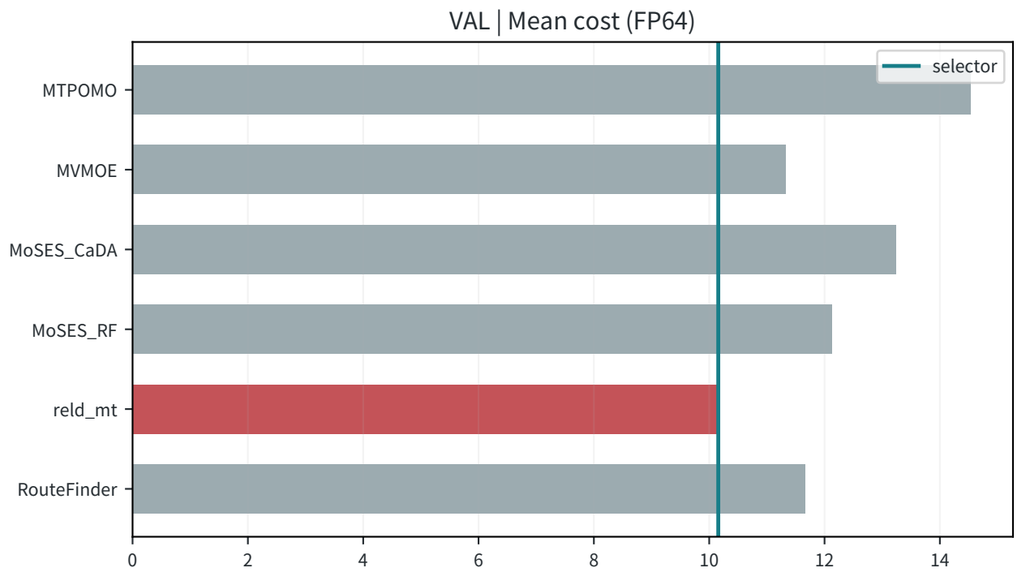



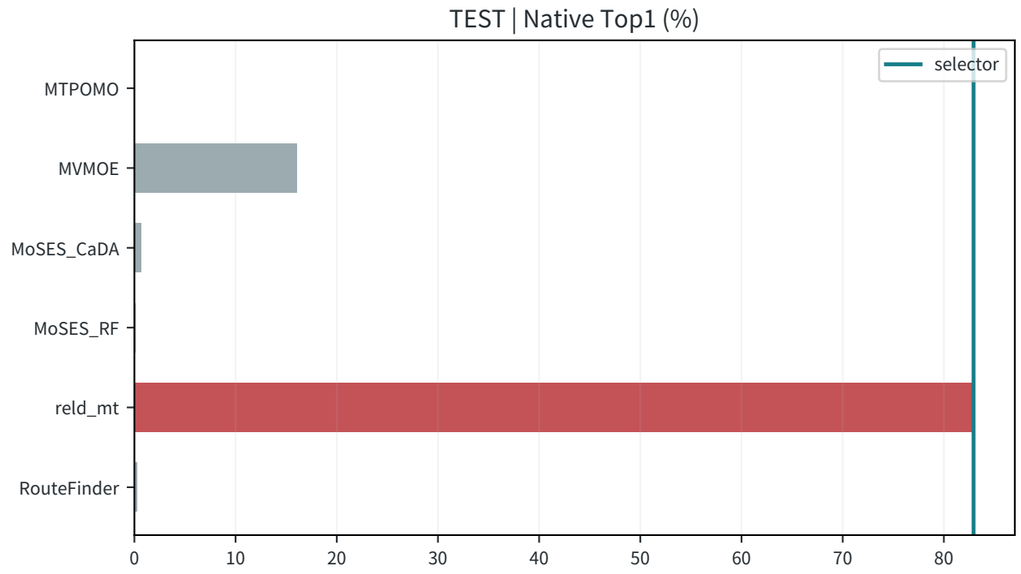



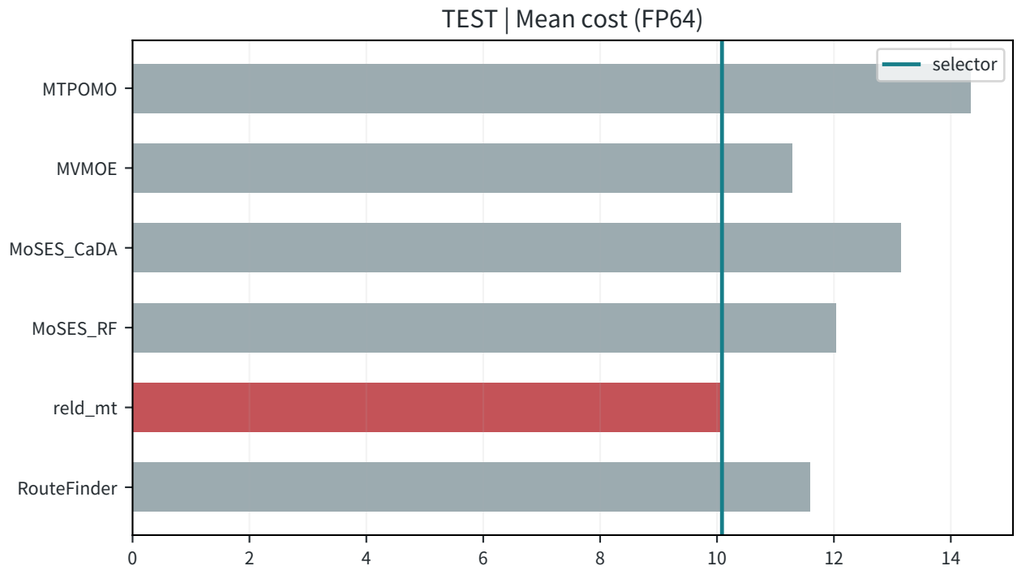
# R85/C_cost_profile | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

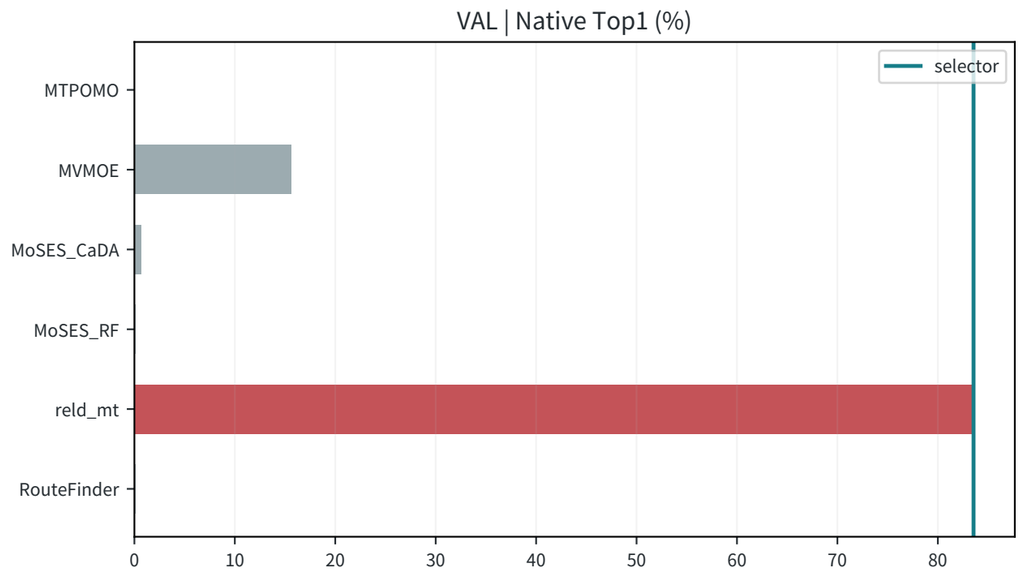





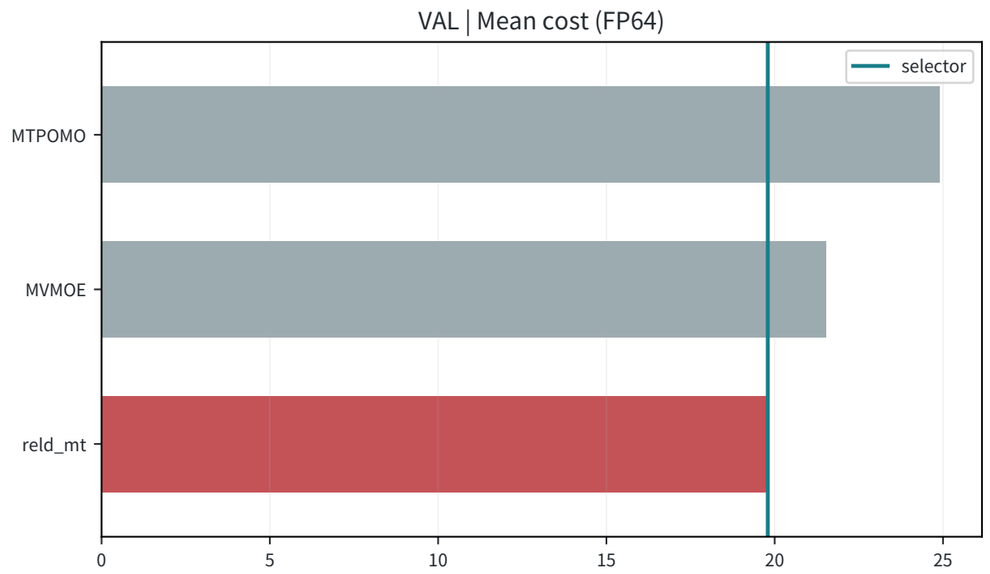



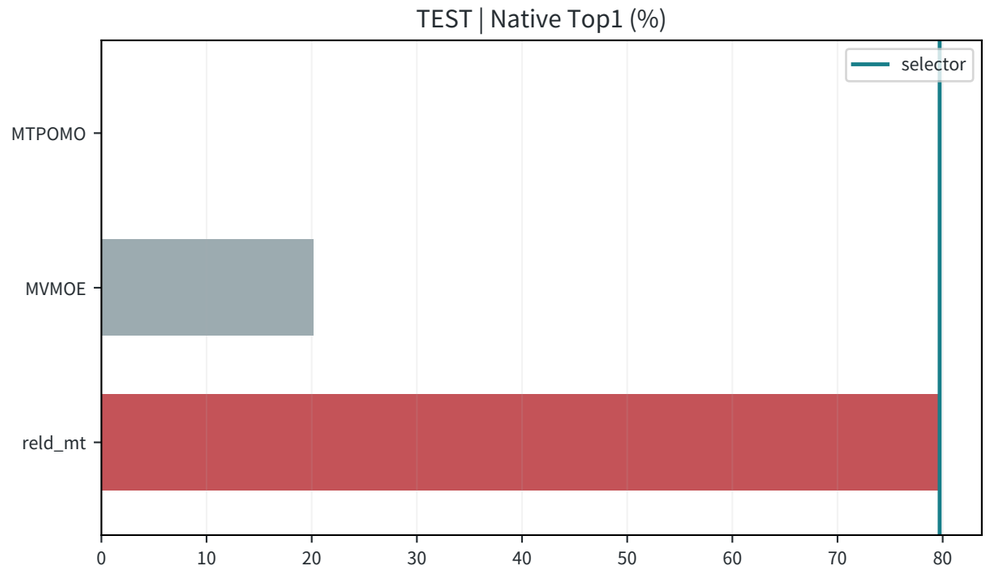



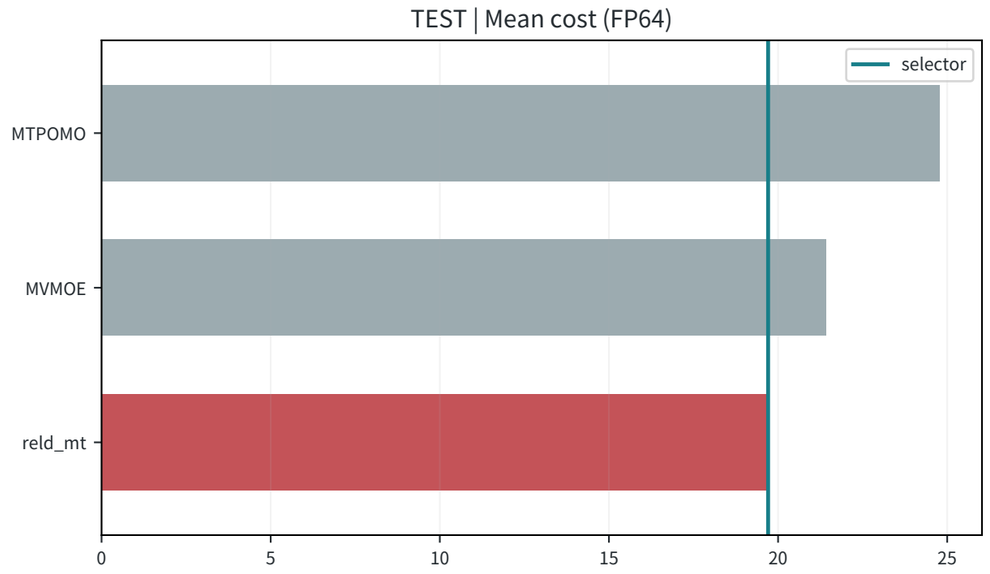
# R85/C_cost_profile | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

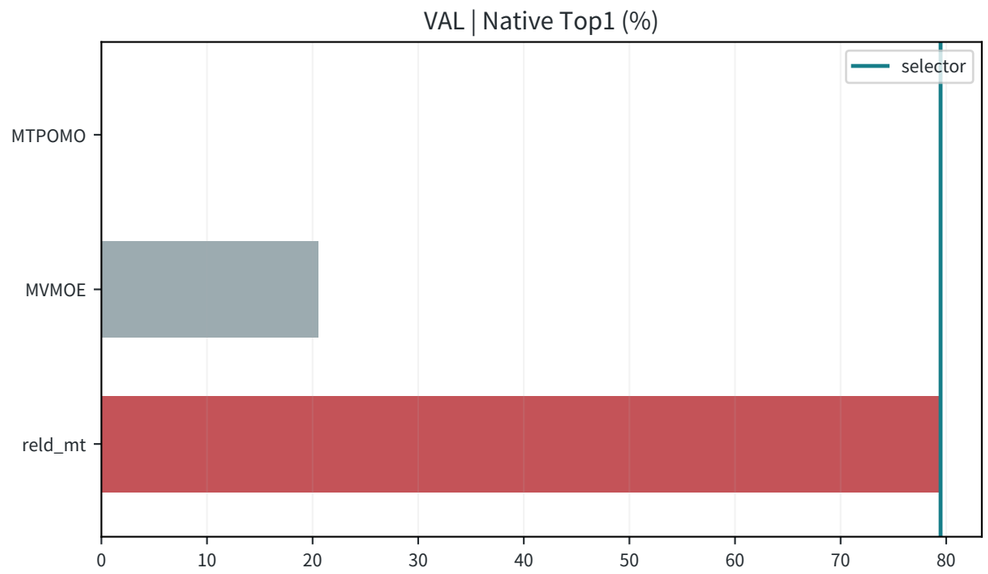

# R85/C_cost_profile | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

