R85/D_candidate_subset | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 35 | update 50400 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.1272	66.2037	11.416646	11.427978	11.371692	-0.1942	+0.3934	0.4034
TEST ALL	71.4370	66.1802	11.373490	11.385299	11.329932	-0.2007	+0.3824	0.3905

Dataset	n	NSS Top1 (%)	R85 Top1 (%)	NSS cost	R85 cost
TSP TEST	4500	45.888889	46.800000	7.970400719	7.971231359
CVRP TEST	4500	45.977778	47.911111	18.004802368	18.010812981
TSPLIB	49	20.408163	20.408163	8.217907074	8.215506239
CVRPLIB	100	70.000000	63.000000	67.101111717	67.268216181

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original native CE

R85/D_candidate_subset | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1272	66.2037	11.416646	11.427978	11.371692	-0.1942	+0.3934	0.4034	per-problem TRAIN SBS
TSP	46.7778	33.1111	8.025734	8.045354	7.990533	-0.2439	+0.4405	0.4291	T2T
CVRP	47.0444	18.7111	18.159953	18.269377	18.064087	-0.5989	+0.5307	0.7085	RELD_CVRP
ATSP	77.1778	47.4889	1.638623	1.676905	1.632471	-2.2829	+0.3769	0.3743	UNICO_MatPOENet
OVRP	40.8222	35.7556	7.461758	7.469579	7.415777	-0.1047	+0.6200	0.6311	MoSES_RF
VRPB	81.1333	80.8444	9.353310	9.354876	9.318750	-0.0167	+0.3709	0.3773	reld_mt
VRPL	37.9778	33.0889	12.431443	12.437959	12.383444	-0.0524	+0.3876	0.3954	MoSES_RF
VRPTW	79.9778	79.9556	18.818923	18.819431	18.766139	-0.0027	+0.2813	0.2980	reld_mt
OVRPTW	83.8667	83.7778	10.142965	10.143730	10.116859	-0.0075	+0.2580	0.2543	reld_mt
OVRPB	88.4667	88.5111	6.358190	6.357254	6.341078	+0.0147	+0.2699	0.2790	reld_mt
OVRPL	41.7111	35.9111	7.437115	7.445709	7.390416	-0.1154	+0.6319	0.6498	MoSES_RF
VRPBL	78.8889	78.5111	9.368244	9.371523	9.328366	-0.0350	+0.4275	0.4279	reld_mt
VRPBTW	78.5556	78.4222	19.946958	19.950430	19.851084	-0.0174	+0.4830	0.4616	reld_mt
VRPLTW	78.7778	78.7556	18.764415	18.765871	18.707843	-0.0078	+0.3024	0.3188	reld_mt
OVRPBL	89.2889	89.2000	6.369584	6.370093	6.352824	-0.0080	+0.2638	0.2753	reld_mt
OVRPBTW	83.5333	83.4444	10.660641	10.661098	10.623245	-0.0043	+0.3520	0.3245	reld_mt
OVRPLTW	83.5333	83.4889	10.157237	10.157423	10.129818	-0.0018	+0.2707	0.2744	reld_mt
VRPBLTW	79.5333	79.4000	19.794338	19.797044	19.706420	-0.0137	+0.4461	0.4355	reld_mt
OVRPBLTW	83.2222	83.2889	10.610201	10.609955	10.571302	+0.0023	+0.3680	0.3462	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R85/D_candidate_subset | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.4370	66.1802	11.373490	11.385299	11.329932	-0.2007	+0.3824	0.3905	per-problem TRAIN SBS
TSP	46.8000	34.5333	7.971231	7.989621	7.937593	-0.2302	+0.4238	0.4159	T2T
CVRP	47.9111	17.9333	18.010813	18.124983	17.918509	-0.6299	+0.5151	0.6778	RELD_CVRP
ATSP	76.8667	47.2444	1.635338	1.674207	1.629441	-2.3217	+0.3619	0.3622	UNICO_MatPOENet
OVRP	41.5778	33.6444	7.445026	7.455750	7.400487	-0.1438	+0.6018	0.6126	MoSES_RF
VRPB	80.8000	80.4000	9.349943	9.351810	9.315298	-0.0200	+0.3719	0.3717	reld_mt
VRPL	37.8000	32.2667	12.350087	12.356138	12.300958	-0.0490	+0.3994	0.4055	MoSES_RF
VRPTW	81.1556	80.8444	18.689340	18.690545	18.637408	-0.0064	+0.2786	0.2909	reld_mt
OVRPTW	83.9333	83.9333	10.092816	10.093063	10.068135	-0.0024	+0.2451	0.2365	reld_mt
OVRPB	88.1111	88.1333	6.370728	6.370826	6.352225	-0.0015	+0.2913	0.2980	reld_mt
OVRPL	42.4222	34.6000	7.462781	7.472542	7.418033	-0.1306	+0.6032	0.6111	MoSES_RF
VRPBL	79.6000	79.4222	9.394519	9.396379	9.355967	-0.0198	+0.4121	0.4101	reld_mt
VRPBTW	78.8889	78.7556	19.663265	19.665725	19.577666	-0.0125	+0.4372	0.4344	reld_mt
VRPLTW	79.3333	79.2444	18.801391	18.803136	18.745143	-0.0093	+0.3001	0.3172	reld_mt
OVRPBL	89.2667	89.2889	6.375615	6.375741	6.359310	-0.0020	+0.2564	0.2677	reld_mt
OVRPBTW	84.9333	84.8222	10.658863	10.659591	10.624748	-0.0068	+0.3211	0.2937	reld_mt
OVRPLTW	83.0000	82.8667	10.085419	10.086112	10.059001	-0.0069	+0.2626	0.2630	reld_mt
VRPBLTW	79.7778	79.7333	19.704024	19.707068	19.613284	-0.0154	+0.4626	0.4447	reld_mt
OVRPBLTW	83.6889	83.5778	10.661618	10.662149	10.625574	-0.0050	+0.3392	0.3156	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R85/D_candidate_subset | LIB and locked provenance

Current R85 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	20.4082	10.2041	8.215506	8.240435	8.142167	-0.3025	+0.9007	0.9149
CVRPLIB	63.0000	45.0000	67.268216	67.245364	66.945093	+0.0340	+0.4827	0.5811

SHA256: 1d0e509c8e06b895aaed4610265194e26d9cb185aea2c0f47105114f08e4beb4

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original R77 maximin logits, stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R85/D_candidate_subset | TSP | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

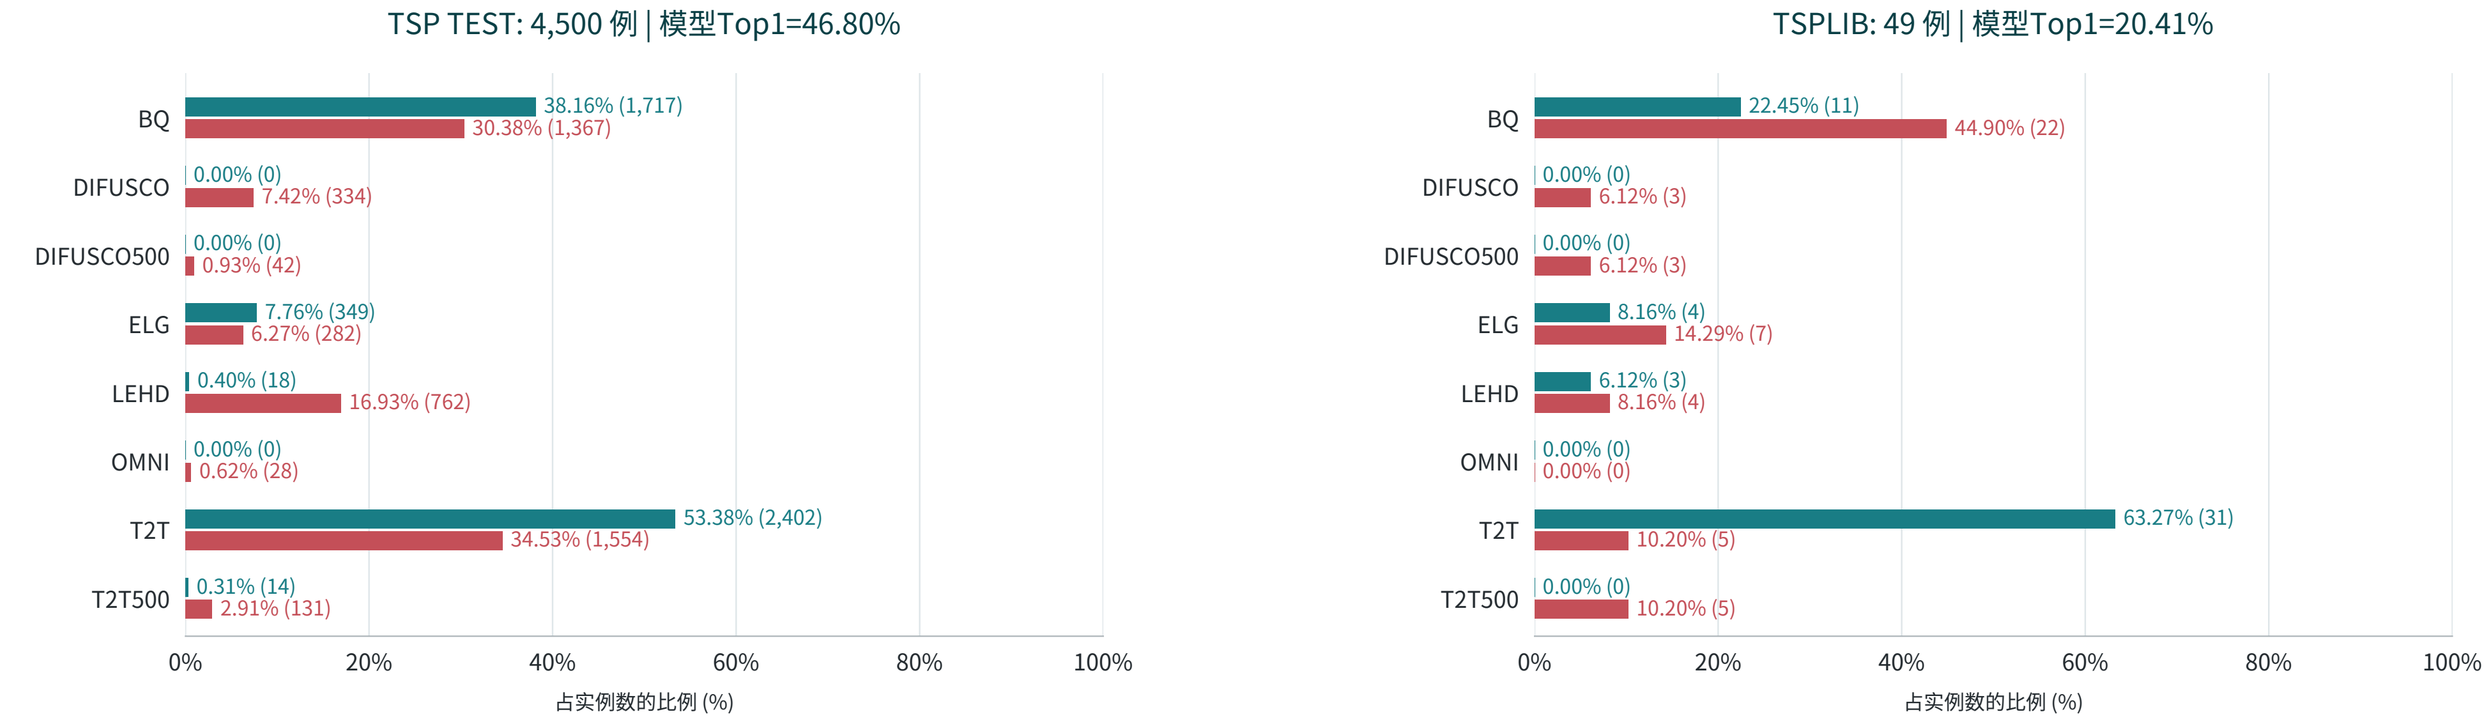

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | CVRP | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

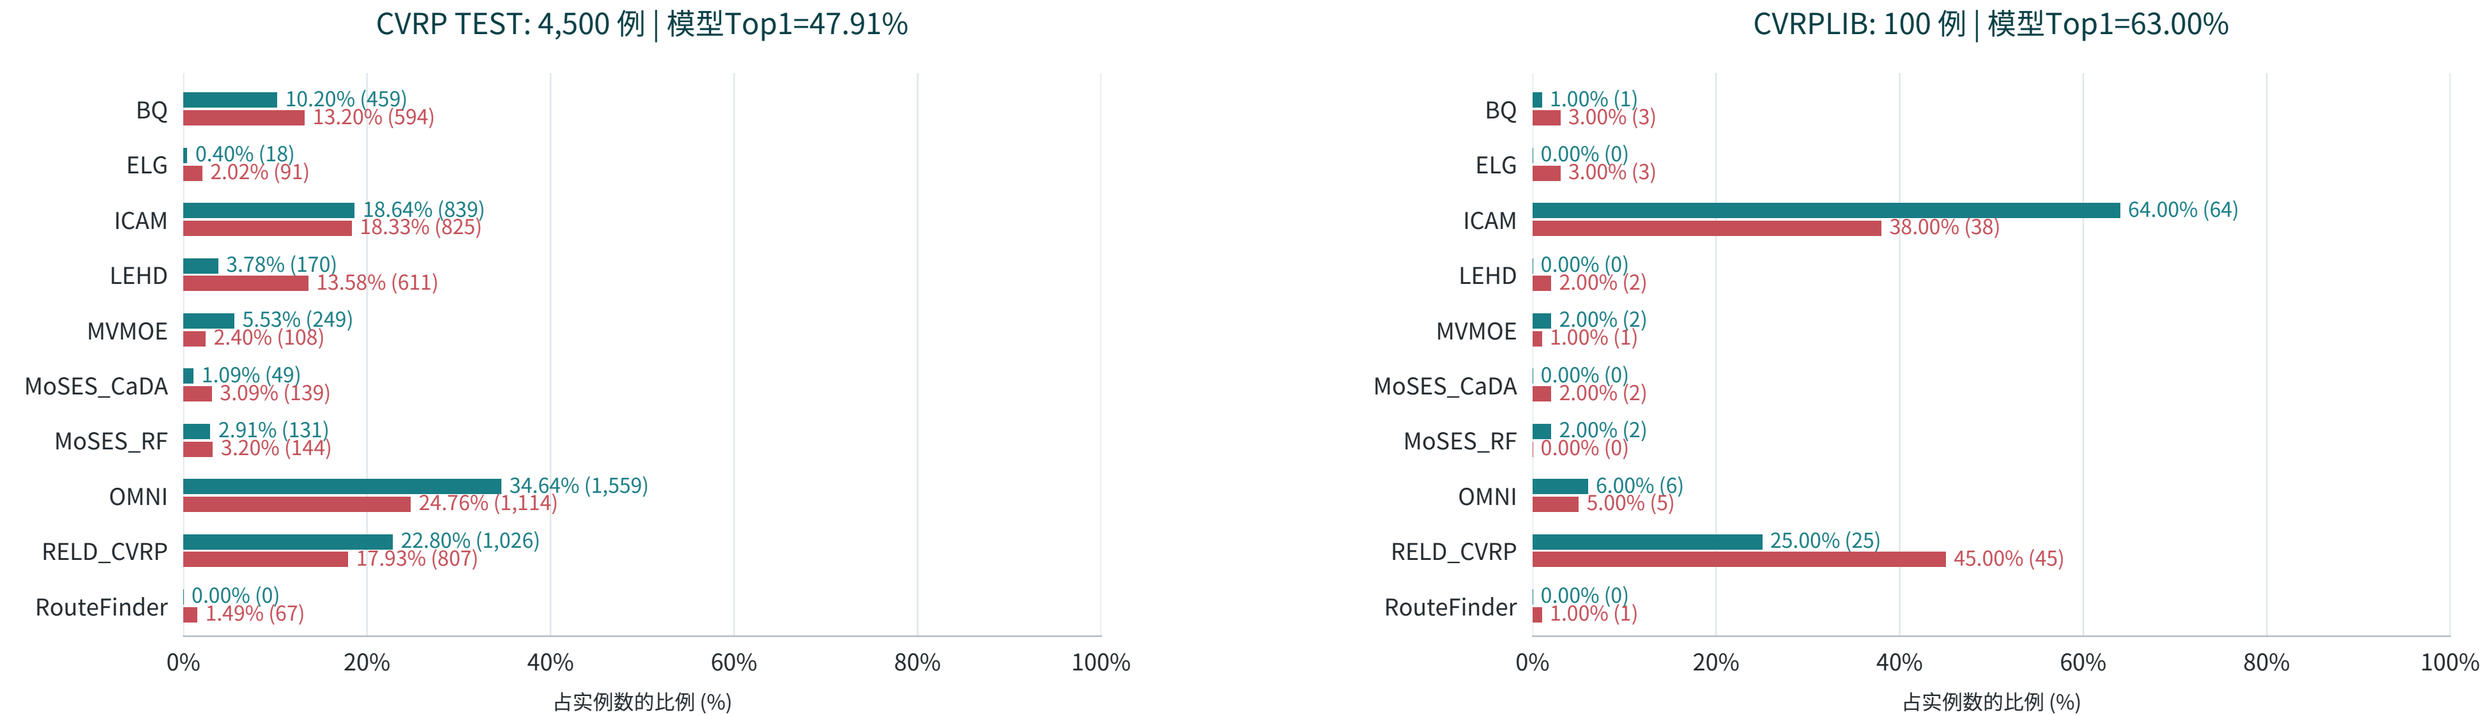

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | ATSP | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

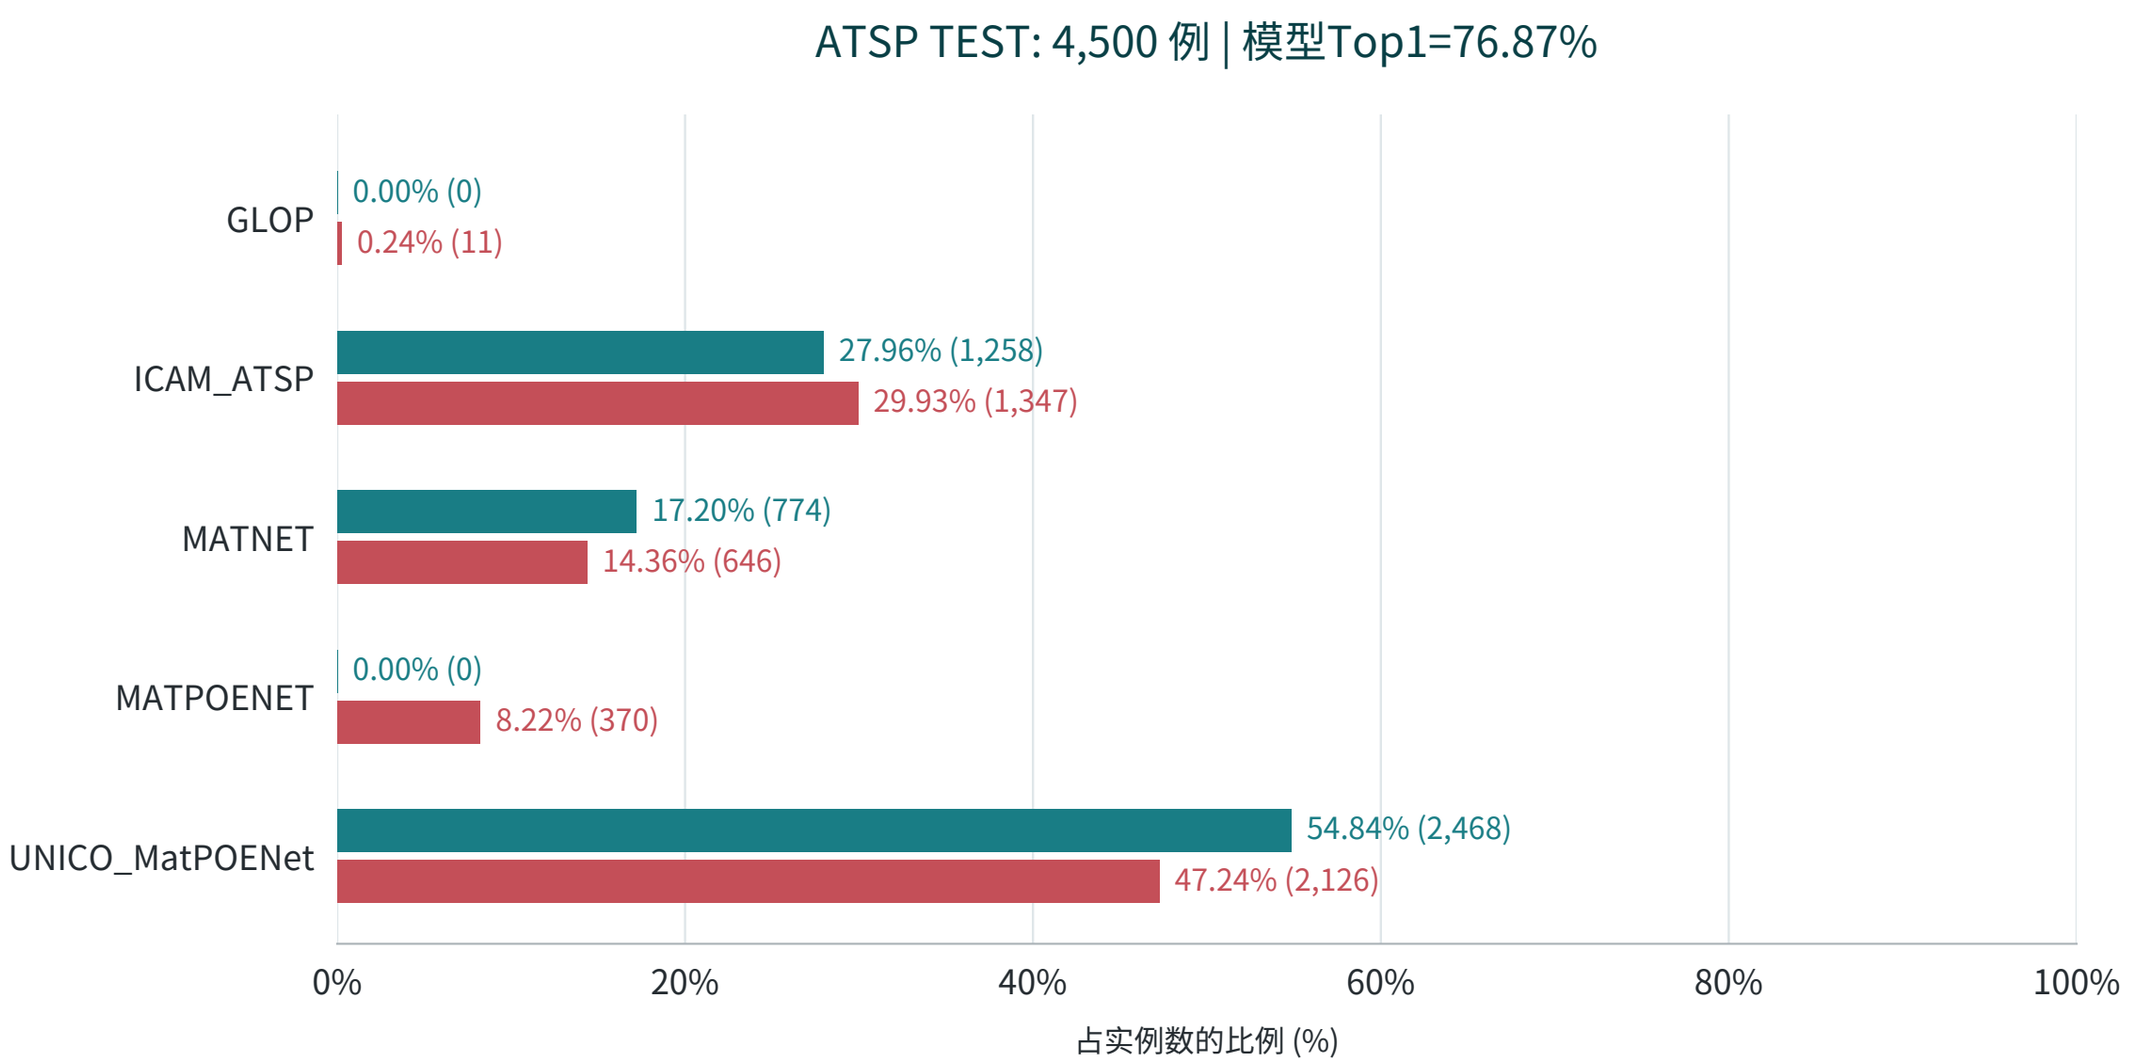

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRP | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

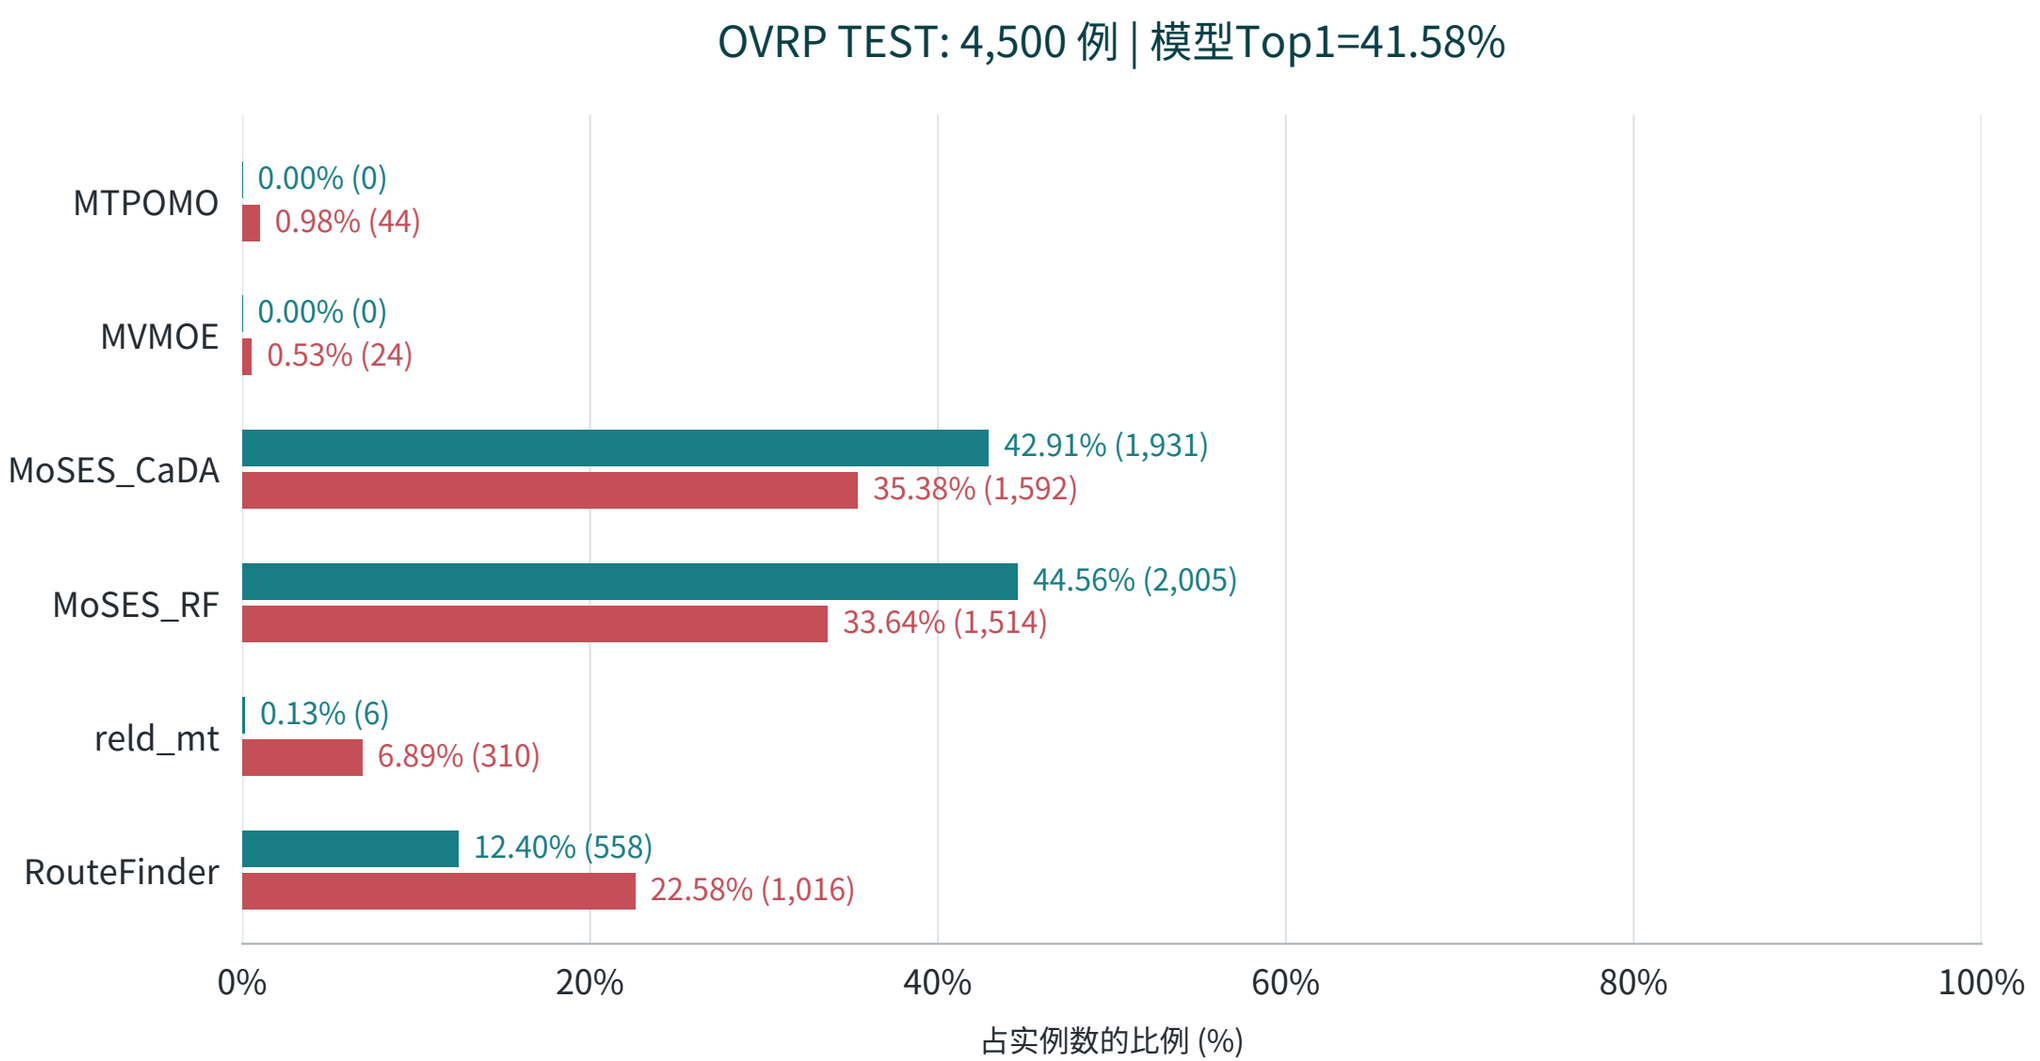

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPB | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

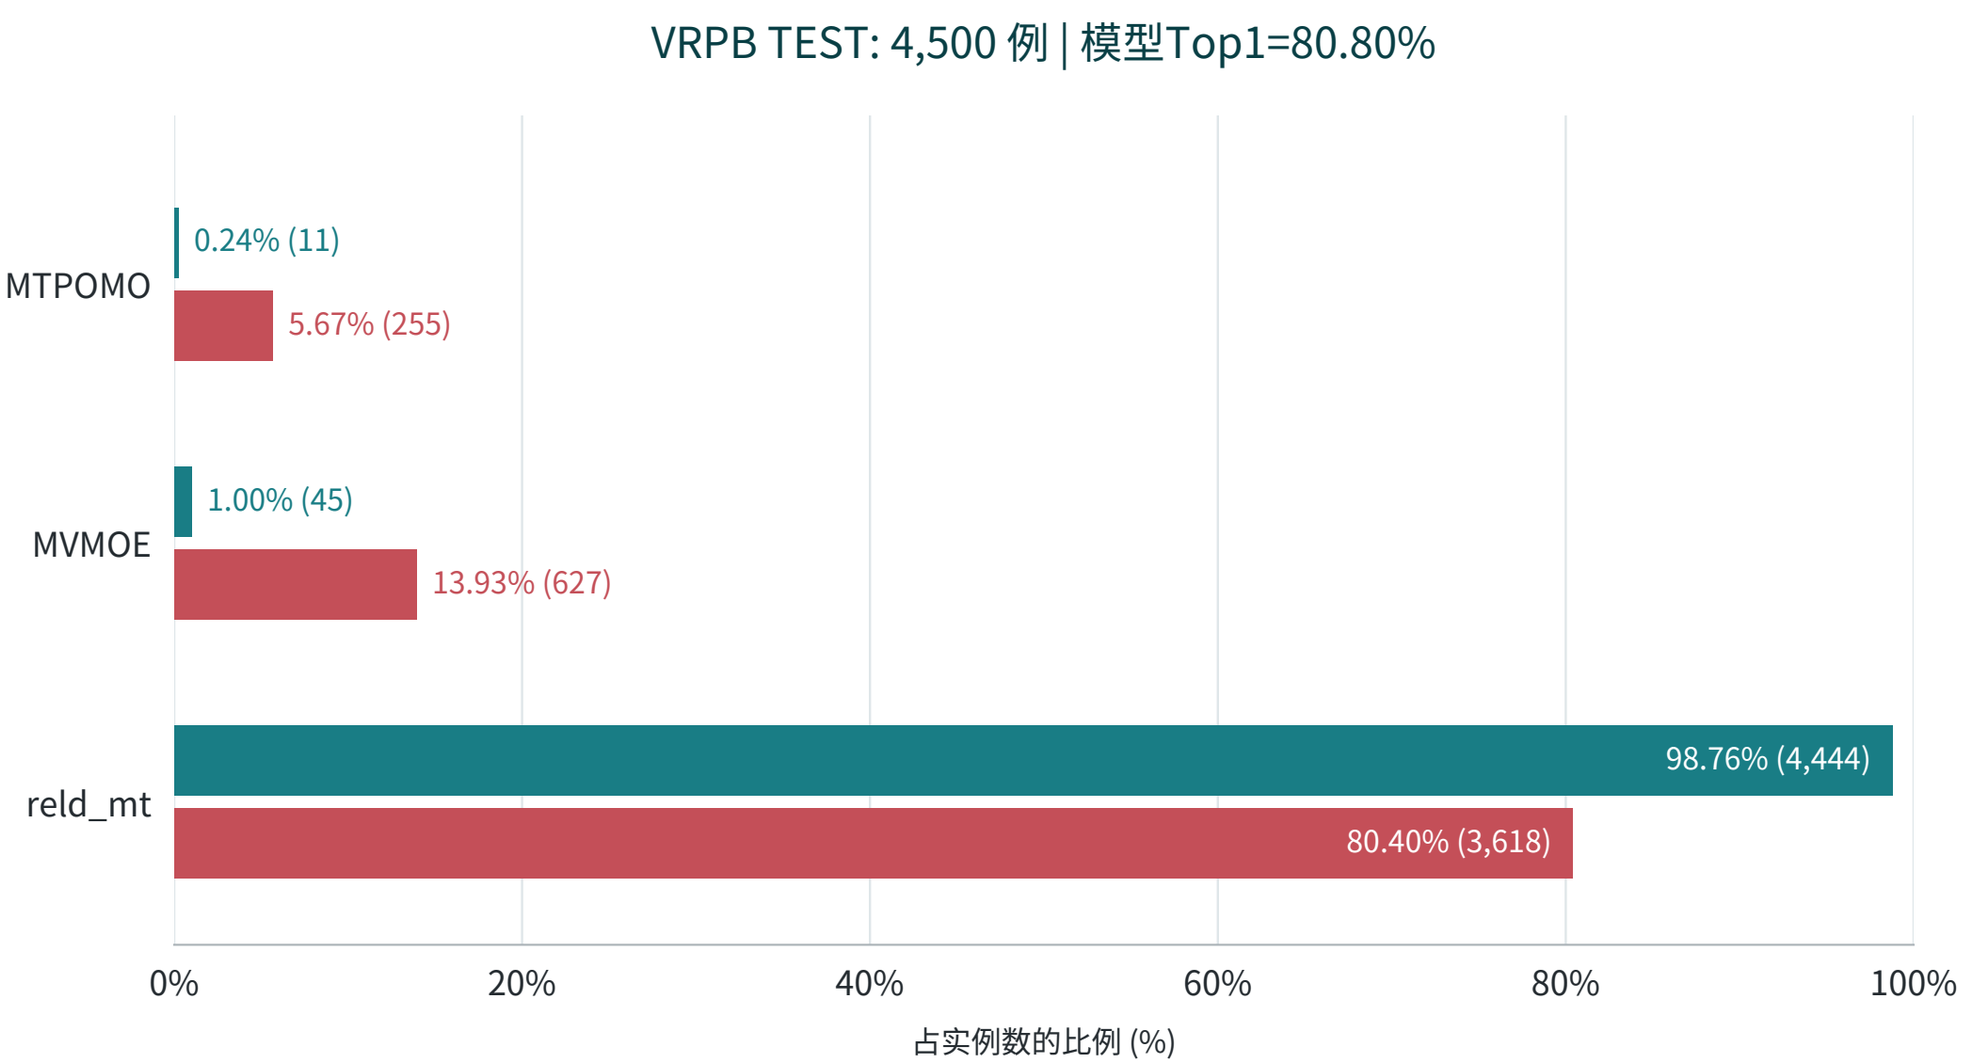

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPL | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

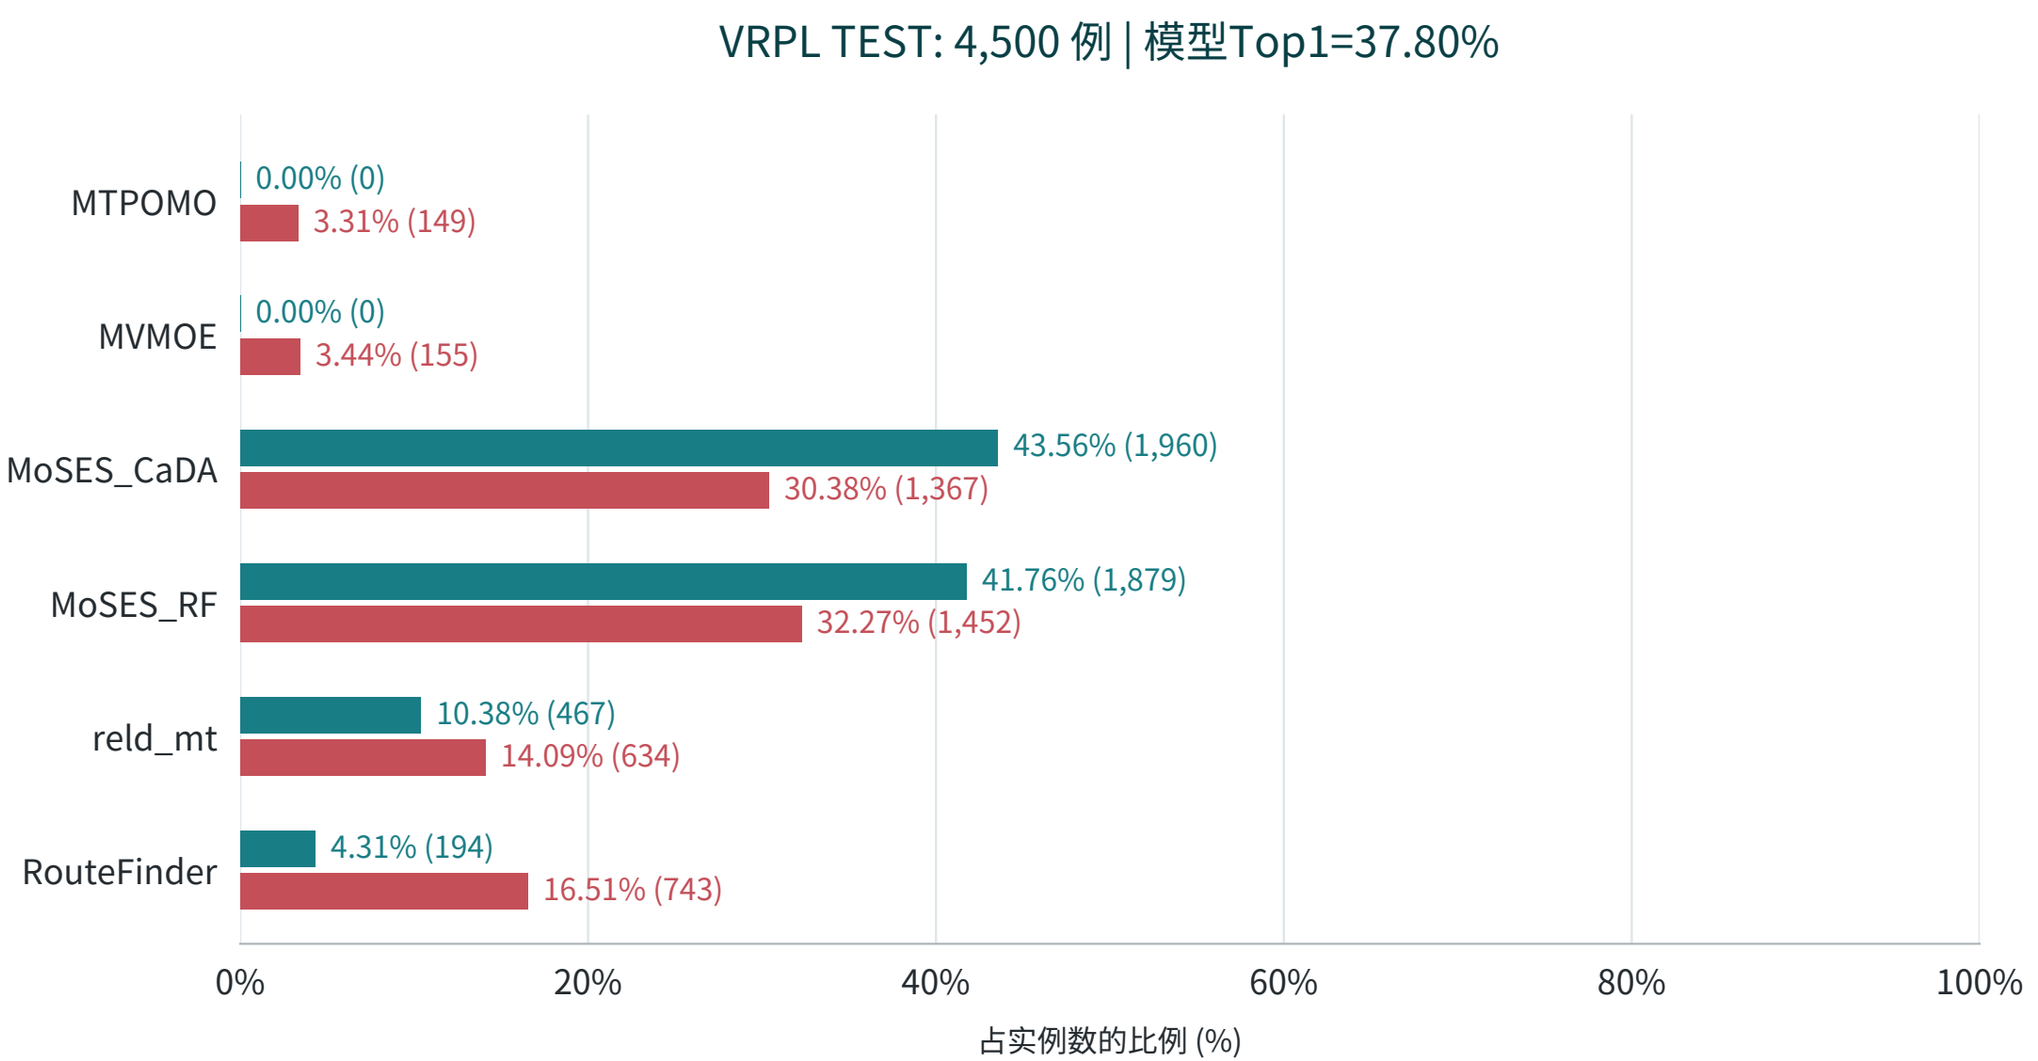

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

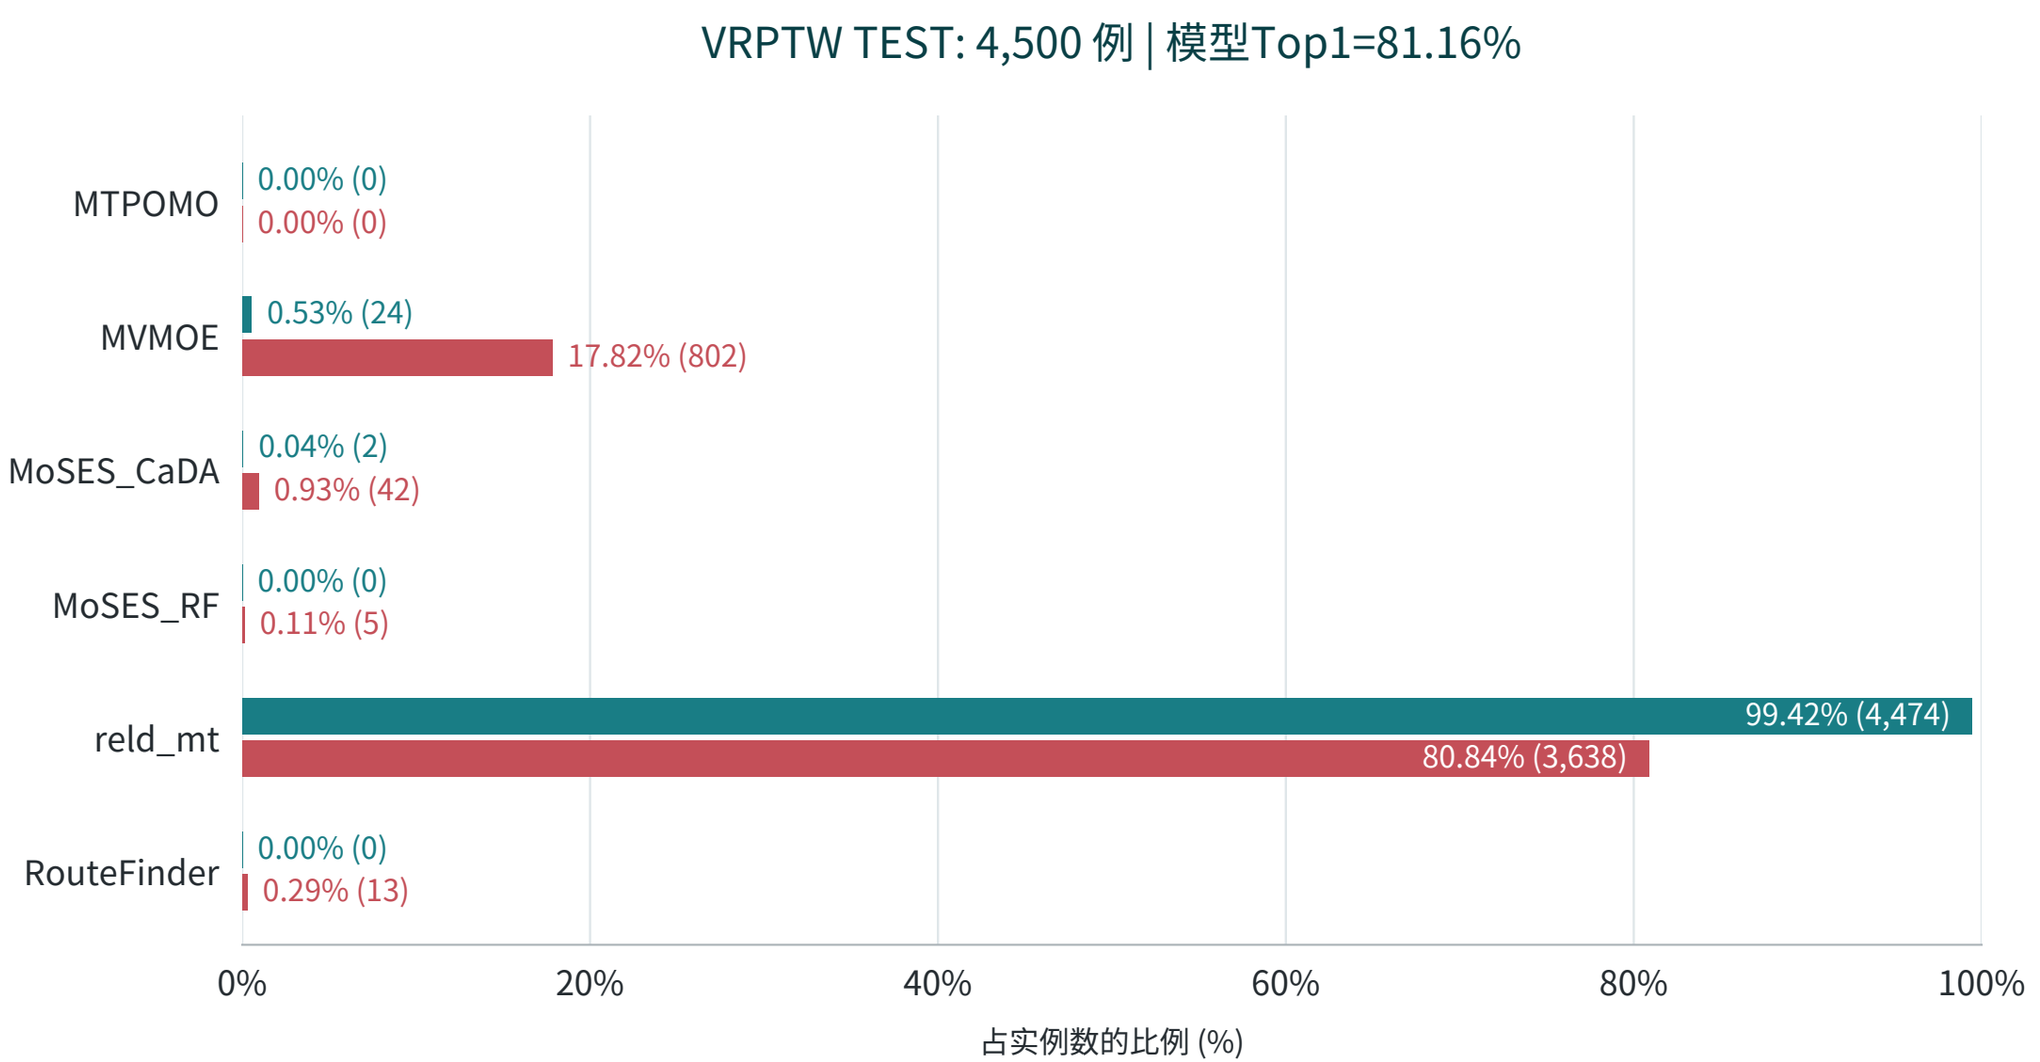

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

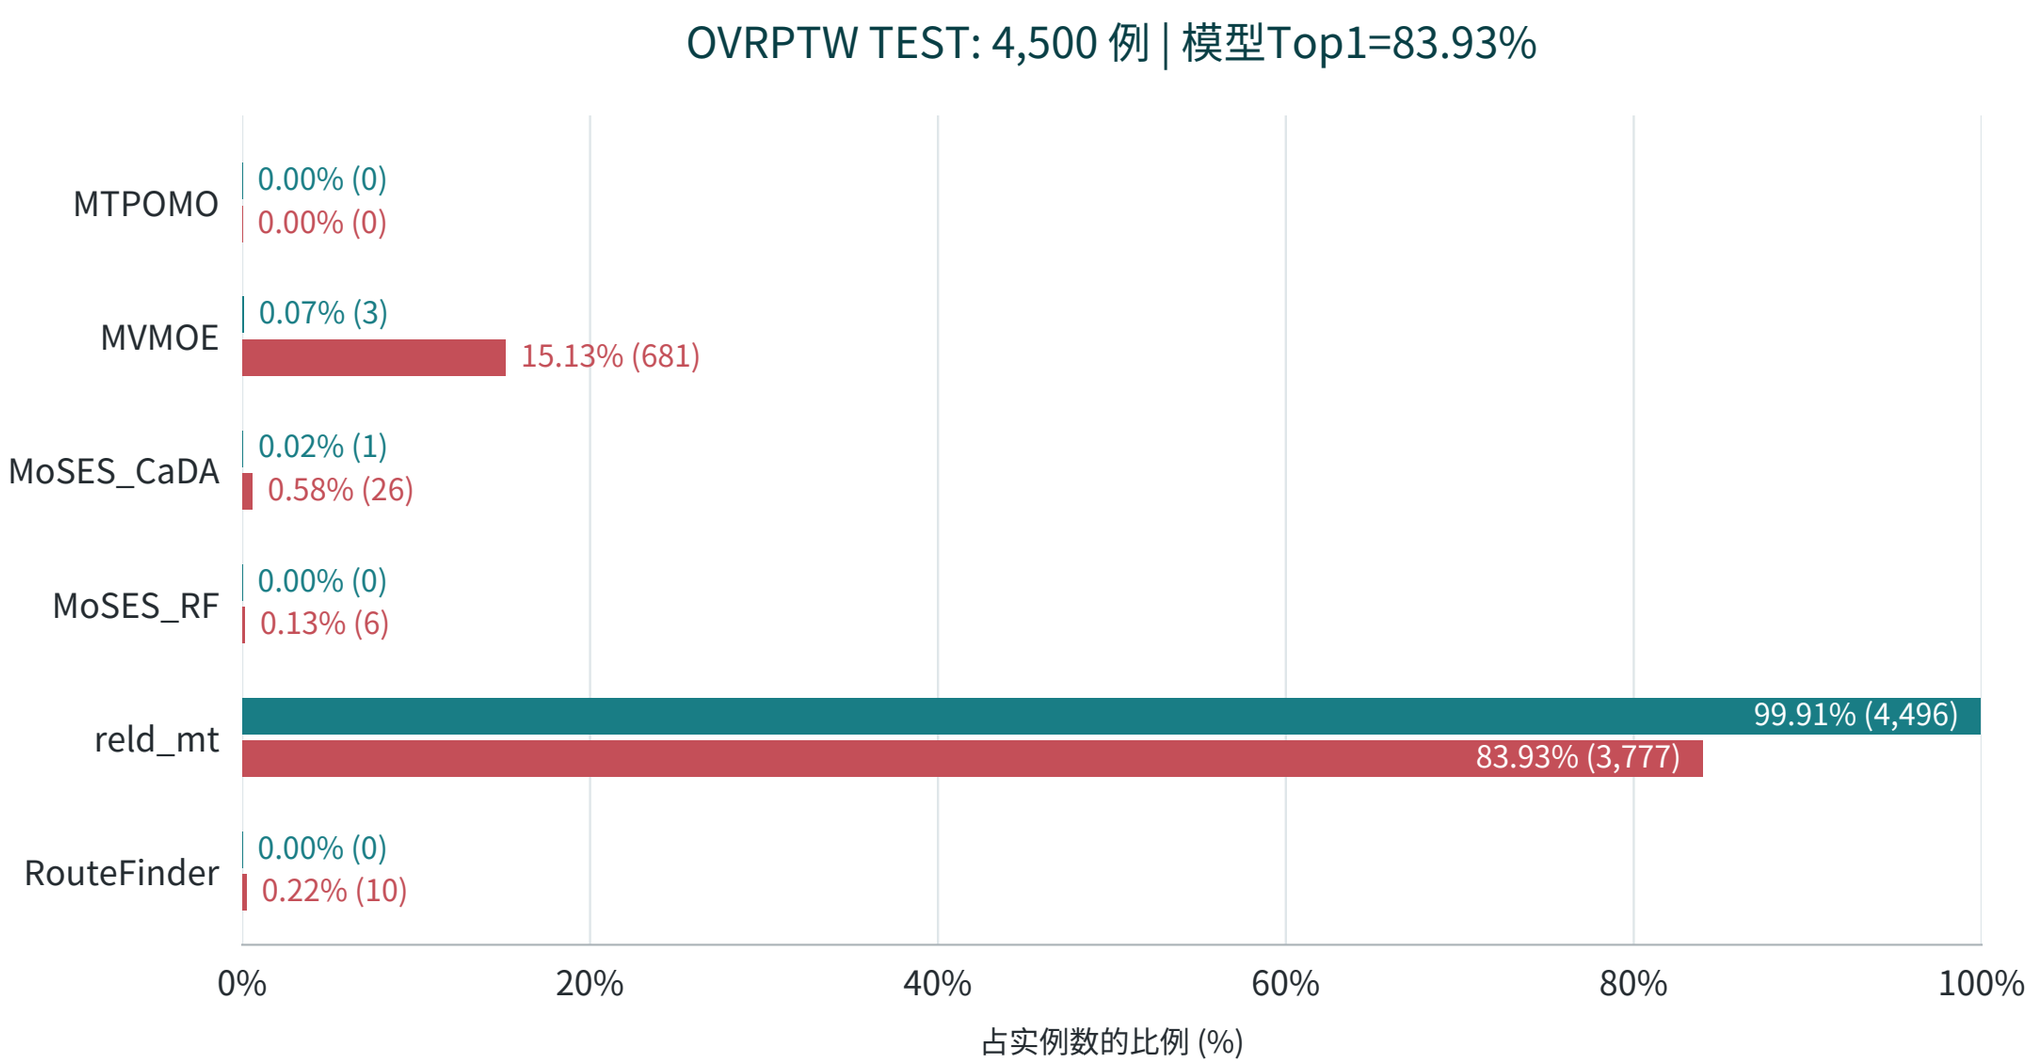

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPB | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

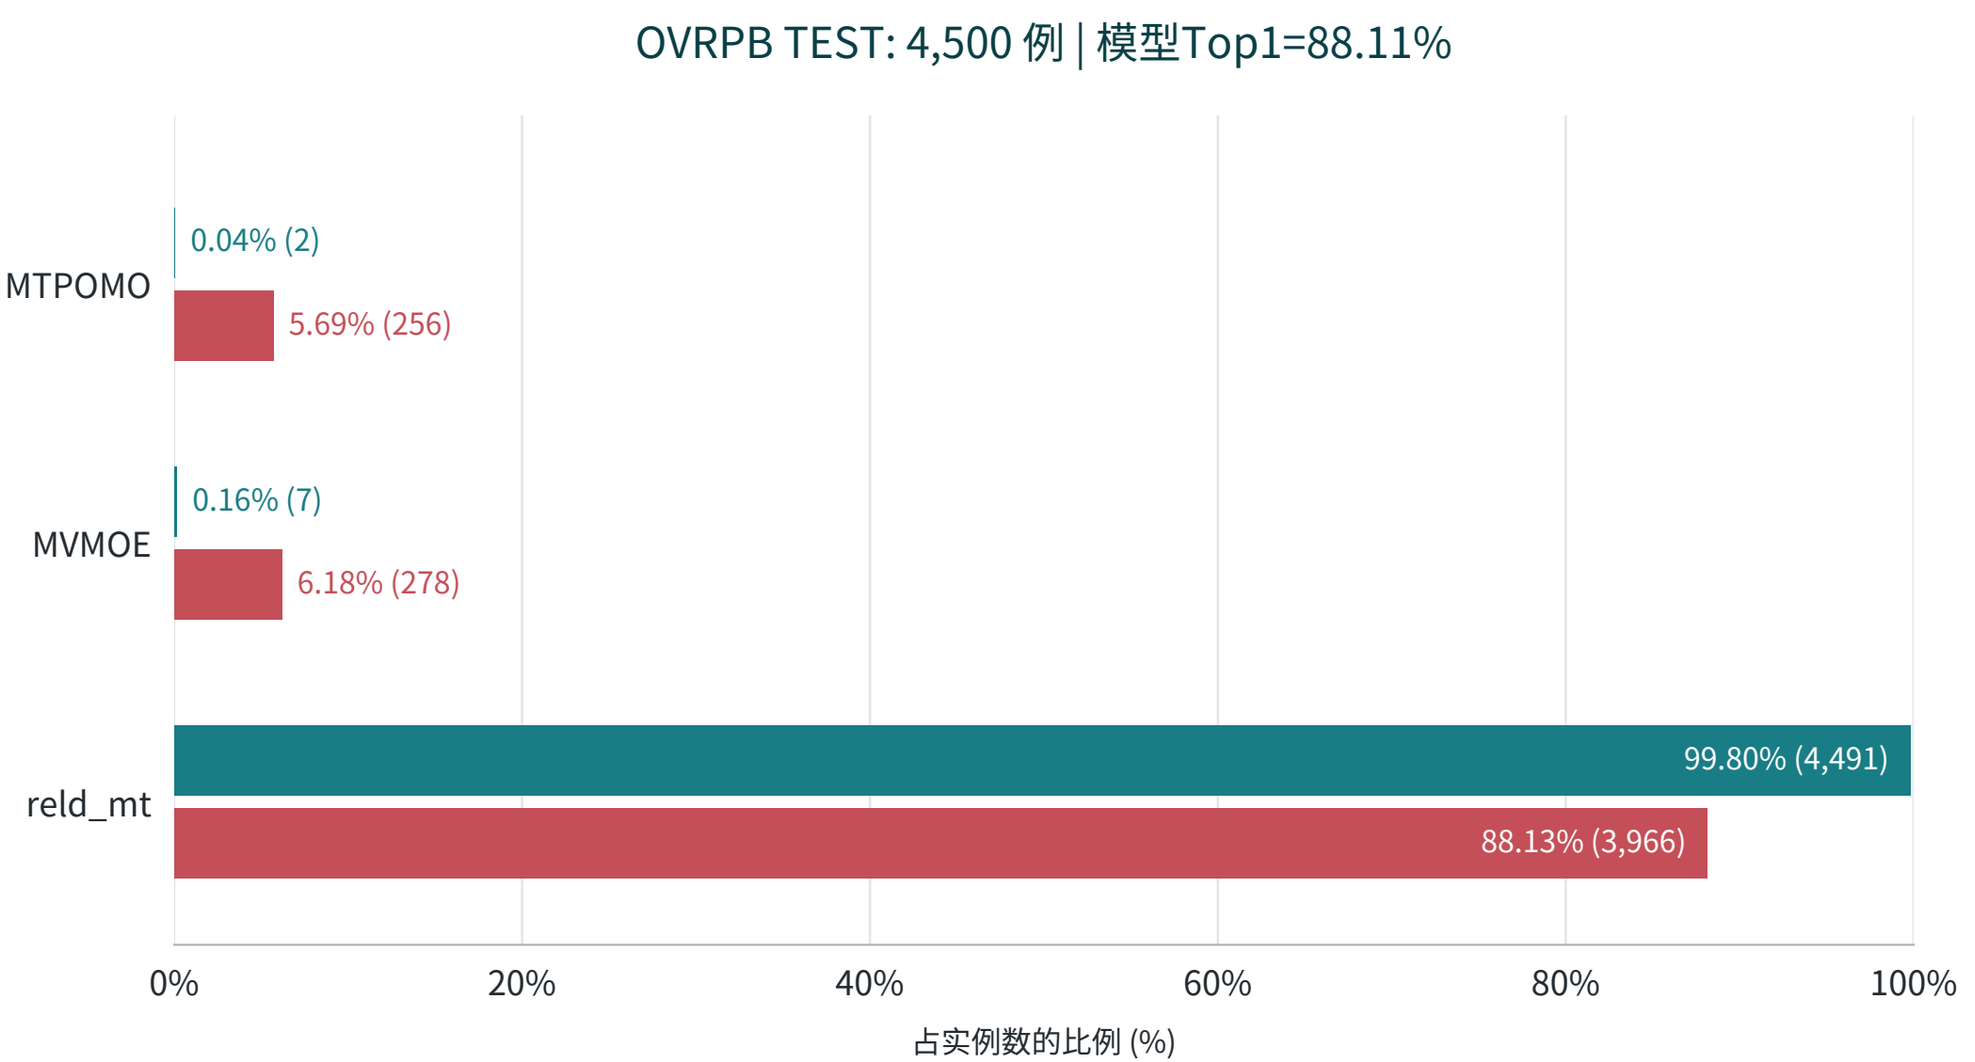

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPL | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

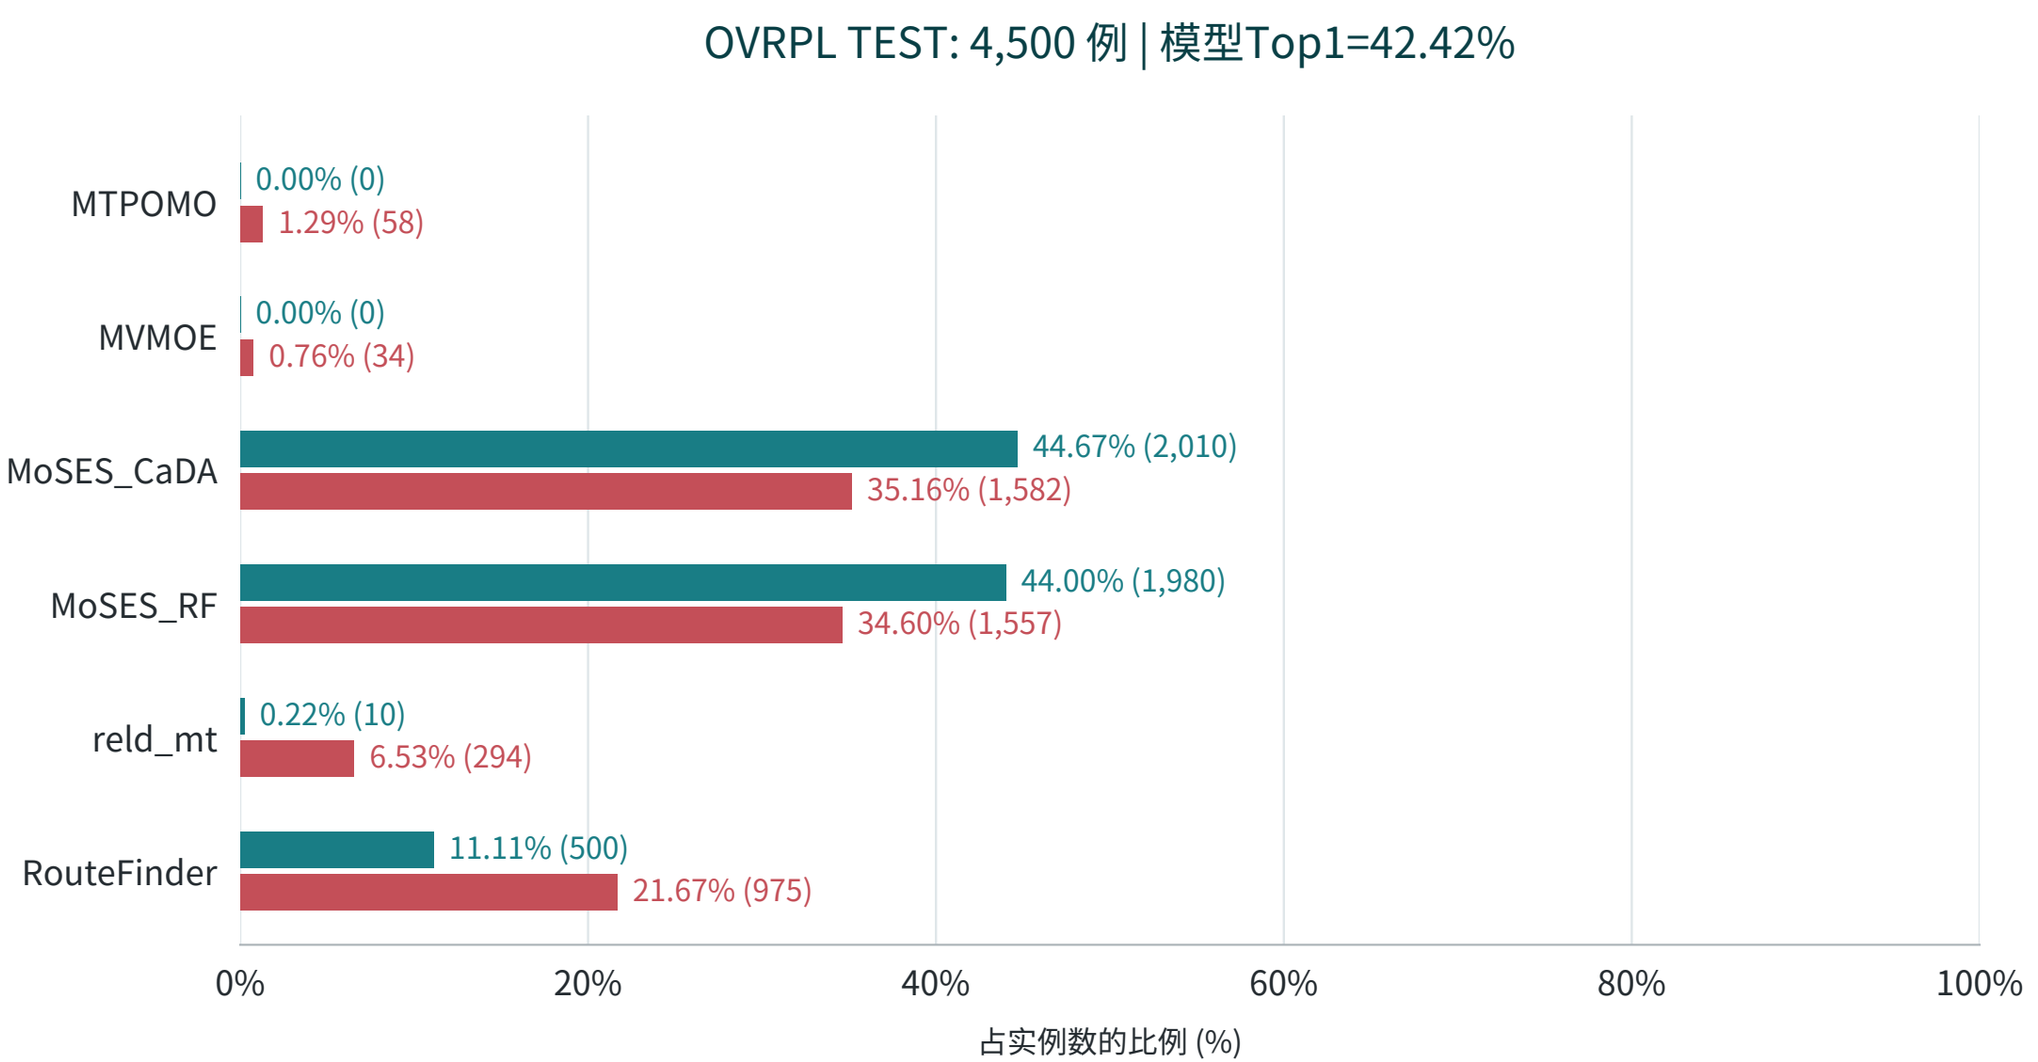

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPBL | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

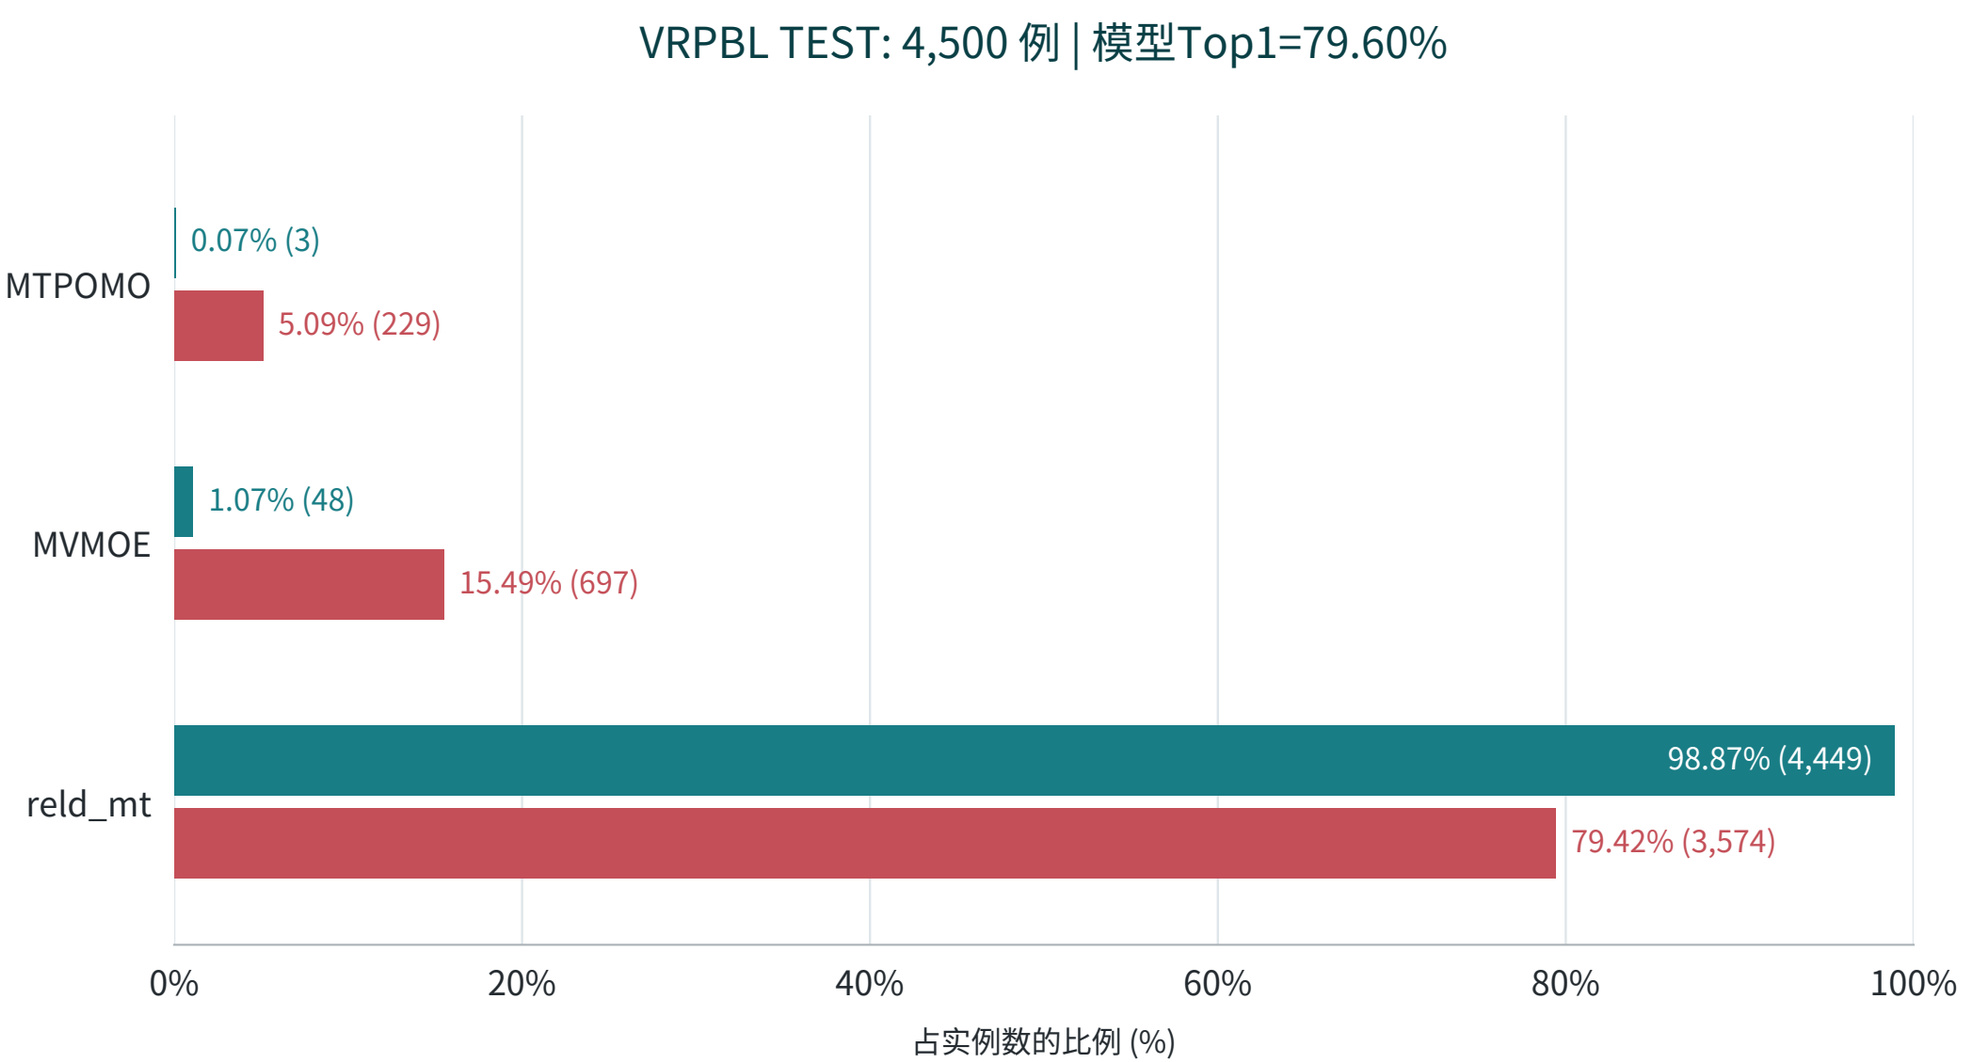

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPBTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

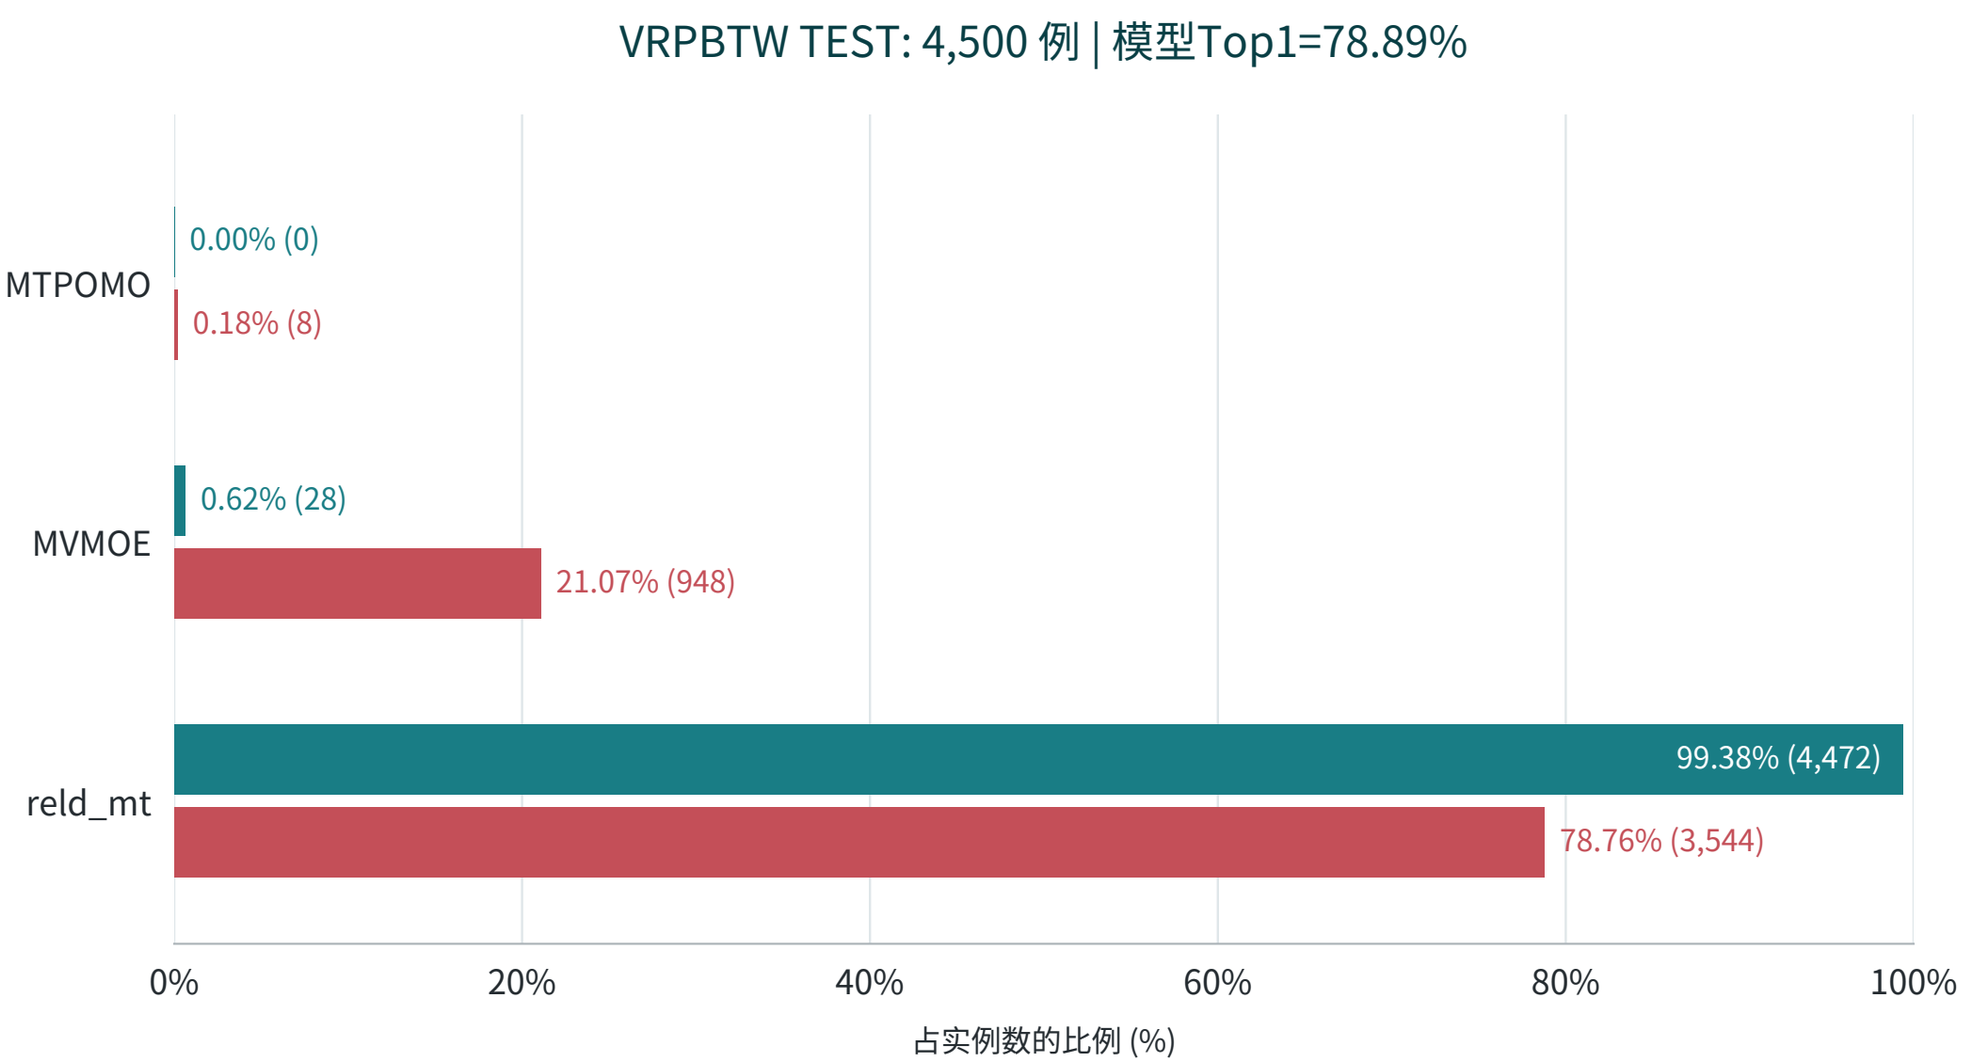

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPLTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

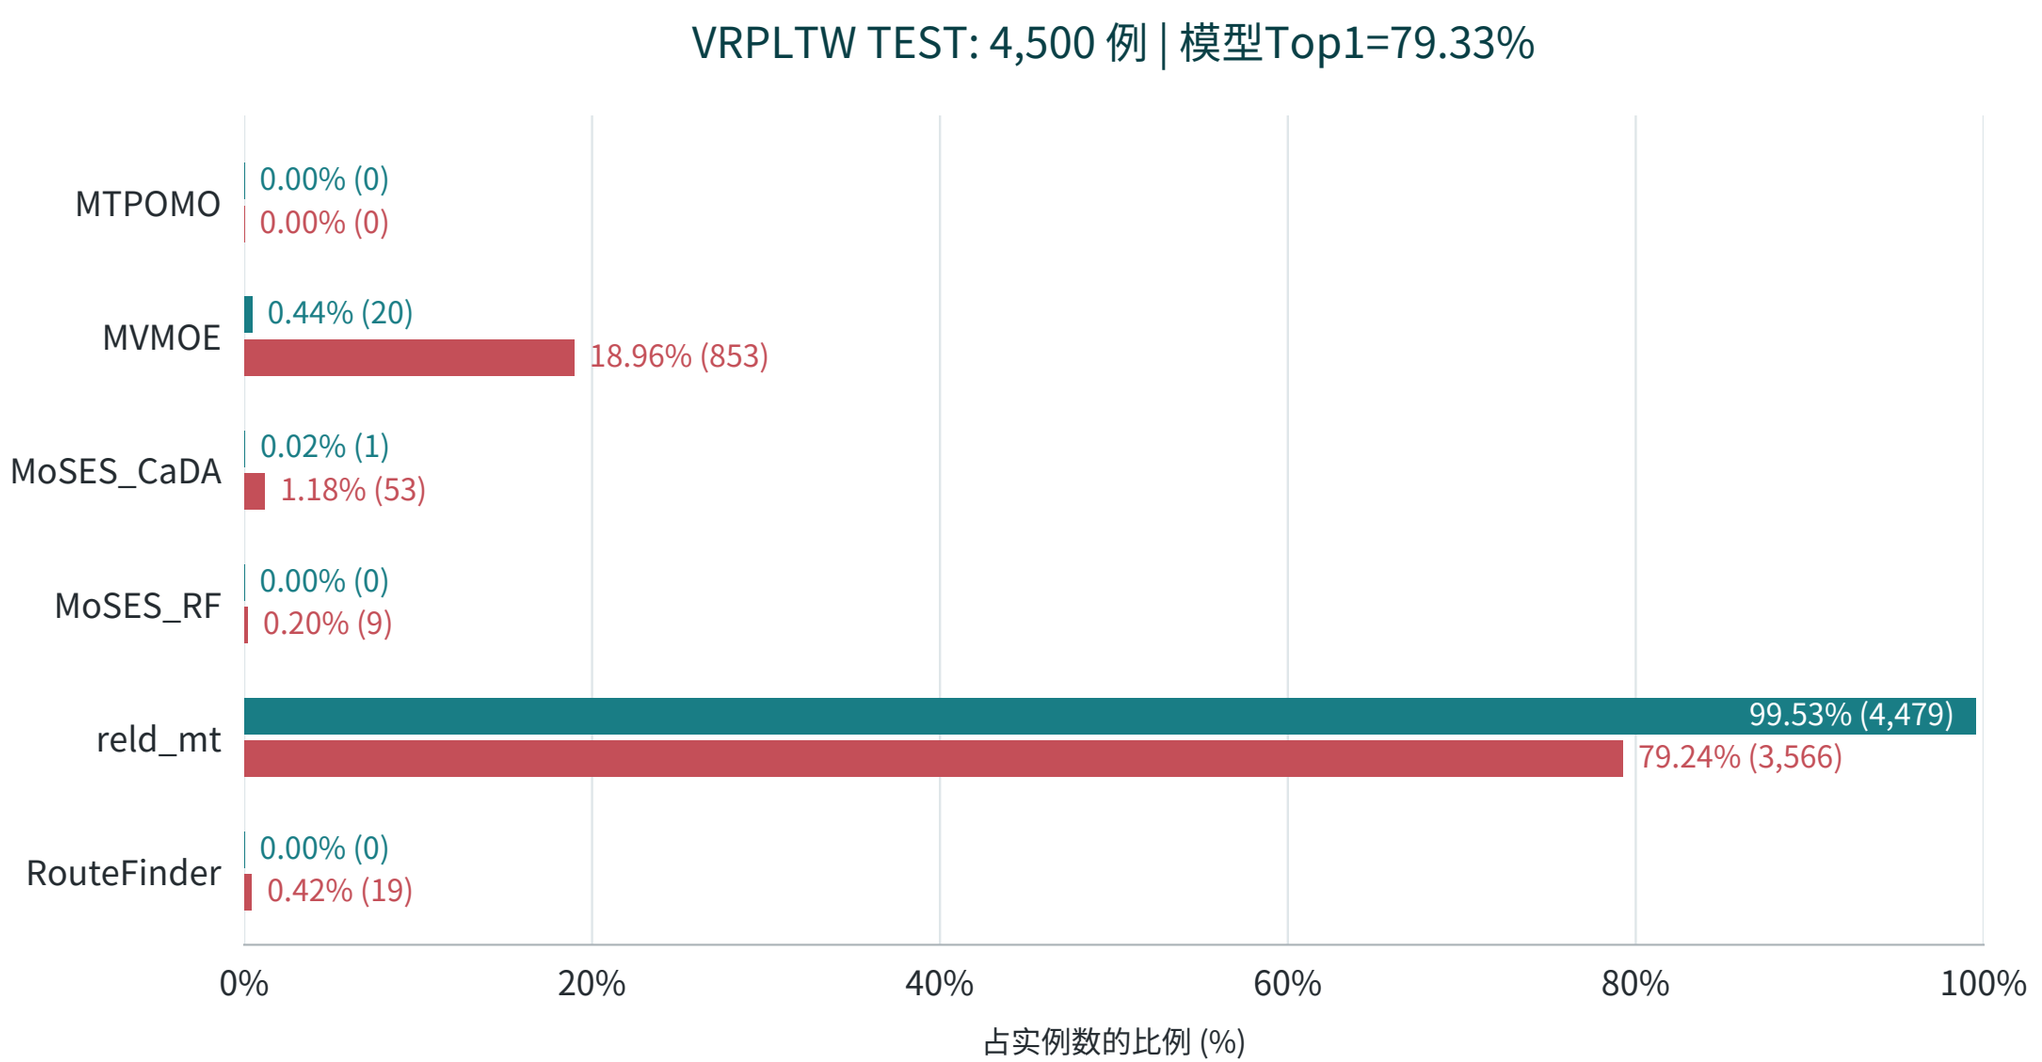

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPBL | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

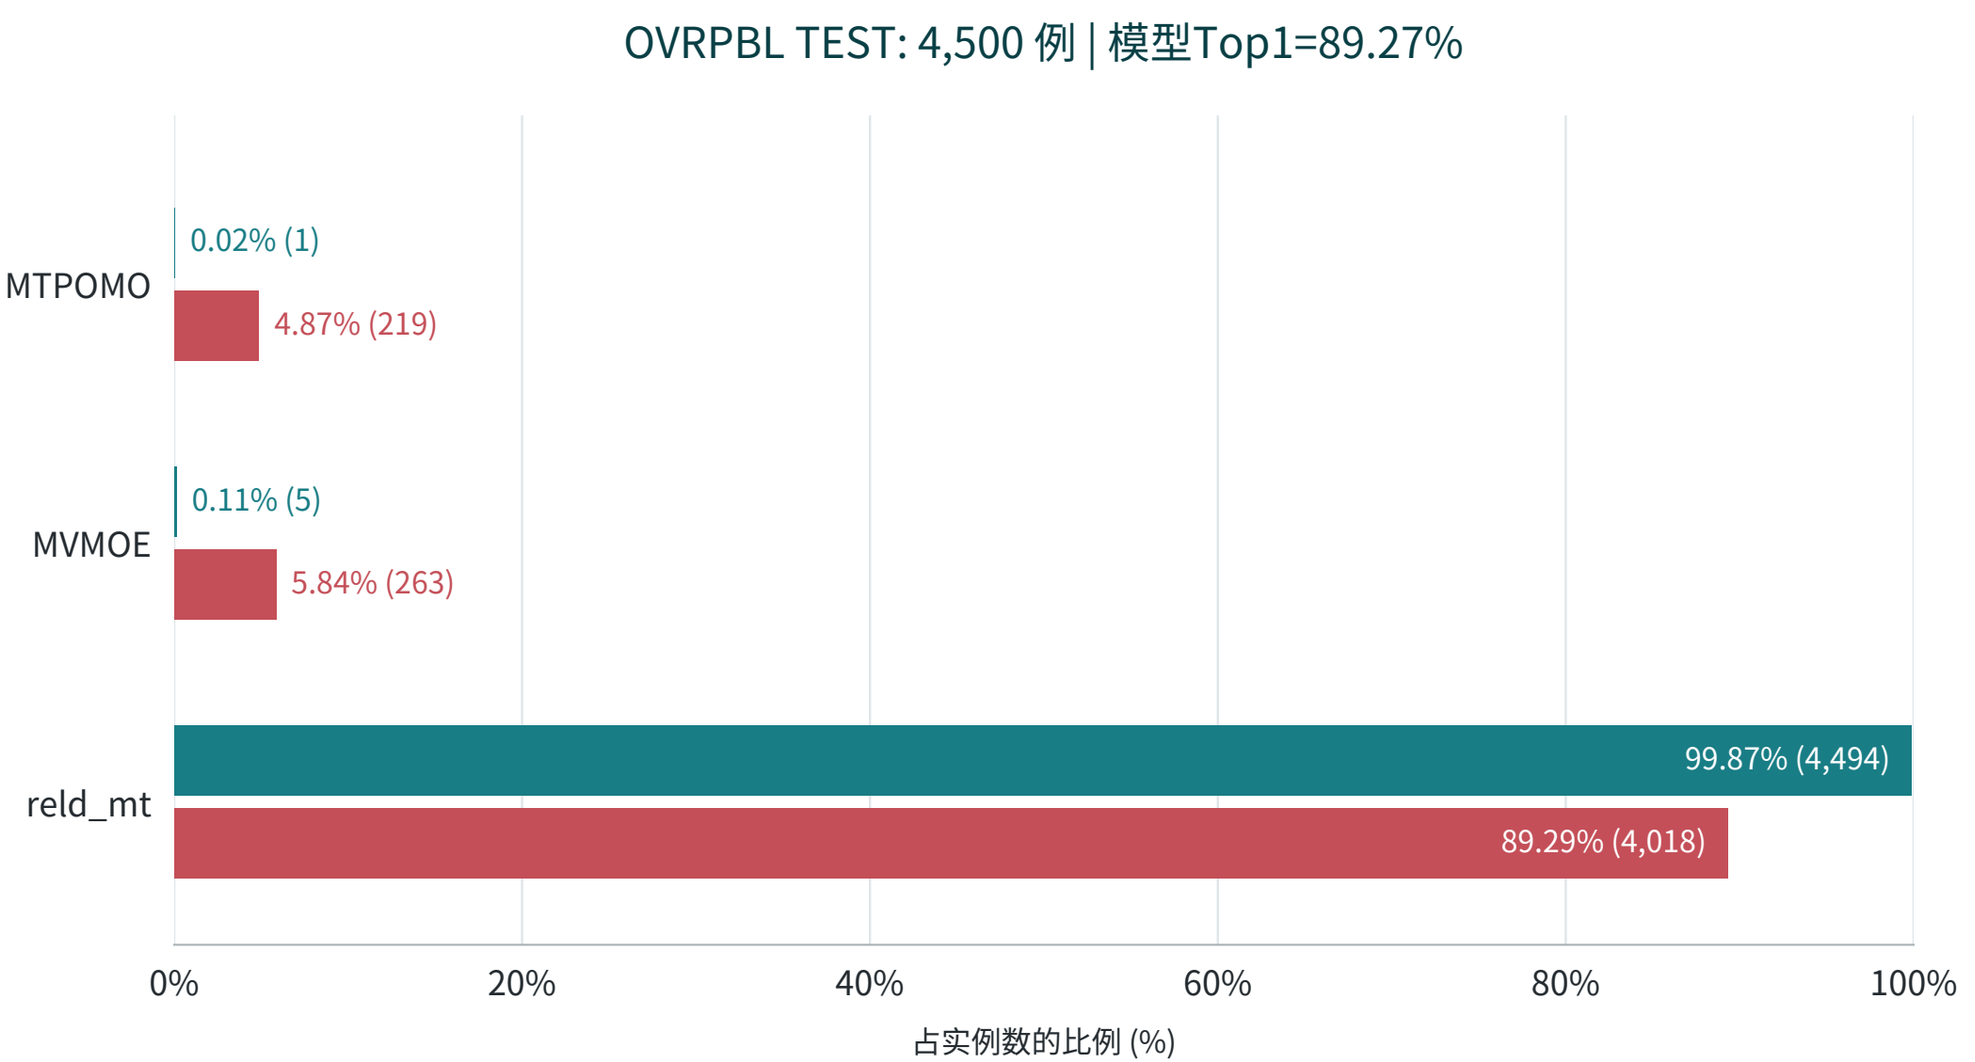

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPBTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

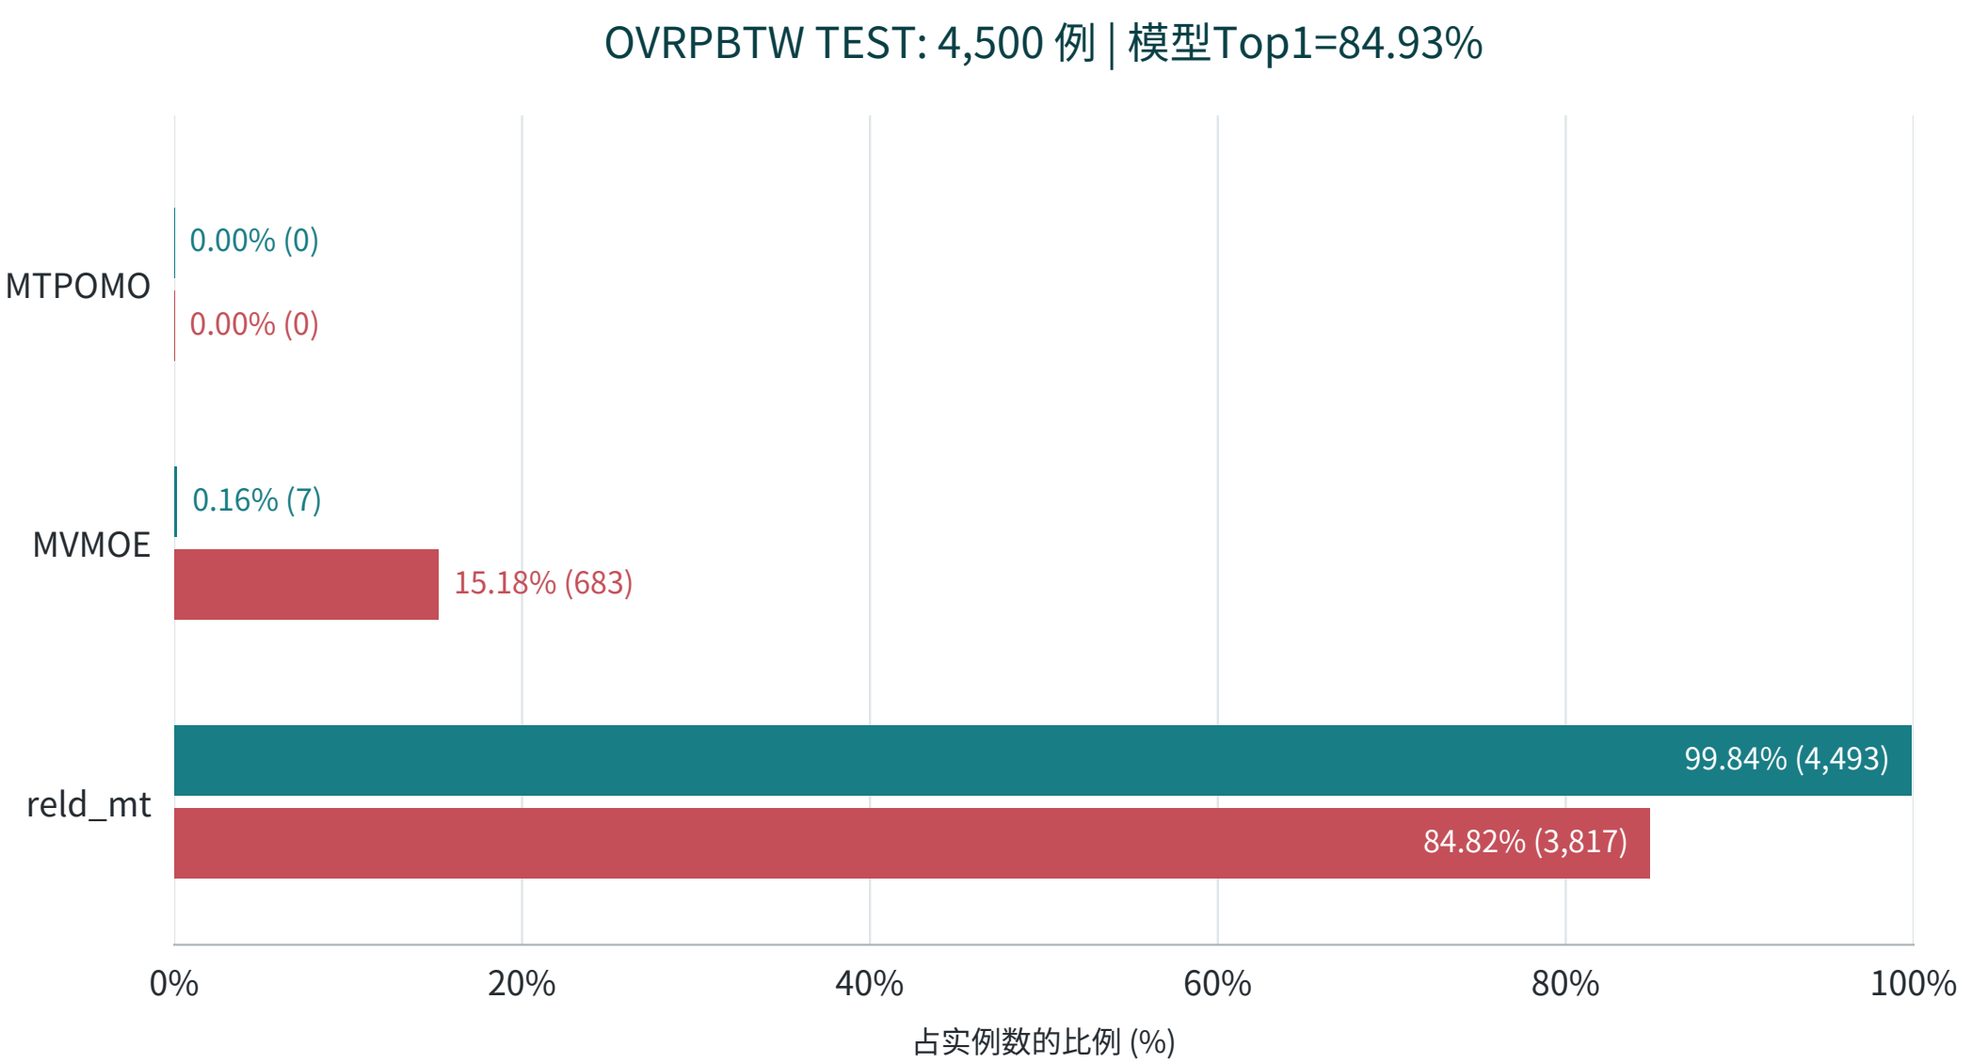

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPLTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

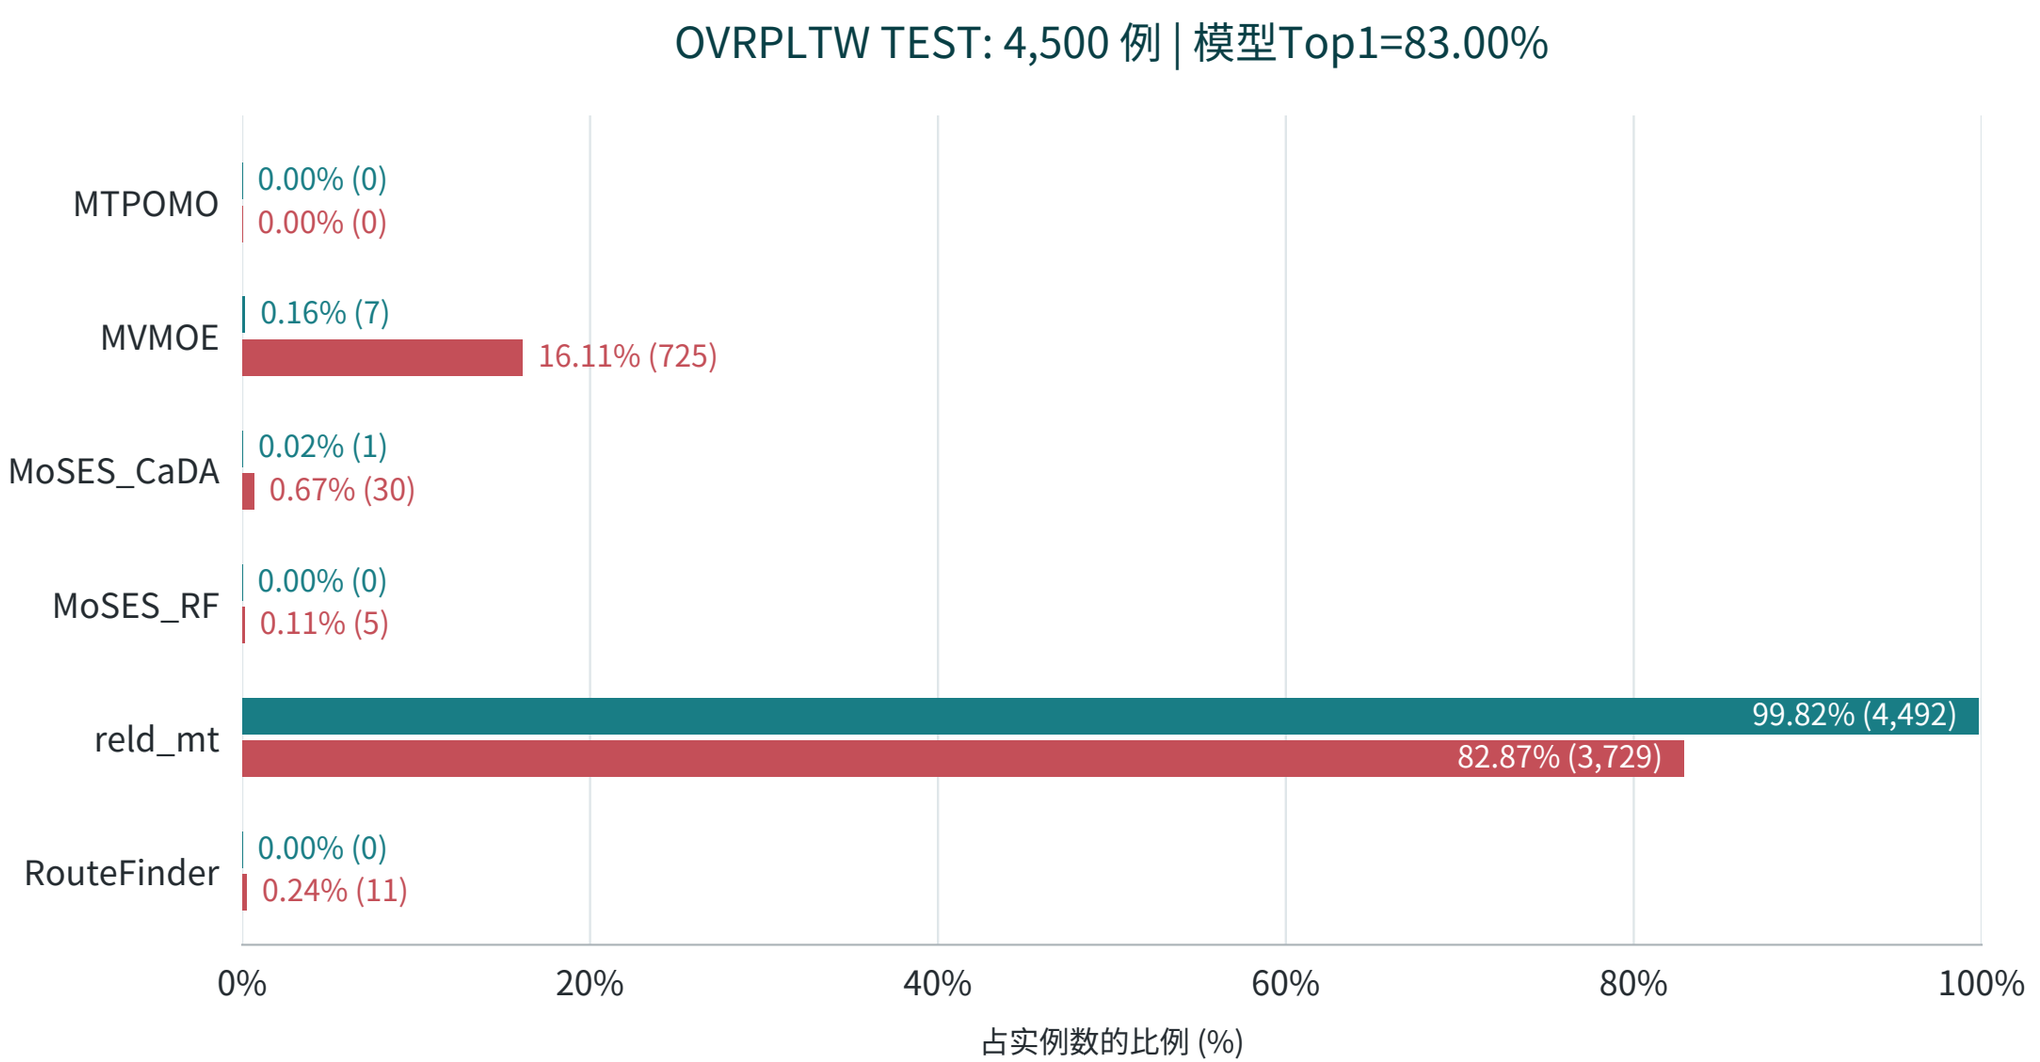

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | VRPBLTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

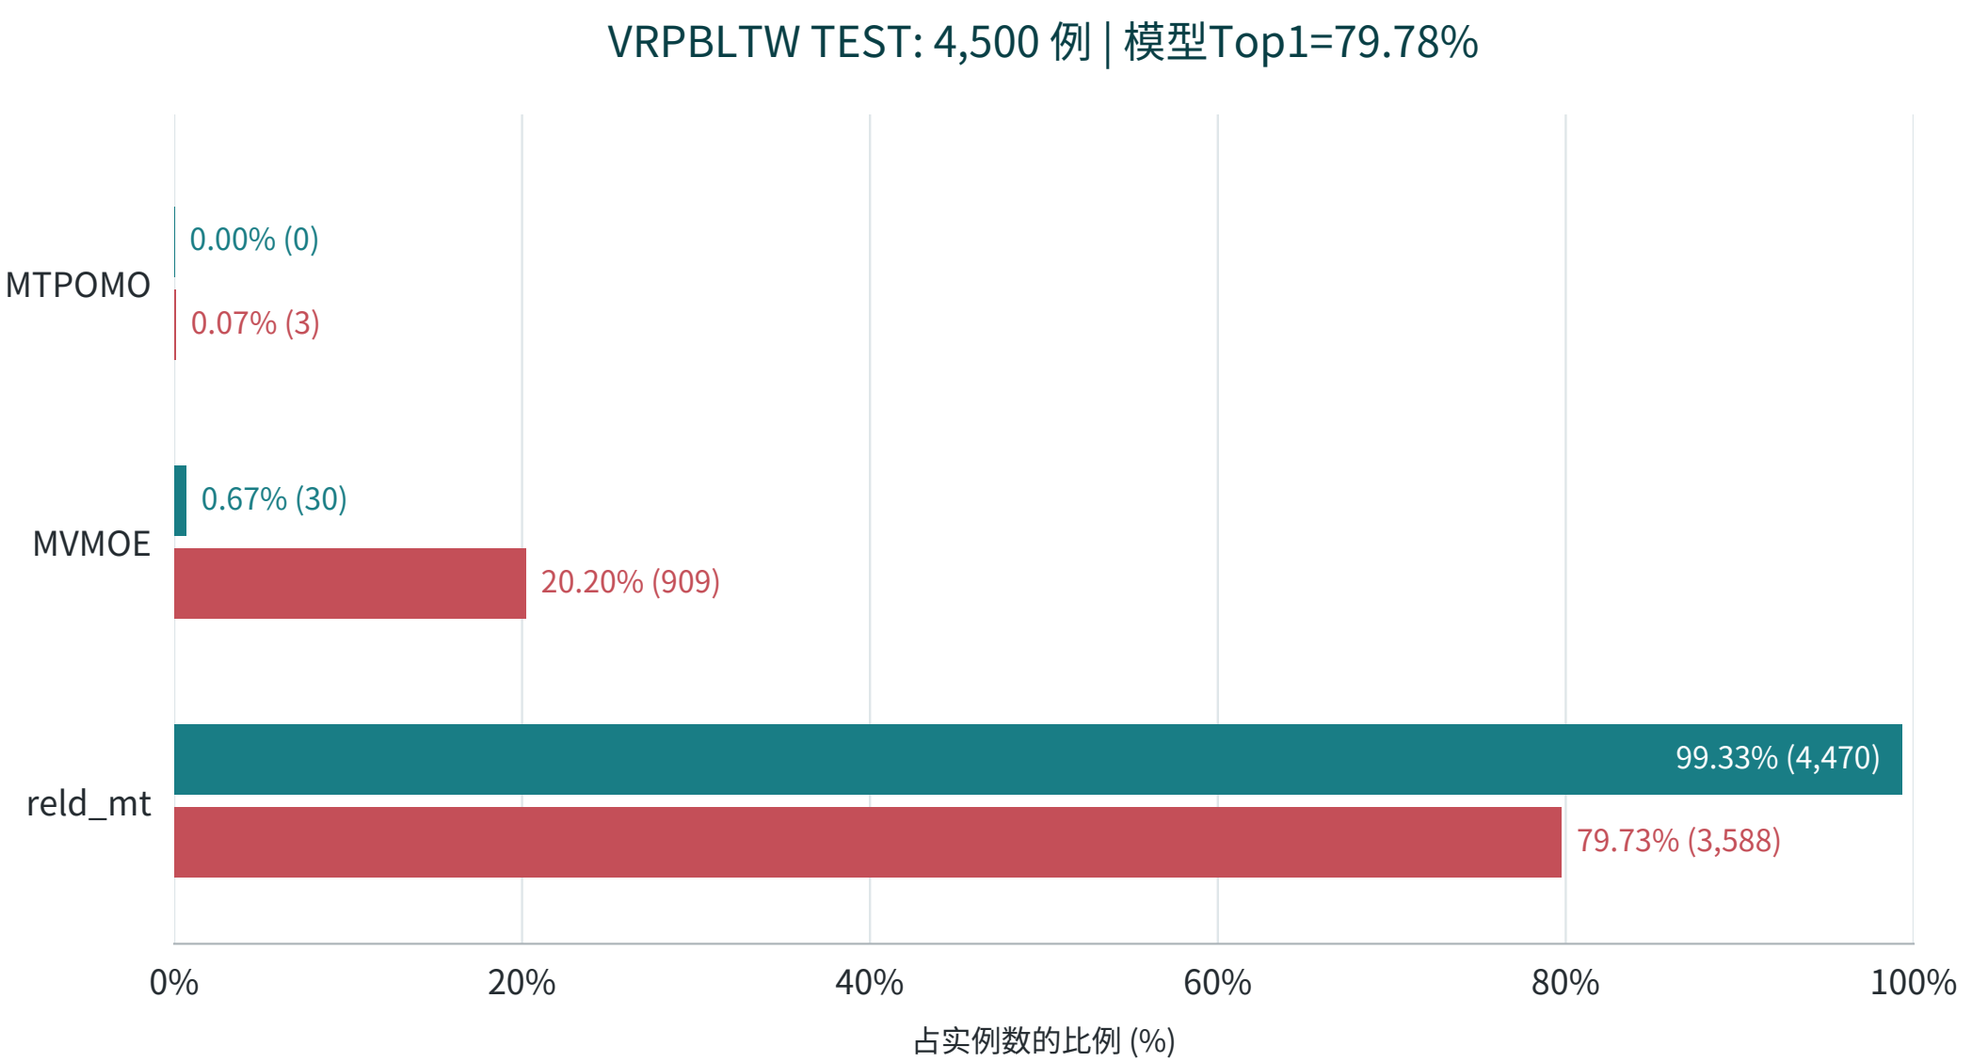

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.

R85/D_candidate_subset | OVRPBLTW | 方法分布

同一锁定模型: epoch 35 / update 50400 / SHA256 1d0e509c8e06b895

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

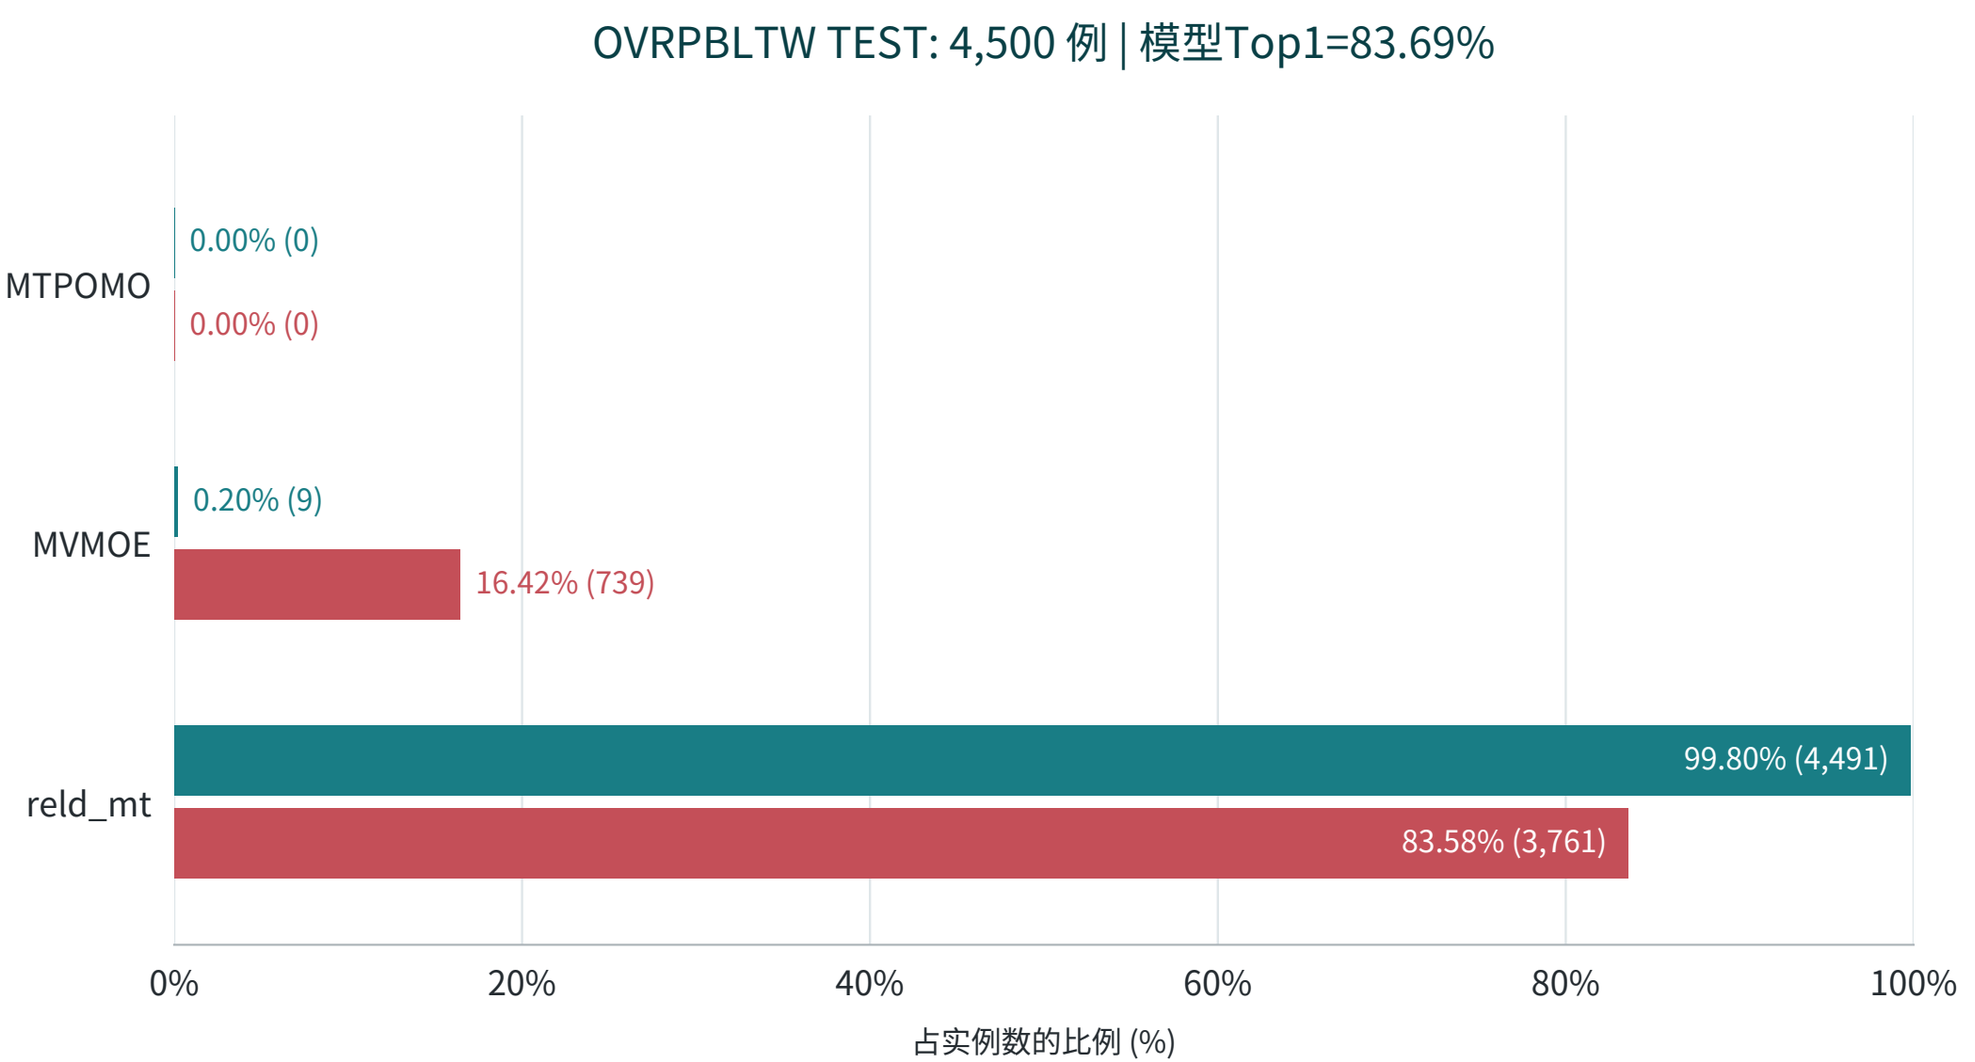

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R85/D_candidate_subset: stable global solver-ID score ties. Same R85 lock; LIB inference only; no training/reselection/Rxx mixing.