R87/A_shared_residual | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 28 | update 40320 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.1481	66.2037	11.416999	11.427978	11.371692	-0.1920	+0.3956	0.4063
TEST ALL	71.4086	66.1802	11.373950	11.385299	11.329932	-0.1981	+0.3851	0.3945

Dataset	n	NSS Top1 (%)	R87 Top1 (%)	NSS cost	R87 cost
TSP TEST	4500	45.888889	46.911111	7.970400719	7.971977270
CVRP TEST	4500	45.977778	47.644444	18.004802368	18.014117444
TSPLIB	49	20.408163	22.448980	8.217907074	8.208815236
CVRPLIB	100	70.000000	64.000000	67.101111717	67.268404379

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_plus_residual_maximin | objective: original native CE

R87/A_shared_residual | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1481	66.2037	11.416999	11.427978	11.371692	-0.1920	+0.3956	0.4063	per-problem TRAIN SBS
TSP	46.6889	33.1111	8.025667	8.045354	7.990533	-0.2447	+0.4397	0.4295	T2T
CVRP	47.1556	18.7111	18.162940	18.269377	18.064087	-0.5826	+0.5472	0.7289	RELD_CVRP
ATSP	77.2444	47.4889	1.638572	1.676905	1.632471	-2.2859	+0.3737	0.3706	UNICO_MatPOENet
OVRP	41.4000	35.7556	7.461281	7.469579	7.415777	-0.1111	+0.6136	0.6277	MoSES_RF
VRPB	81.1111	80.8444	9.355687	9.354876	9.318750	+0.0087	+0.3964	0.3998	reld_mt
VRPL	38.1333	33.0889	12.431655	12.437959	12.383444	-0.0507	+0.3893	0.3969	MoSES_RF
VRPTW	80.0667	79.9556	18.819004	18.819431	18.766139	-0.0023	+0.2817	0.2984	reld_mt
OVRPTW	83.8667	83.7778	10.142960	10.143730	10.116859	-0.0076	+0.2580	0.2550	reld_mt
OVRPB	88.4222	88.5111	6.357959	6.357254	6.341078	+0.0111	+0.2662	0.2792	reld_mt
OVRPL	41.3333	35.9111	7.437784	7.445709	7.390416	-0.1064	+0.6409	0.6579	MoSES_RF
VRPBL	78.8000	78.5111	9.368045	9.371523	9.328366	-0.0371	+0.4254	0.4284	reld_mt
VRPBTW	78.5111	78.4222	19.948577	19.950430	19.851084	-0.0093	+0.4911	0.4669	reld_mt
VRPLTW	78.7556	78.7556	18.764438	18.765871	18.707843	-0.0076	+0.3025	0.3189	reld_mt
OVRPBL	89.3778	89.2000	6.368966	6.370093	6.352824	-0.0177	+0.2541	0.2641	reld_mt
OVRPBTW	83.5111	83.4444	10.661813	10.661098	10.623245	+0.0067	+0.3631	0.3416	reld_mt
OVRPLTW	83.6000	83.4889	10.156934	10.157423	10.129818	-0.0048	+0.2677	0.2714	reld_mt
VRPBLTW	79.5111	79.4000	19.793339	19.797044	19.706420	-0.0187	+0.4411	0.4309	reld_mt
OVRPBLTW	83.1778	83.2889	10.610355	10.609955	10.571302	+0.0038	+0.3694	0.3480	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R87/A_shared_residual | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.4086	66.1802	11.373950	11.385299	11.329932	-0.1981	+0.3851	0.3945	per-problem TRAIN SBS
TSP	46.9111	34.5333	7.971977	7.989621	7.937593	-0.2208	+0.4332	0.4242	T2T
CVRP	47.6444	17.9333	18.014117	18.124983	17.918509	-0.6117	+0.5336	0.7035	RELD_CVRP
ATSP	76.8444	47.2444	1.635323	1.674207	1.629441	-2.3226	+0.3609	0.3607	UNICO_MatPOENet
OVRP	41.3111	33.6444	7.445007	7.455750	7.400487	-0.1441	+0.6016	0.6120	MoSES_RF
VRPB	80.5778	80.4000	9.350318	9.351810	9.315298	-0.0160	+0.3759	0.3833	reld_mt
VRPL	37.7111	32.2667	12.349622	12.356138	12.300958	-0.0527	+0.3956	0.4026	MoSES_RF
VRPTW	81.2222	80.8444	18.687853	18.690545	18.637408	-0.0144	+0.2707	0.2826	reld_mt
OVRPTW	83.9333	83.9333	10.092676	10.093063	10.068135	-0.0038	+0.2437	0.2343	reld_mt
OVRPB	88.1333	88.1333	6.370800	6.370826	6.352225	-0.0004	+0.2924	0.2990	reld_mt
OVRPL	42.7556	34.6000	7.462293	7.472542	7.418033	-0.1371	+0.5967	0.6070	MoSES_RF
VRPBL	79.5778	79.4222	9.395080	9.396379	9.355967	-0.0138	+0.4181	0.4224	reld_mt
VRPBTW	78.8222	78.7556	19.665624	19.665725	19.577666	-0.0005	+0.4493	0.4478	reld_mt
VRPLTW	79.2667	79.2444	18.803609	18.803136	18.745143	+0.0025	+0.3119	0.3328	reld_mt
OVRPBL	89.2889	89.2889	6.375552	6.375741	6.359310	-0.0030	+0.2554	0.2666	reld_mt
OVRPBTW	84.9556	84.8222	10.658849	10.659591	10.624748	-0.0070	+0.3210	0.2936	reld_mt
OVRPLTW	83.0000	82.8667	10.085368	10.086112	10.059001	-0.0074	+0.2621	0.2626	reld_mt
VRPBLTW	79.7778	79.7333	19.705192	19.707068	19.613284	-0.0095	+0.4686	0.4481	reld_mt
OVRPBLTW	83.6222	83.5778	10.661846	10.662149	10.625574	-0.0028	+0.3414	0.3181	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R87/A_shared_residual | LIB and locked provenance

Current R87 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	22.4490	10.2041	8.208815	8.240435	8.142167	-0.3837	+0.8186	0.8421
CVRPLIB	64.0000	45.0000	67.268404	67.245364	66.945093	+0.0343	+0.4829	0.5846

SHA256: d3041a4292206bcd3ed4a2be6d71116bddd16f37afc033ed1f361c1fe309c8ab

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original shared utility plus residual, original pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R87/A_shared_residual | TSP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

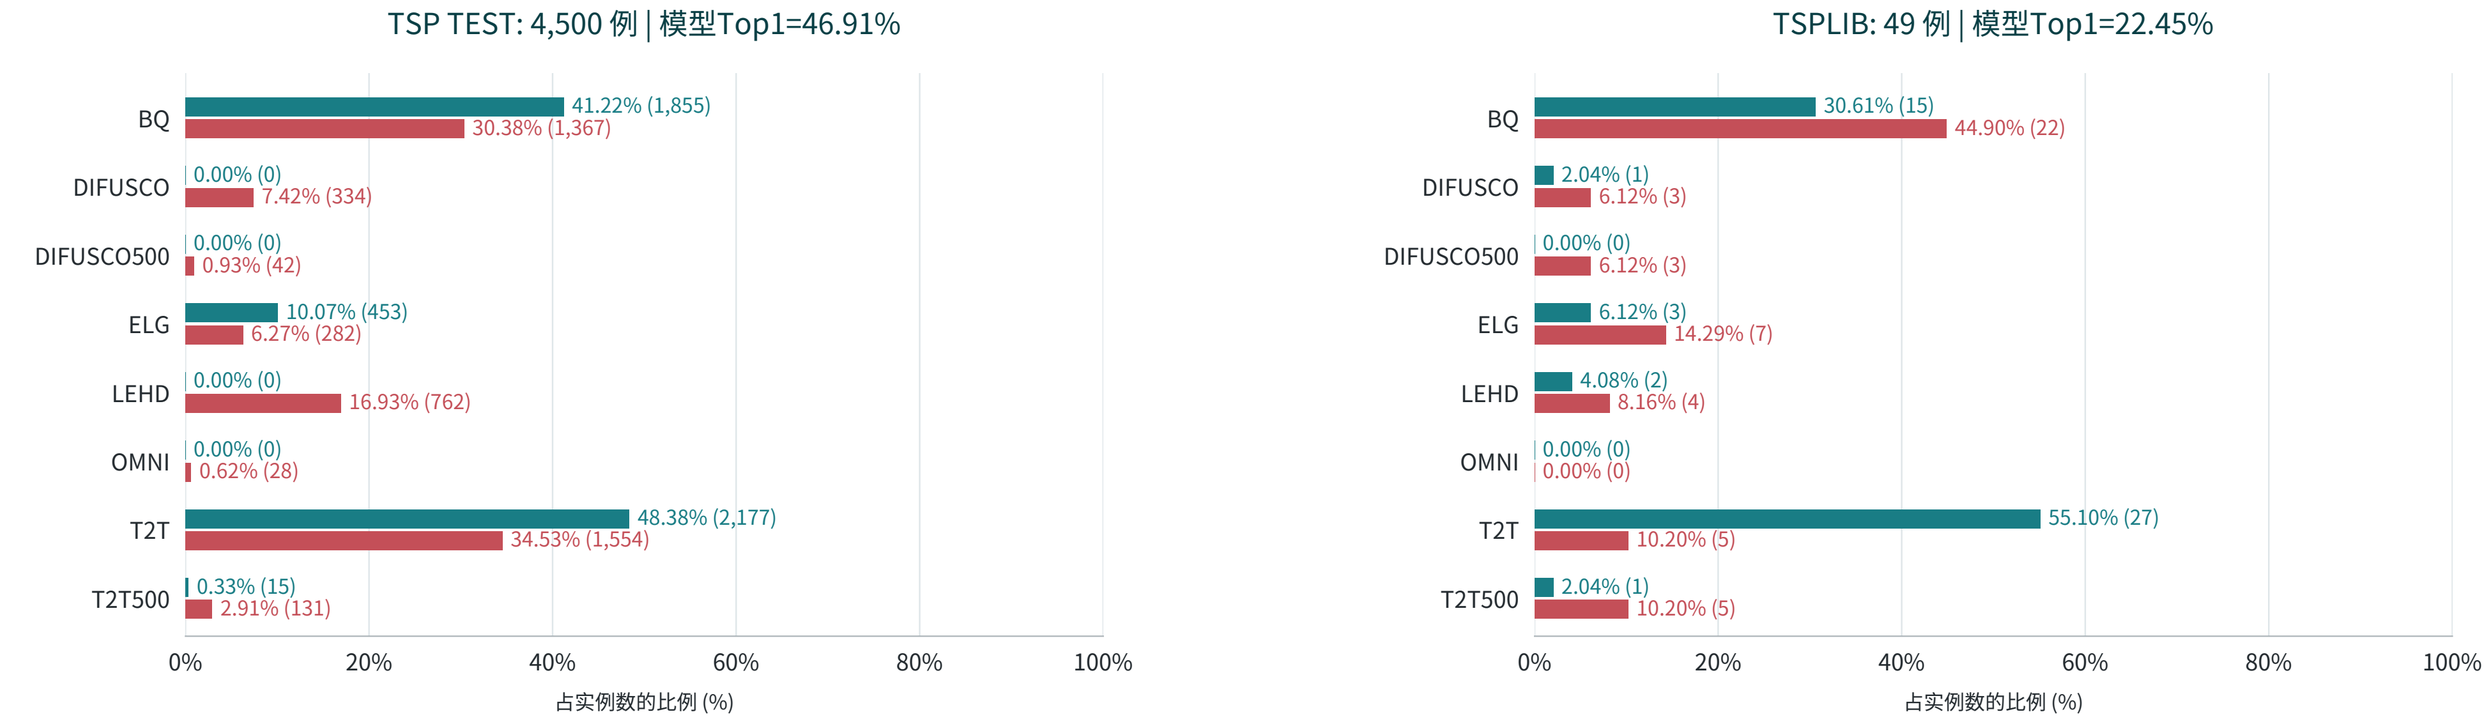

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | CVRP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

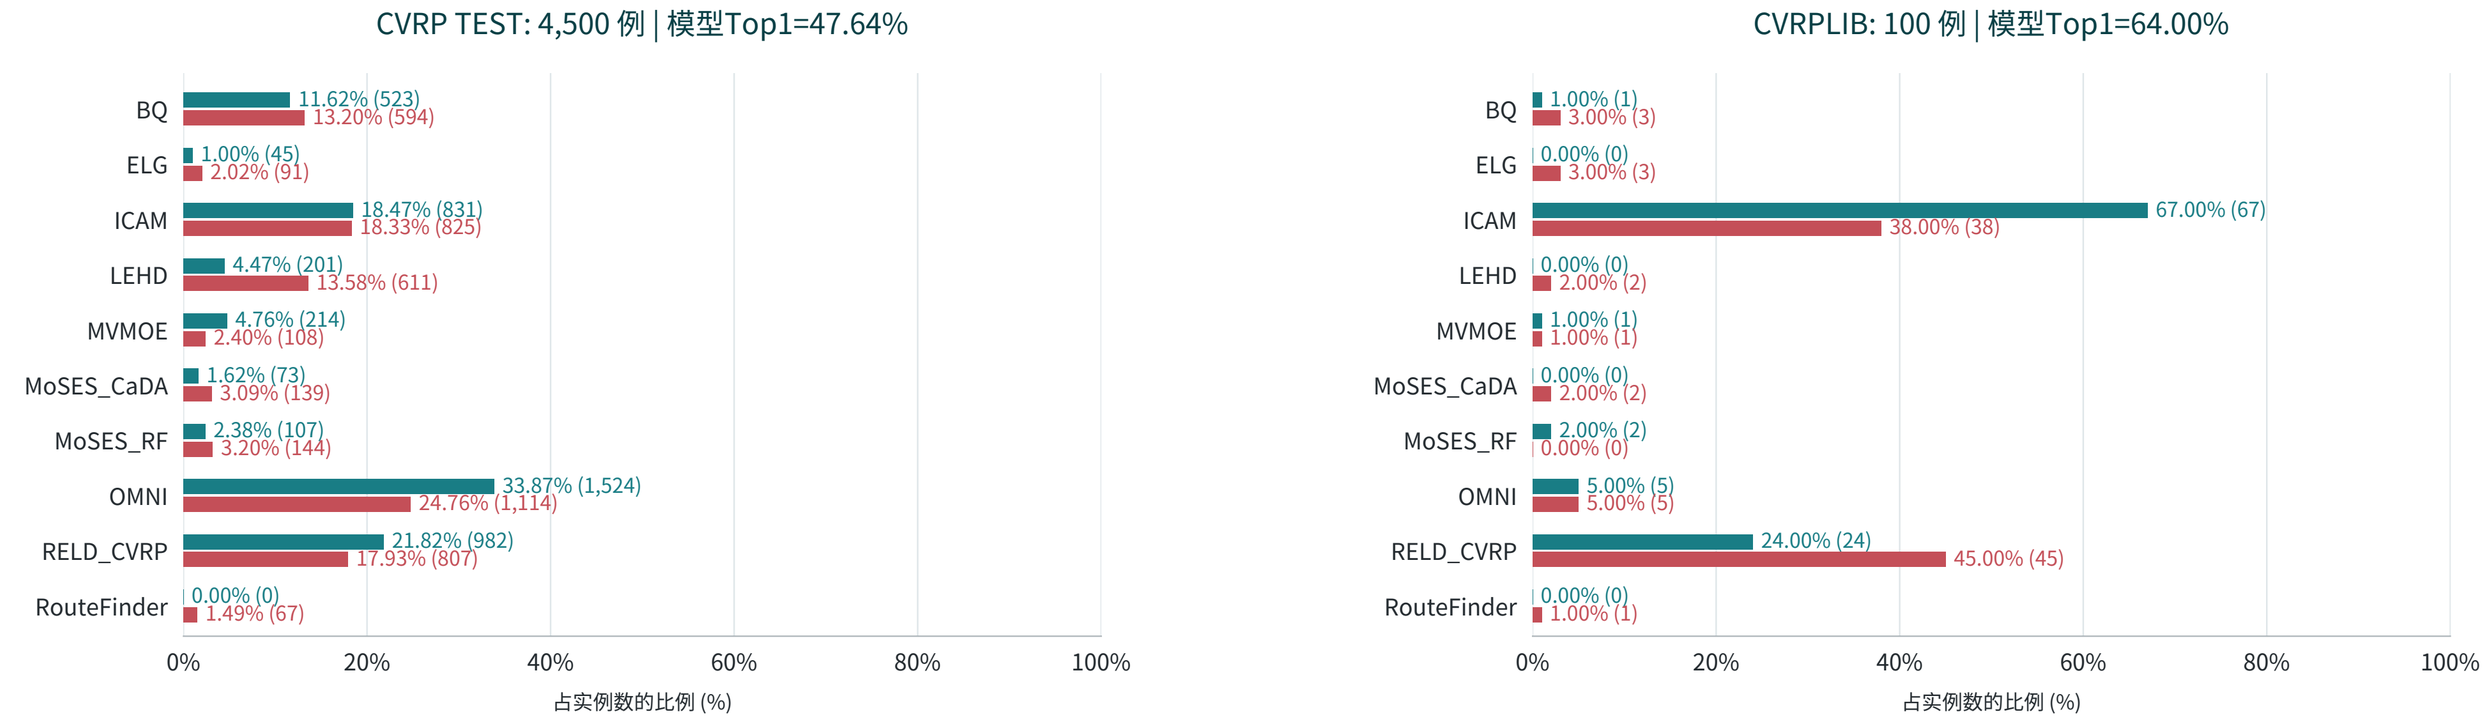

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | ATSP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

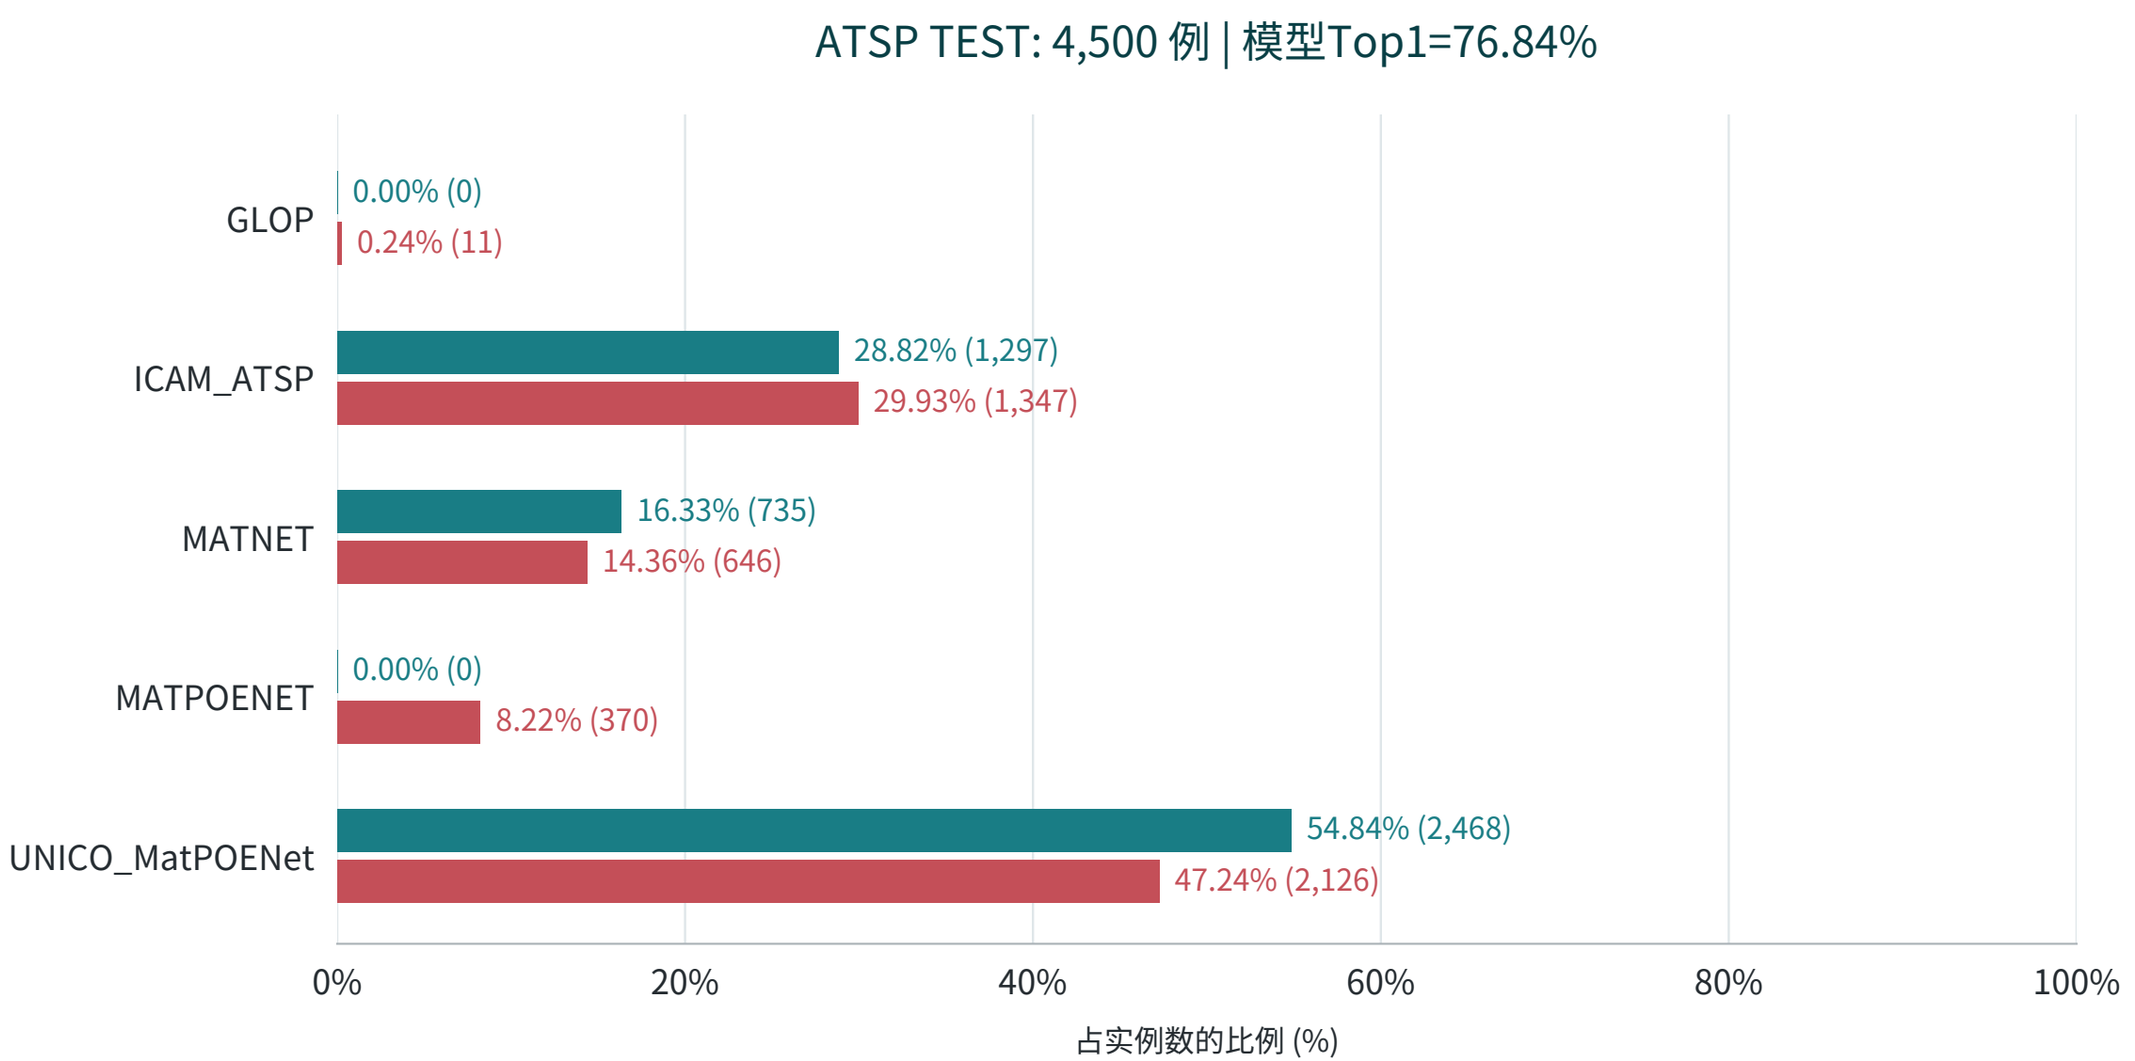

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

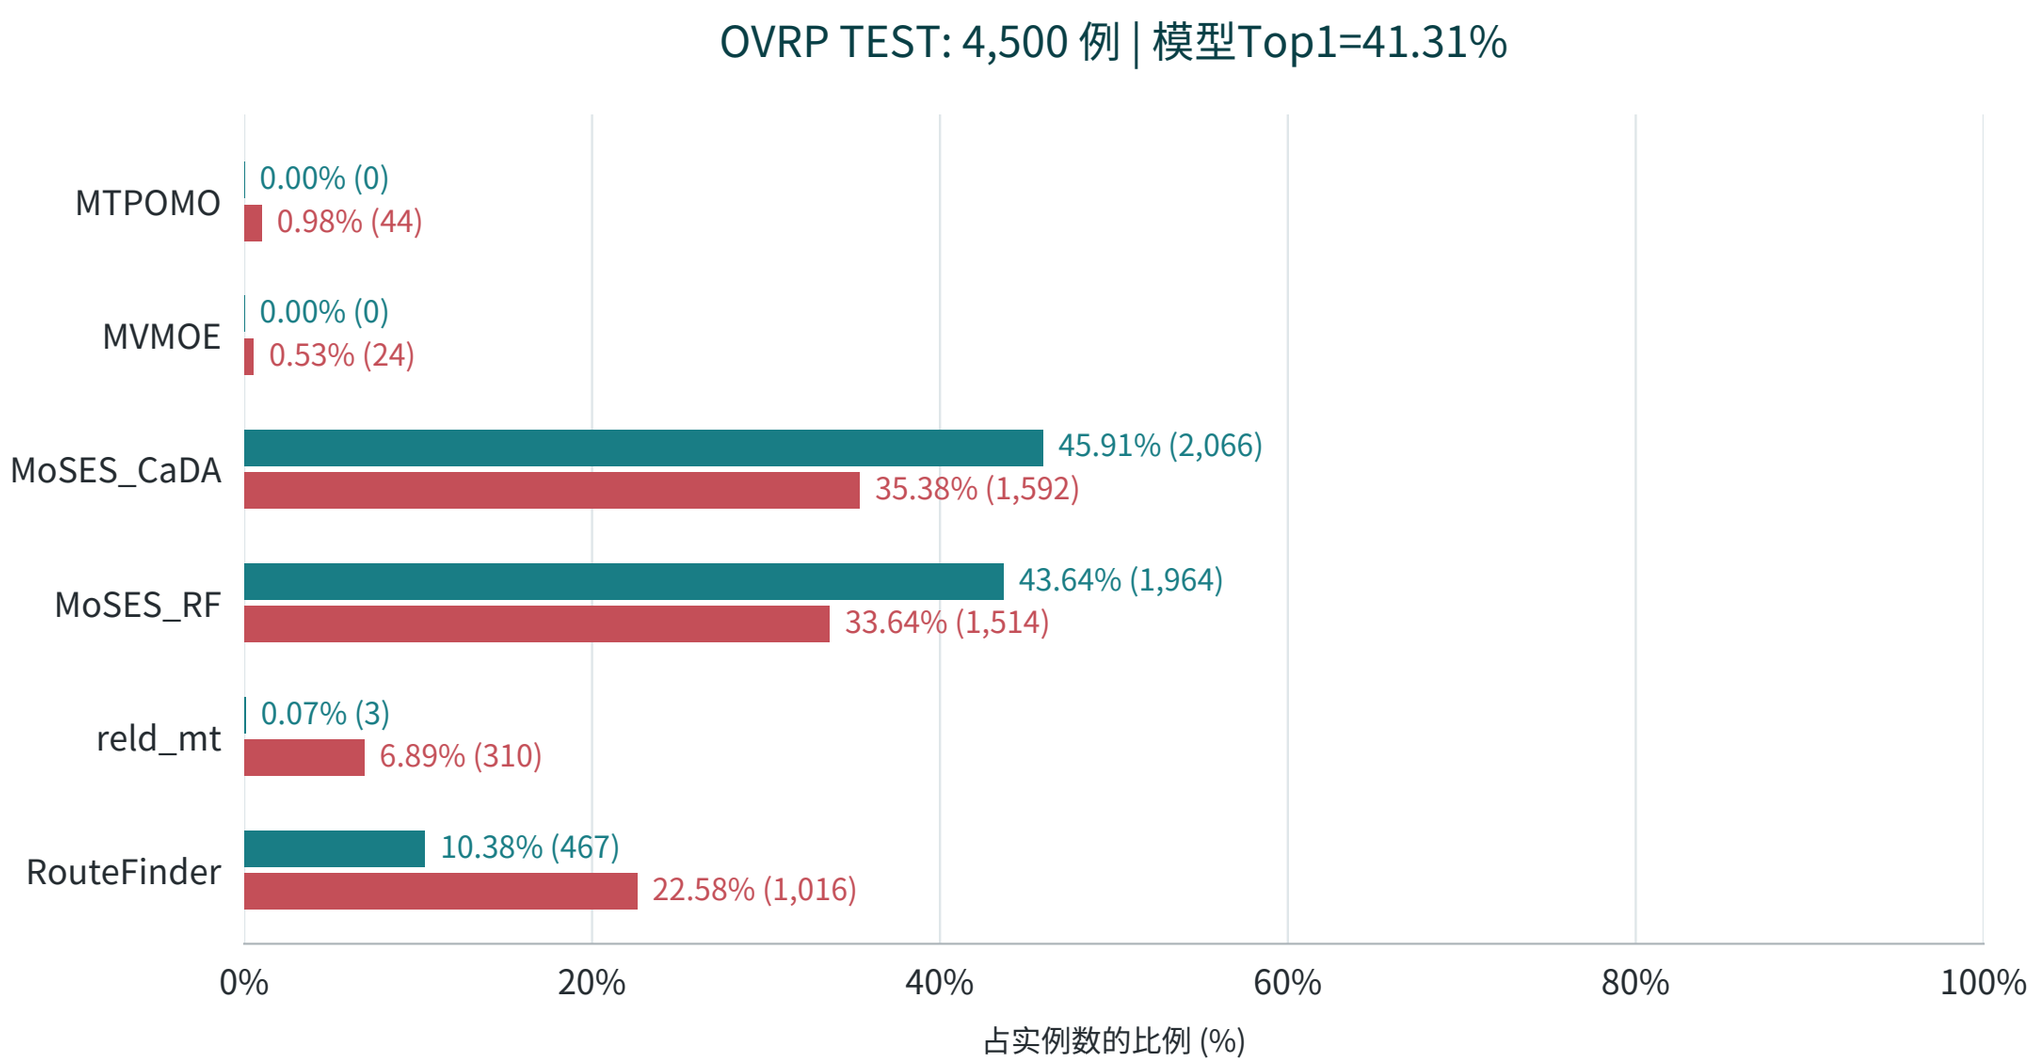

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPB | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

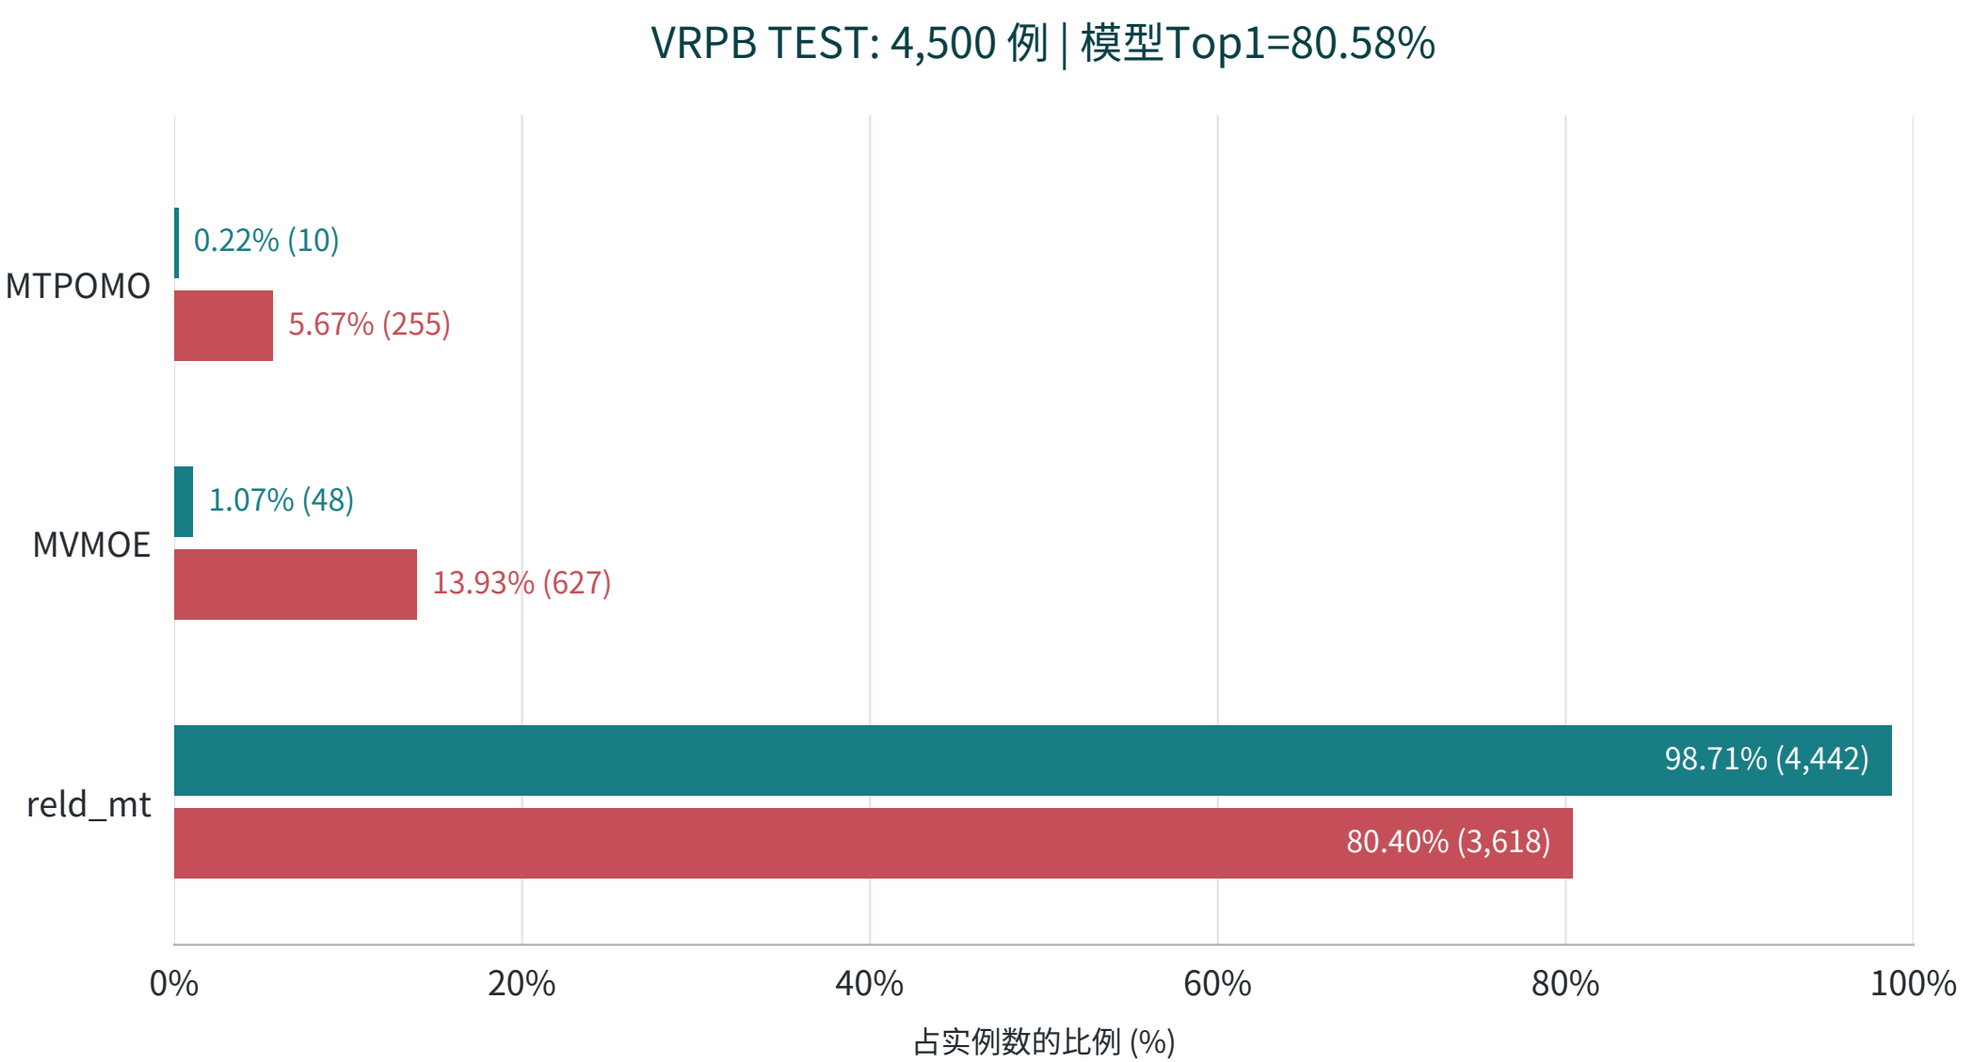

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

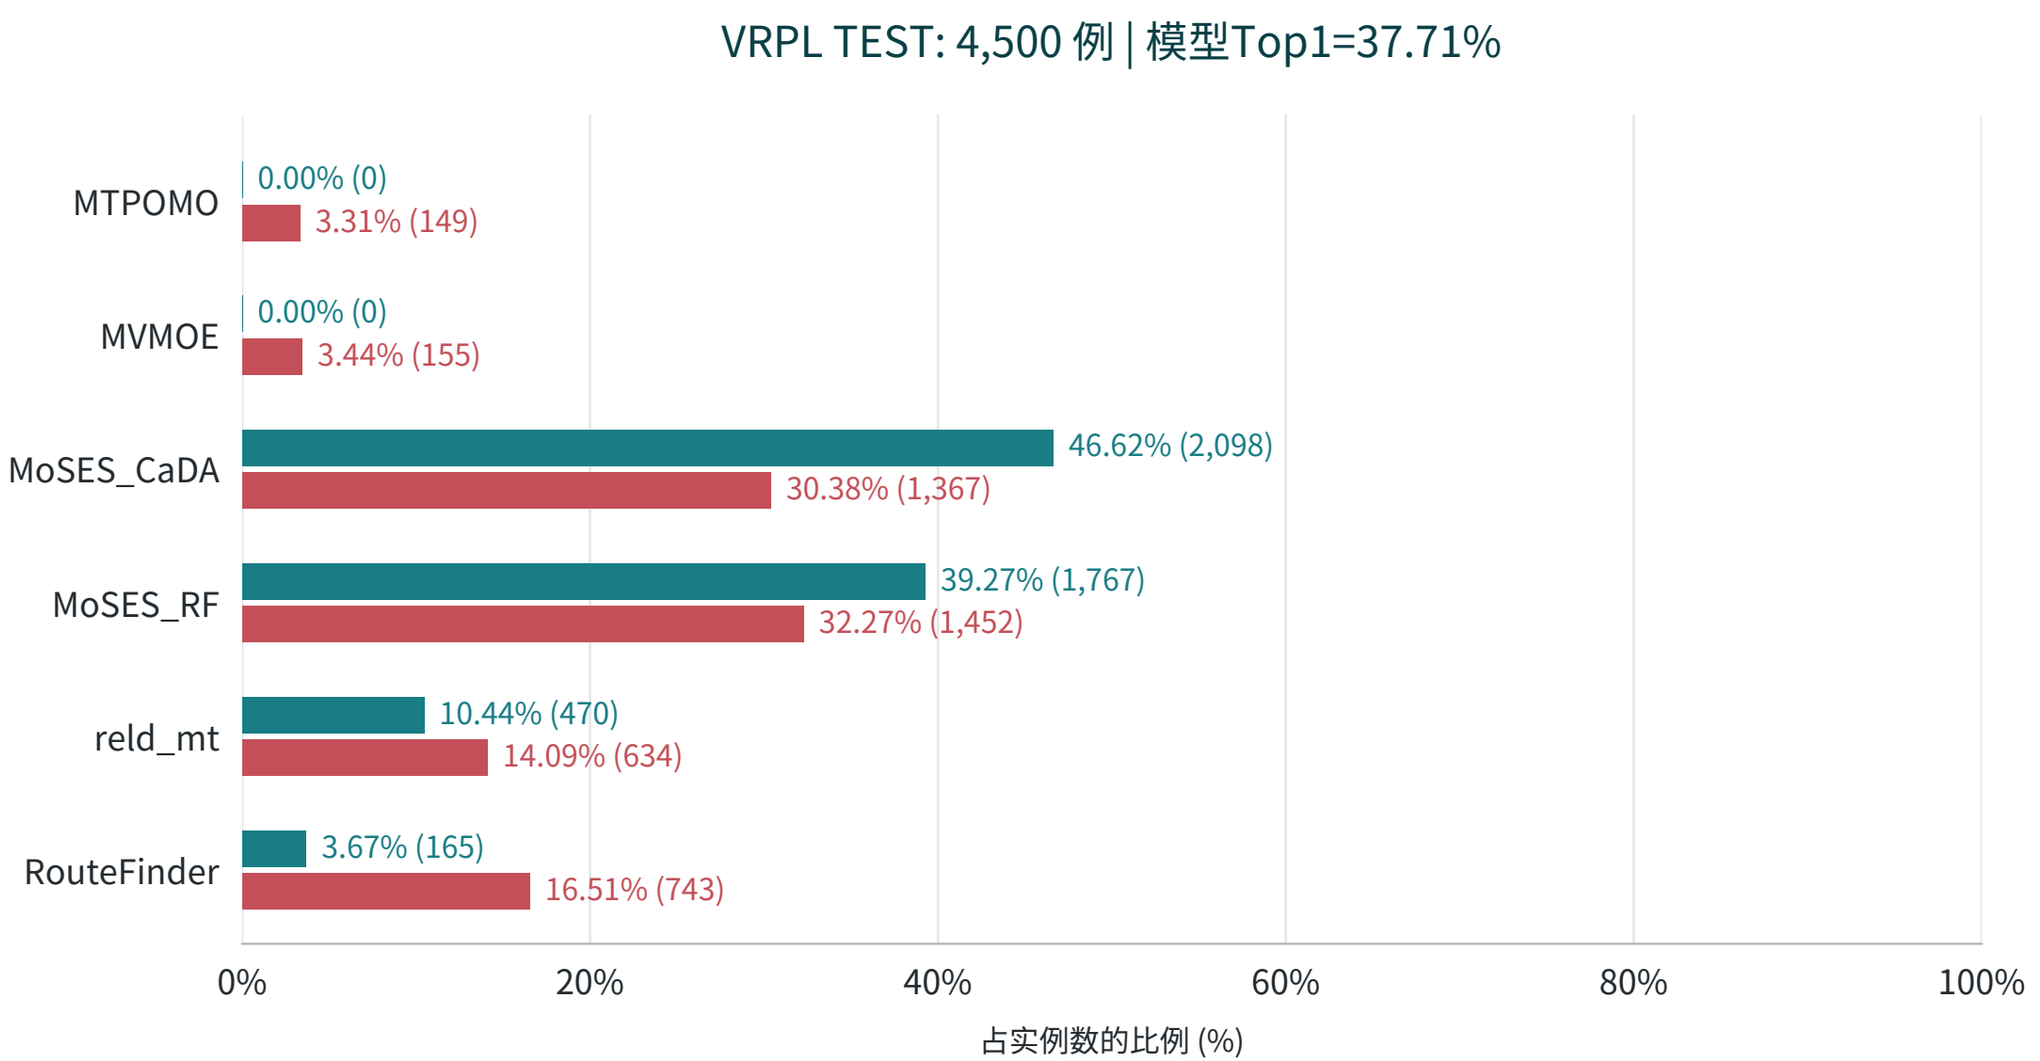

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

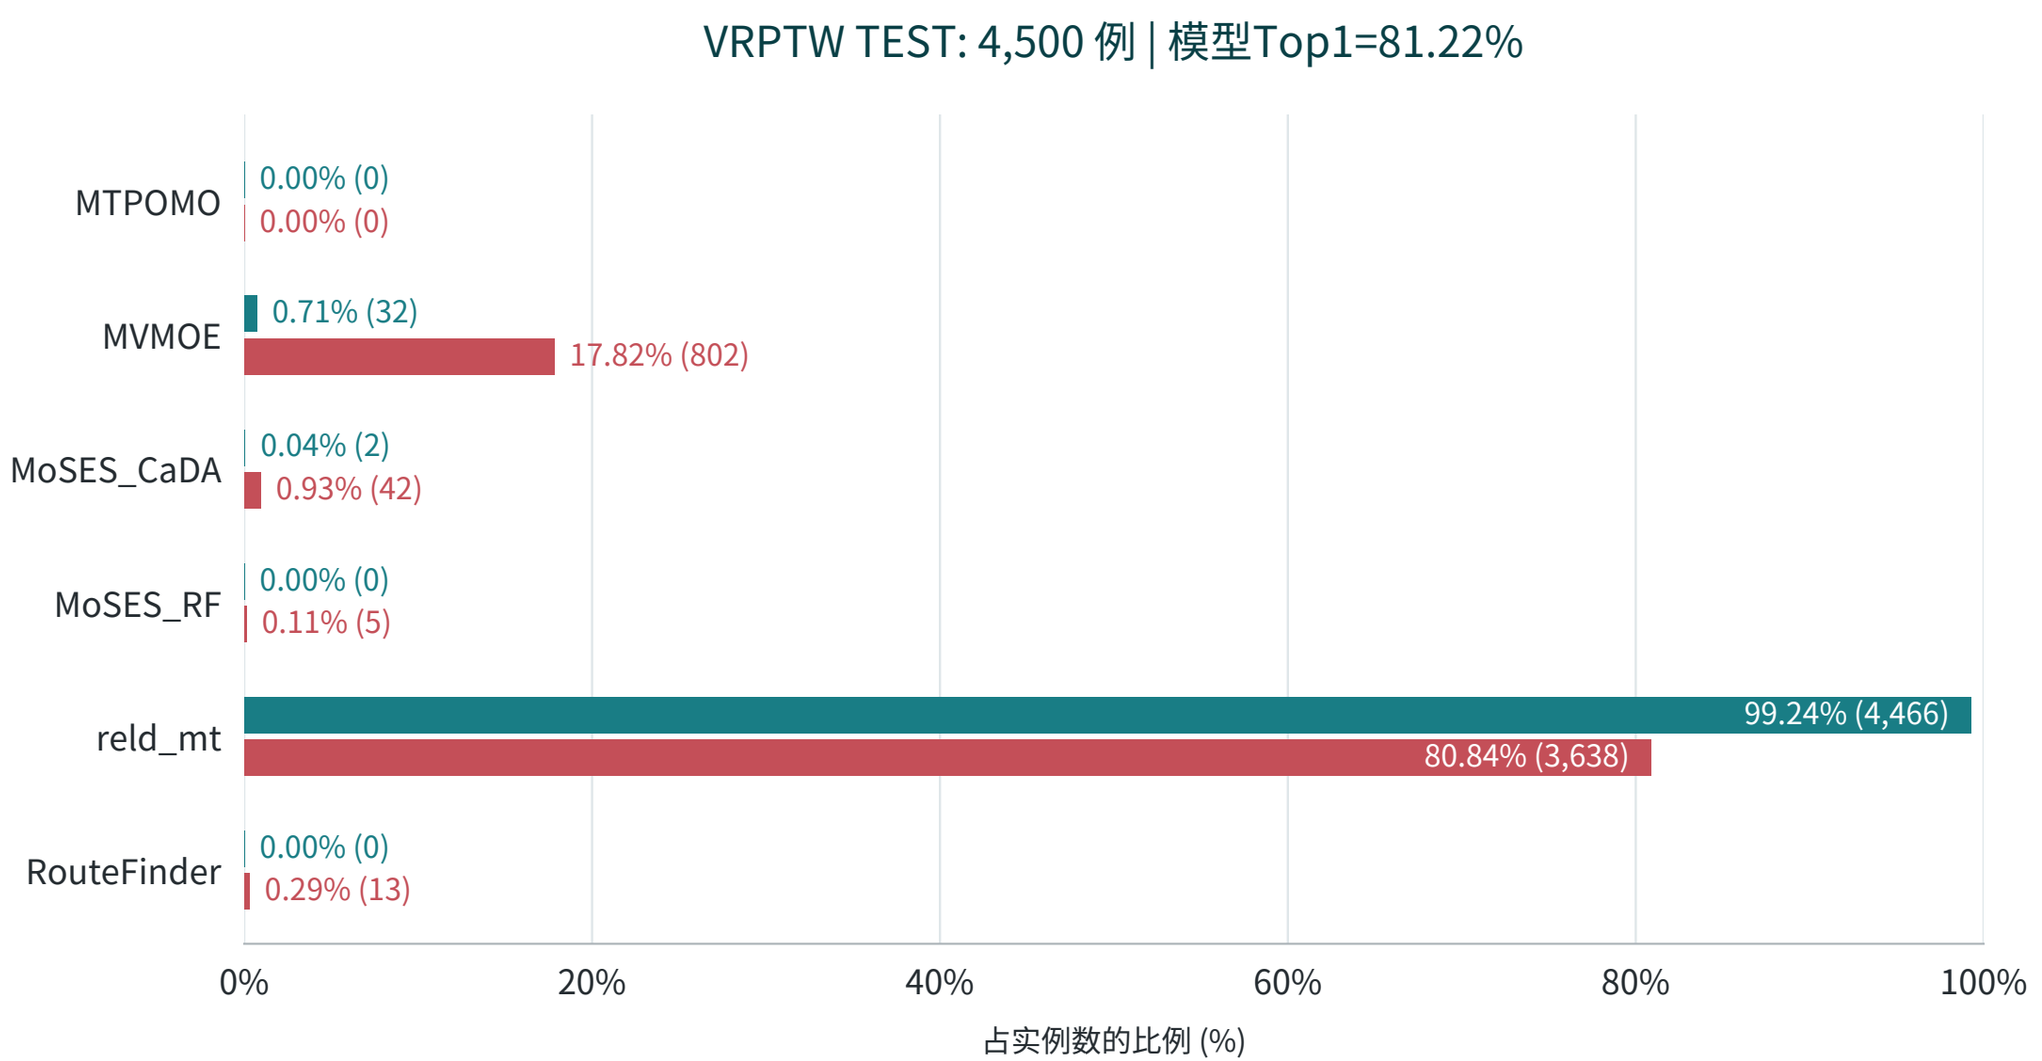

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

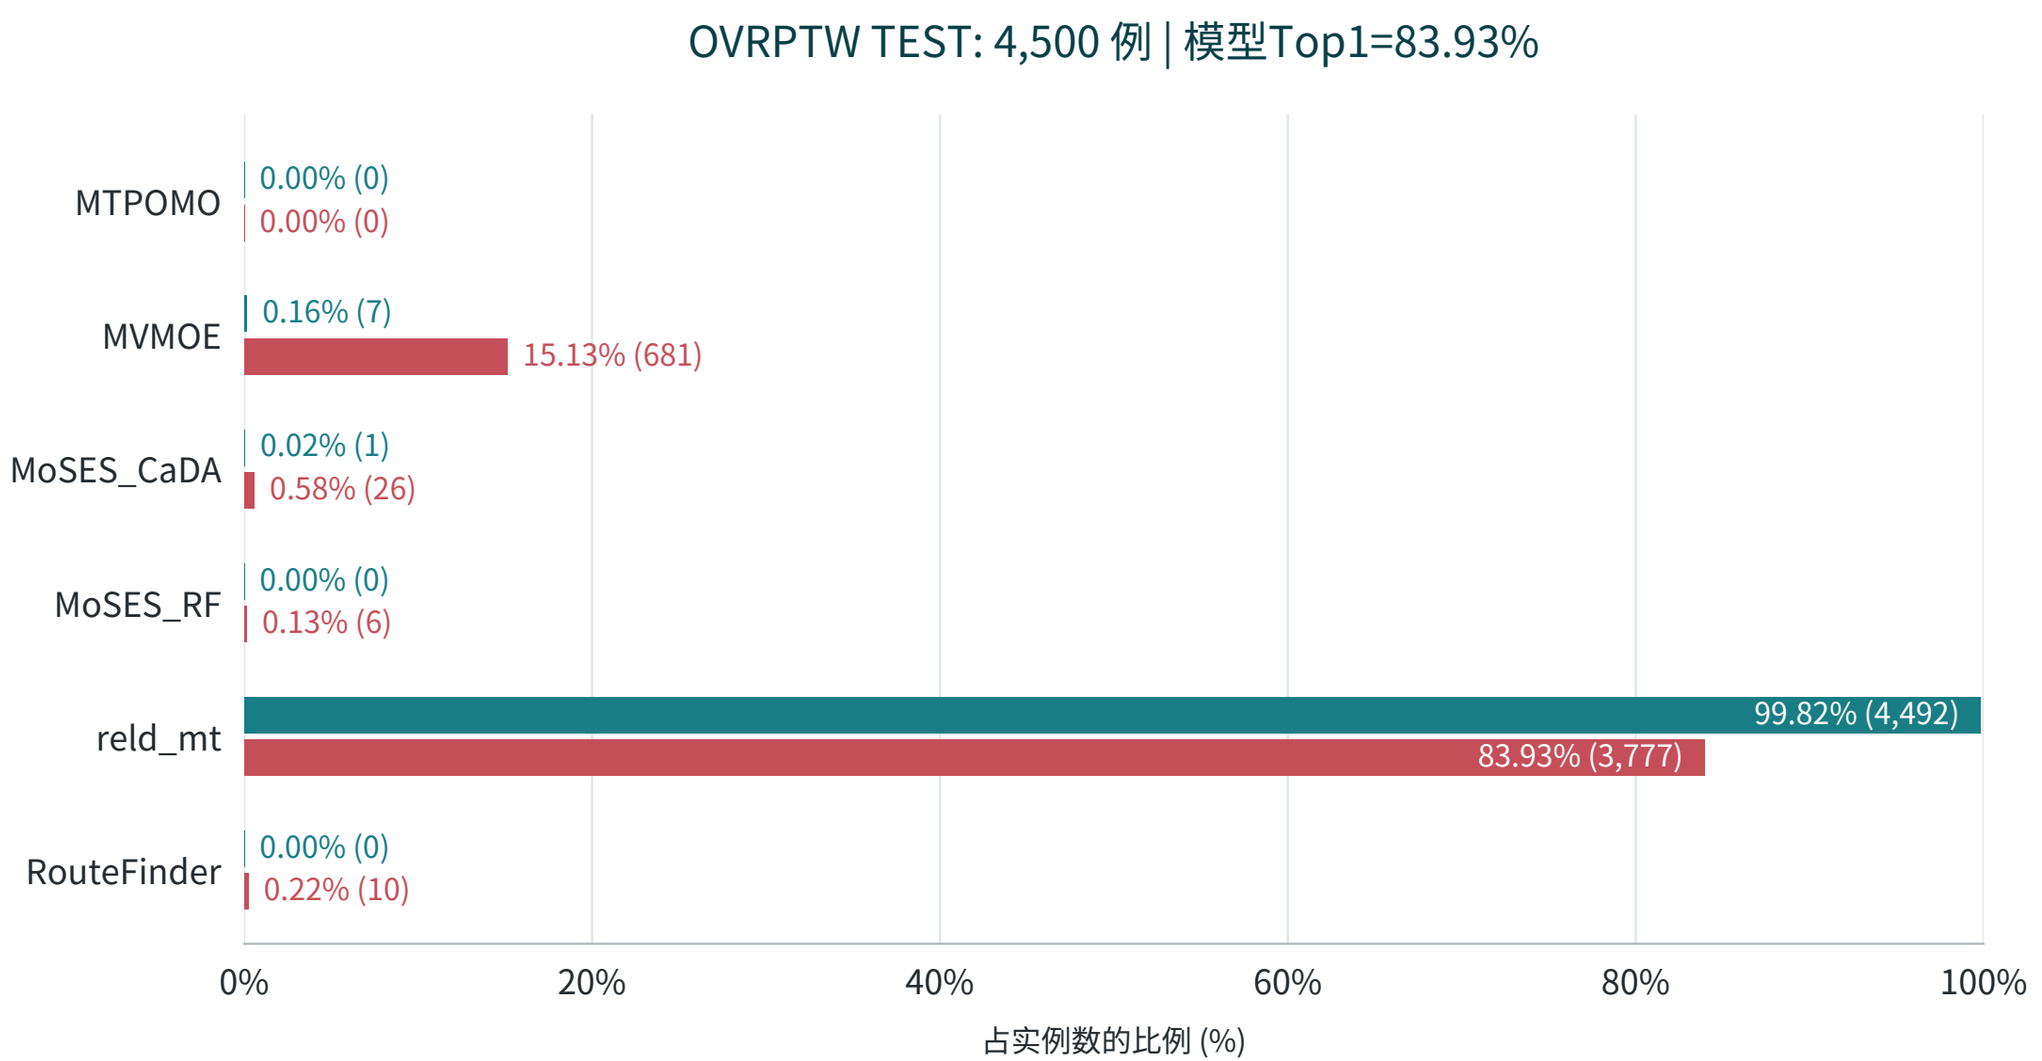

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPB | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

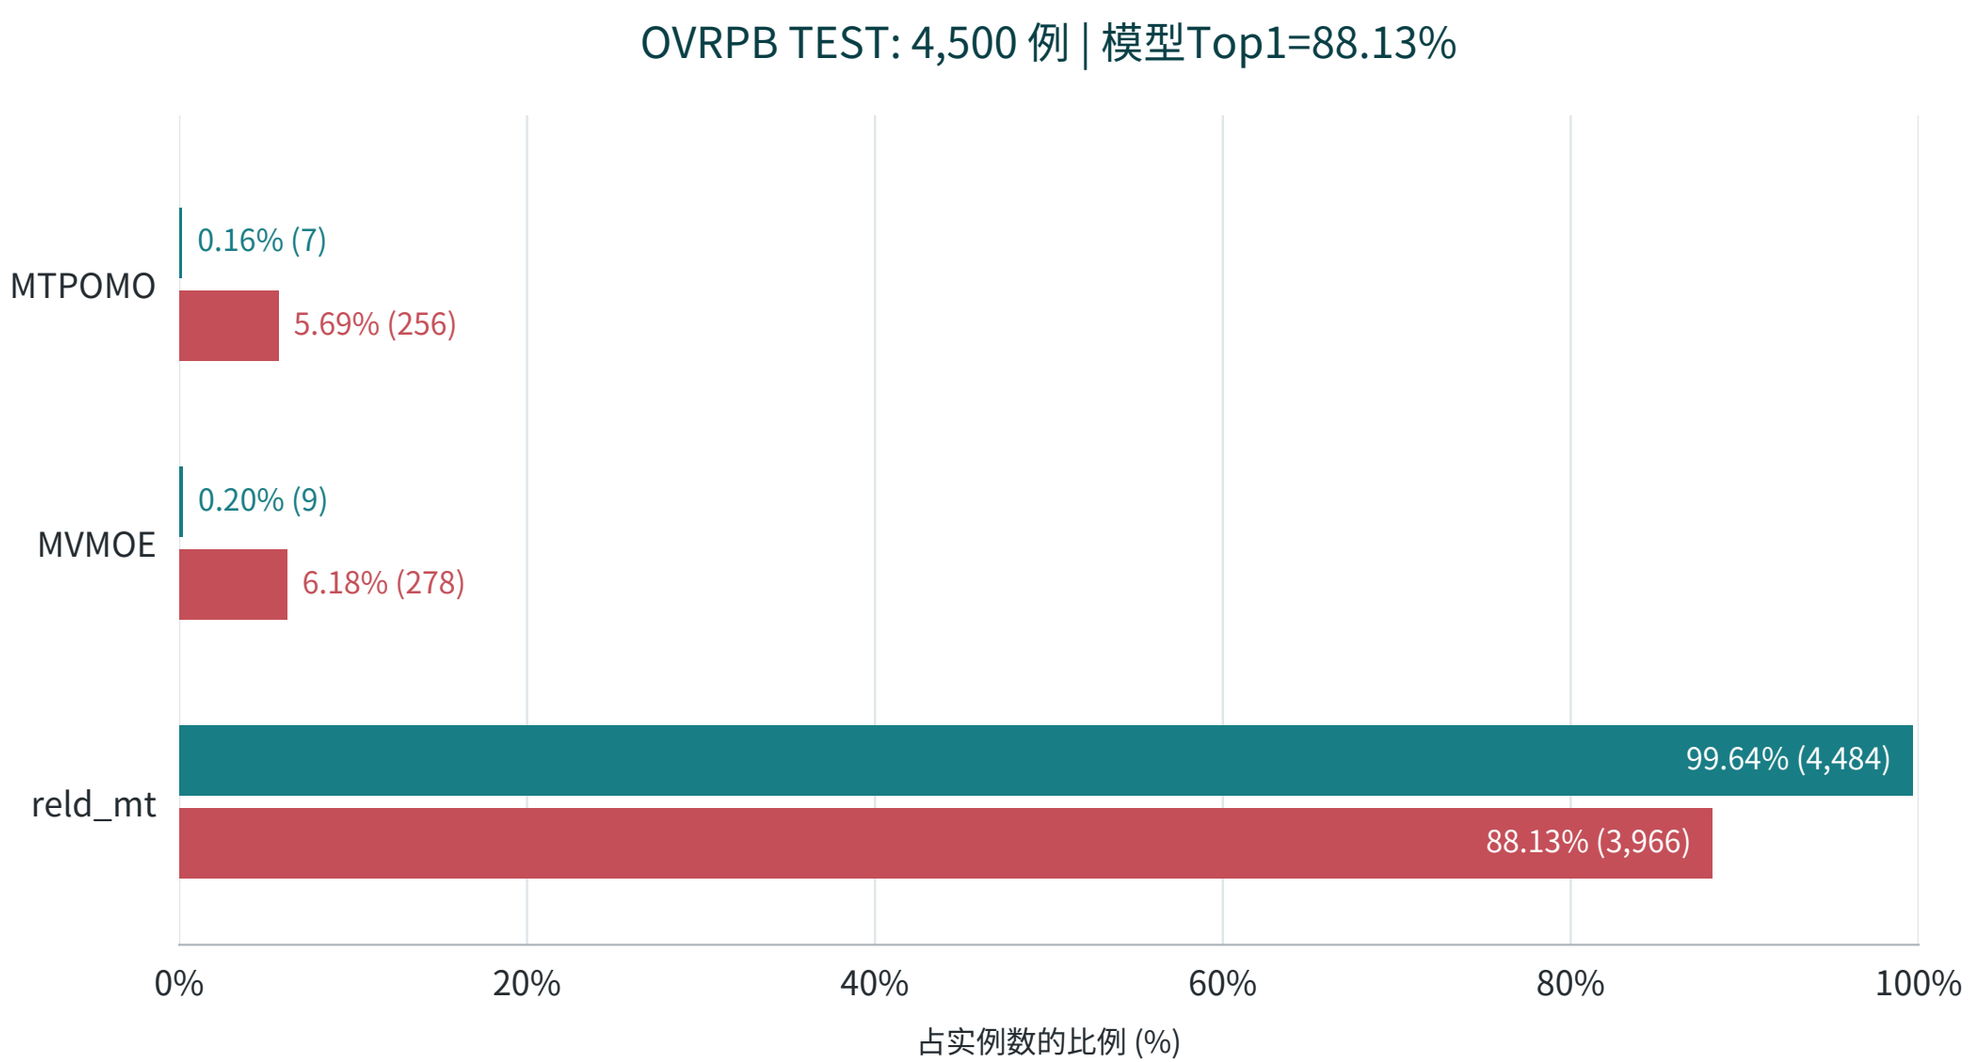

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

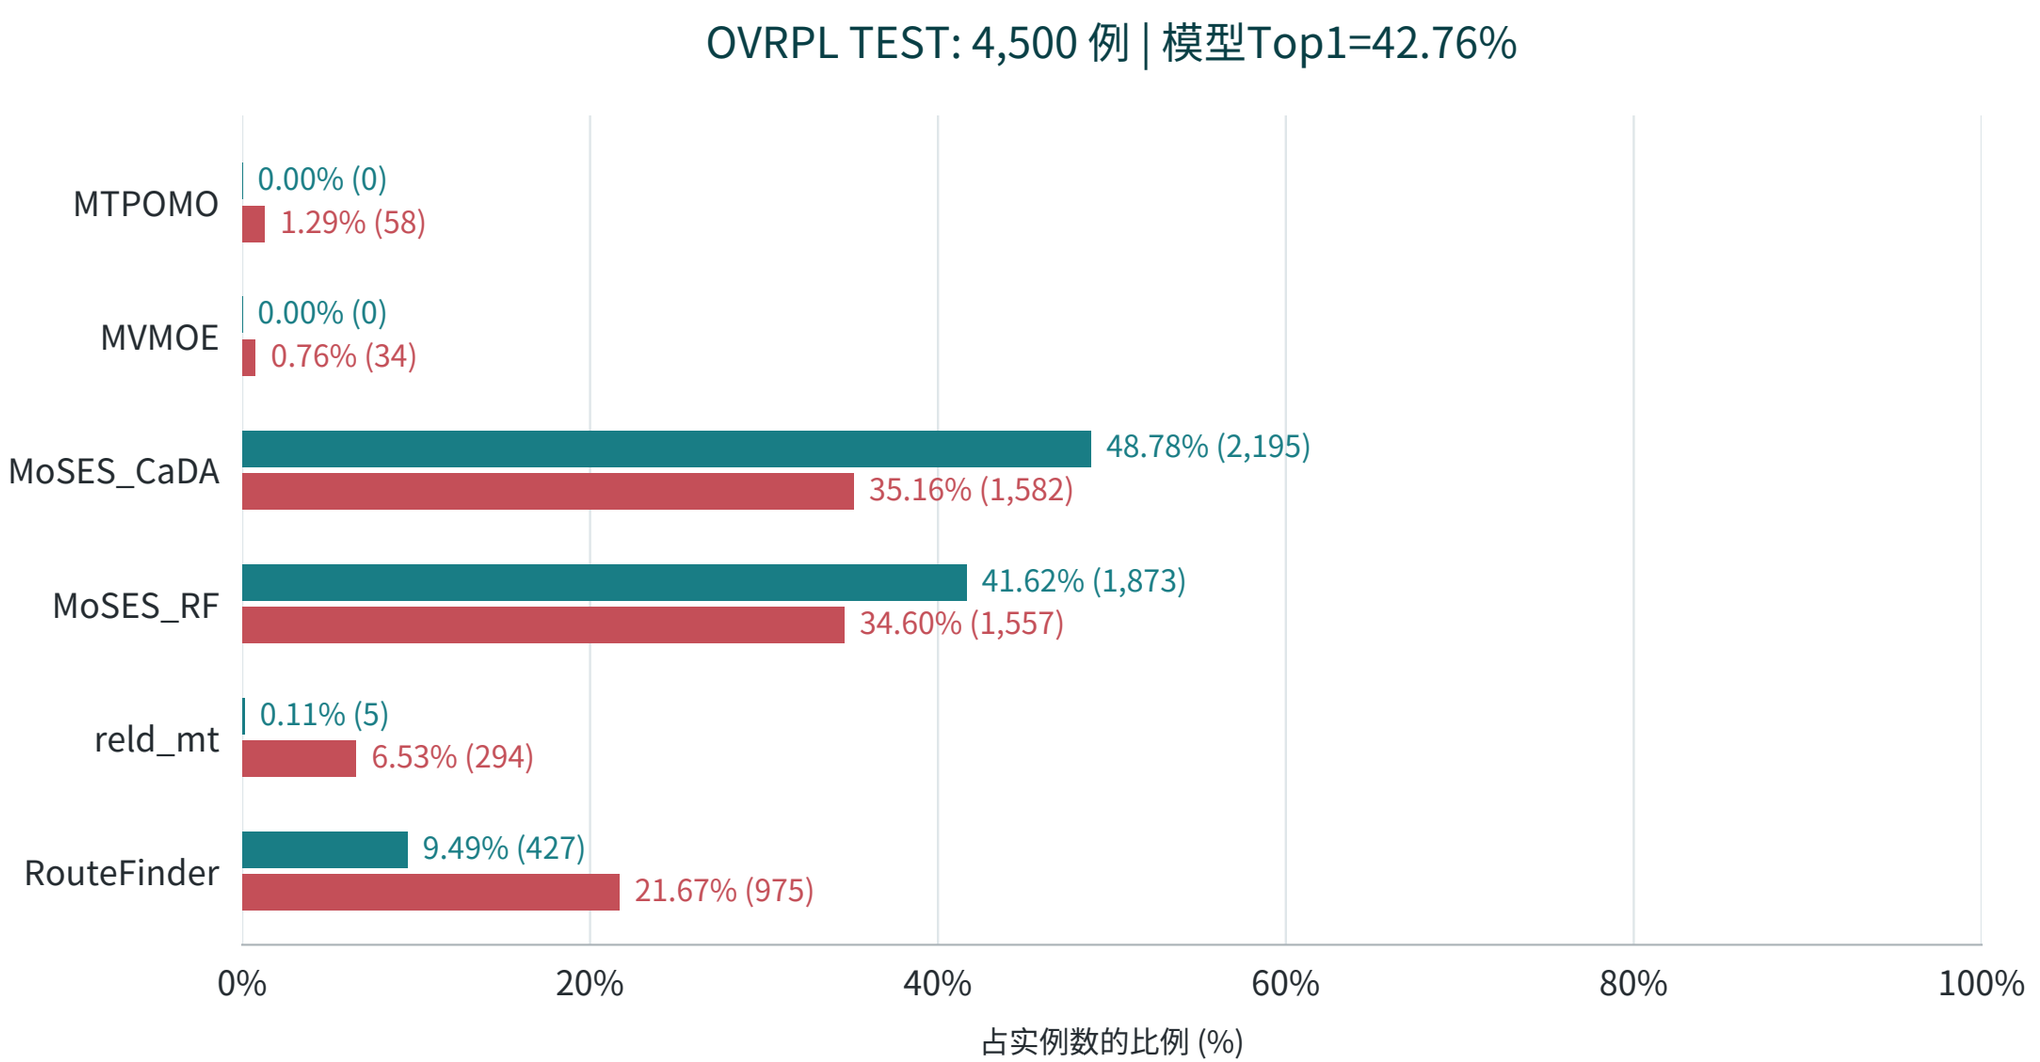

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPBL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

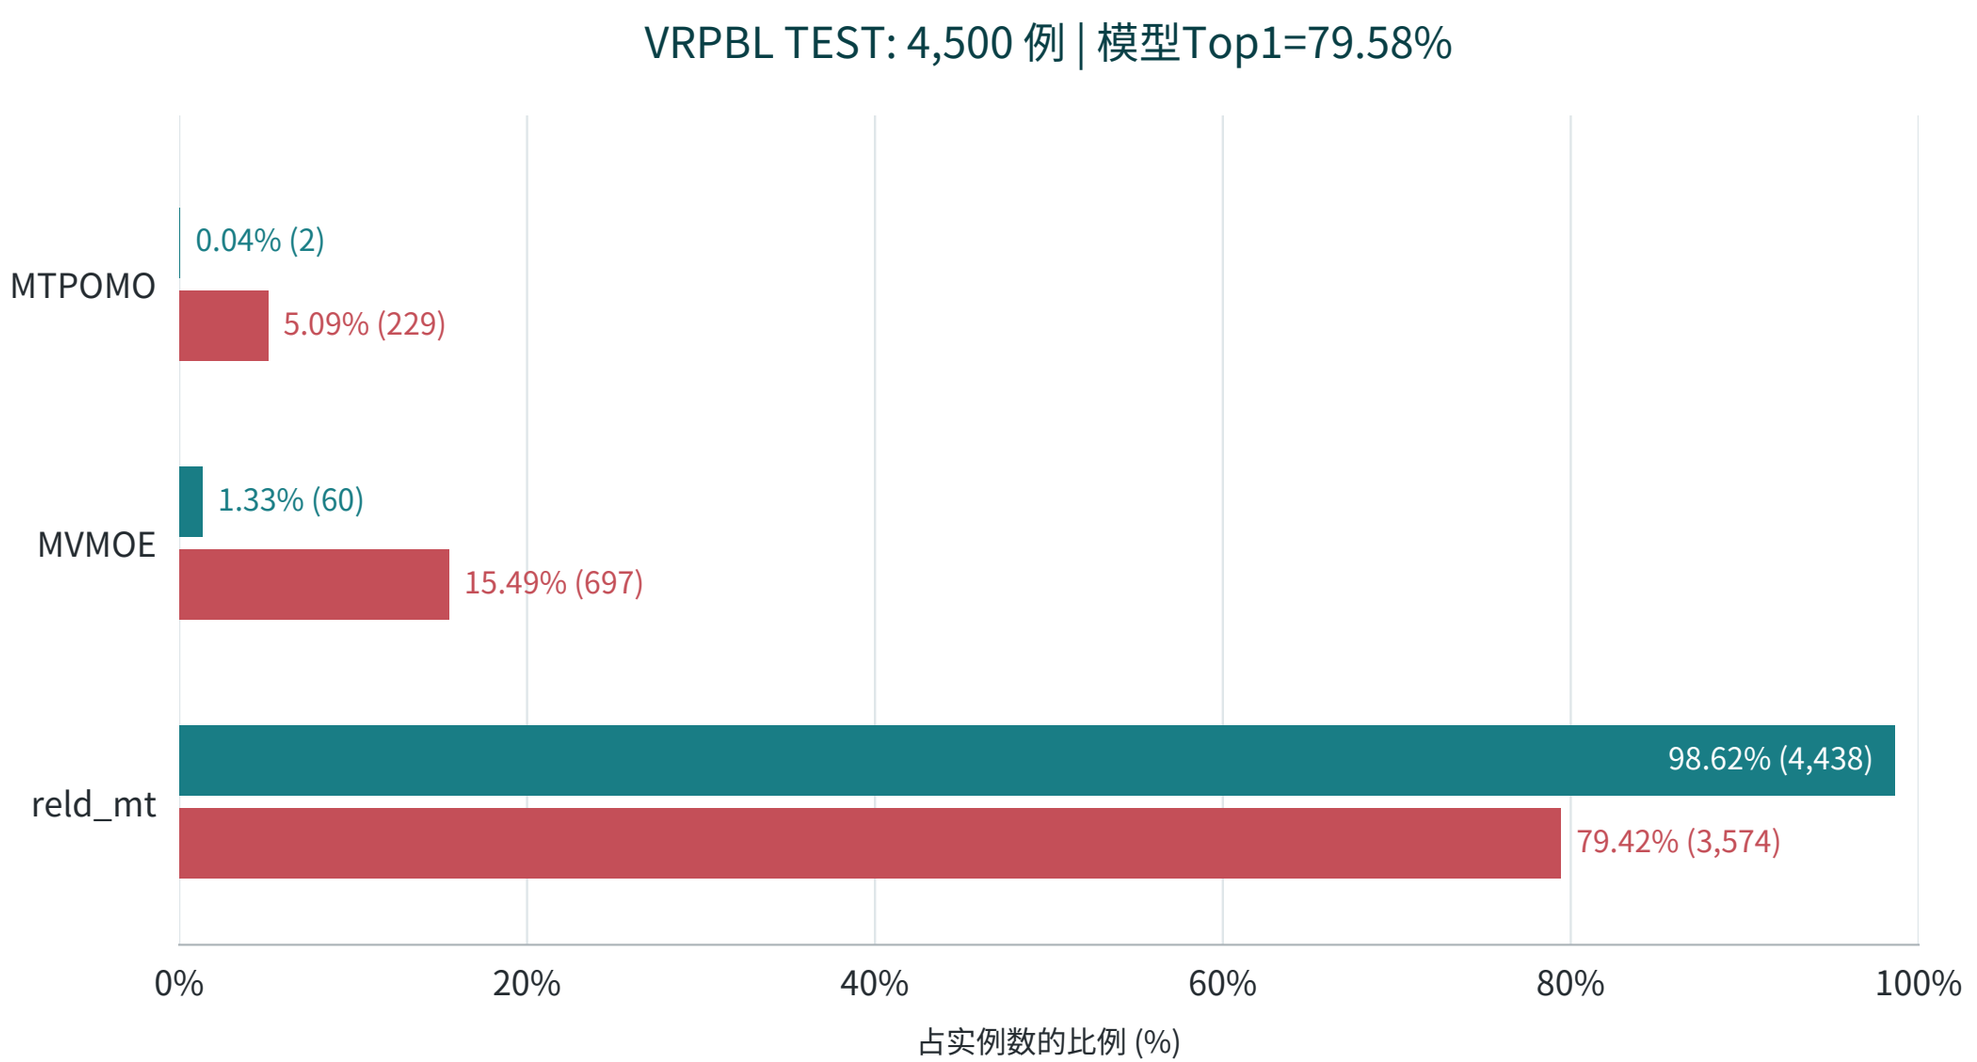

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPBTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

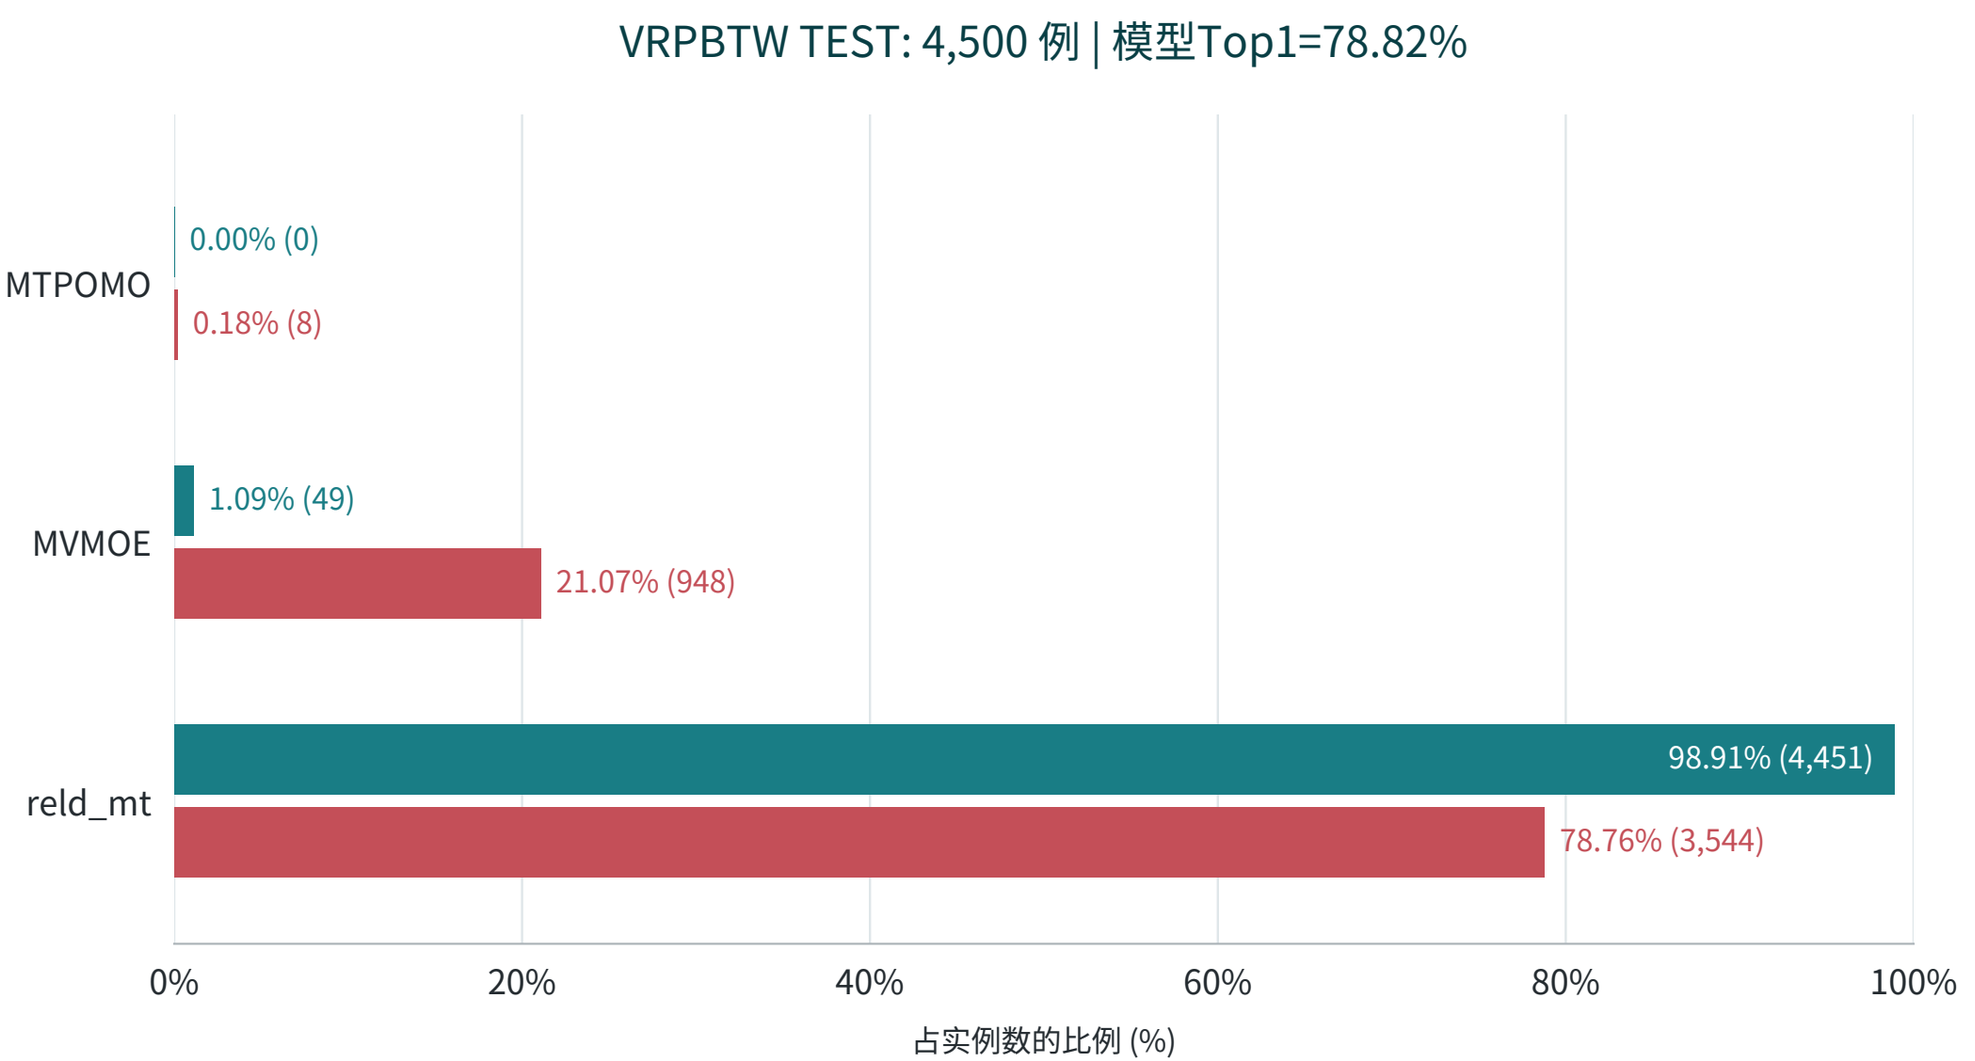

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

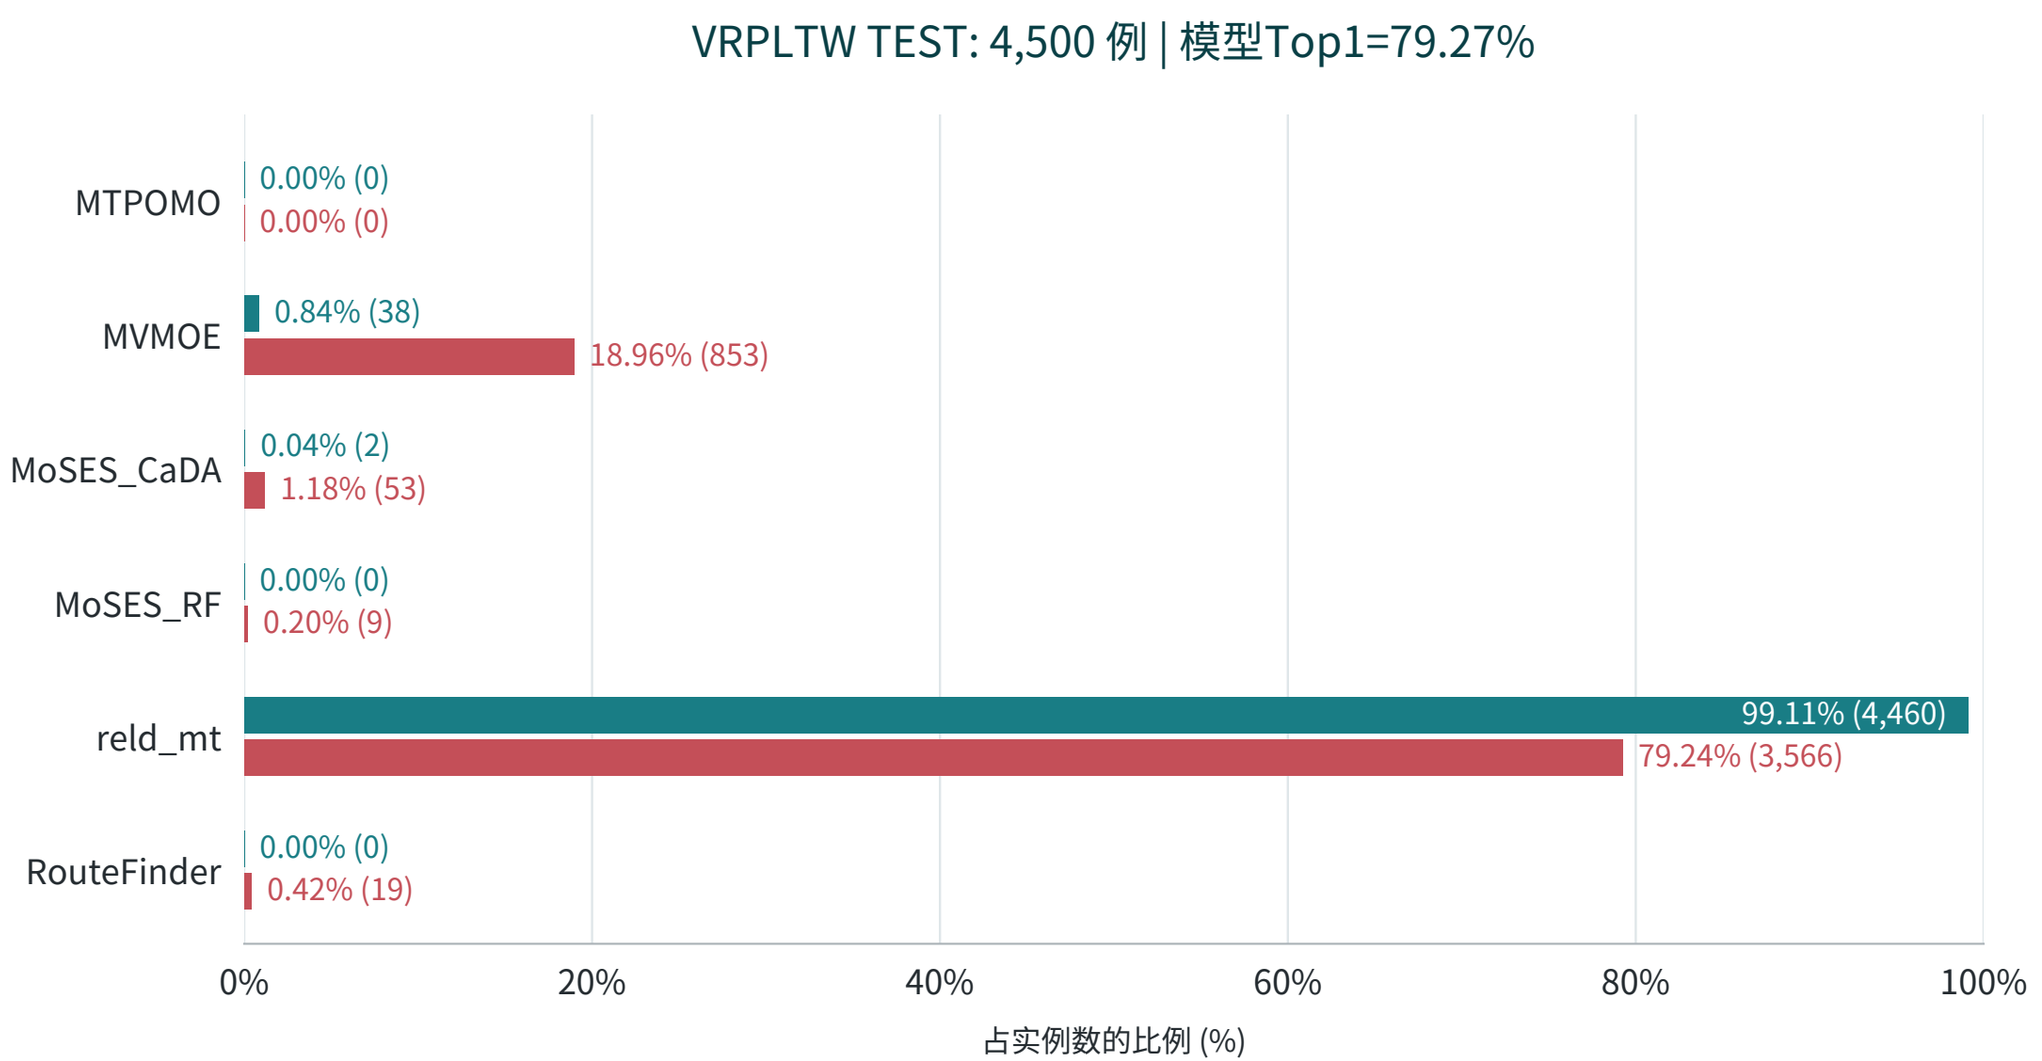

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPBL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

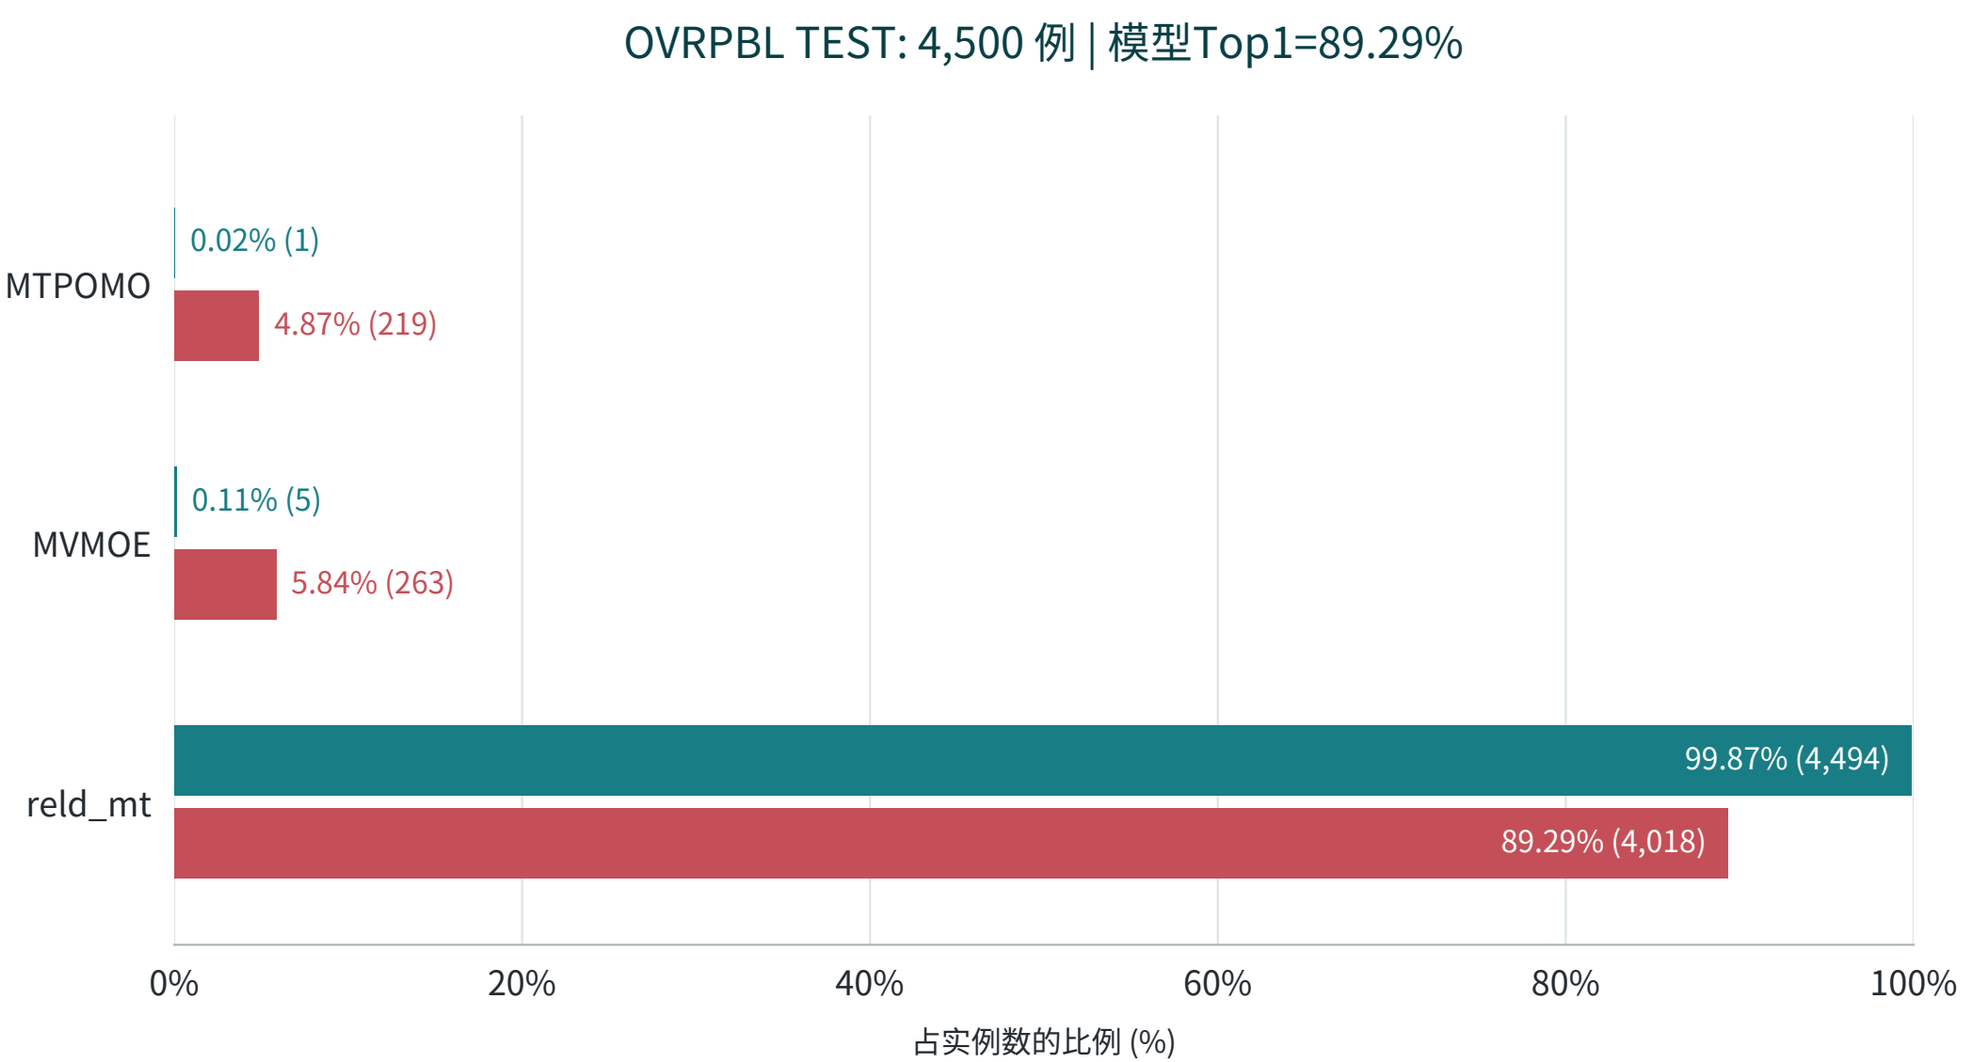

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPBTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

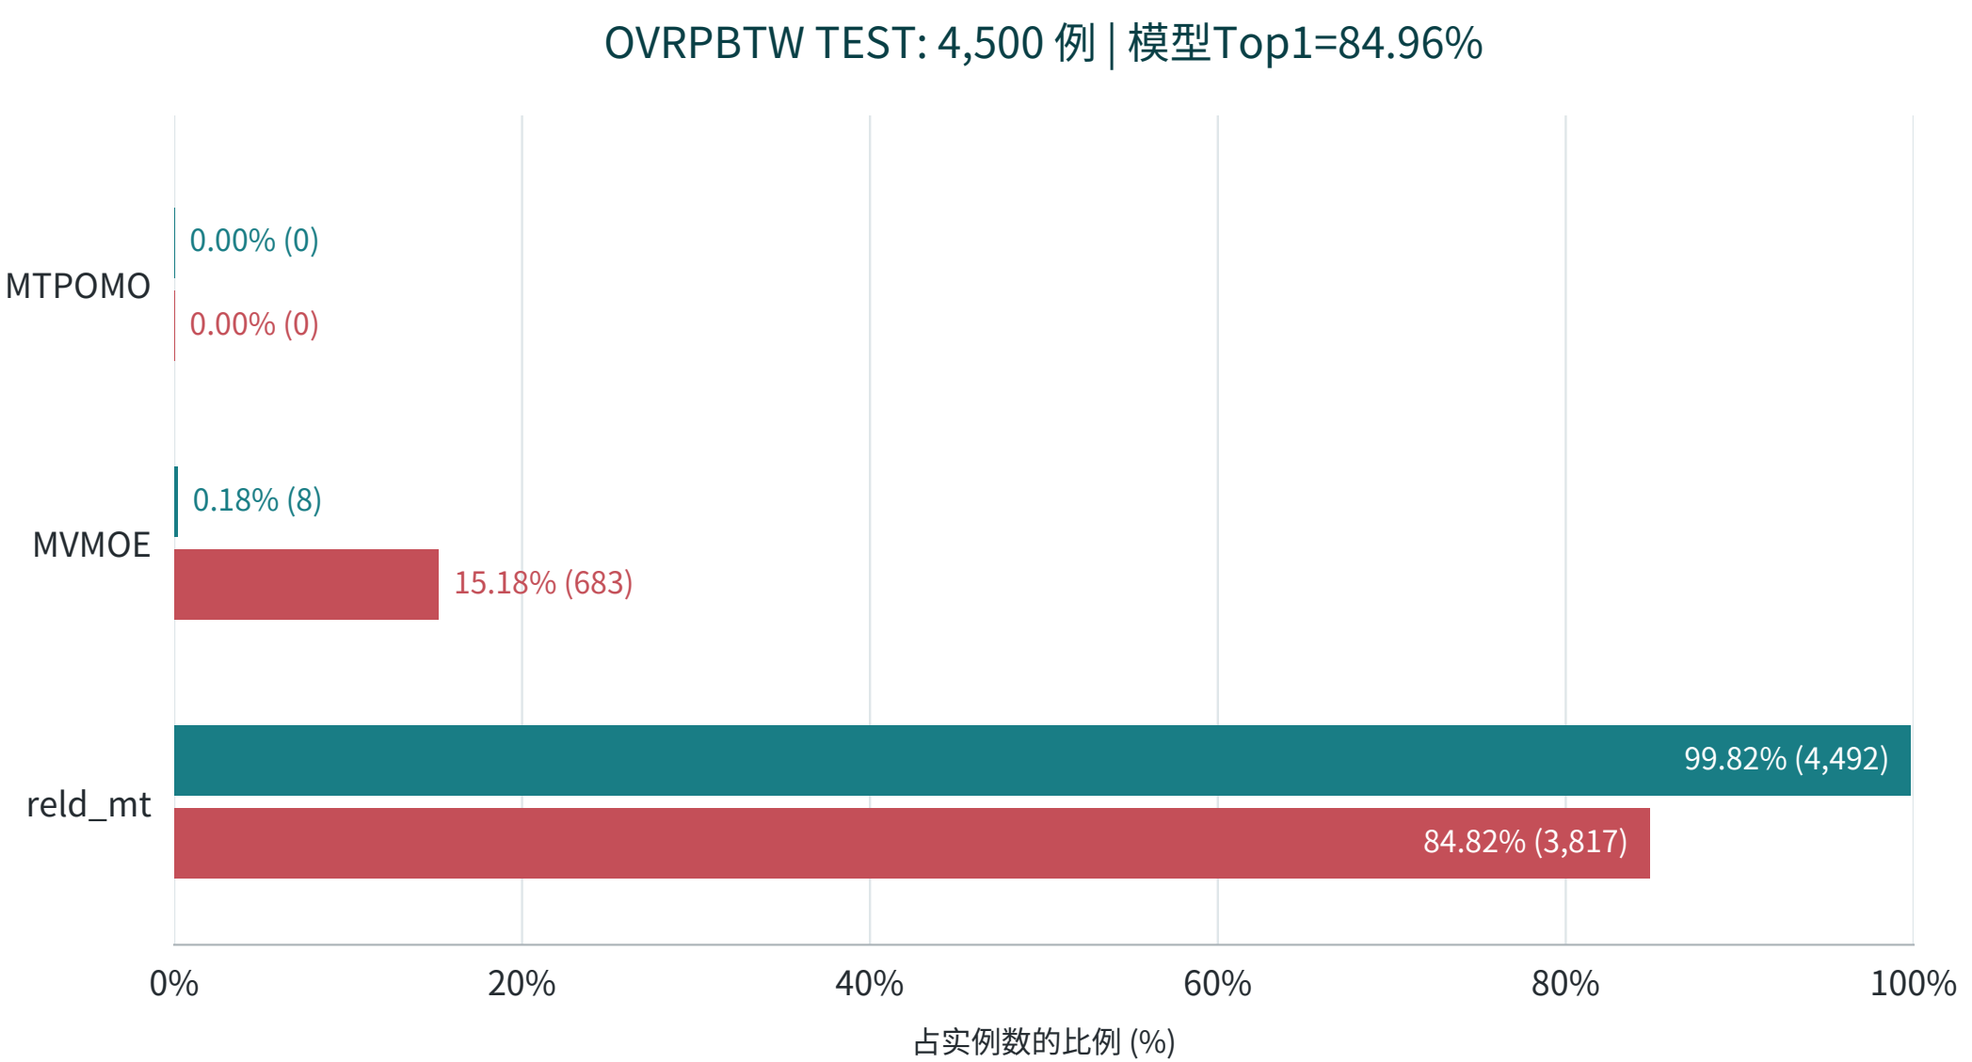

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

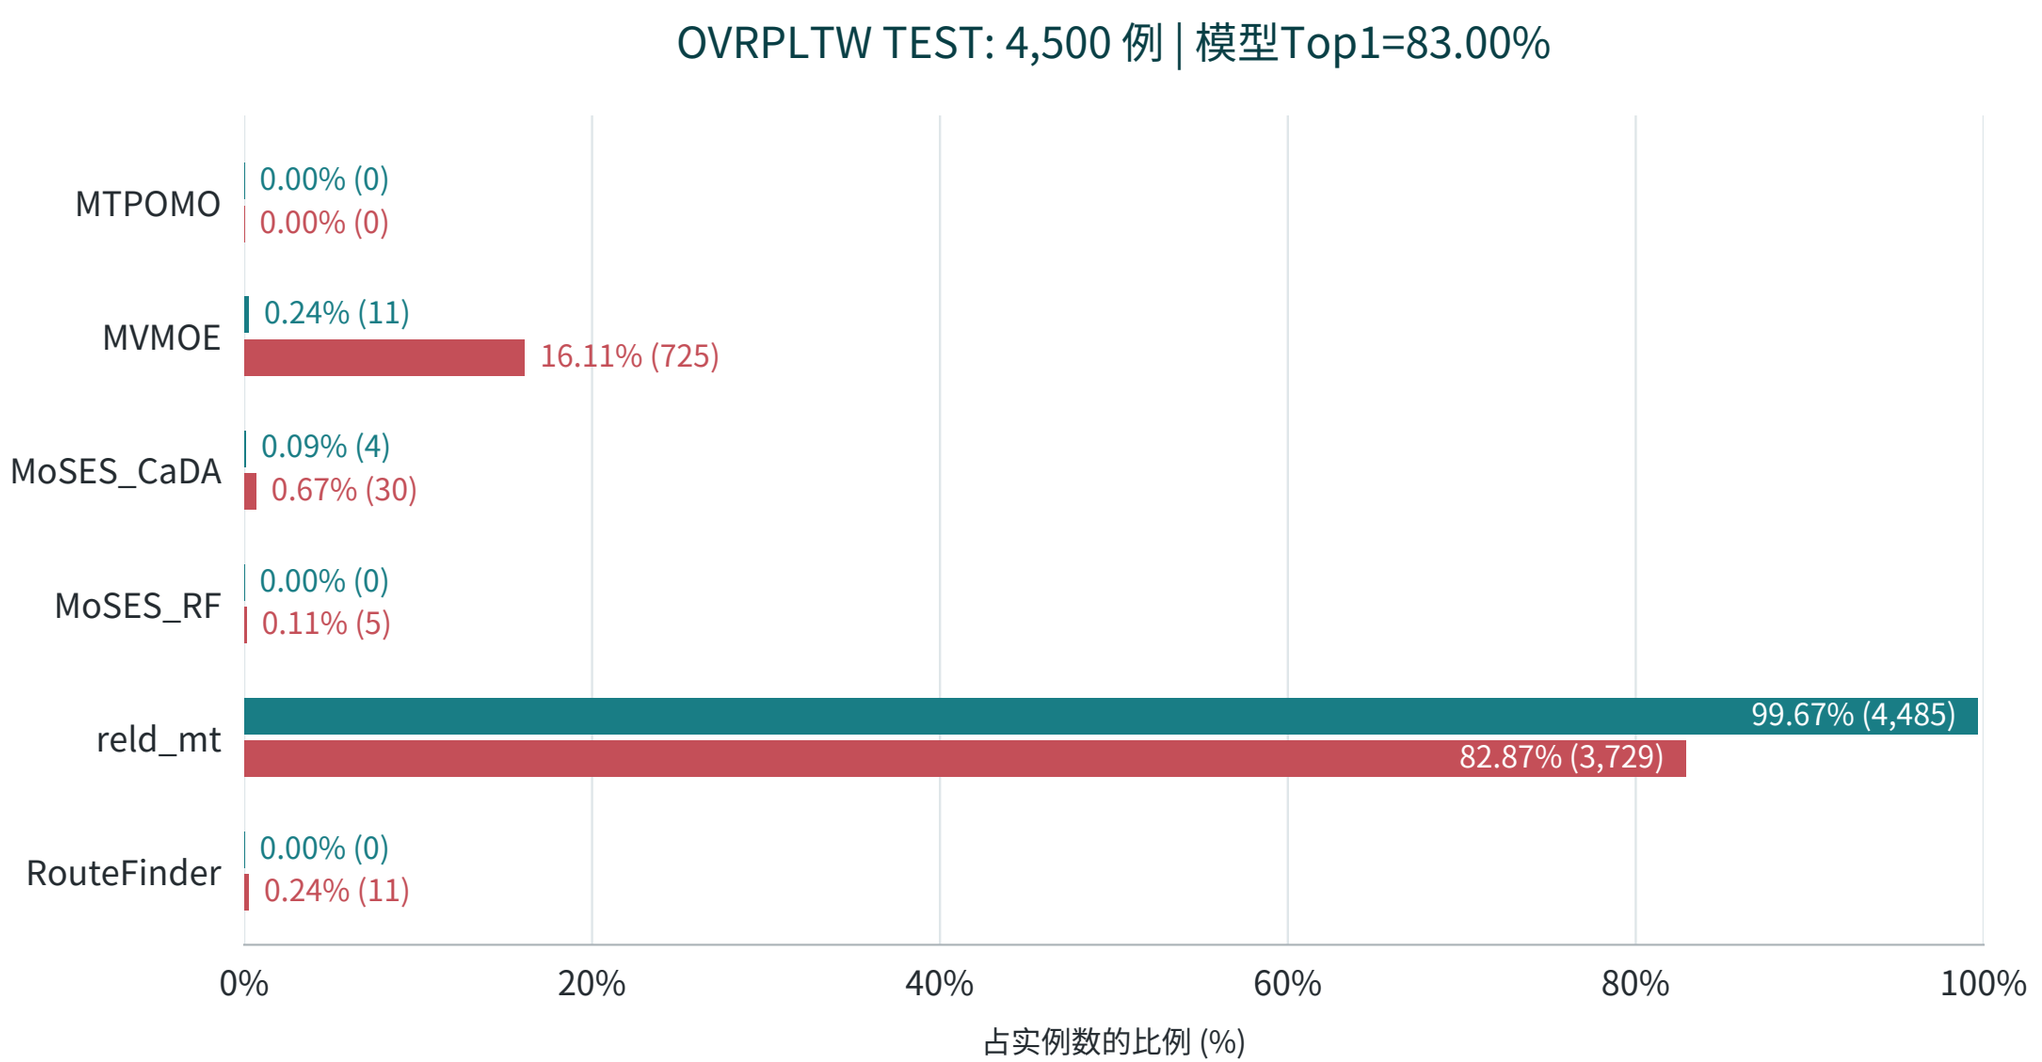

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | VRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

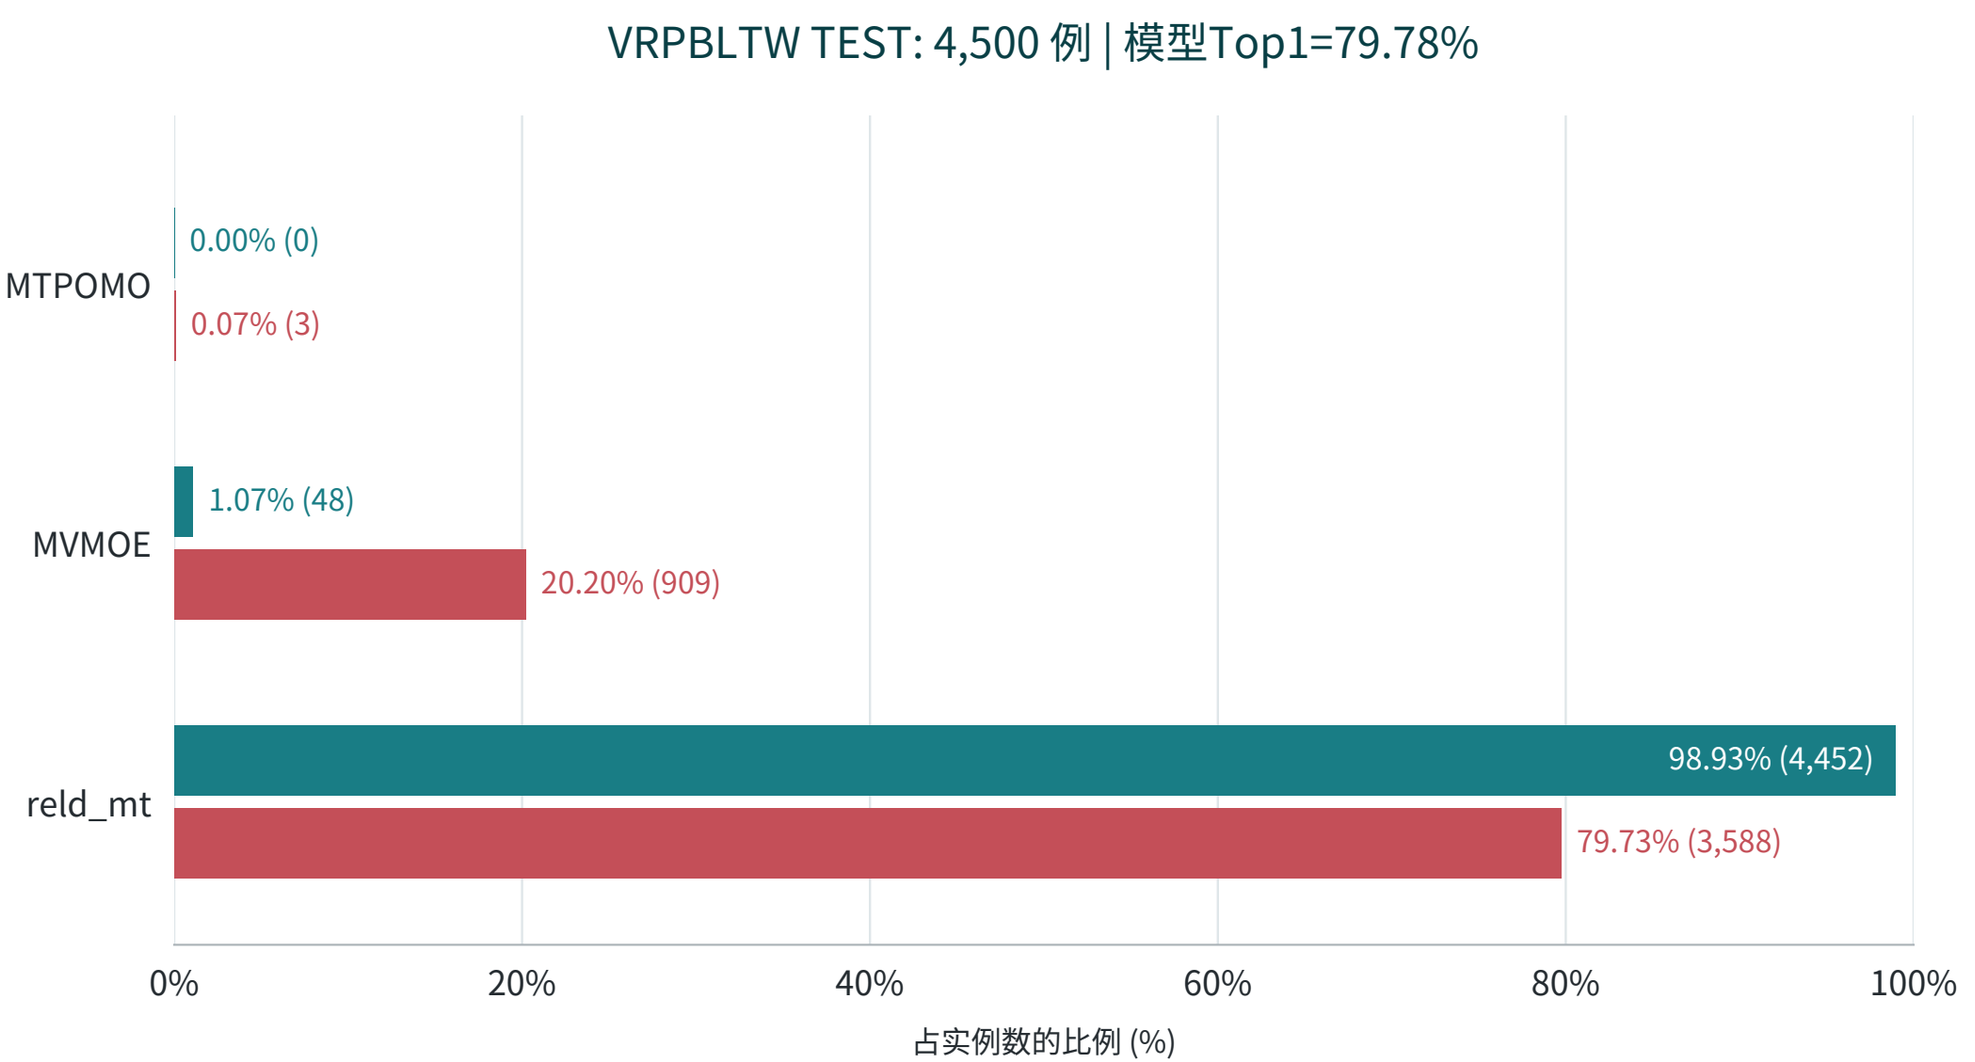

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/A_shared_residual | OVRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 d3041a4292206bcd

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

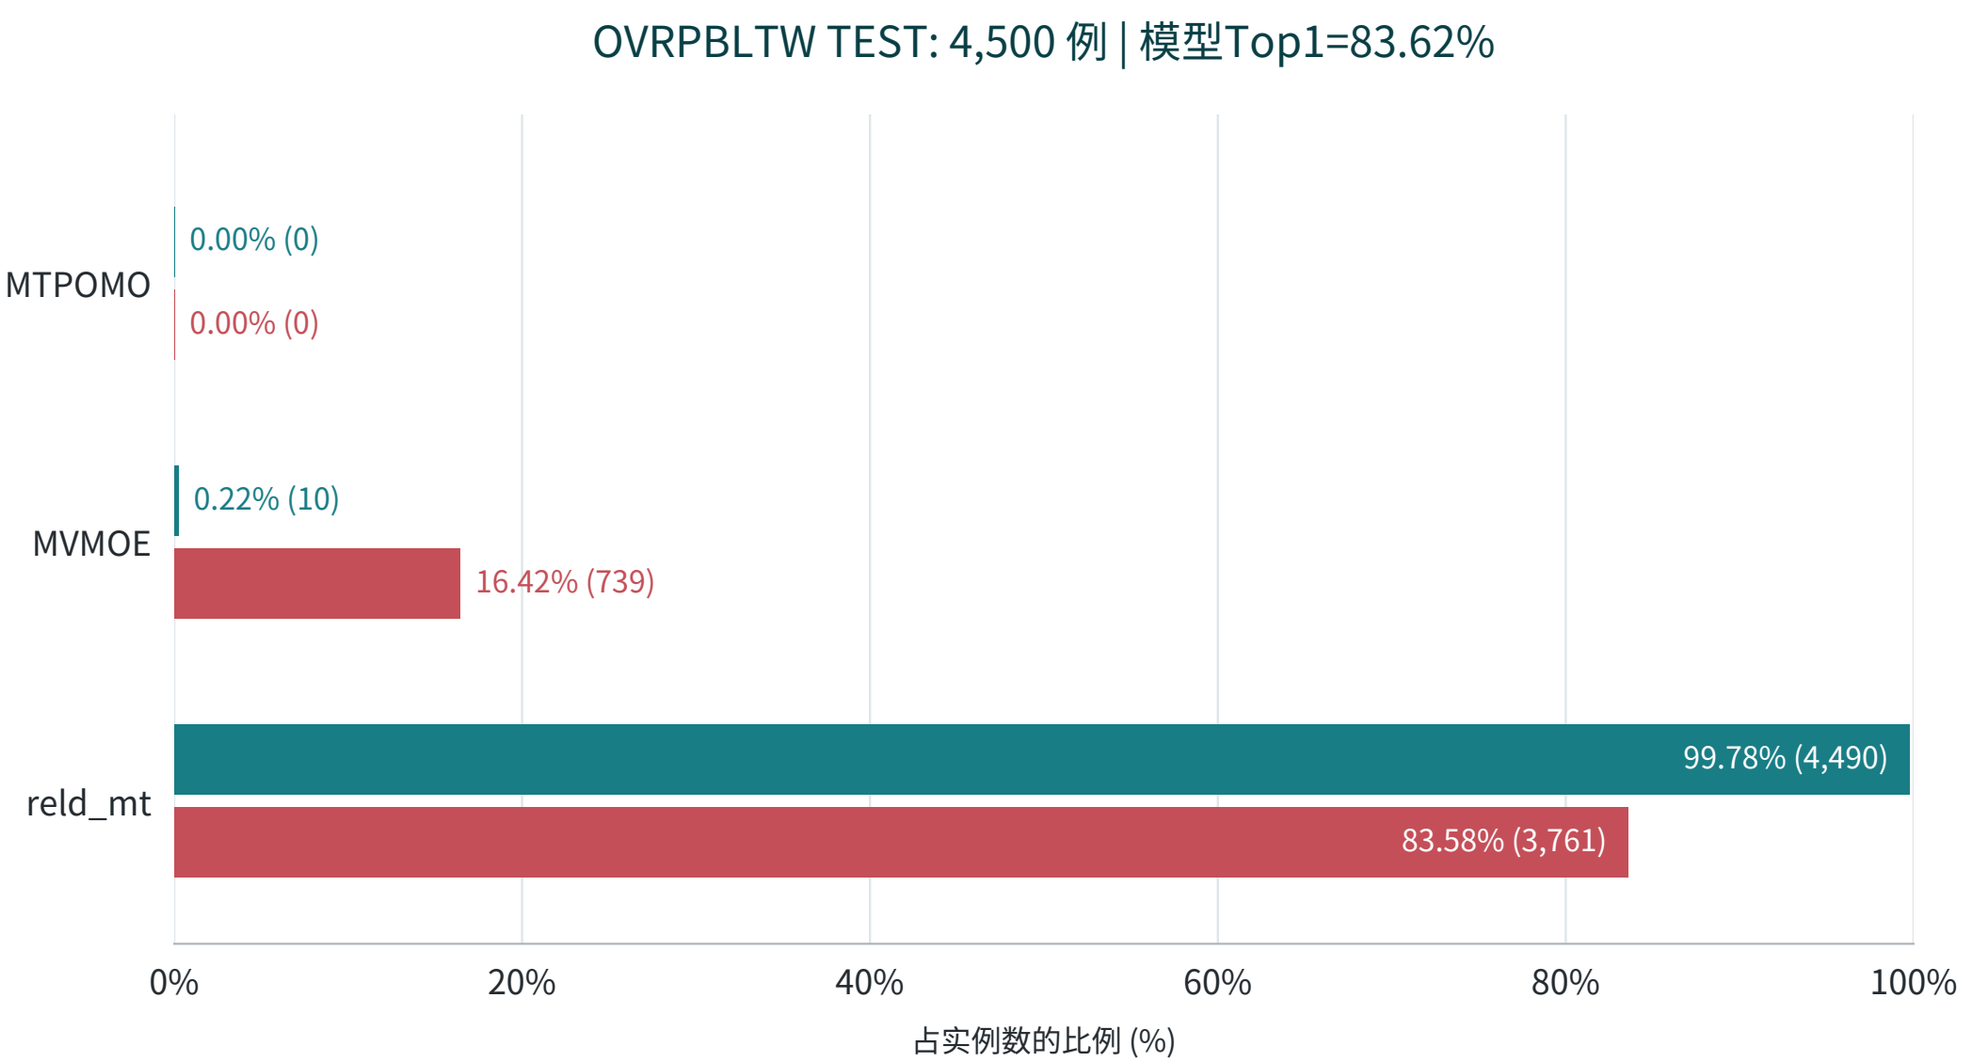

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R87/A_shared_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.