R87/B_private_residual | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 25 | update 36000 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0790	66.2037	11.416529	11.427978	11.371692	-0.1953	+0.3923	0.4021
TEST ALL	71.2704	66.1802	11.373975	11.385299	11.329932	-0.1970	+0.3862	0.3940

Dataset	n	NSS Top1 (%)	R87 Top1 (%)	NSS cost	R87 cost
TSP TEST	4500	45.888889	46.888889	7.970400719	7.971296912
CVRP TEST	4500	45.977778	46.644444	18.004802368	18.013507616
TSPLIB	49	20.408163	18.367347	8.217907074	8.220090694
CVRPLIB	100	70.000000	61.000000	67.101111717	67.298507204

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_plus_residual_maximin | objective: original native CE

R87/B_private_residual | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0790	66.2037	11.416529	11.427978	11.371692	-0.1953	+0.3923	0.4021	per-problem TRAIN SBS
TSP	46.7111	33.1111	8.025375	8.045354	7.990533	-0.2483	+0.4360	0.4252	T2T
CVRP	45.9556	18.7111	18.160346	18.269377	18.064087	-0.5968	+0.5329	0.6971	RELD_CVRP
ATSP	77.0889	47.4889	1.638559	1.676905	1.632471	-2.2867	+0.3730	0.3694	UNICO_MatPOENet
OVRP	41.5111	35.7556	7.461168	7.469579	7.415777	-0.1126	+0.6121	0.6254	MoSES_RF
VRPB	81.0000	80.8444	9.353437	9.354876	9.318750	-0.0154	+0.3722	0.3796	reld_mt
VRPL	37.7778	33.0889	12.432558	12.437959	12.383444	-0.0434	+0.3966	0.4048	MoSES_RF
VRPTW	80.0667	79.9556	18.818444	18.819431	18.766139	-0.0052	+0.2787	0.2940	reld_mt
OVRPTW	83.8667	83.7778	10.142696	10.143730	10.116859	-0.0102	+0.2554	0.2519	reld_mt
OVRPB	88.4444	88.5111	6.357917	6.357254	6.341078	+0.0104	+0.2656	0.2785	reld_mt
OVRPL	41.4889	35.9111	7.437709	7.445709	7.390416	-0.1074	+0.6399	0.6554	MoSES_RF
VRPBL	78.8667	78.5111	9.368196	9.371523	9.328366	-0.0355	+0.4270	0.4291	reld_mt
VRPBTW	78.5556	78.4222	19.946331	19.950430	19.851084	-0.0205	+0.4798	0.4603	reld_mt
VRPLTW	78.9111	78.7556	18.763508	18.765871	18.707843	-0.0126	+0.2976	0.3131	reld_mt
OVRPBL	89.3111	89.2000	6.368994	6.370093	6.352824	-0.0173	+0.2545	0.2644	reld_mt
OVRPBTW	83.5556	83.4444	10.661921	10.661098	10.623245	+0.0077	+0.3641	0.3413	reld_mt
OVRPLTW	83.4889	83.4889	10.157429	10.157423	10.129818	+0.0001	+0.2726	0.2762	reld_mt
VRPBLTW	79.5556	79.4000	19.793098	19.797044	19.706420	-0.0199	+0.4398	0.4300	reld_mt
OVRPBLTW	83.2667	83.2889	10.609836	10.609955	10.571302	-0.0011	+0.3645	0.3413	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R87/B_private_residual | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2704	66.1802	11.373975	11.385299	11.329932	-0.1970	+0.3862	0.3940	per-problem TRAIN SBS
TSP	46.8889	34.5333	7.971297	7.989621	7.937593	-0.2294	+0.4246	0.4162	T2T
CVRP	46.6444	17.9333	18.013508	18.124983	17.918509	-0.6150	+0.5302	0.6841	RELD_CVRP
ATSP	77.0222	47.2444	1.635236	1.674207	1.629441	-2.3278	+0.3556	0.3546	UNICO_MatPOENet
OVRP	40.8000	33.6444	7.445863	7.455750	7.400487	-0.1326	+0.6131	0.6221	MoSES_RF
VRPB	80.4667	80.4000	9.351552	9.351810	9.315298	-0.0028	+0.3892	0.3931	reld_mt
VRPL	37.4444	32.2667	12.350442	12.356138	12.300958	-0.0461	+0.4023	0.4094	MoSES_RF
VRPTW	81.2889	80.8444	18.687487	18.690545	18.637408	-0.0164	+0.2687	0.2786	reld_mt
OVRPTW	84.0000	83.9333	10.092557	10.093063	10.068135	-0.0050	+0.2426	0.2330	reld_mt
OVRPB	88.0889	88.1333	6.371192	6.370826	6.352225	+0.0057	+0.2986	0.3059	reld_mt
OVRPL	42.0667	34.6000	7.463089	7.472542	7.418033	-0.1265	+0.6074	0.6177	MoSES_RF
VRPBL	79.4444	79.4222	9.395313	9.396379	9.355967	-0.0113	+0.4205	0.4190	reld_mt
VRPBTW	78.7556	78.7556	19.666671	19.665725	19.577666	+0.0048	+0.4546	0.4533	reld_mt
VRPLTW	79.2667	79.2444	18.802503	18.803136	18.745143	-0.0034	+0.3060	0.3234	reld_mt
OVRPBL	89.3556	89.2889	6.375448	6.375741	6.359310	-0.0046	+0.2538	0.2650	reld_mt
OVRPBTW	84.8889	84.8222	10.659474	10.659591	10.624748	-0.0011	+0.3268	0.2995	reld_mt
OVRPLTW	82.9333	82.8667	10.085097	10.086112	10.059001	-0.0101	+0.2594	0.2593	reld_mt
VRPBLTW	79.8667	79.7333	19.703067	19.707068	19.613284	-0.0203	+0.4578	0.4407	reld_mt
OVRPBLTW	83.6444	83.5778	10.661762	10.662149	10.625574	-0.0036	+0.3406	0.3171	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R87/B_private_residual | LIB and locked provenance

Current R87 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	18.3673	10.2041	8.220091	8.240435	8.142167	-0.2469	+0.9570	0.9563
CVRPLIB	61.0000	45.0000	67.298507	67.245364	66.945093	+0.0790	+0.5279	0.6340

SHA256: 36e4685625906b790f042a7895fad3b57d8b9584afa90e04b988778a01657cf6

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, original shared utility plus residual, original pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R87/B_private_residual | TSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

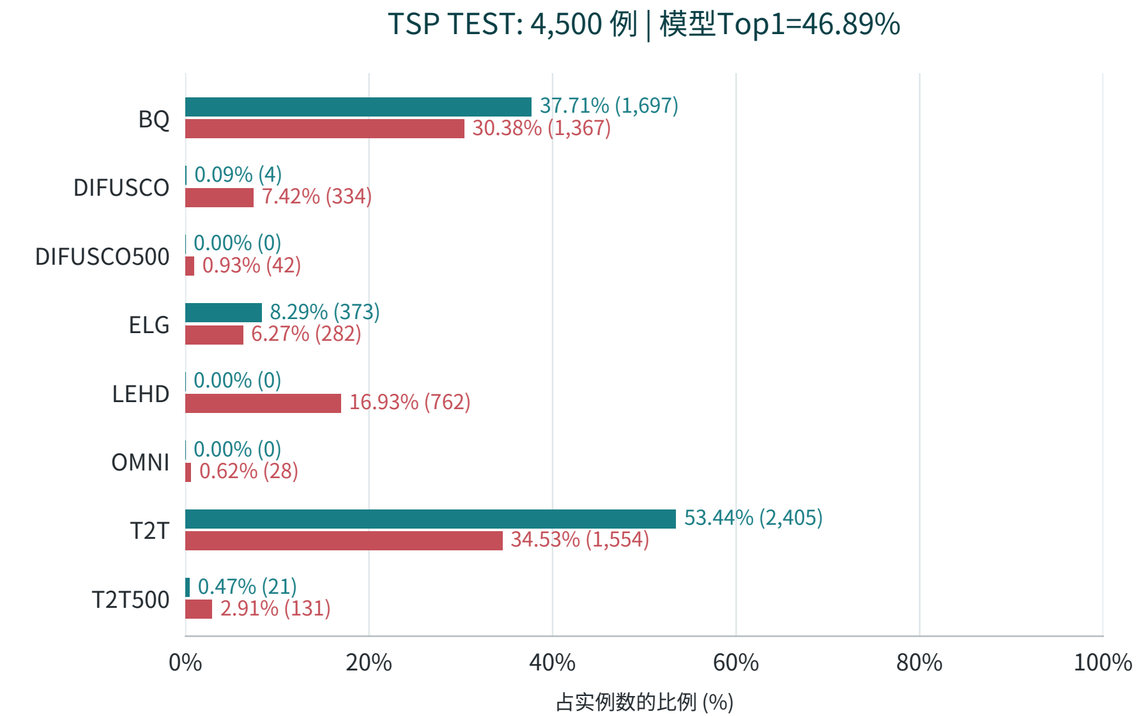

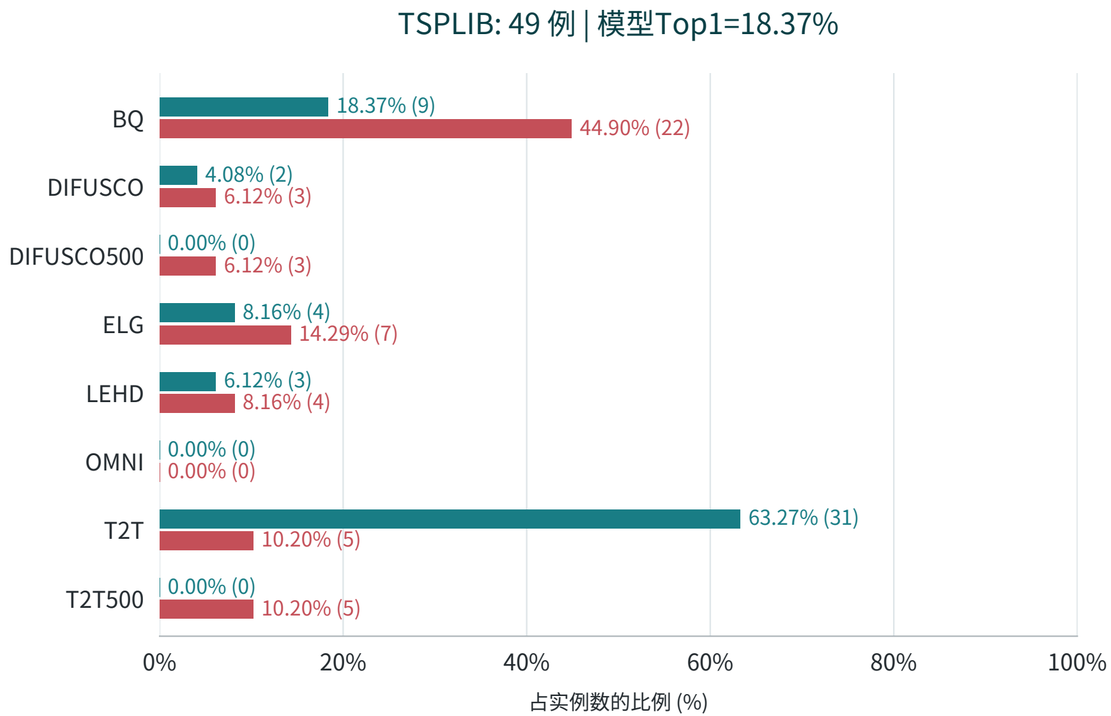

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.


R87/B_private_residual | CVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

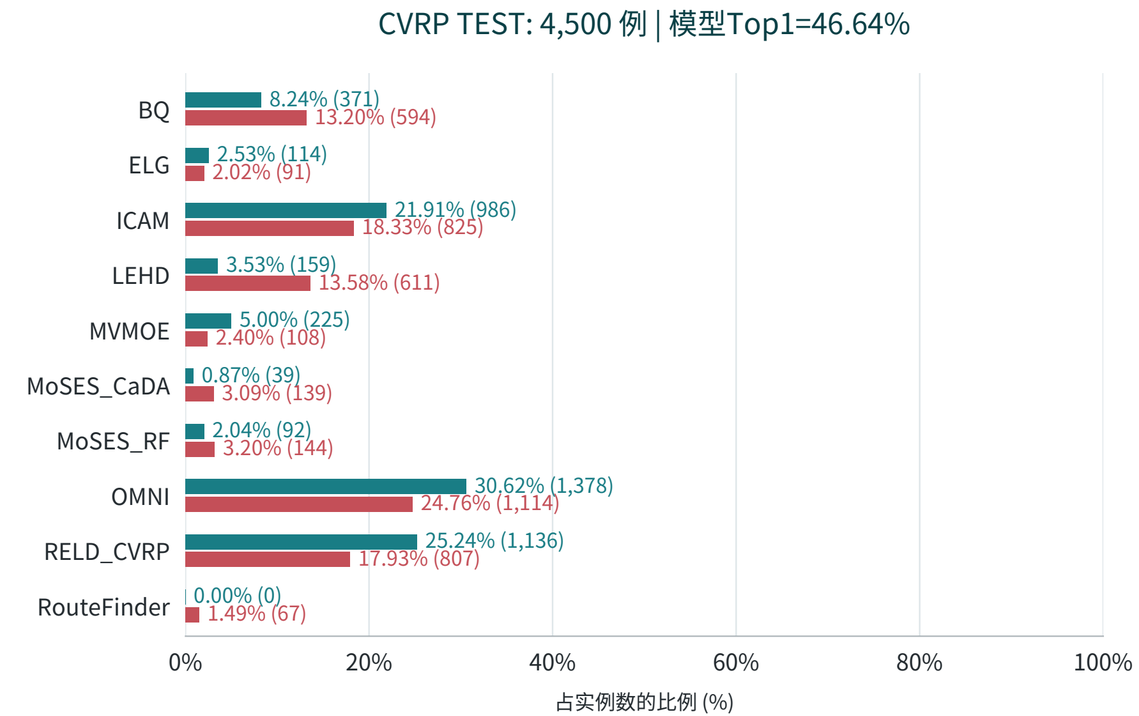

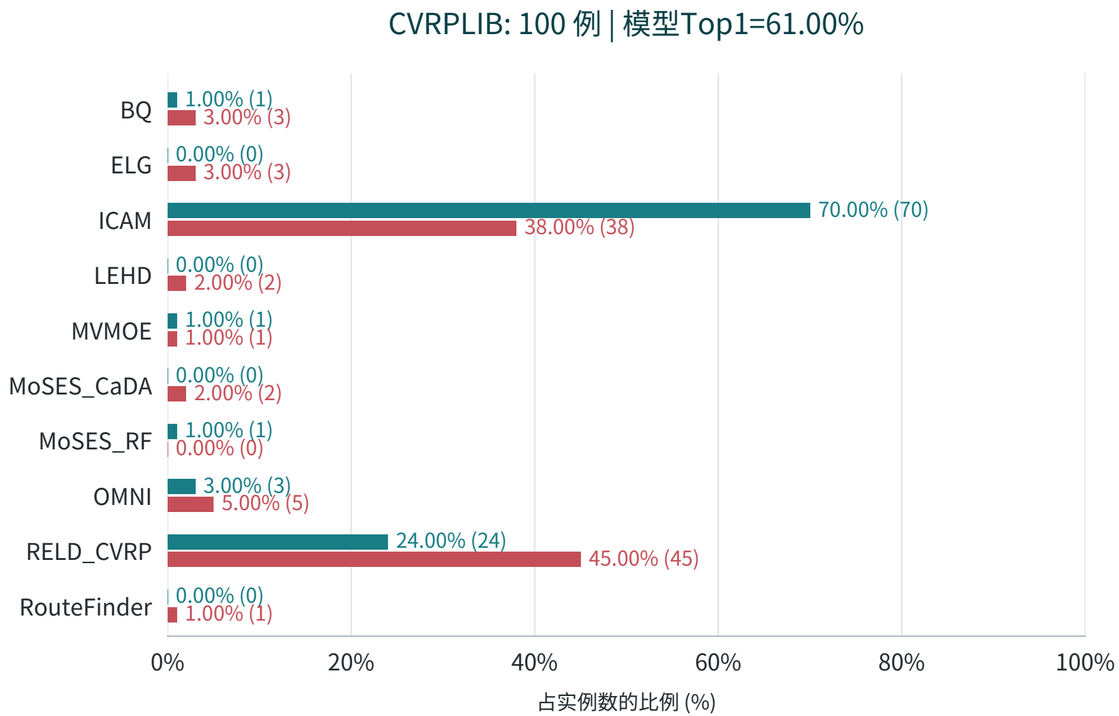

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | ATSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

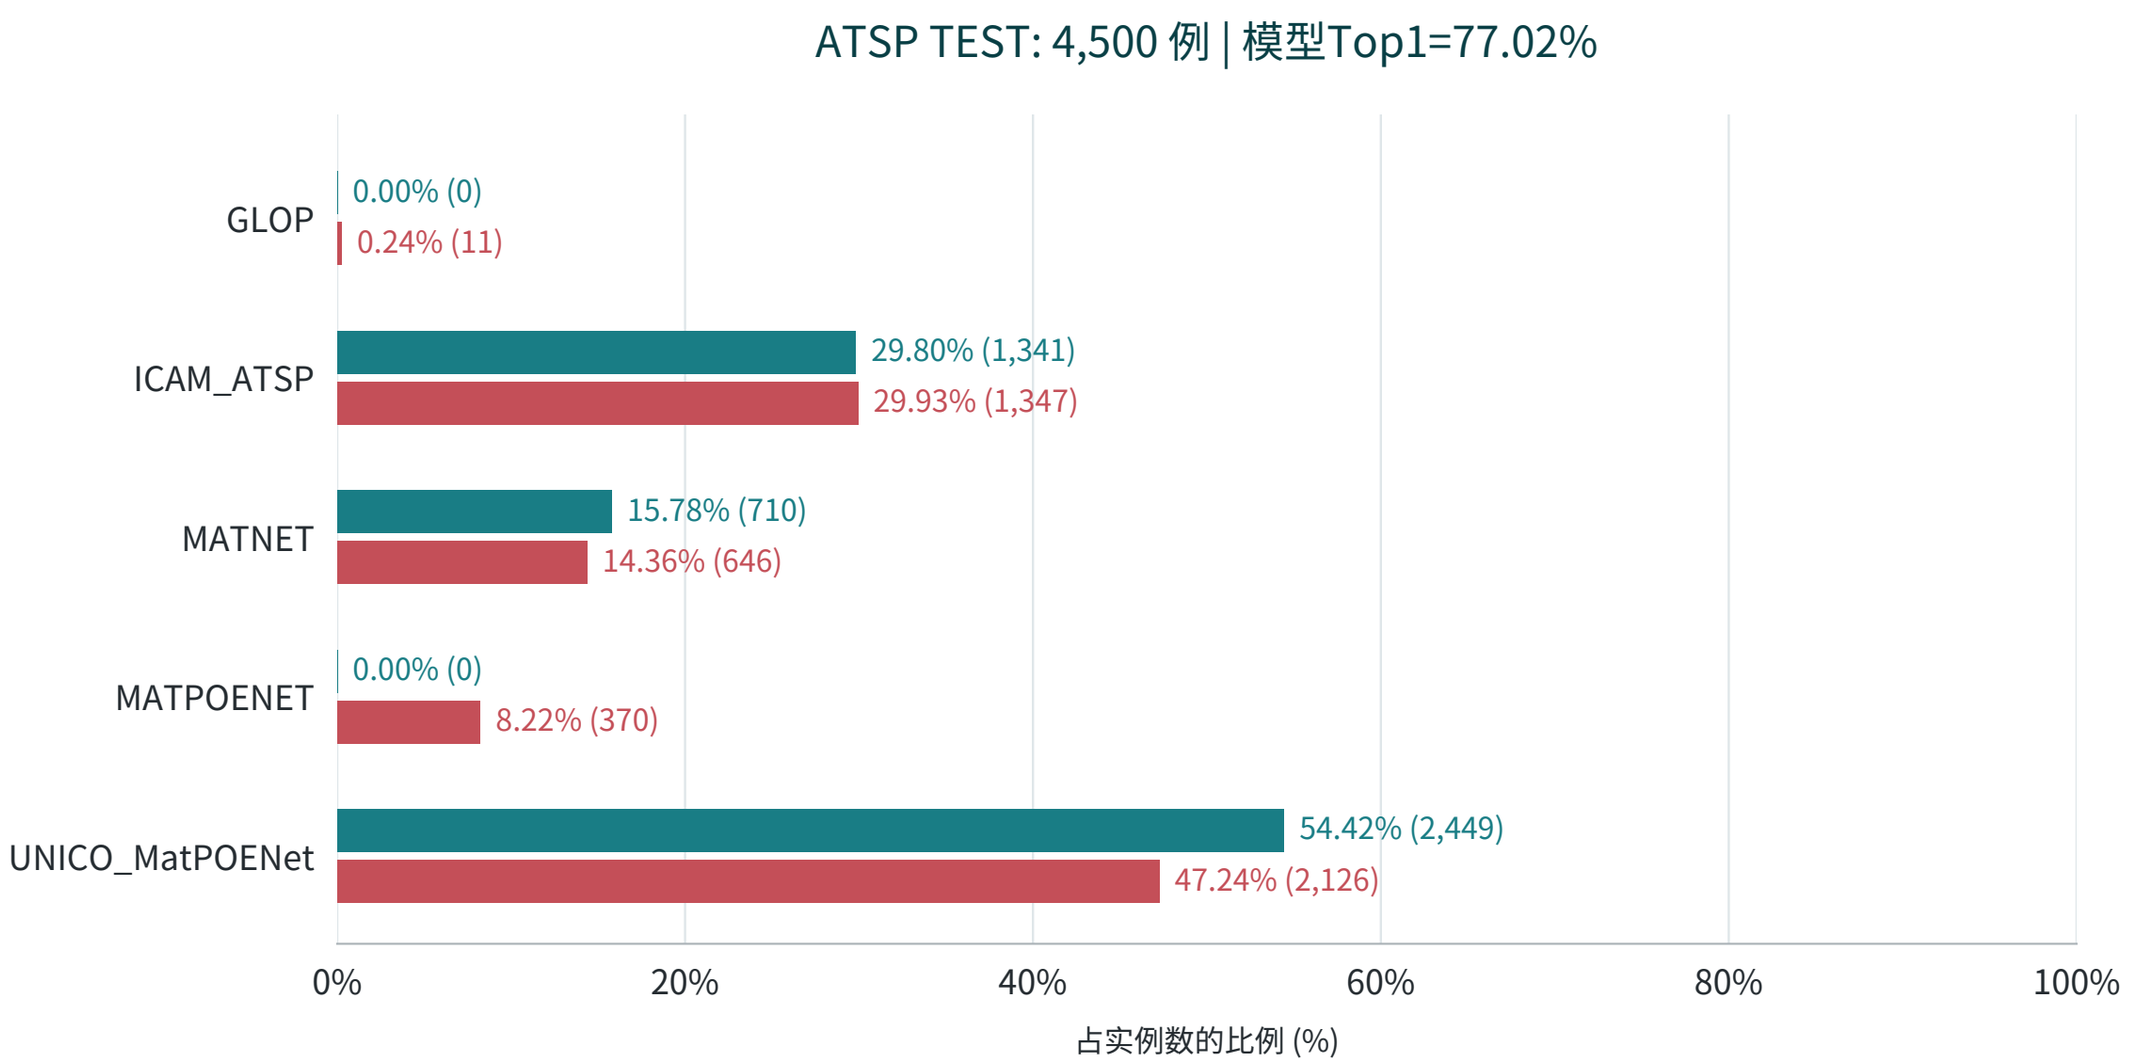

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

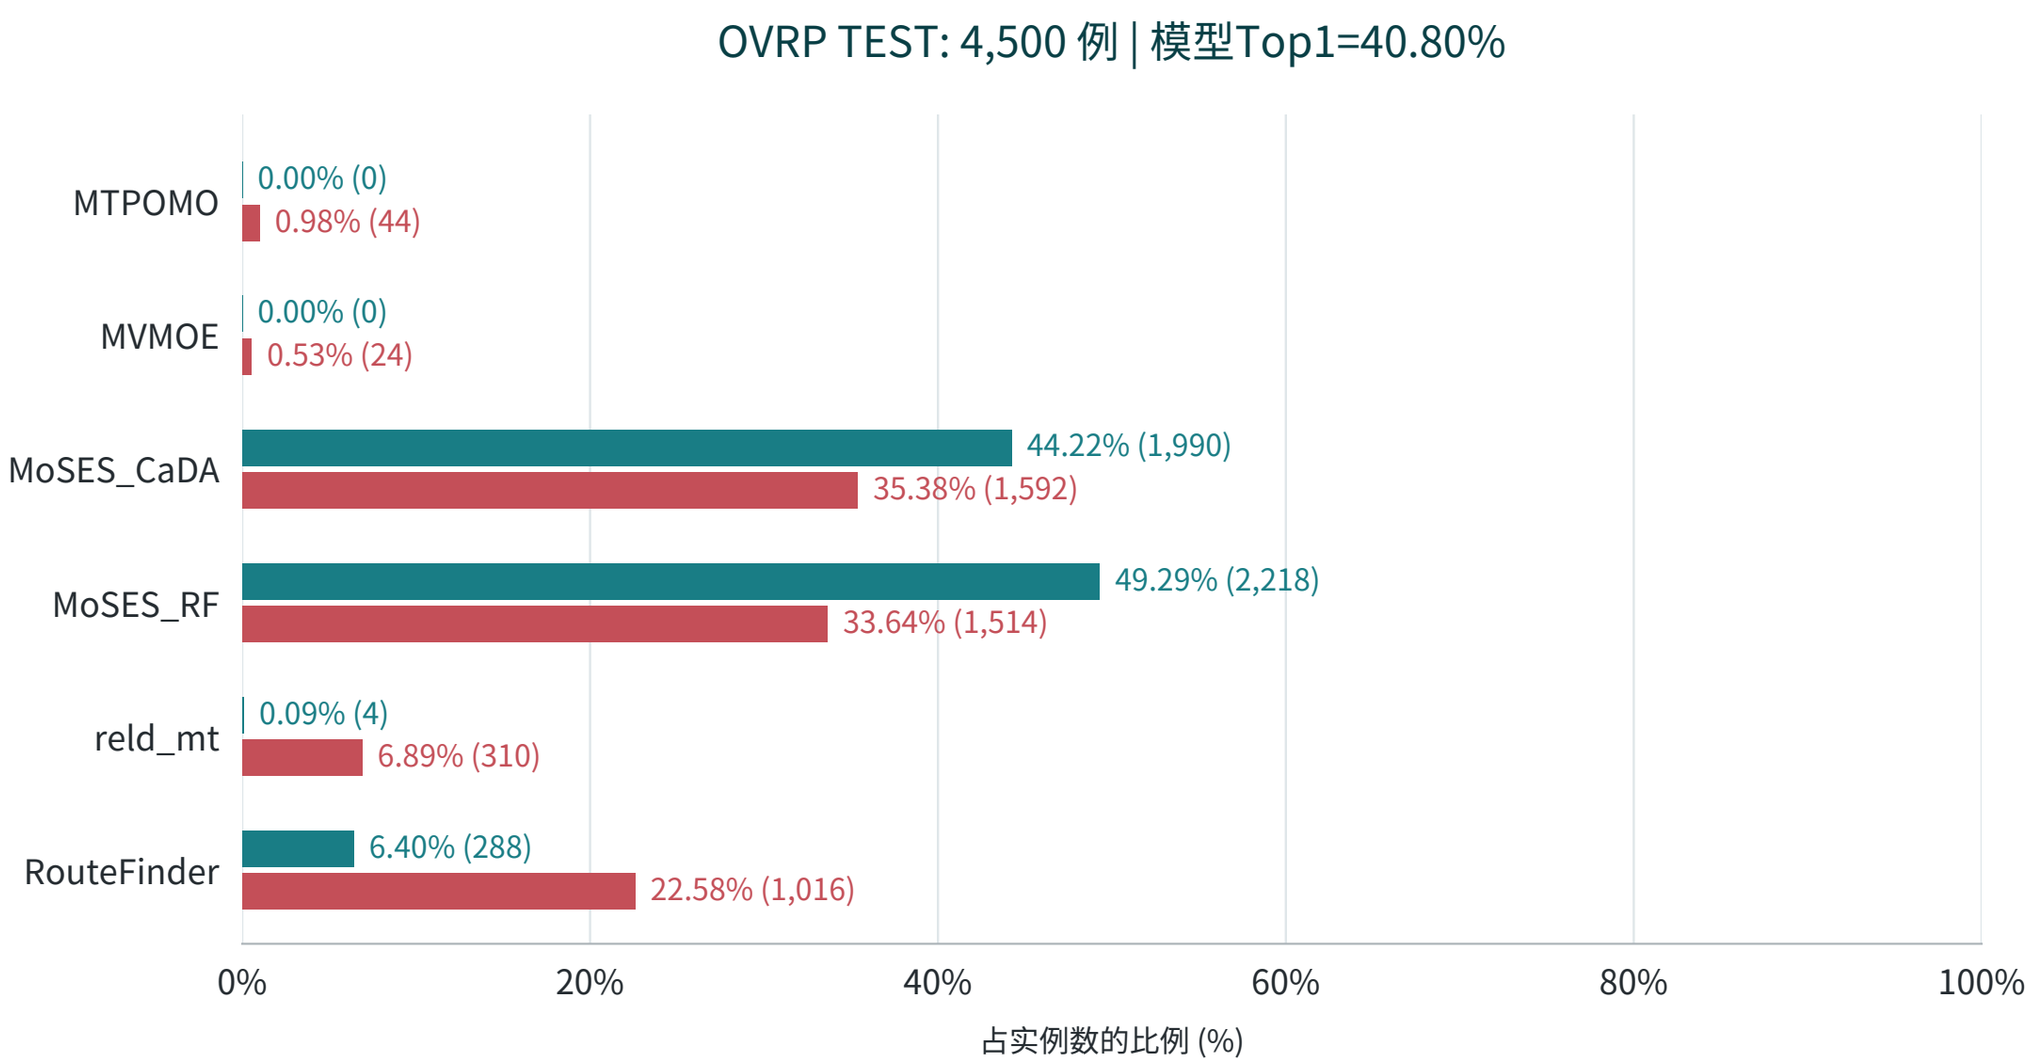

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

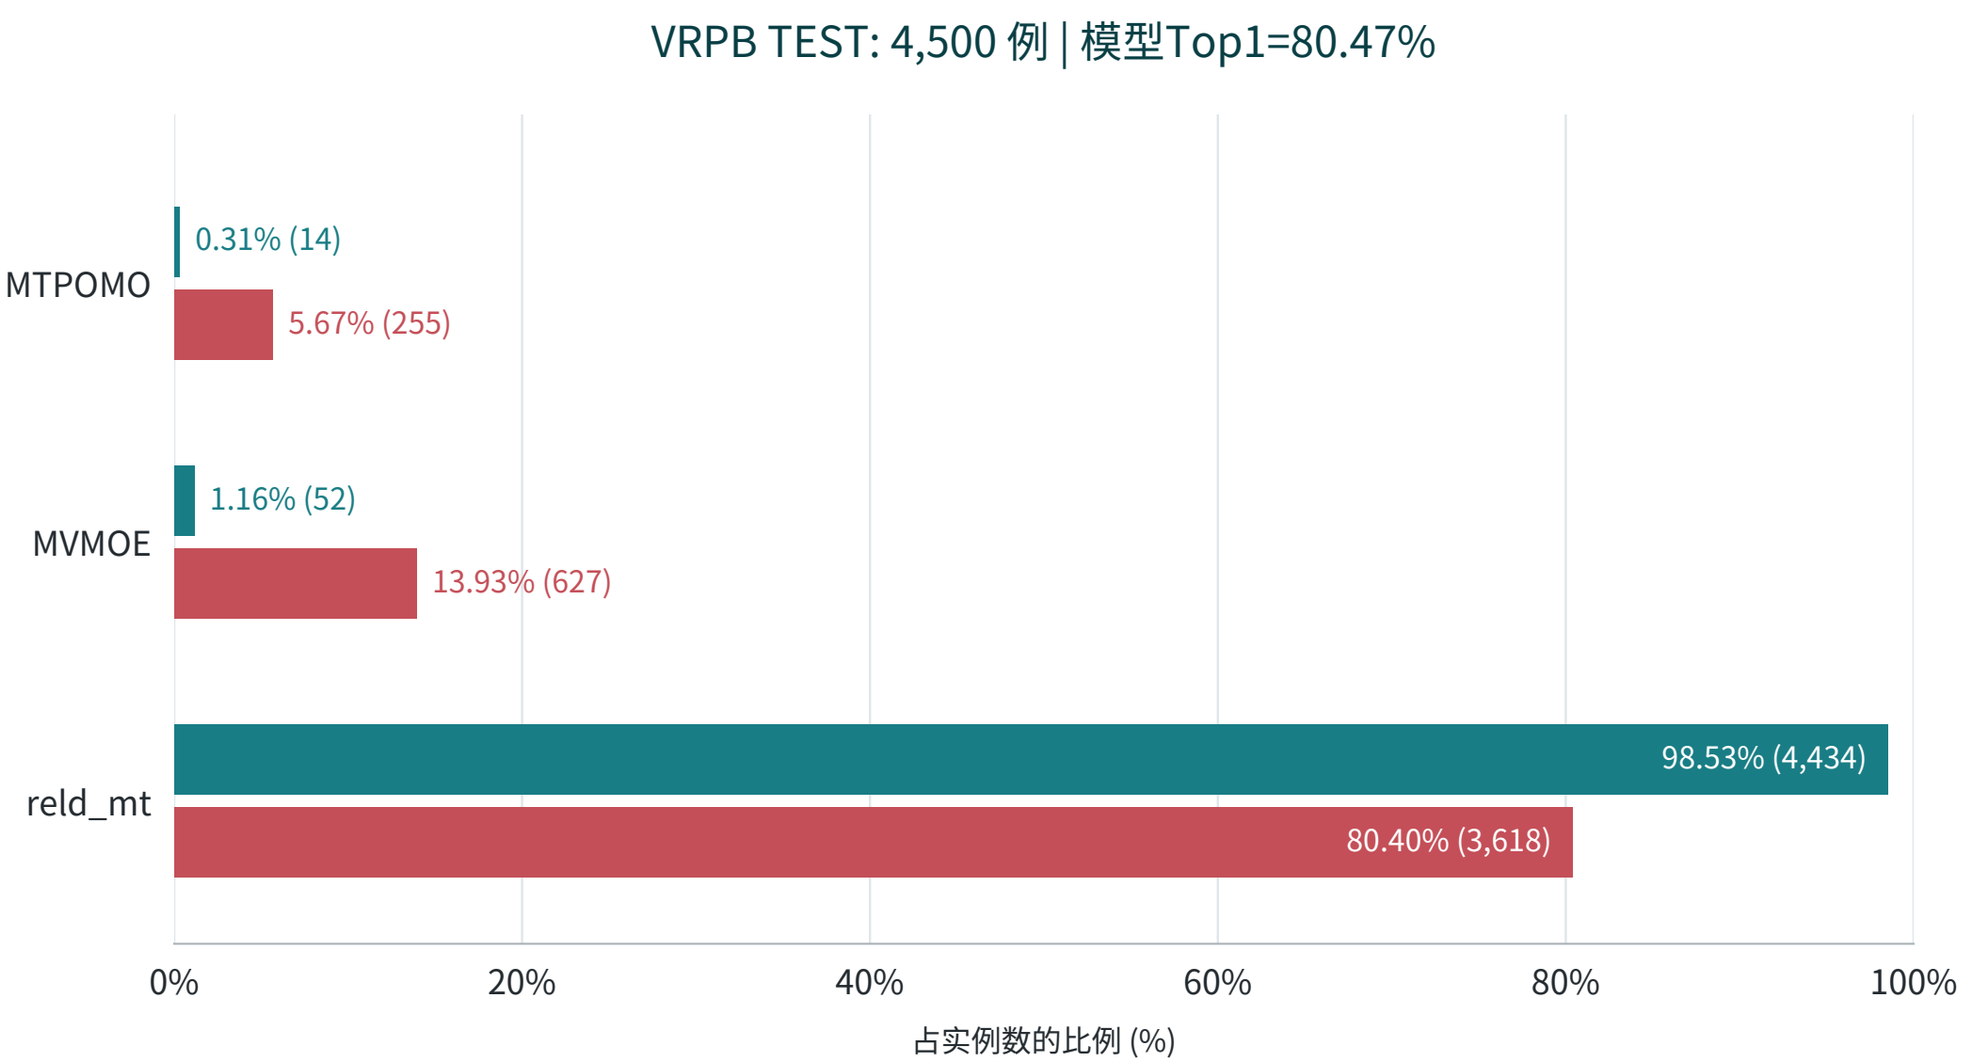

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

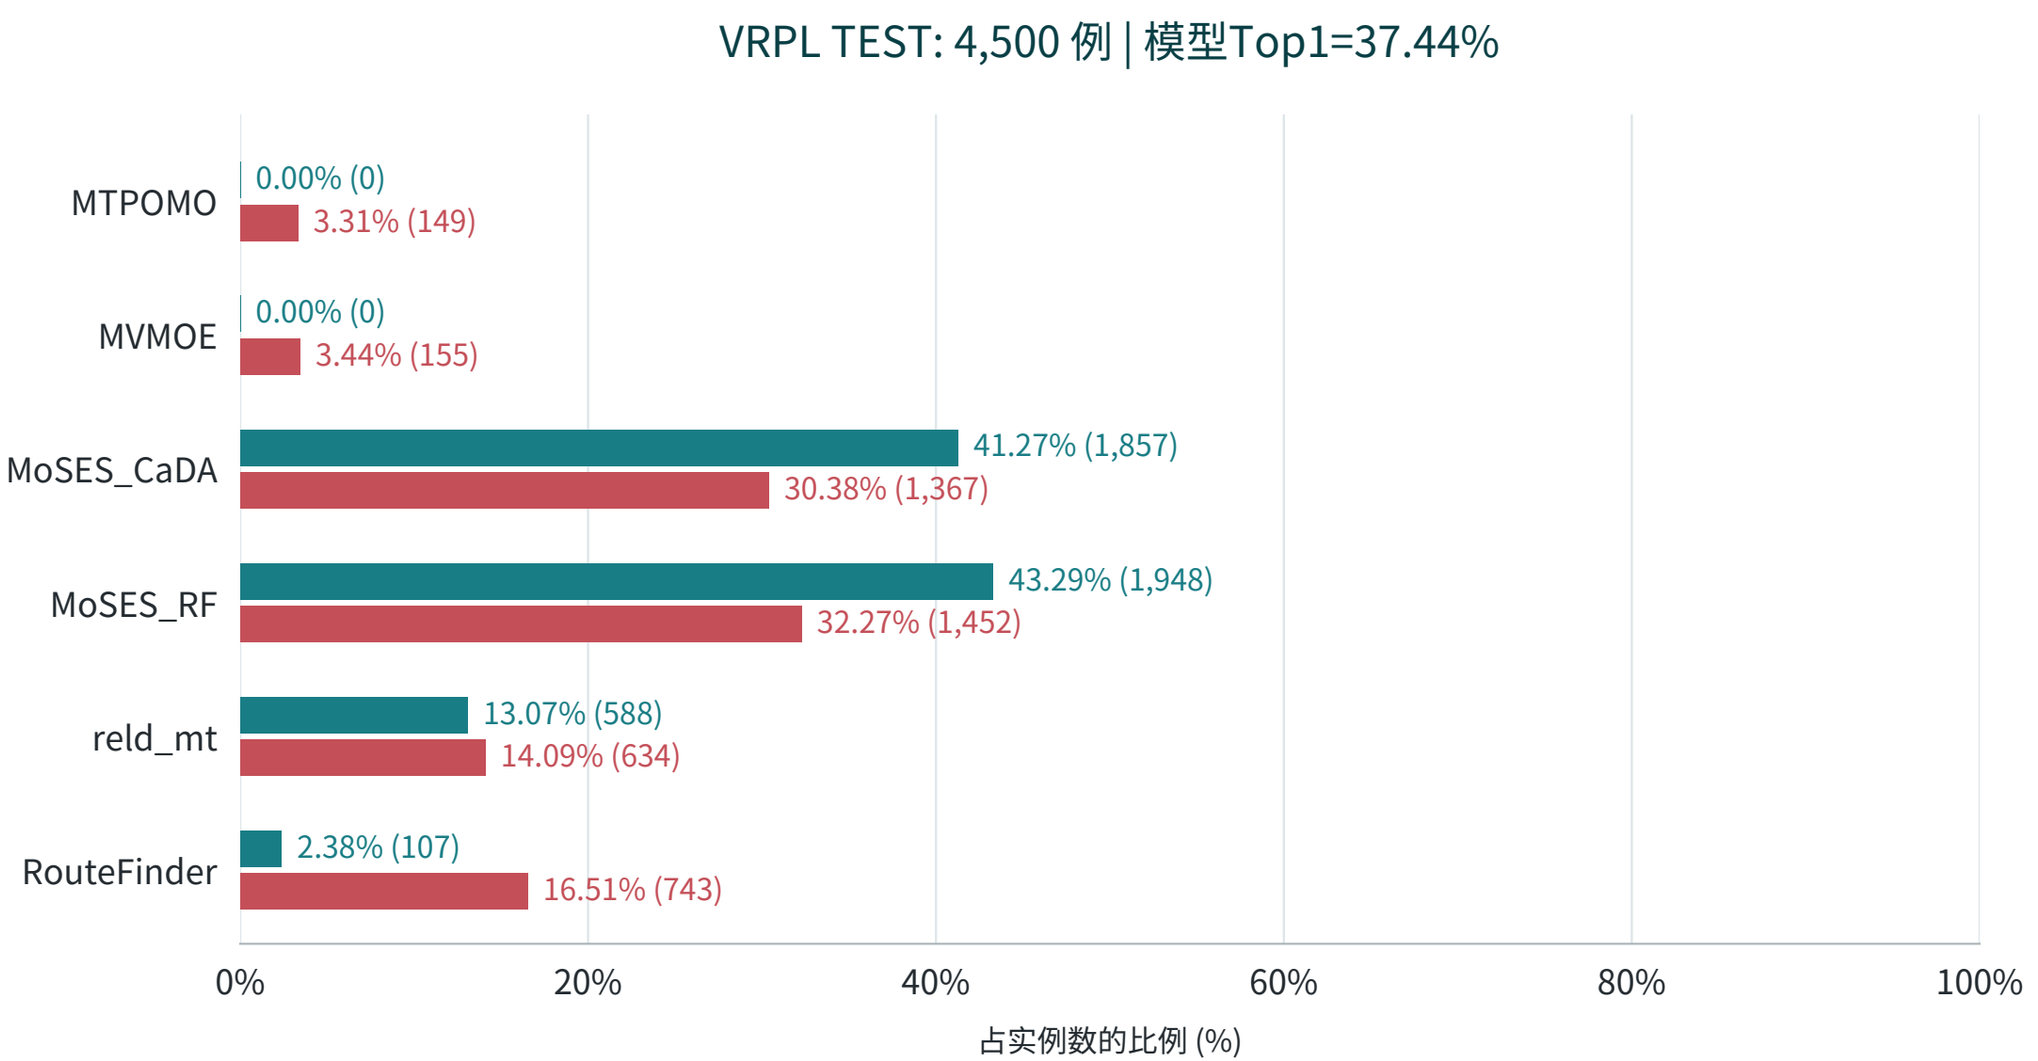

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

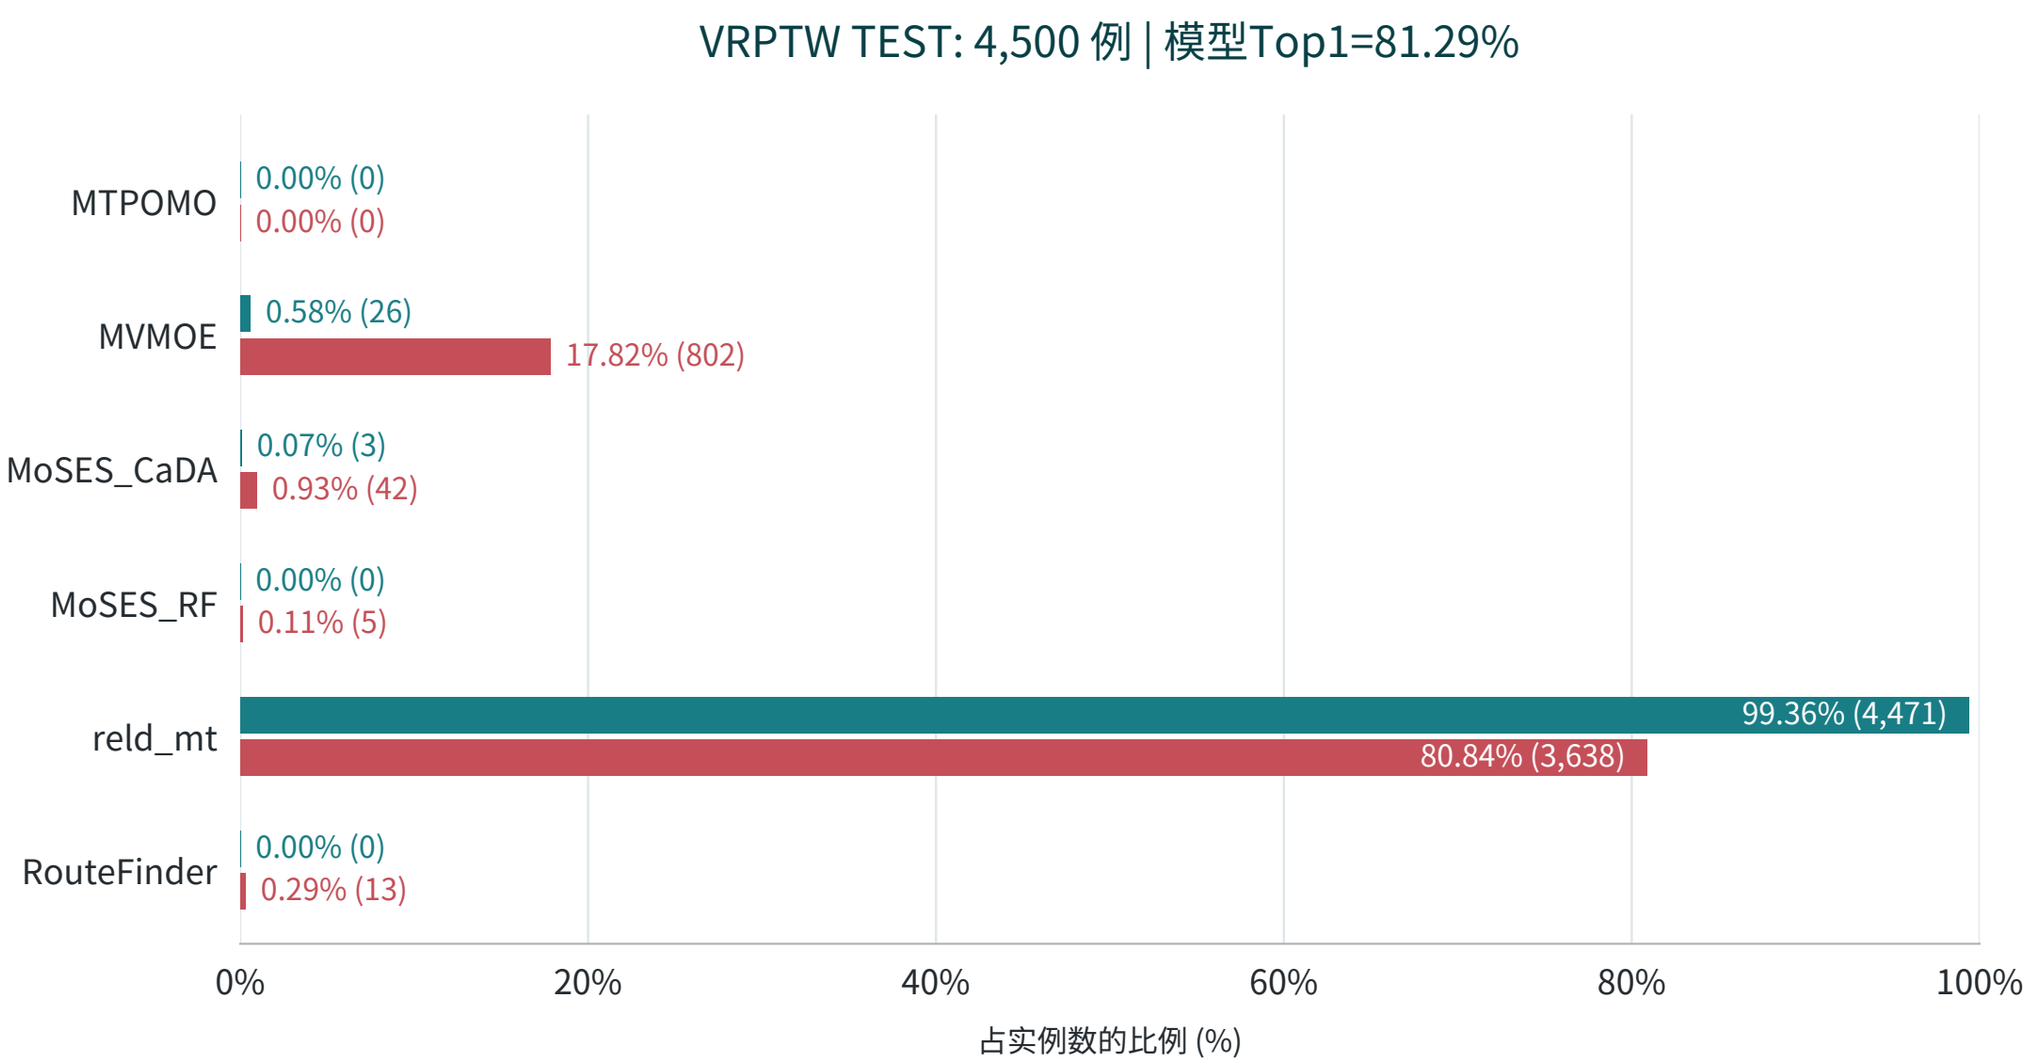

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

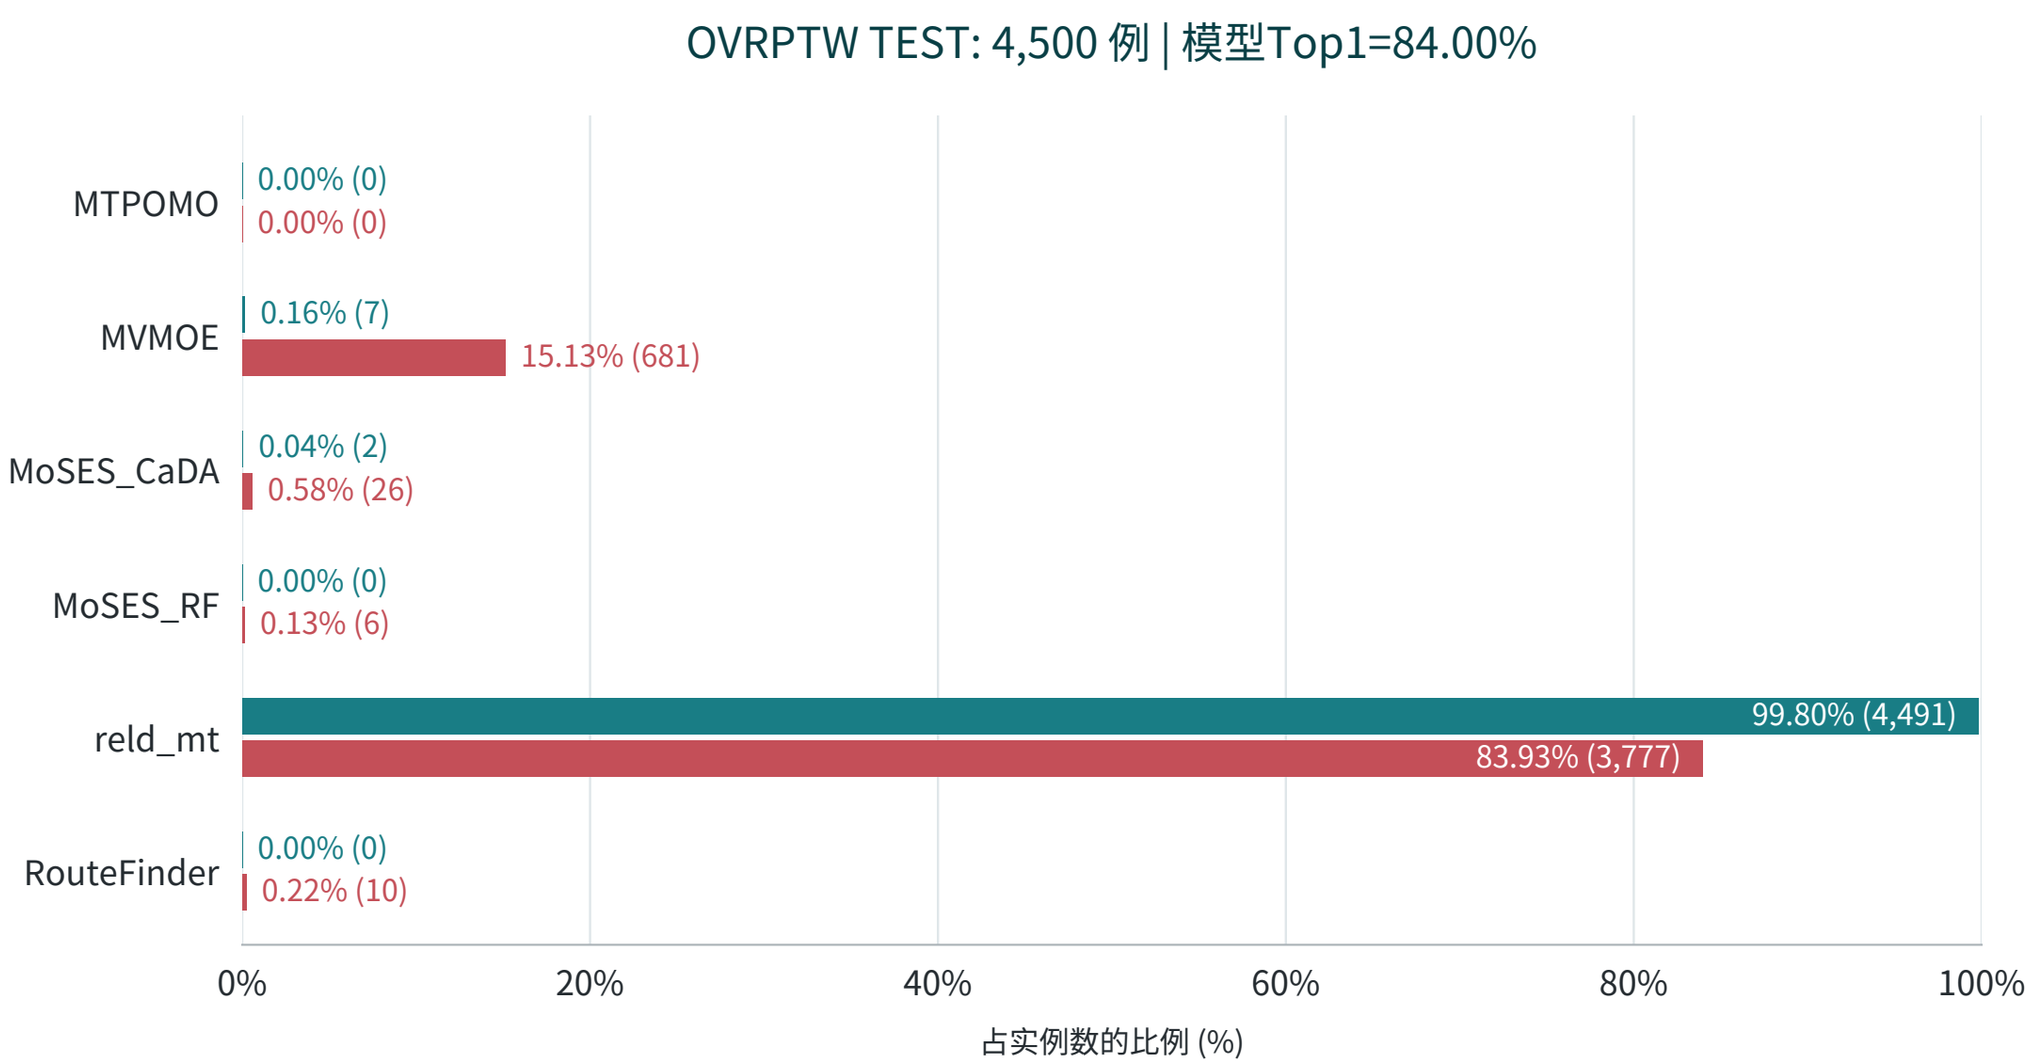

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

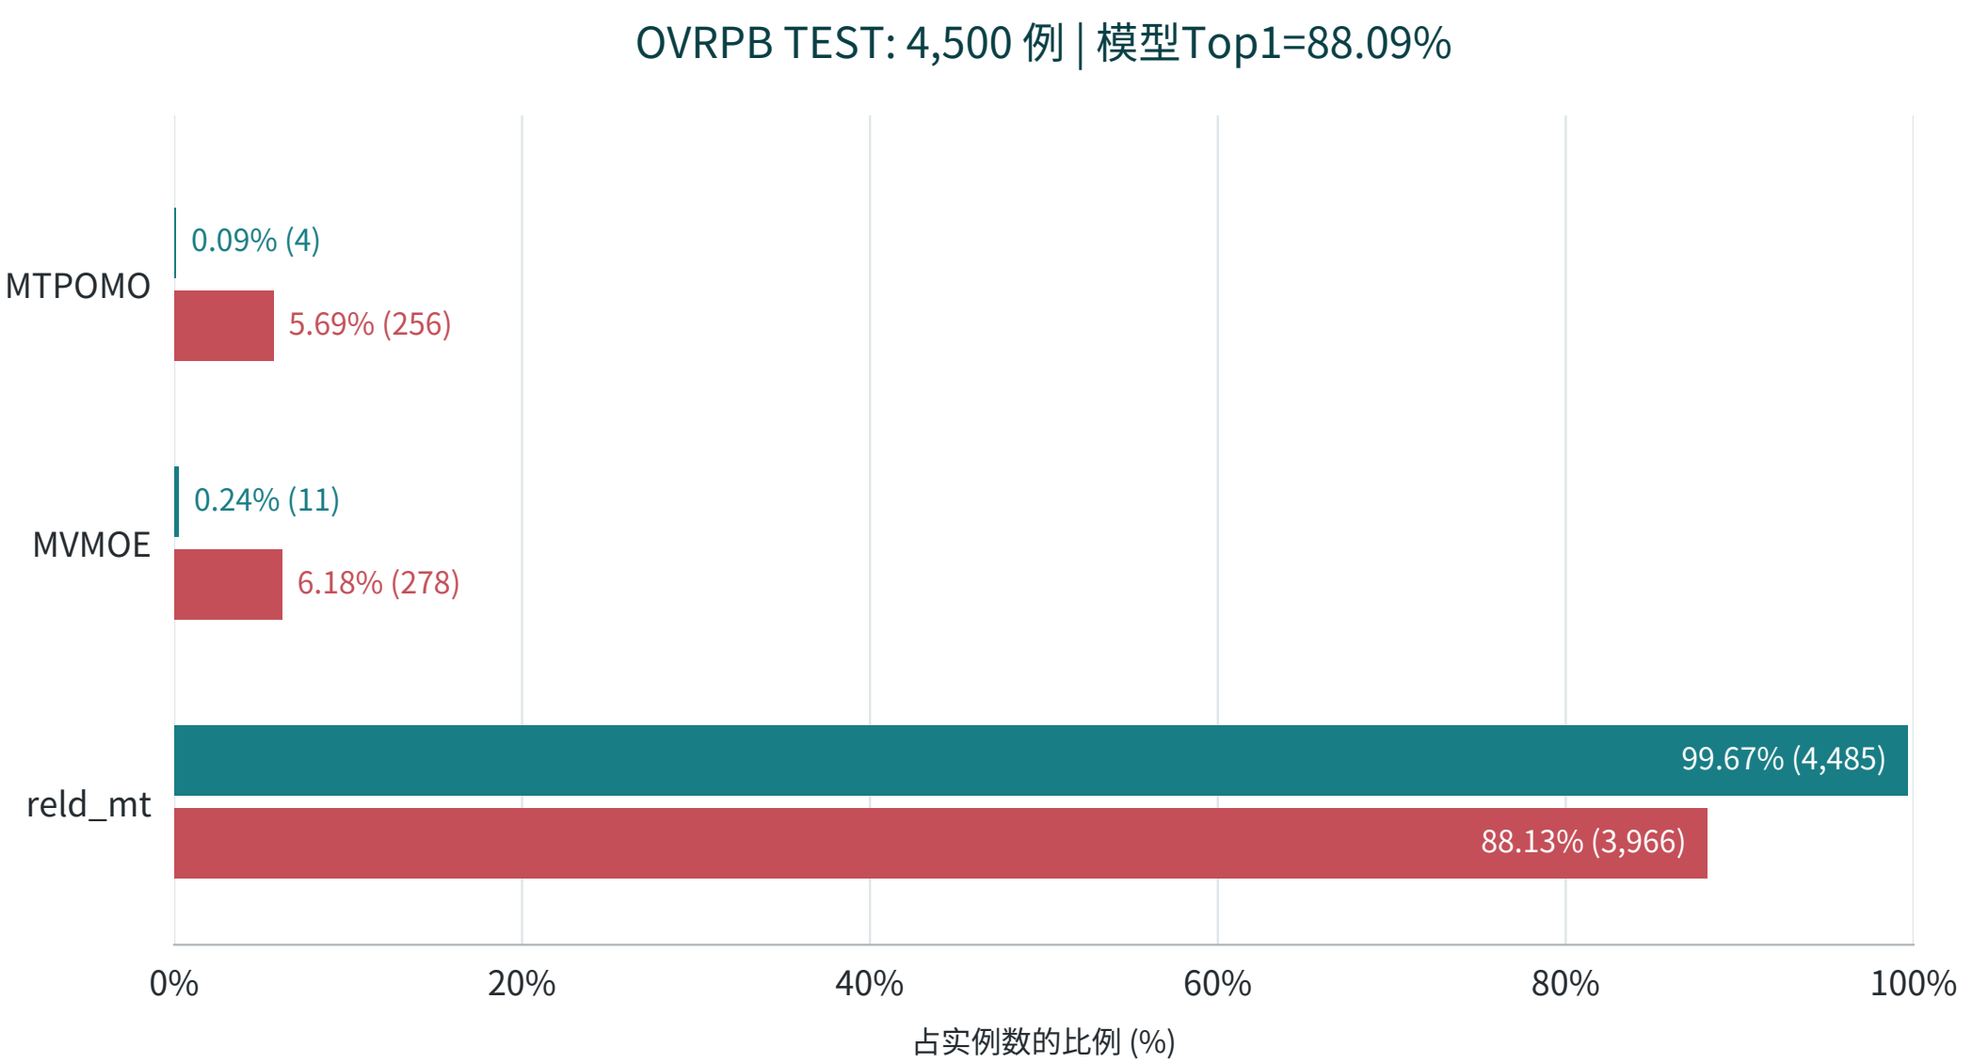

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

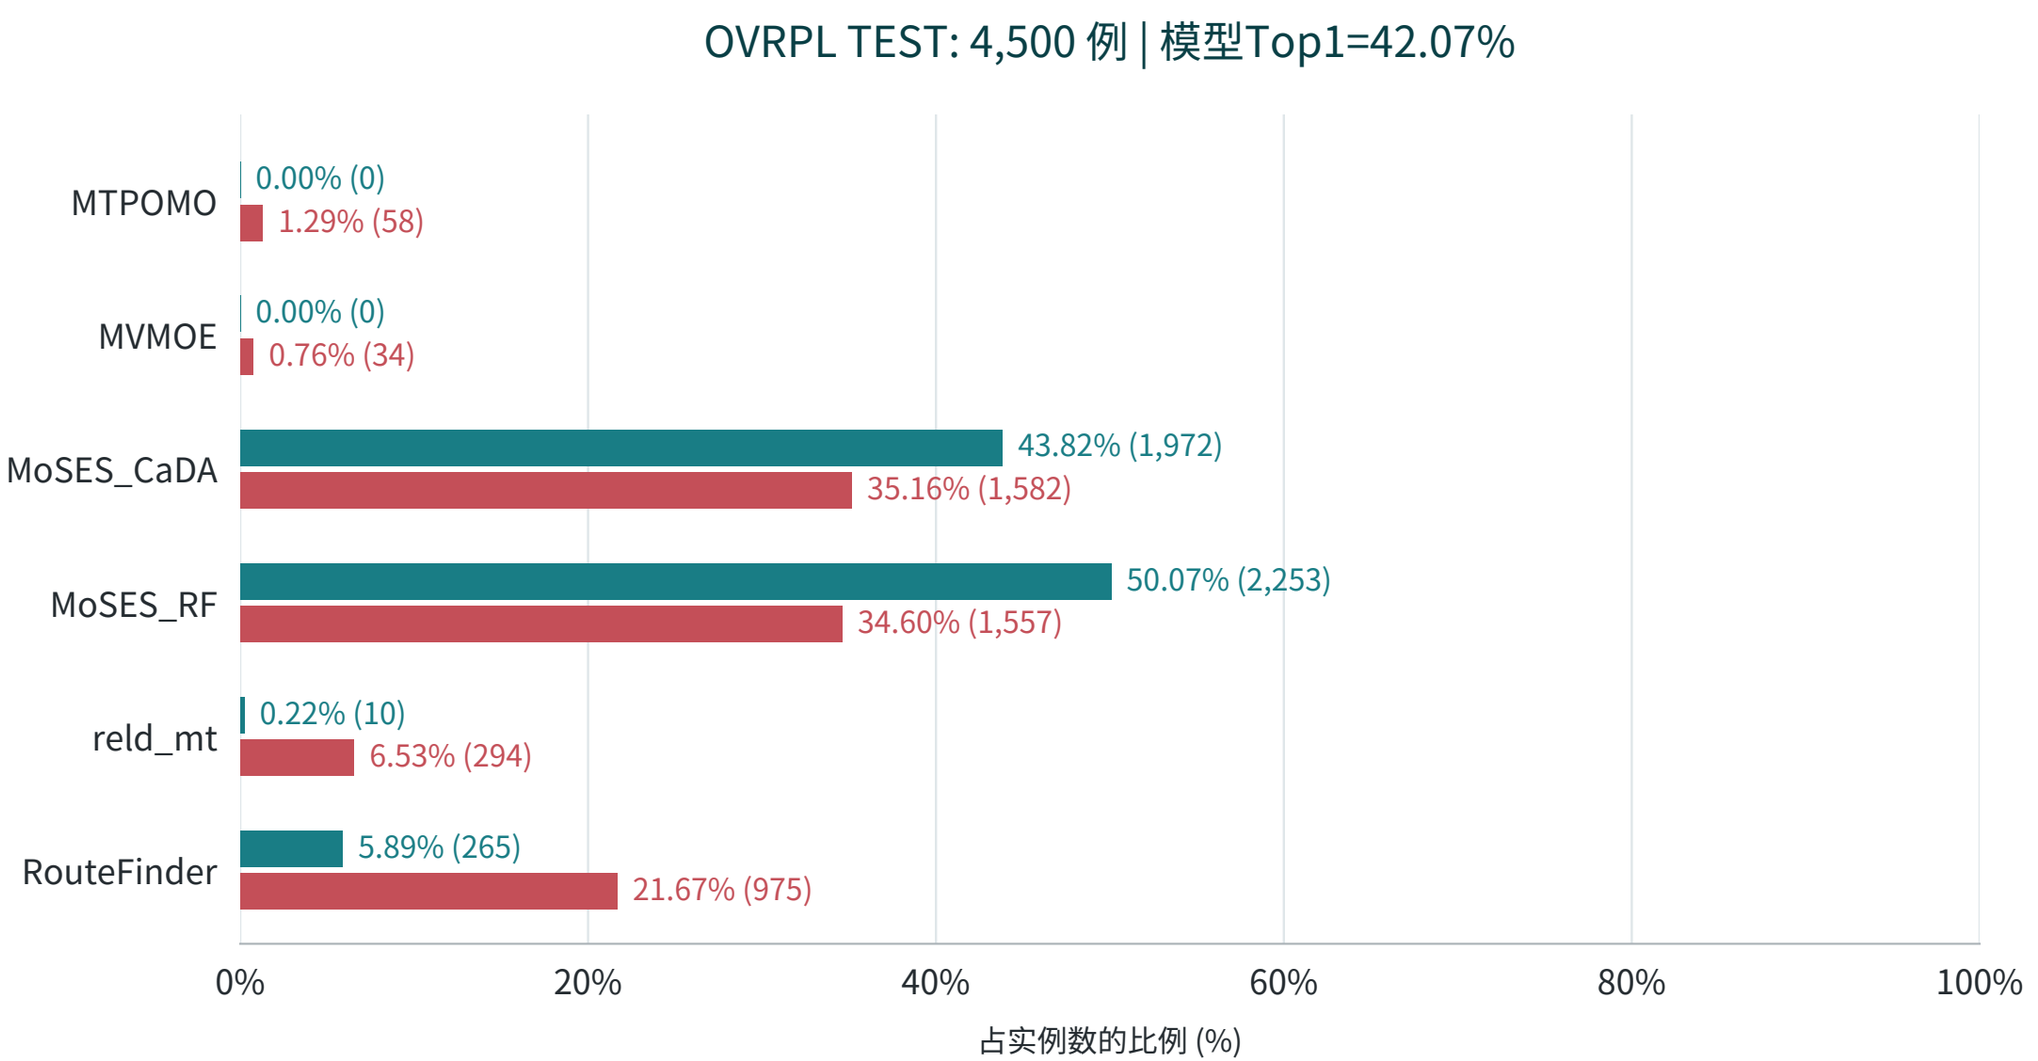

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

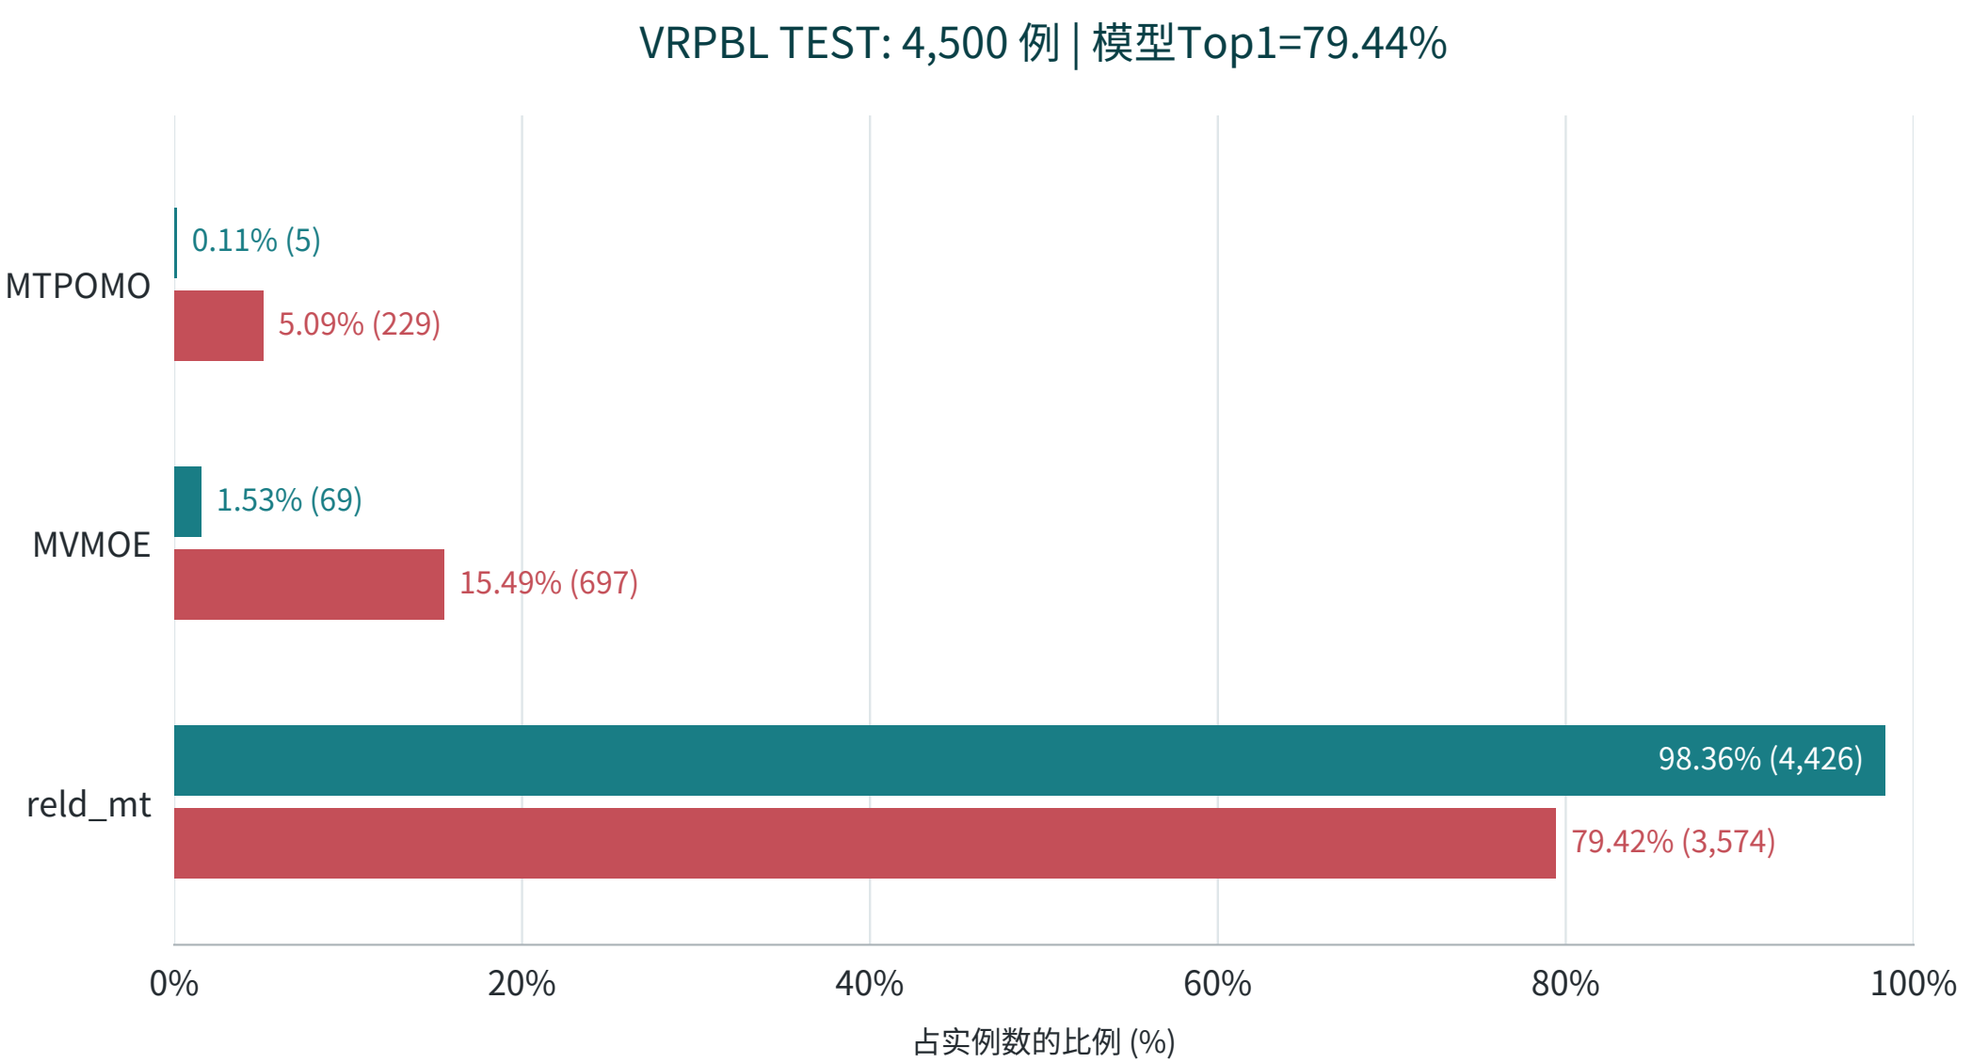

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

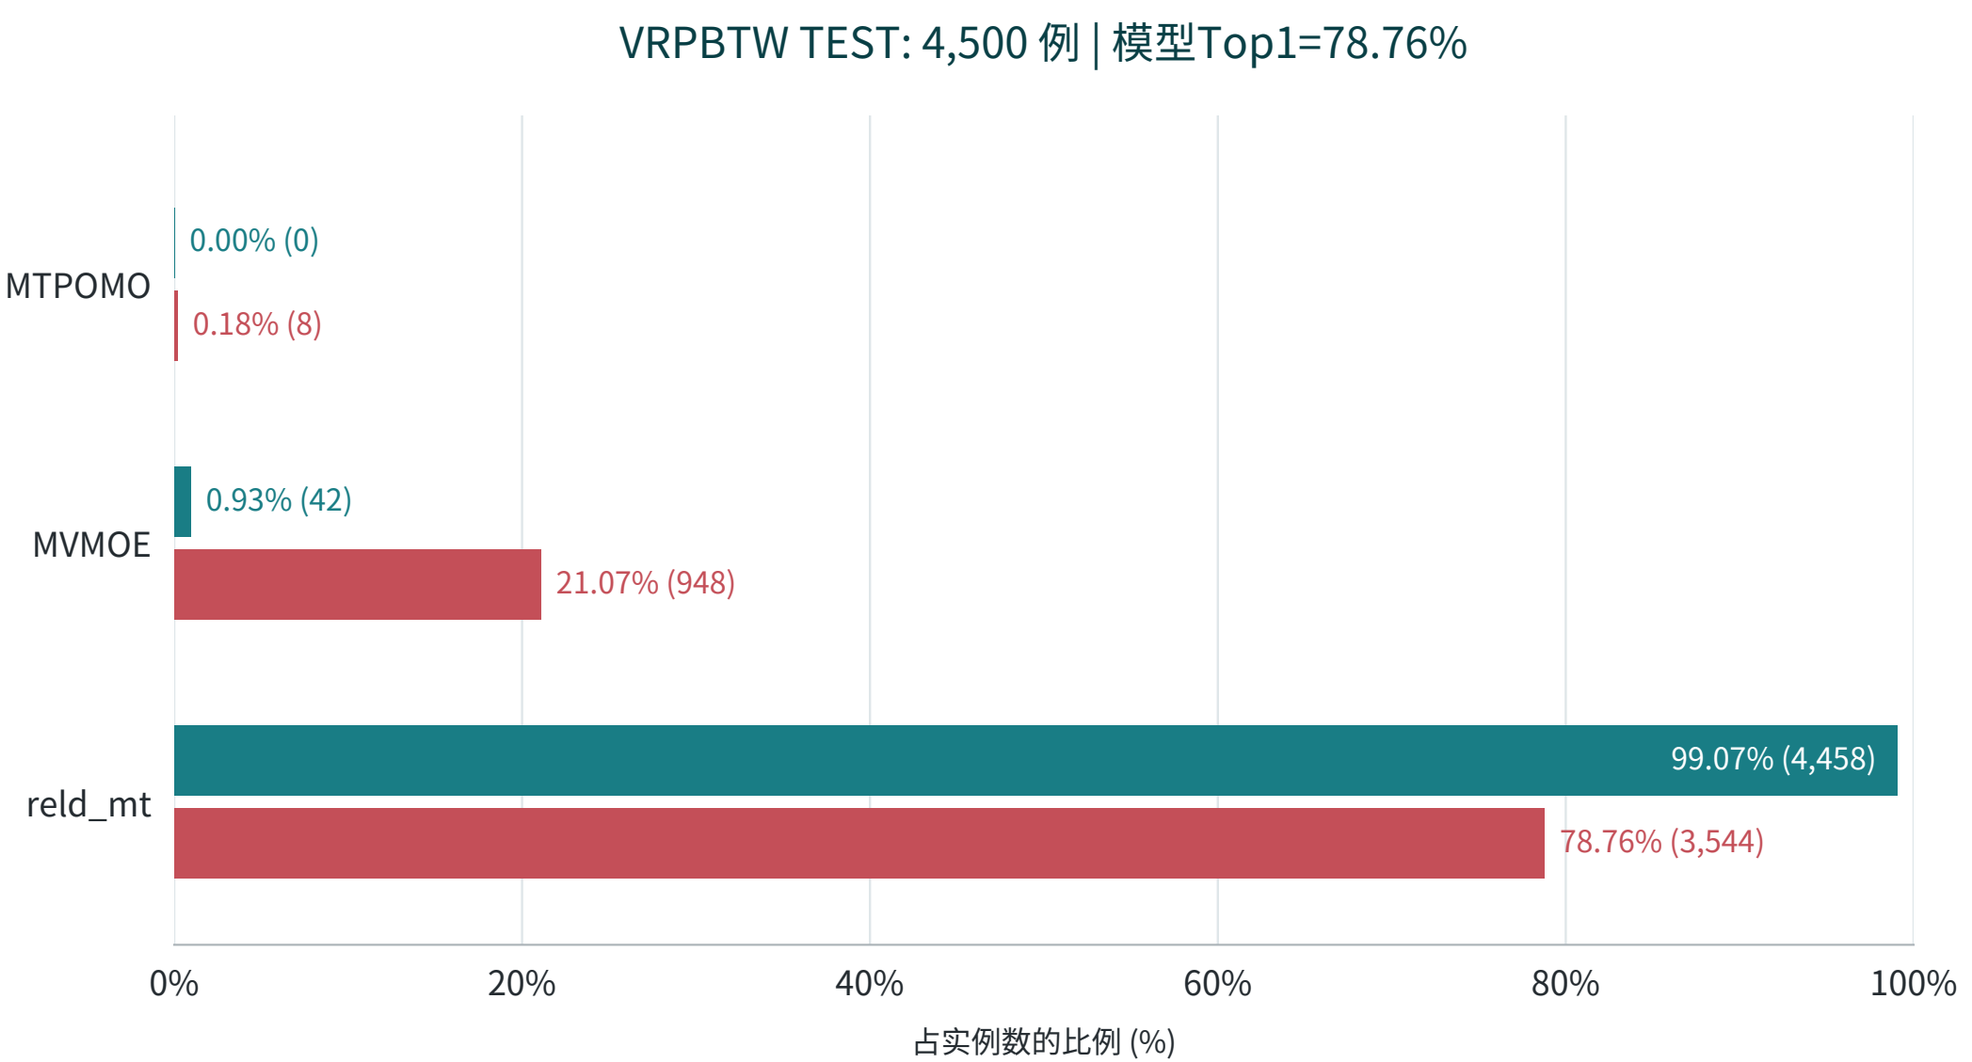

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

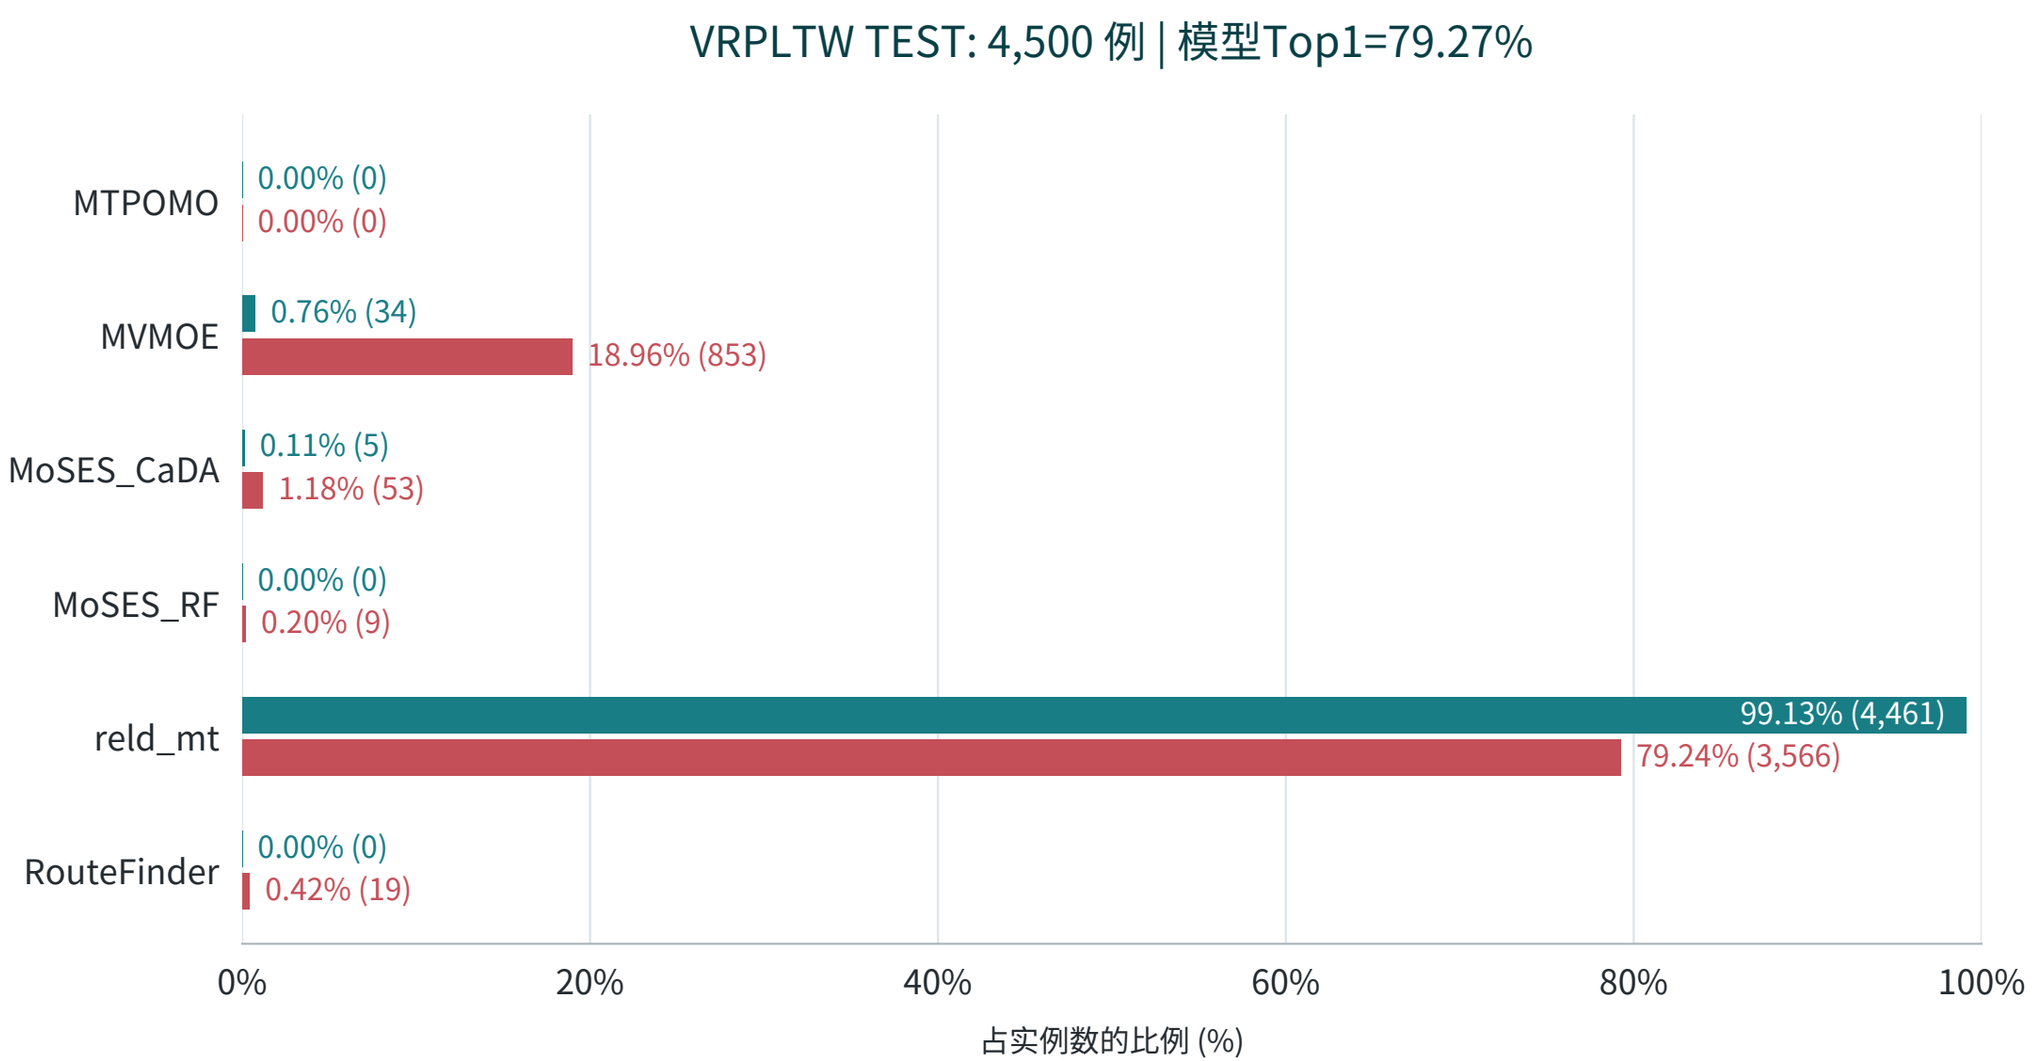

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

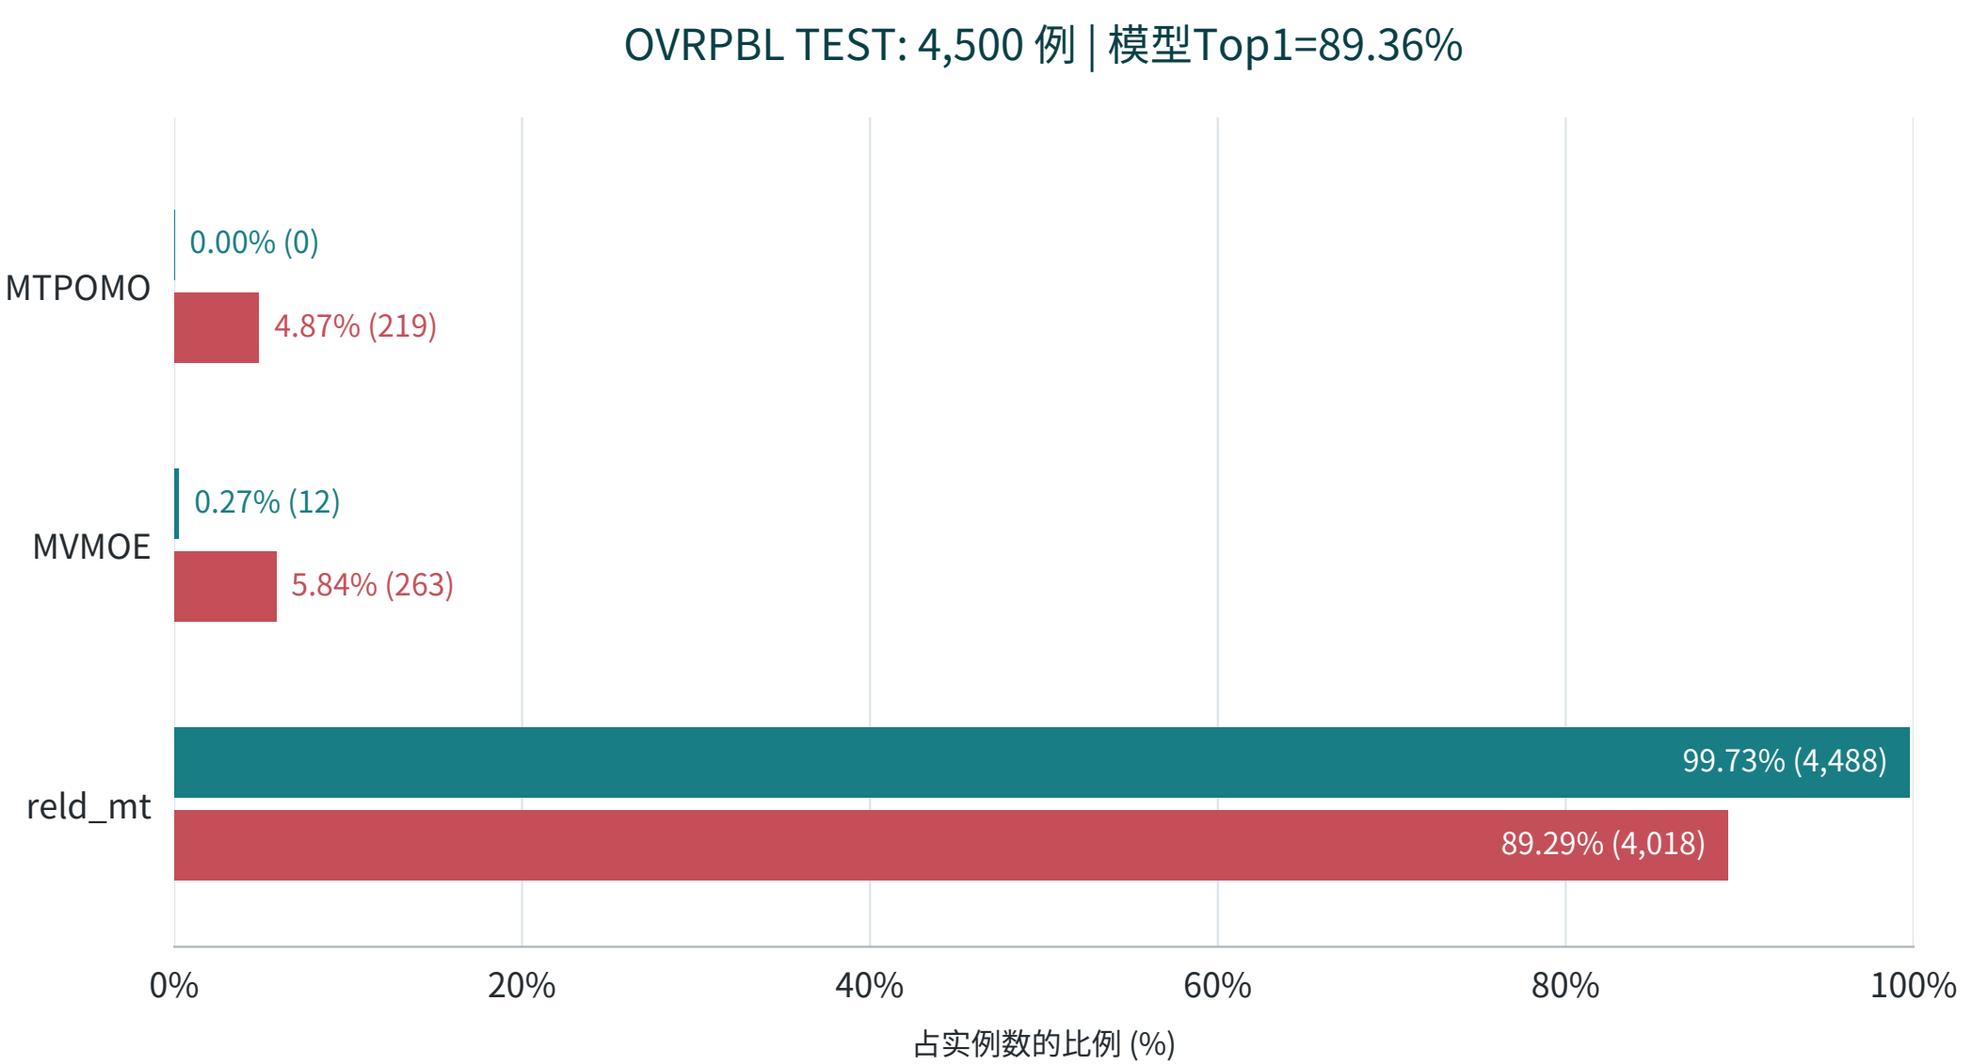

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

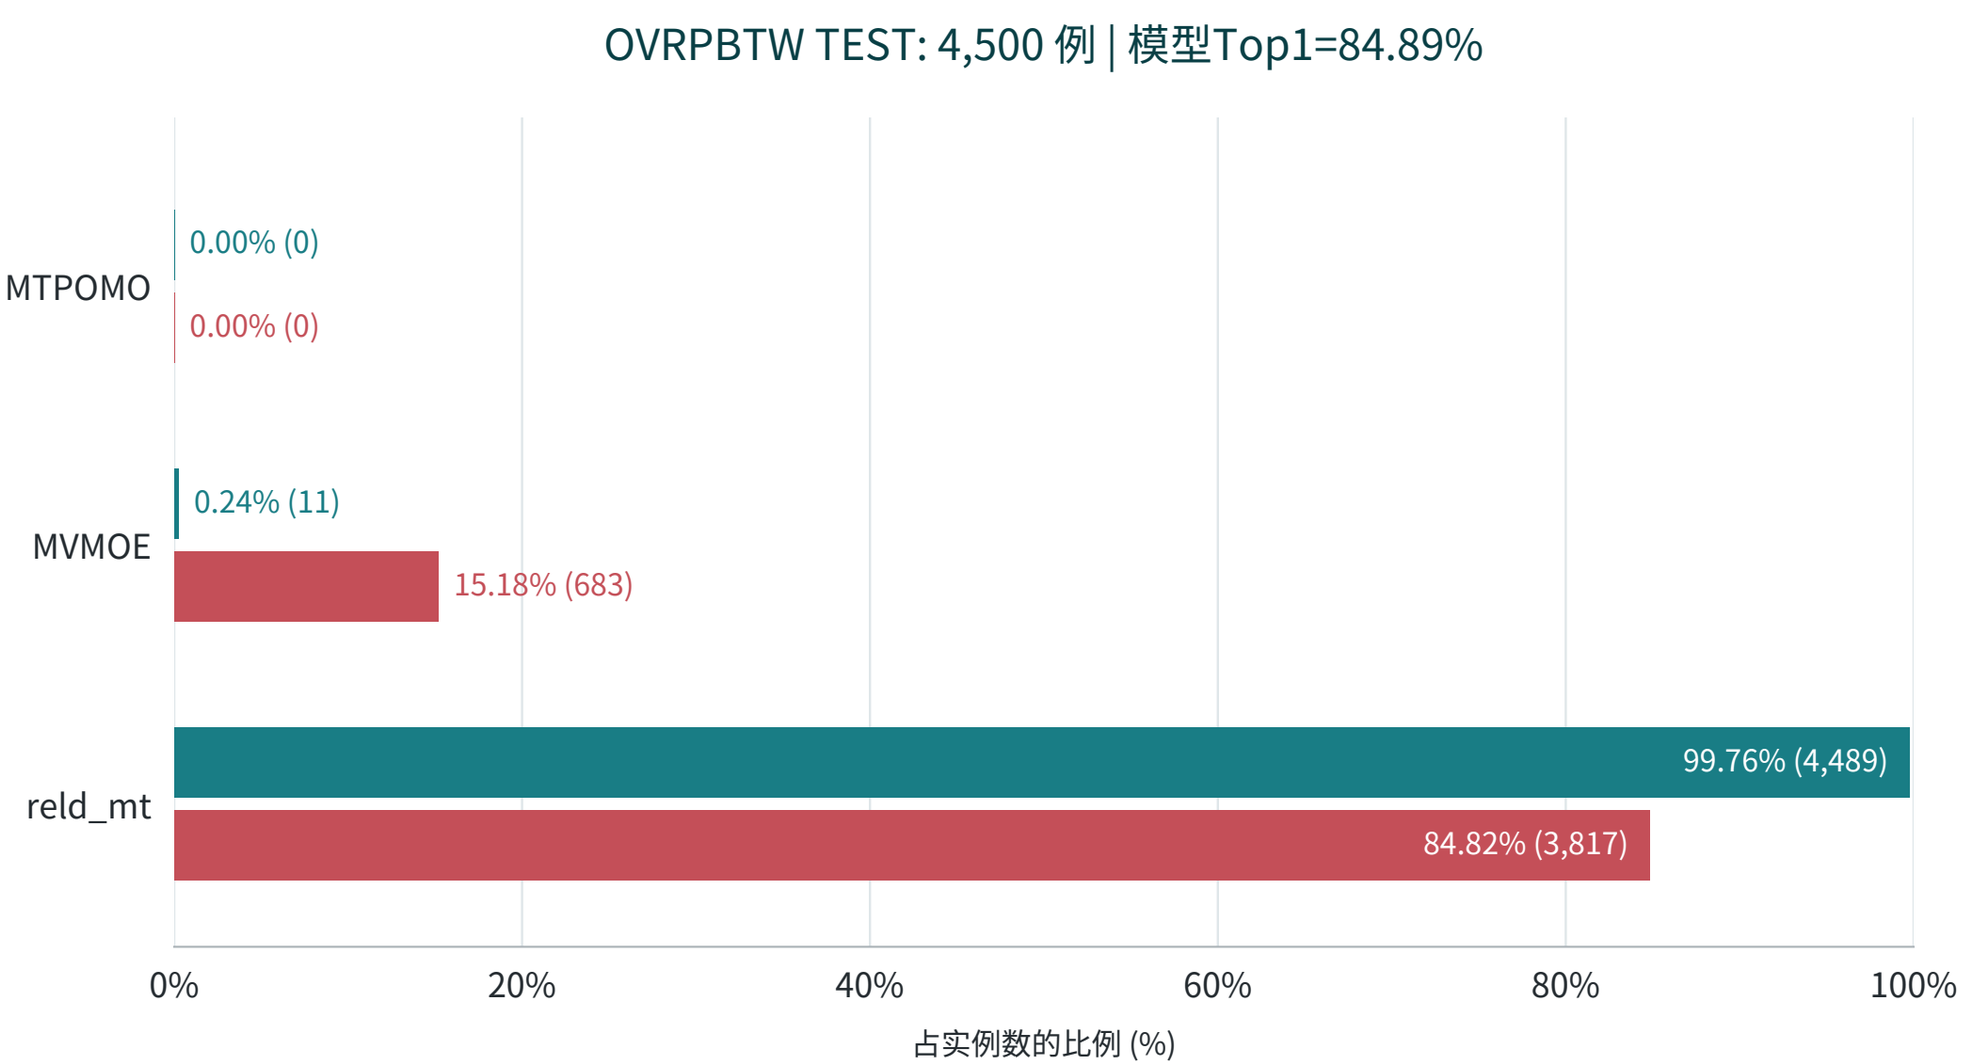

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

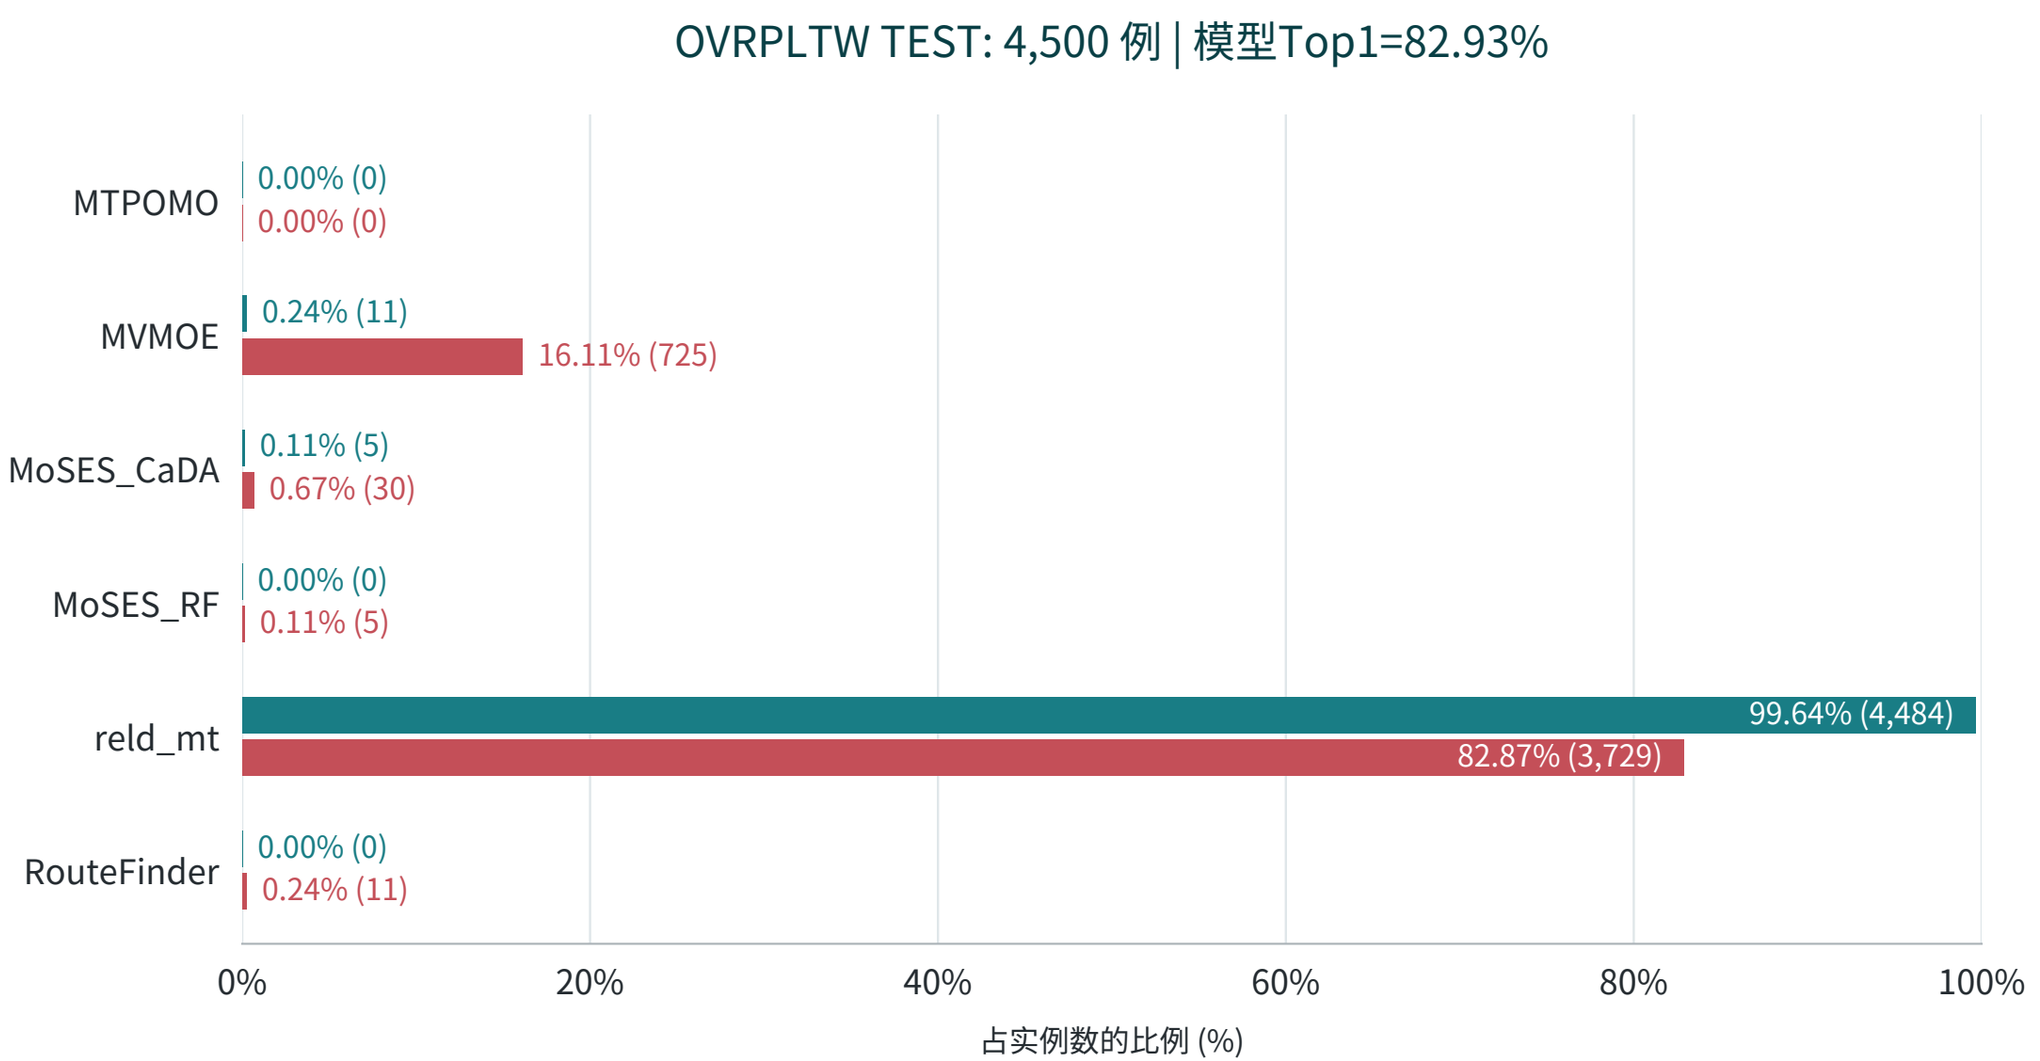

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | VRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

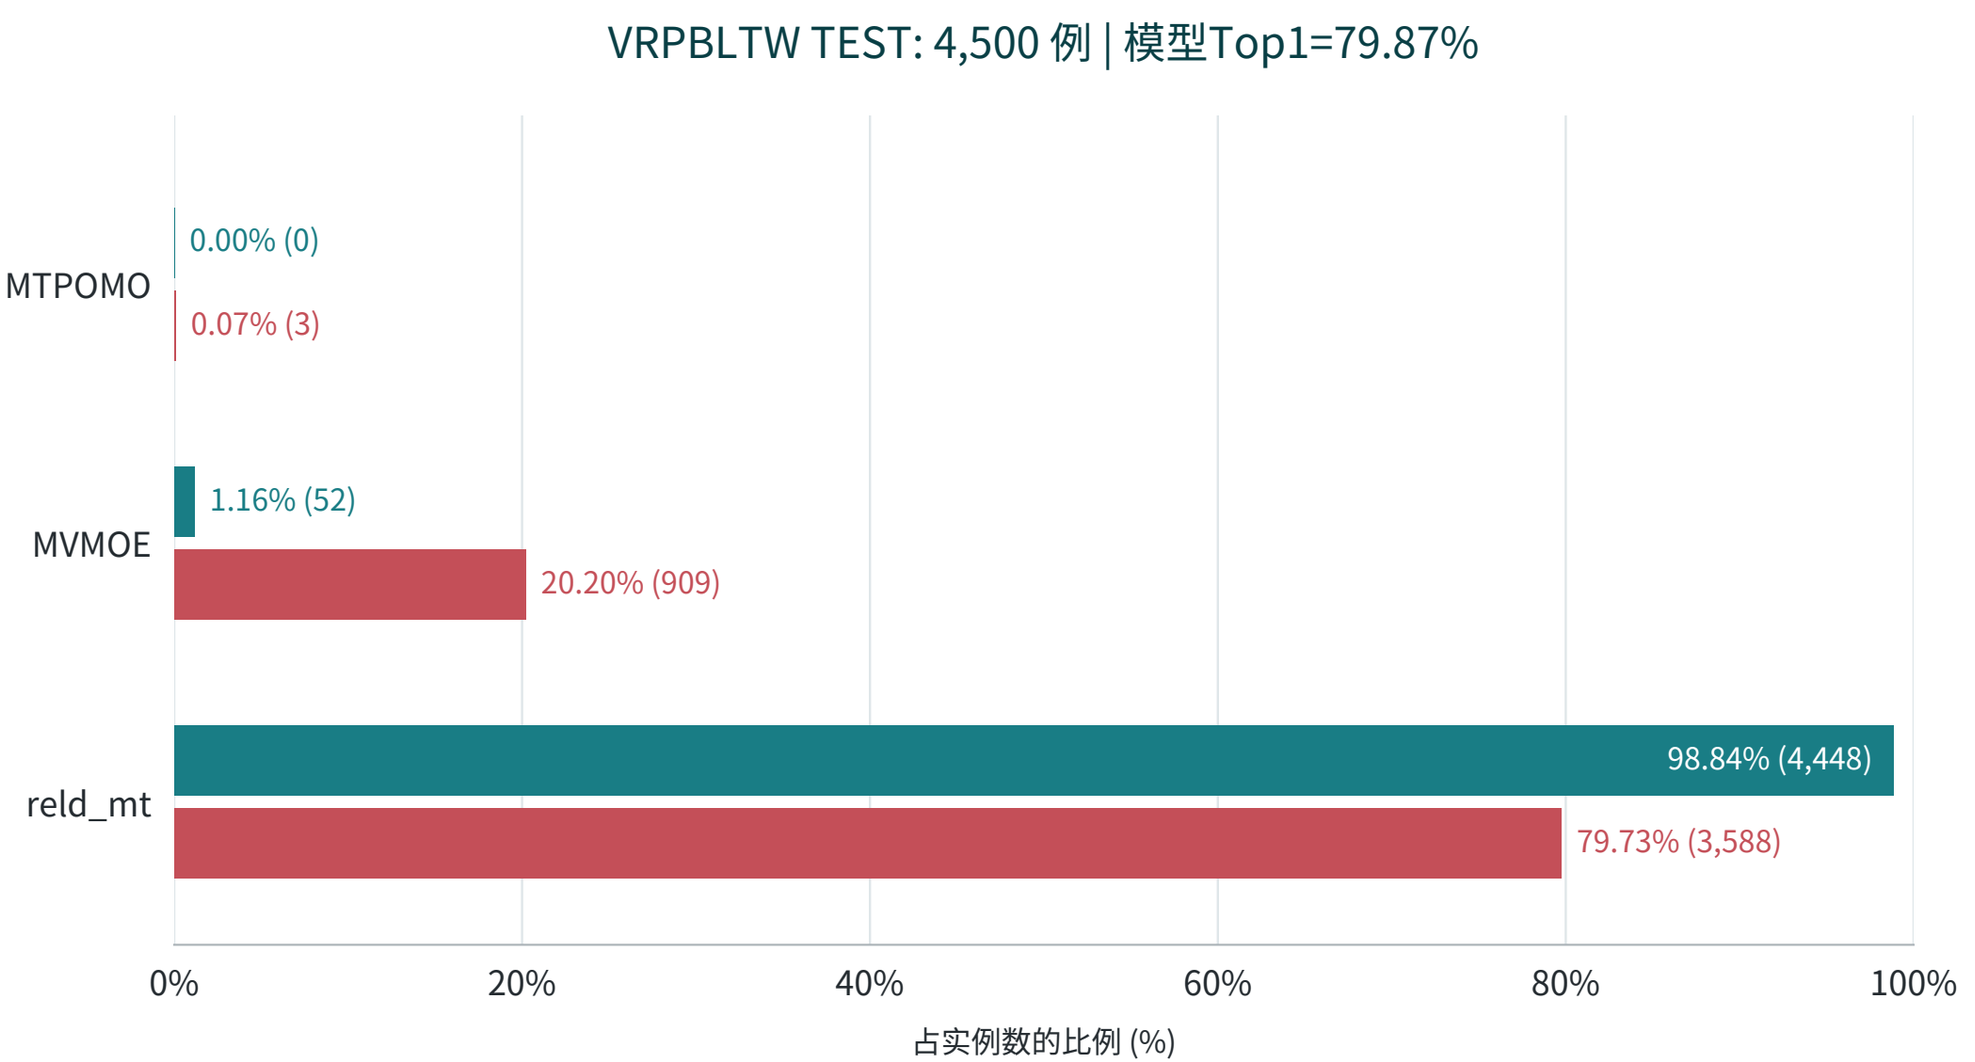

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.

R87/B_private_residual | OVRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 36e4685625906b79

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

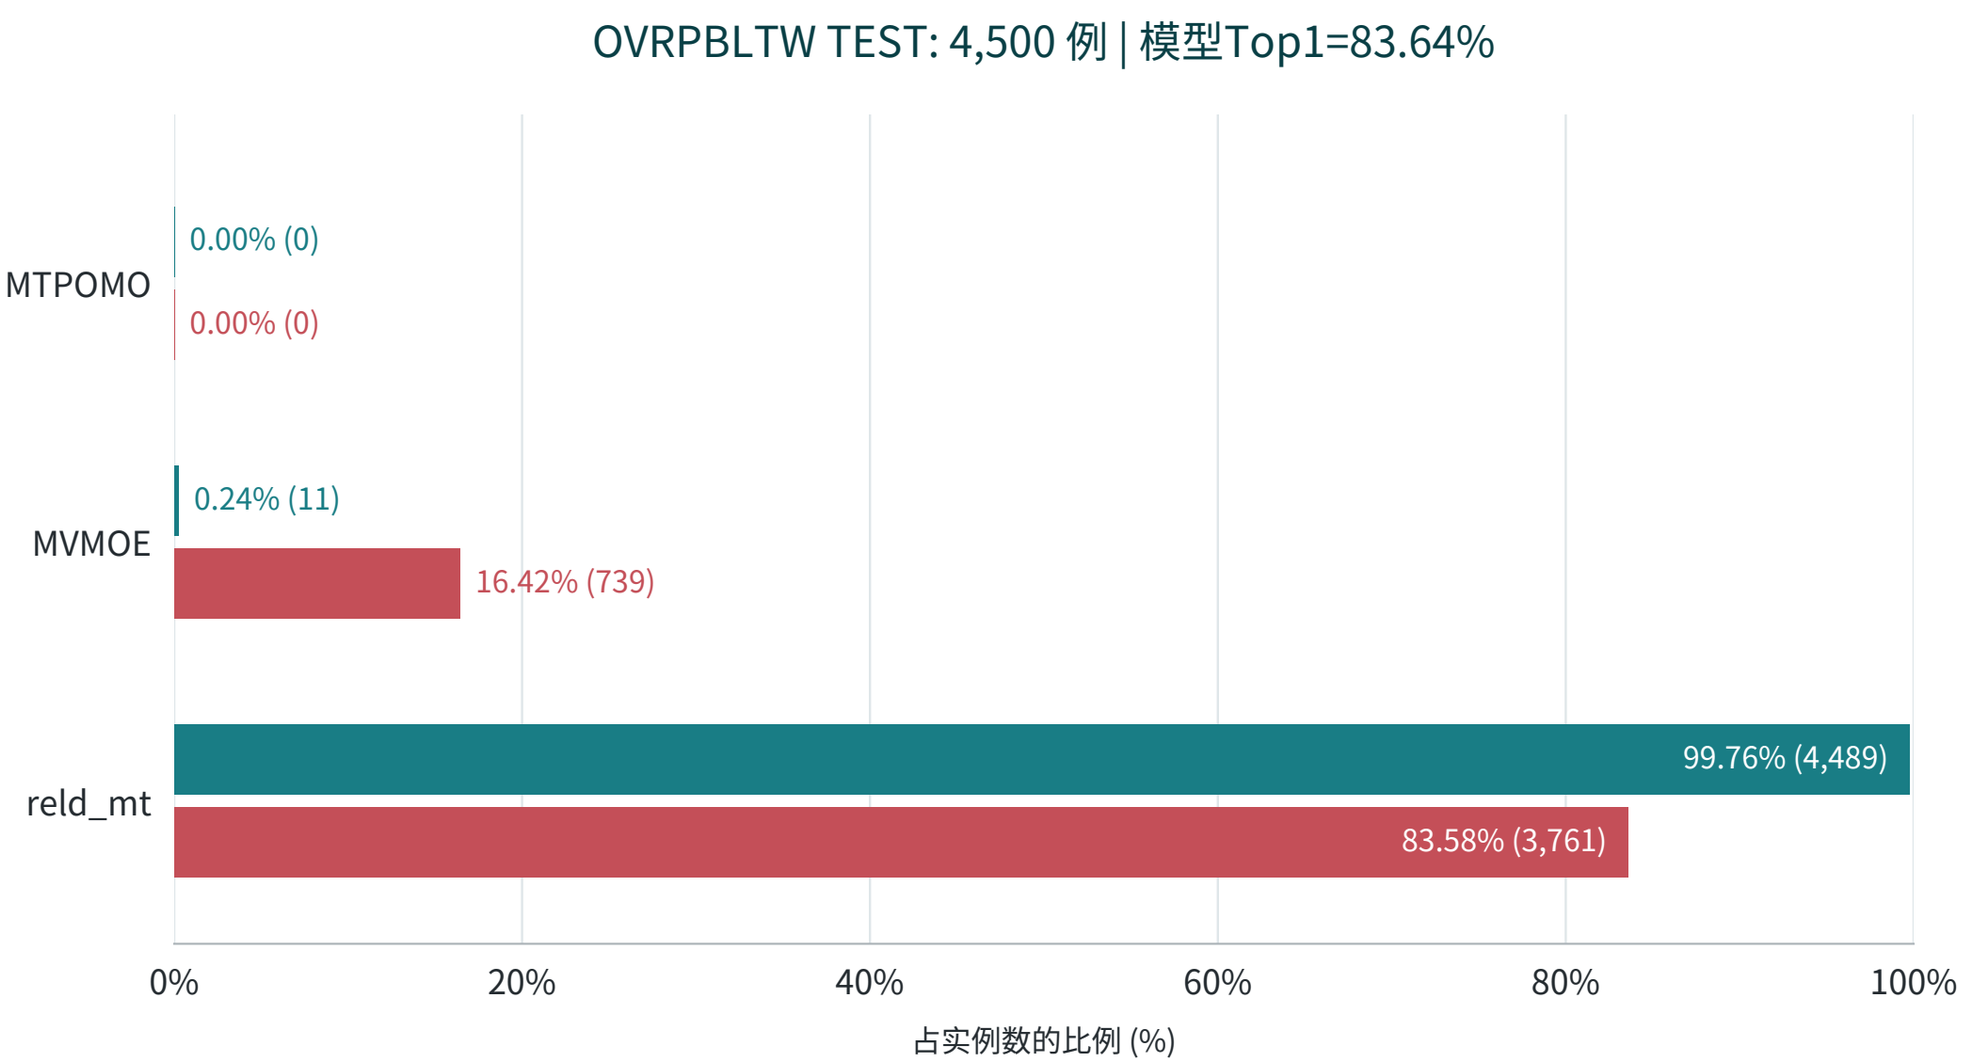

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R87/B_private_residual: stable global solver-ID score ties. Same R87 lock; LIB inference only; no training/reselection/Rxx mixing.