

R87/B_private_residual | Saved Training History

Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.


TRAIN interval-mean loss components

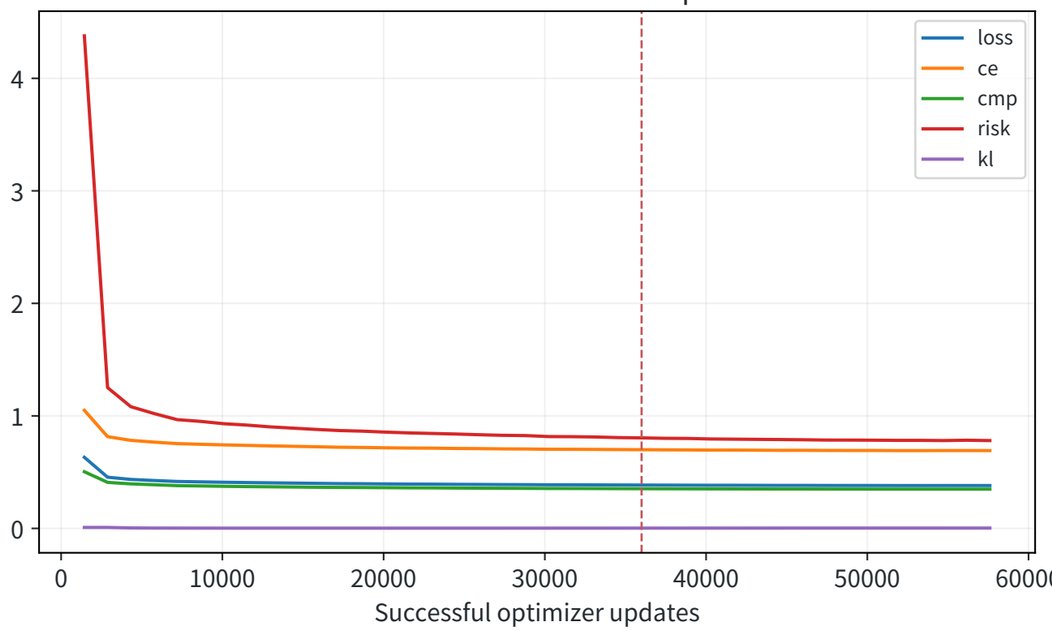


VAL ALL native Top1 (%)

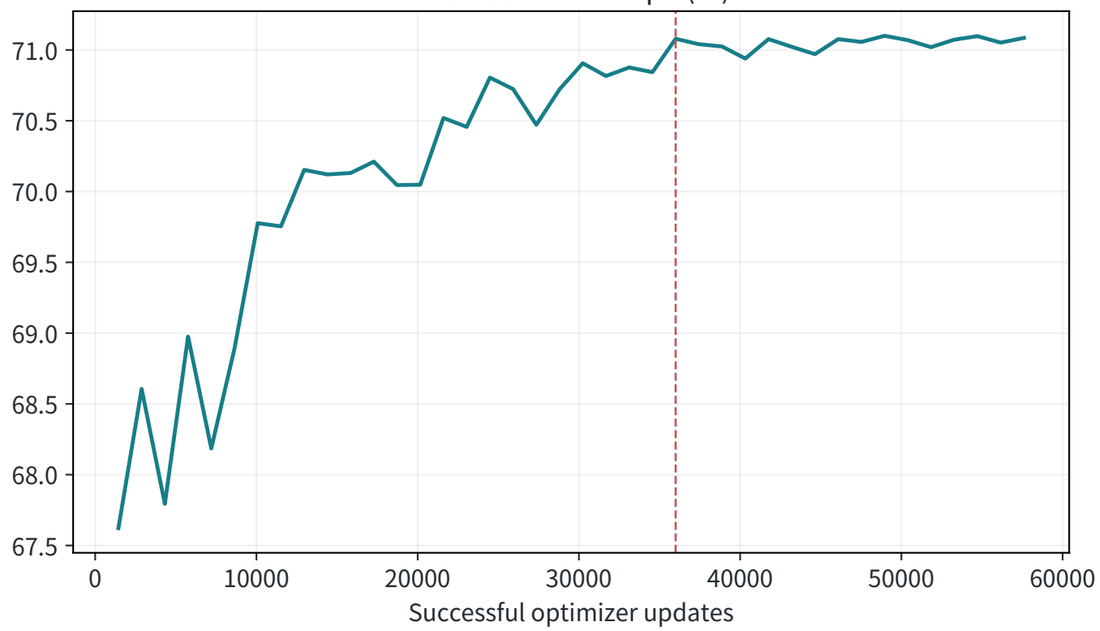

VAL ALL vs fixed TRAIN SBS (%)

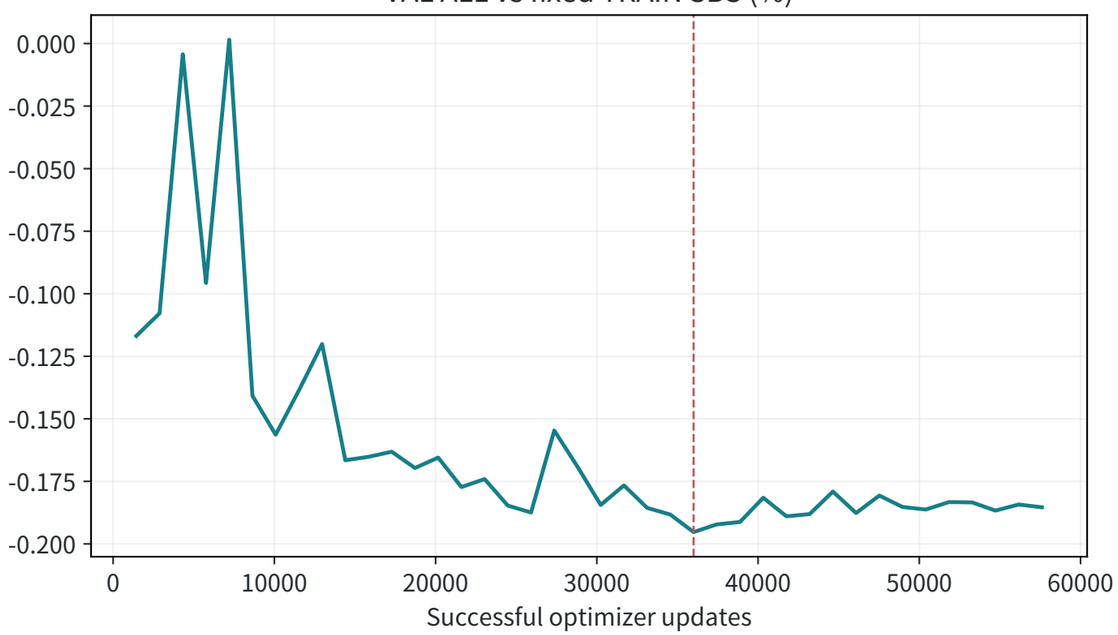



VAL ALL actual regret (%)

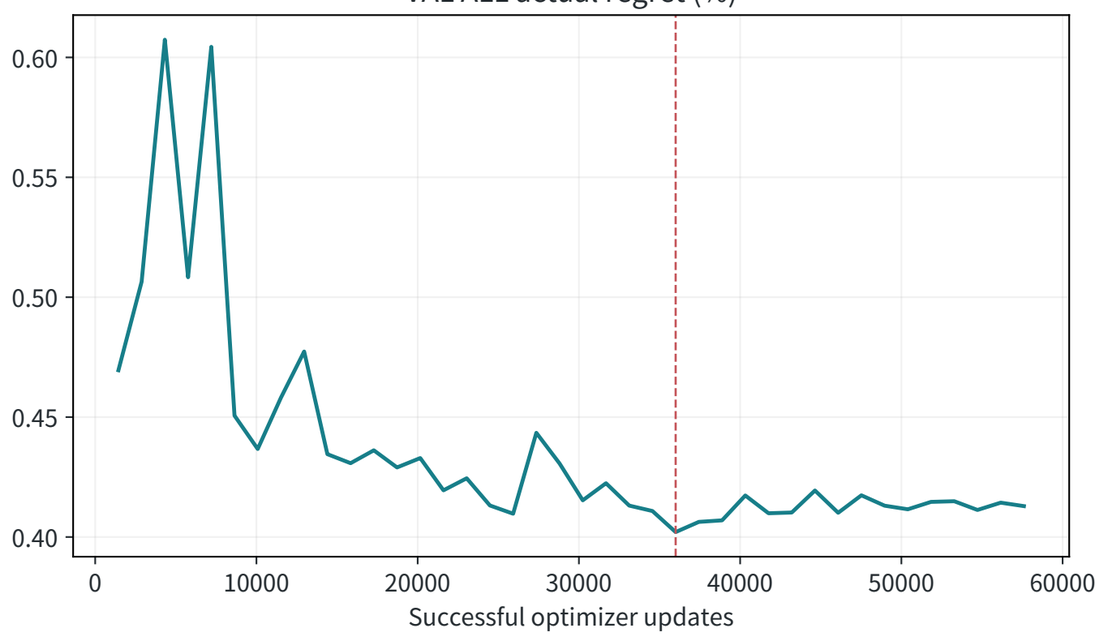



R87/B_private_residual | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

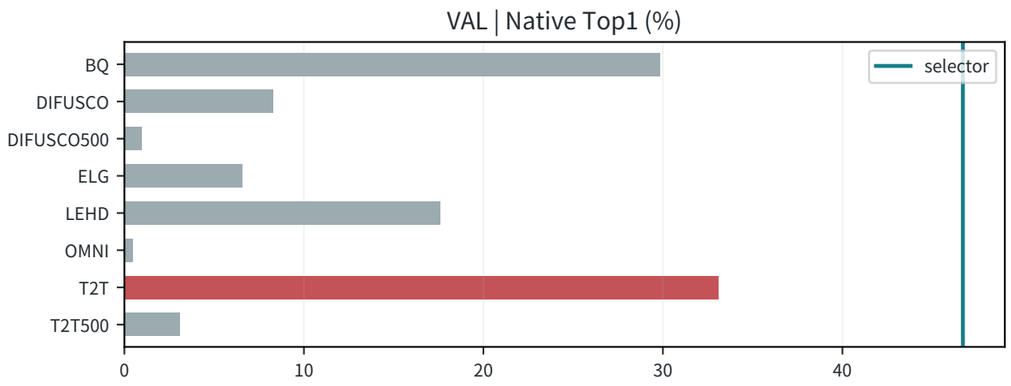


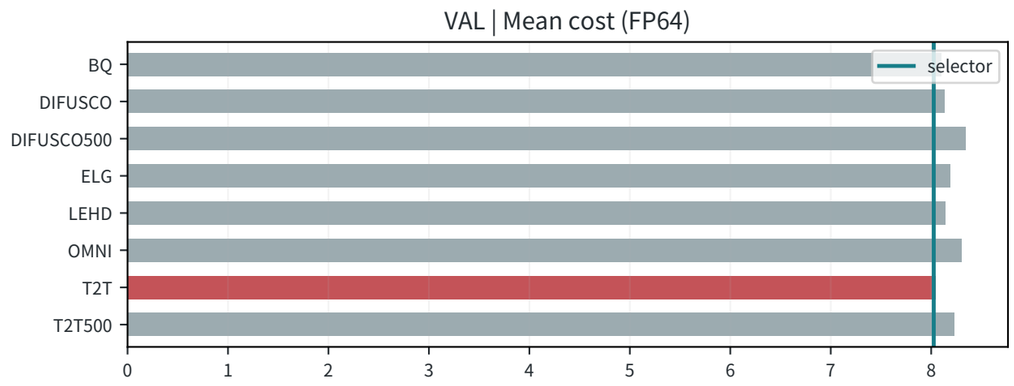

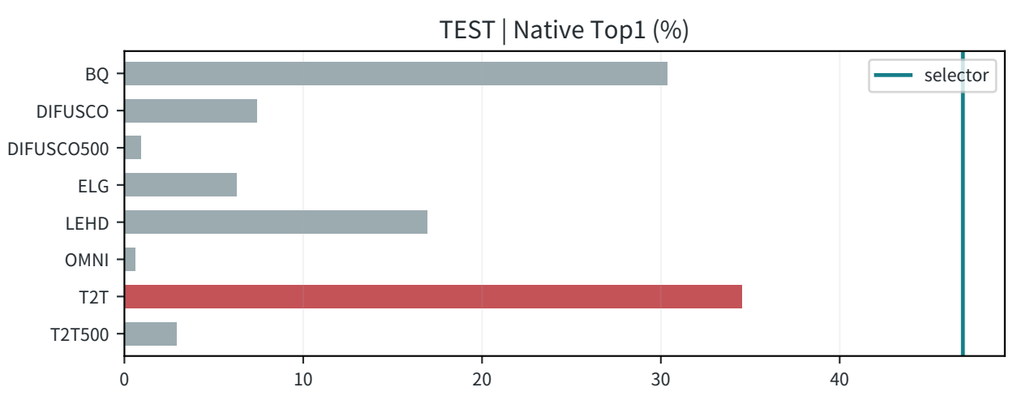

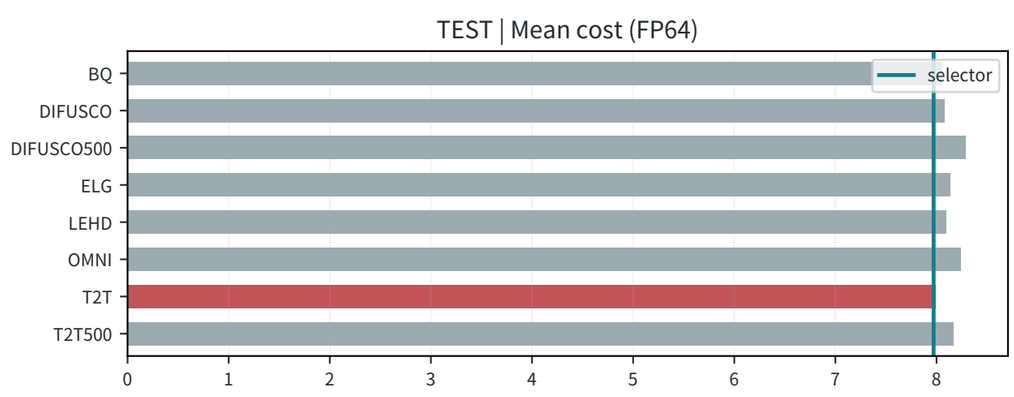


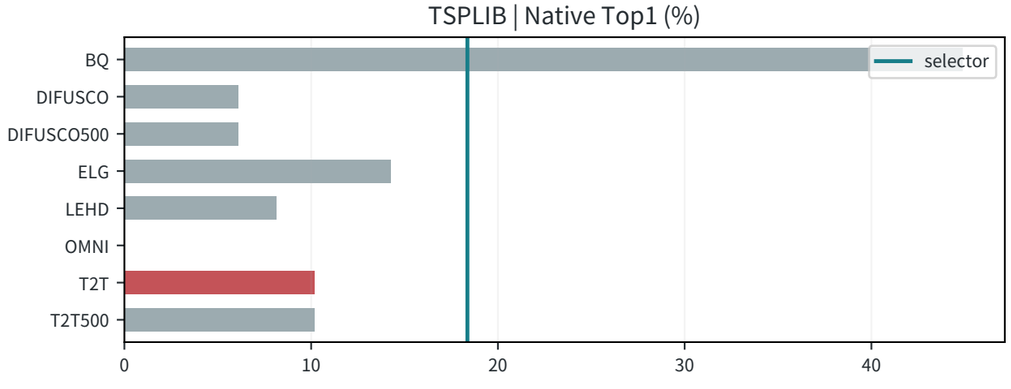


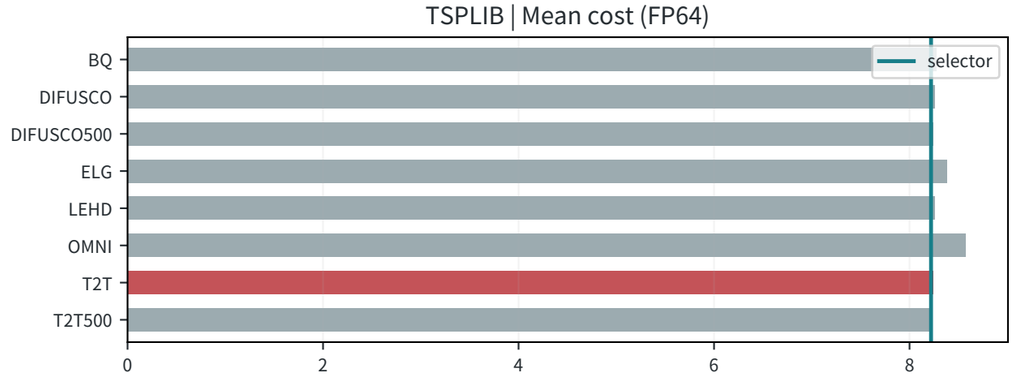



R87/B_private_residual | CVRP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

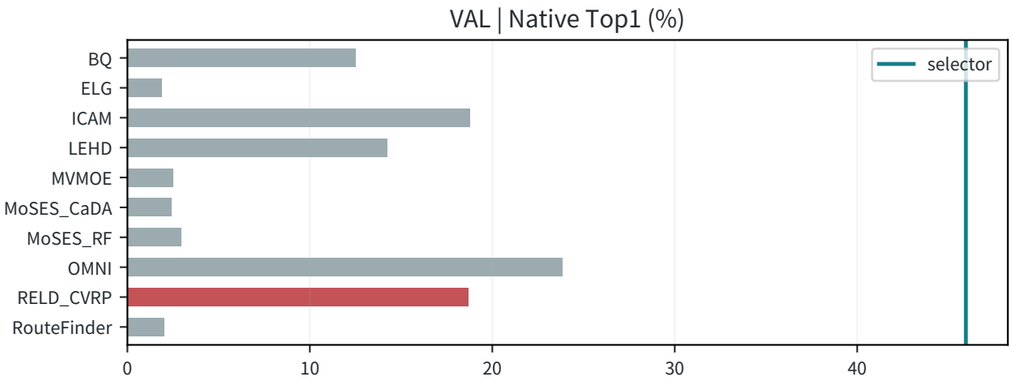


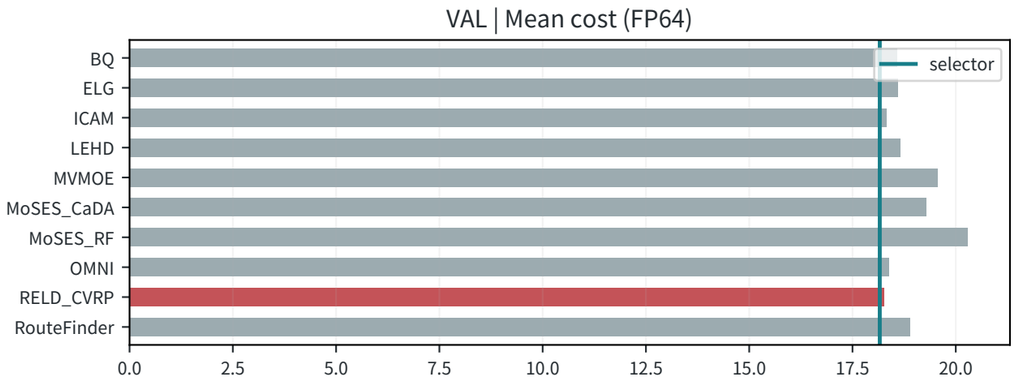

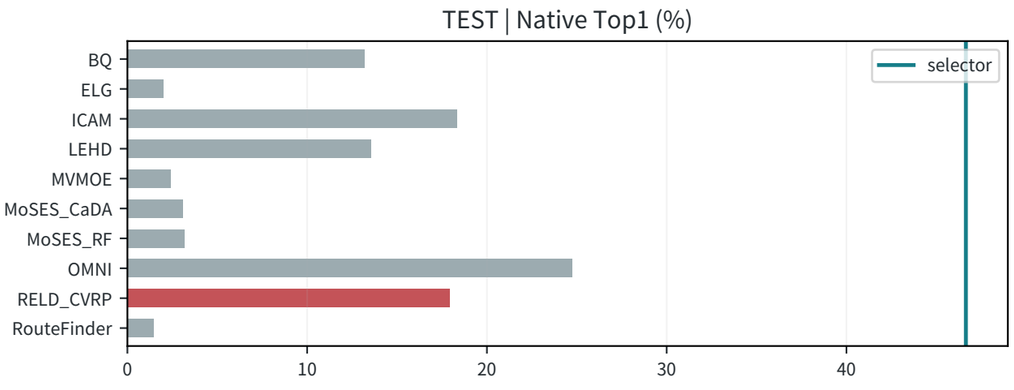

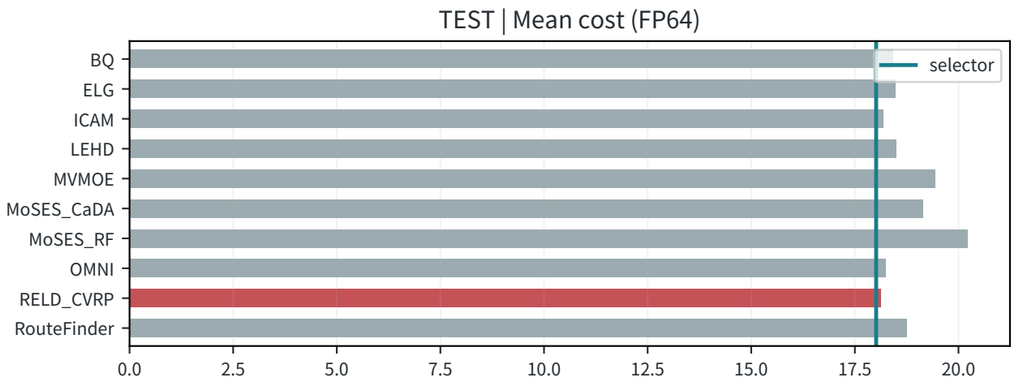


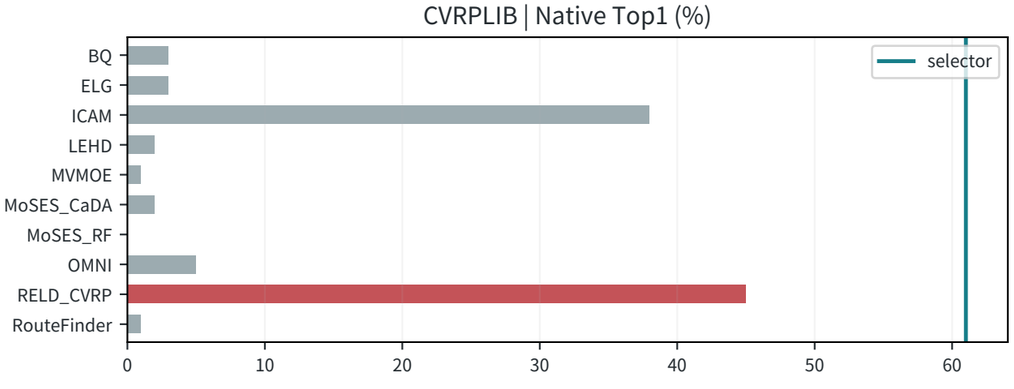


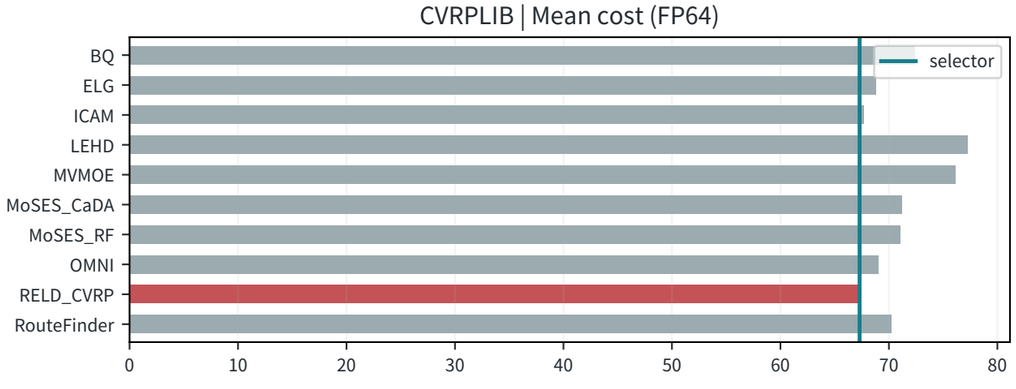



R87/B_private_residual | ATSP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

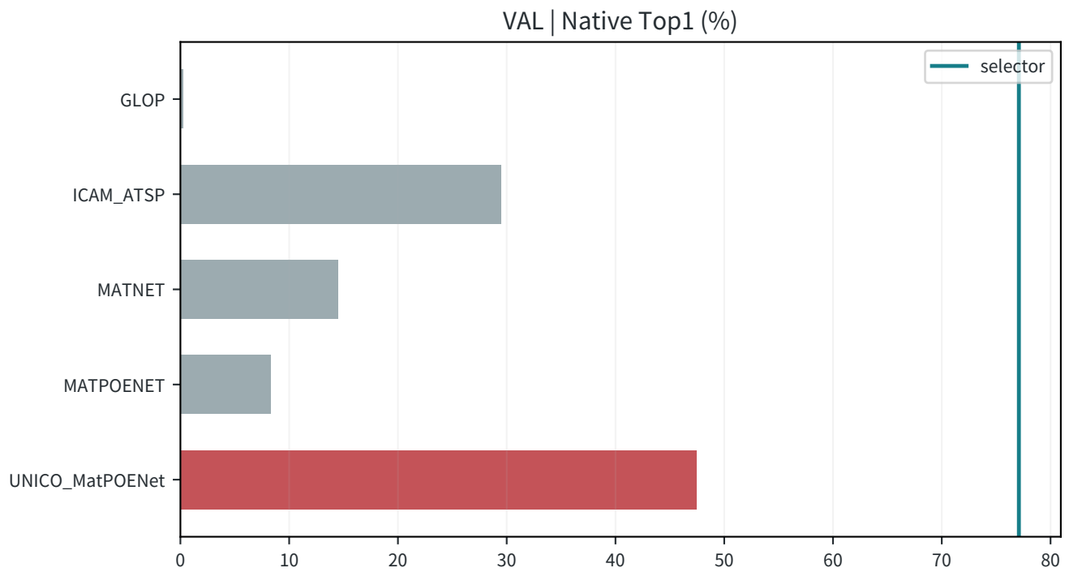

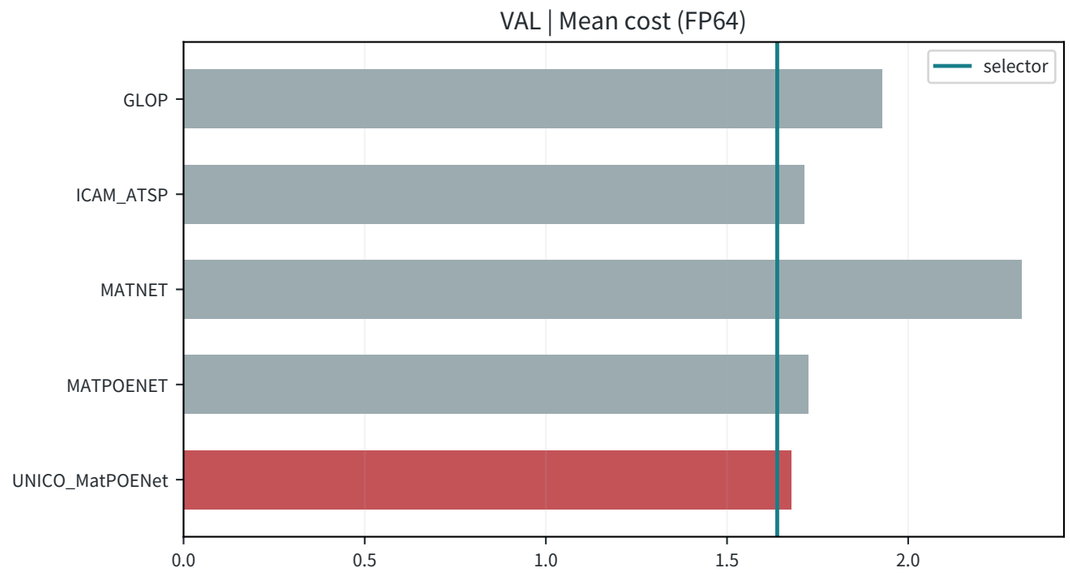


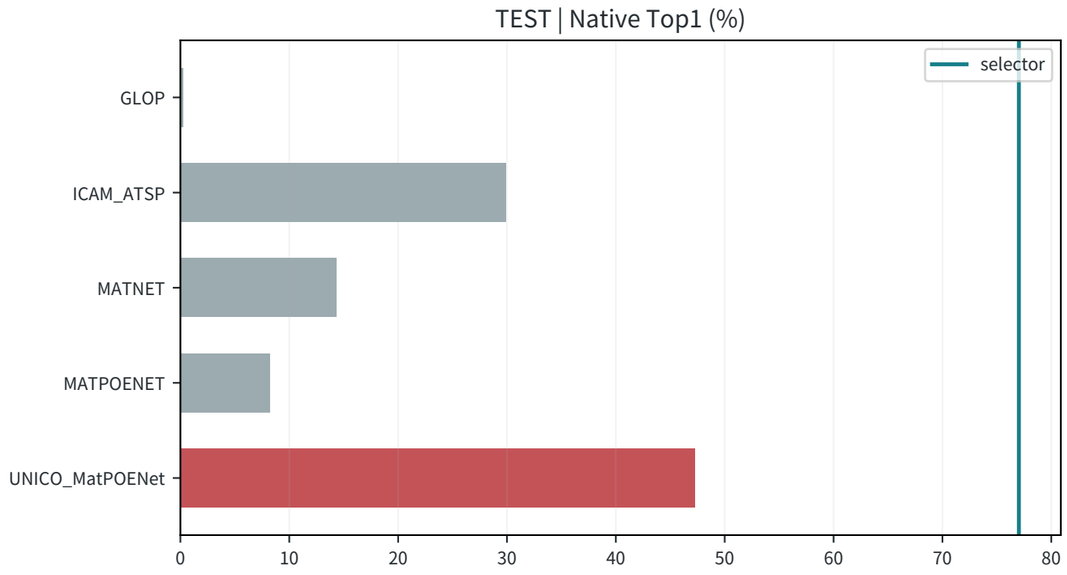


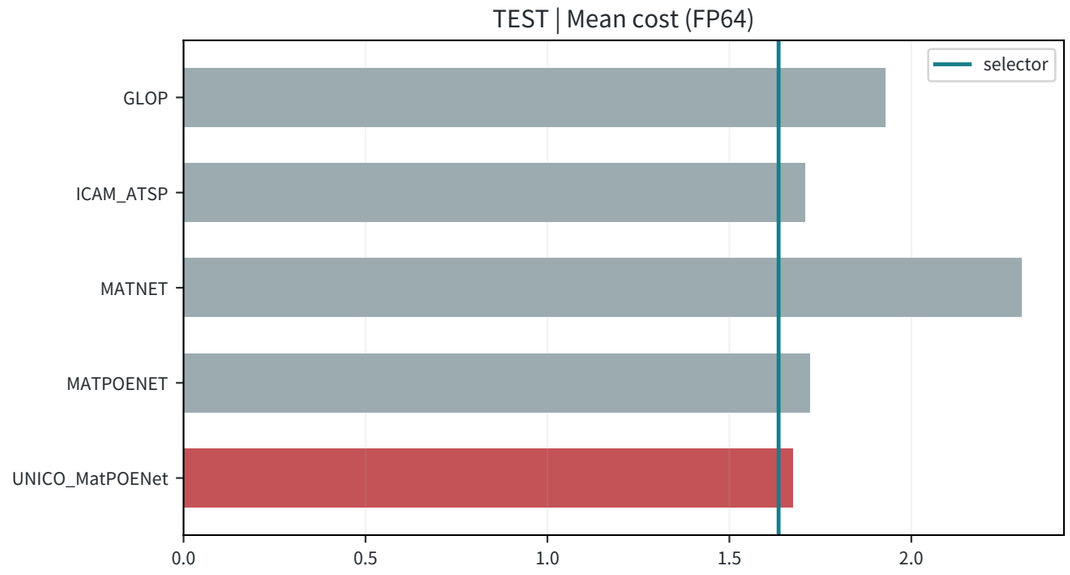



R87/B_private_residual | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

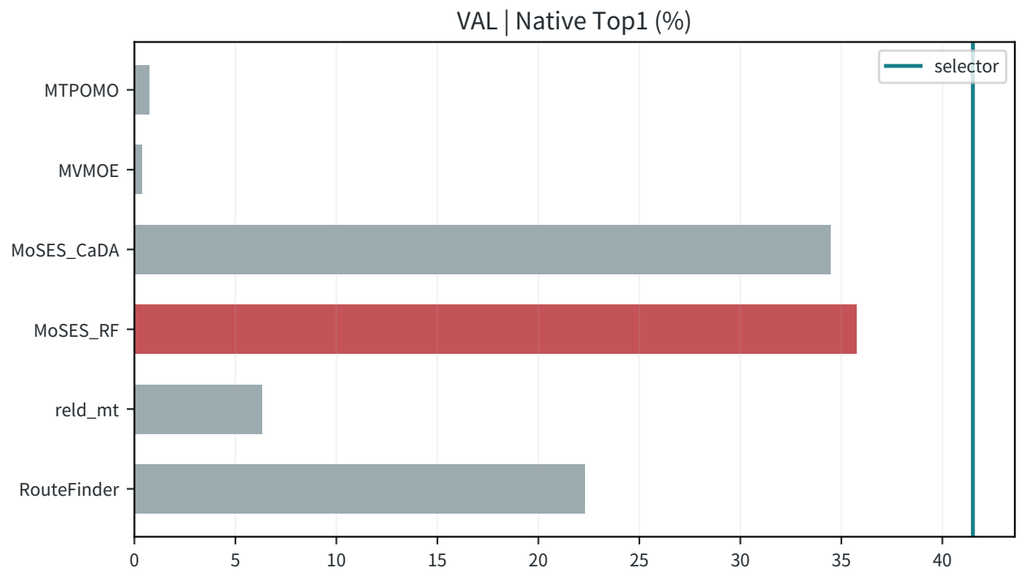

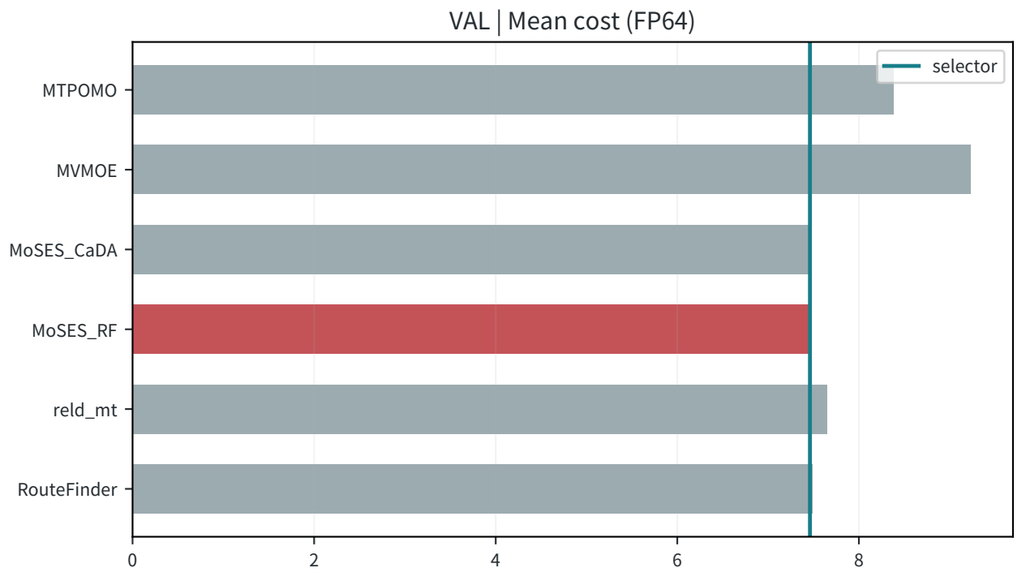


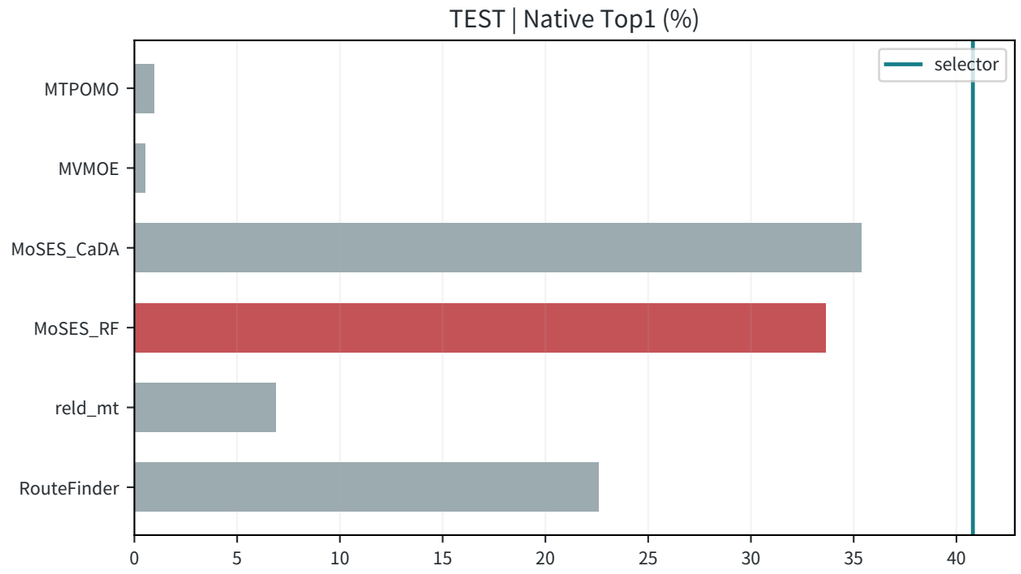


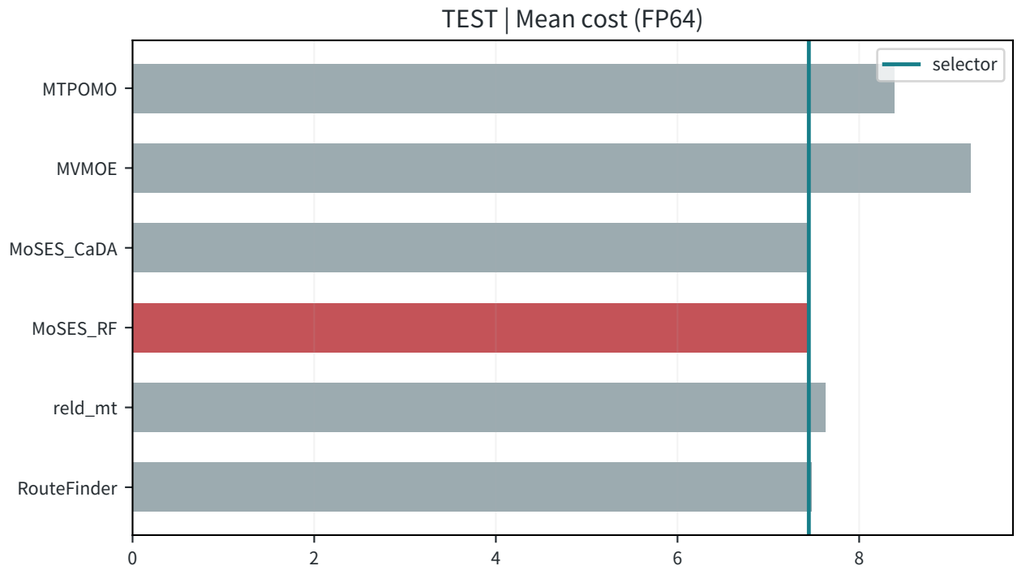



R87/B_private_residual | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

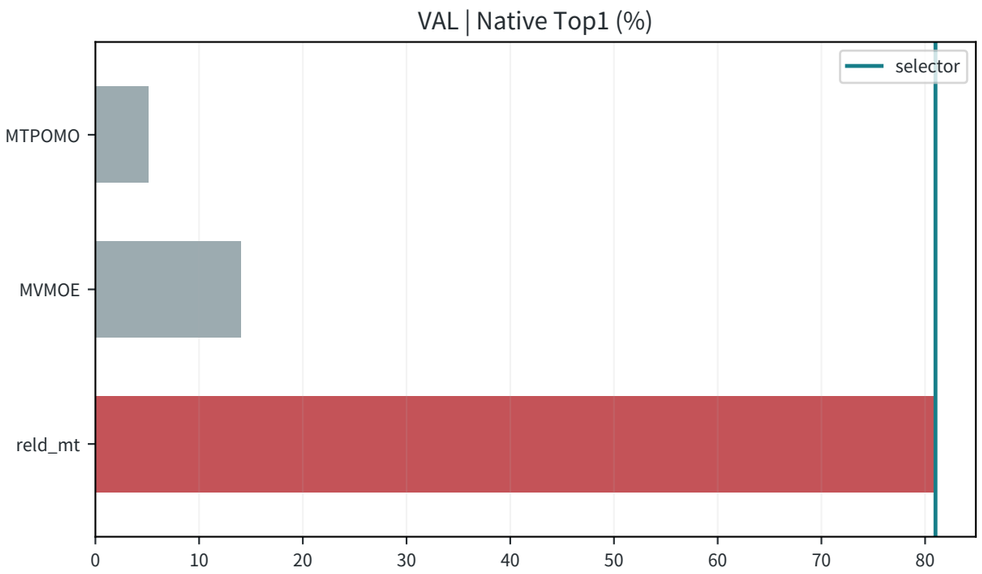

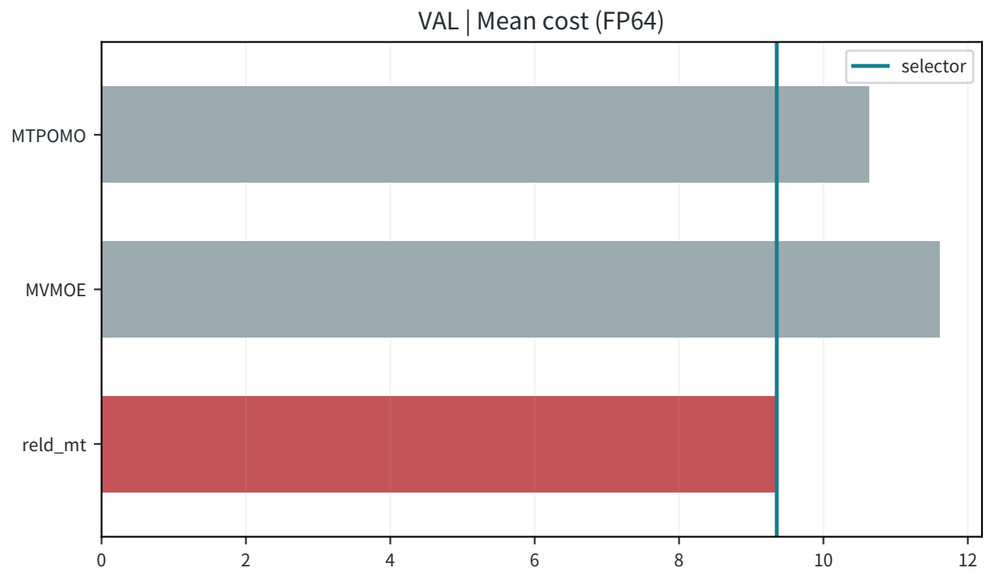


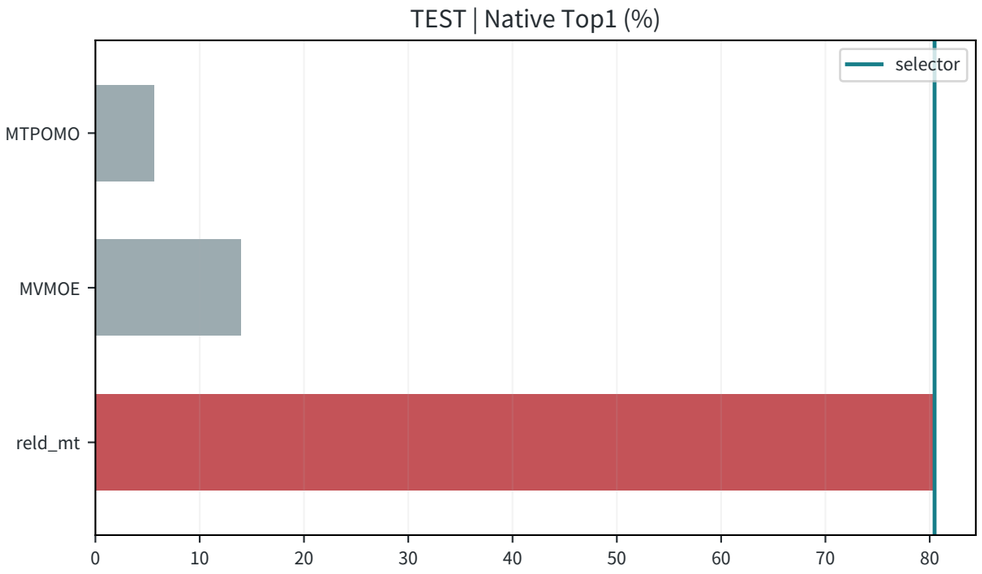


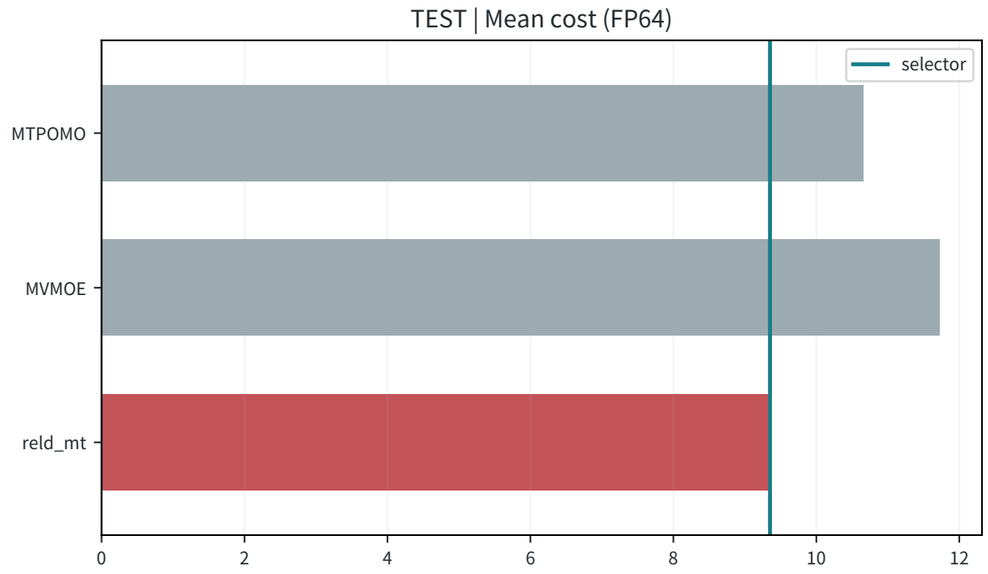



R87/B_private_residual | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

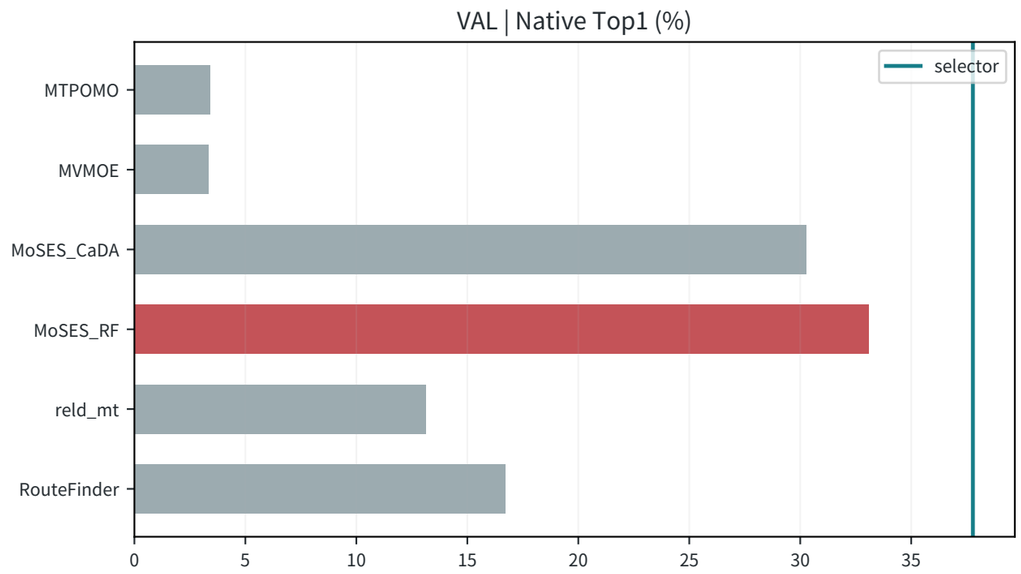

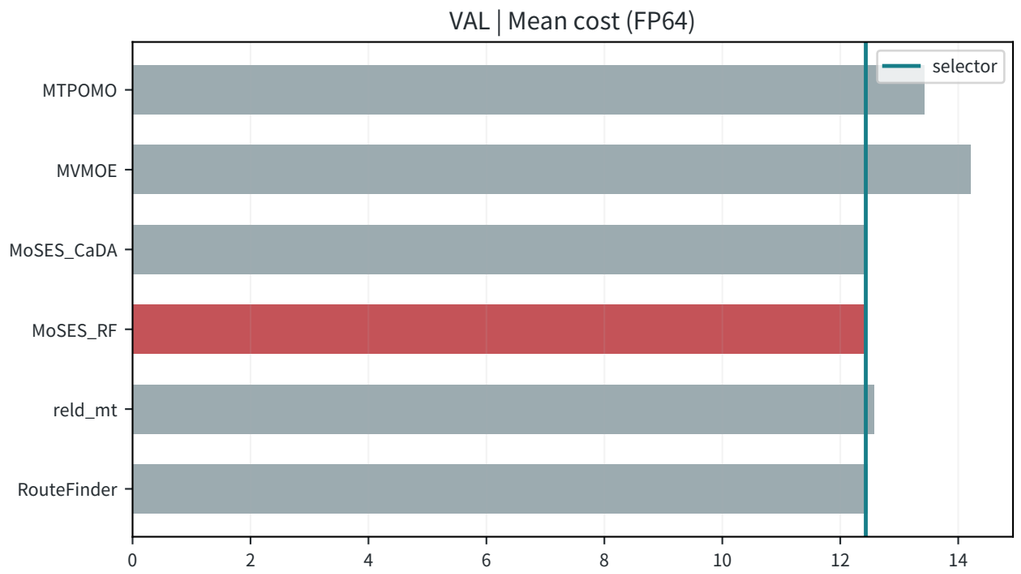


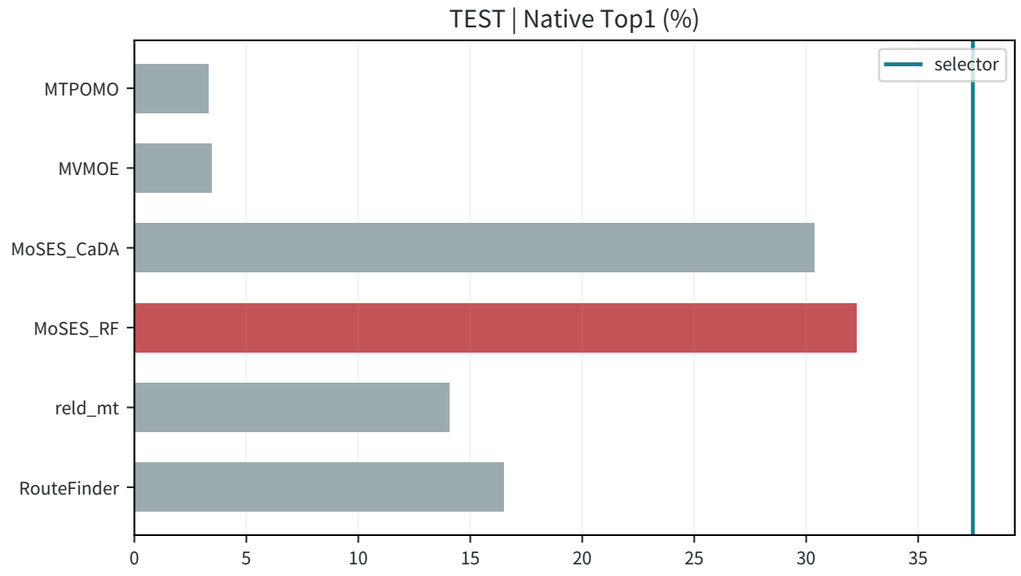


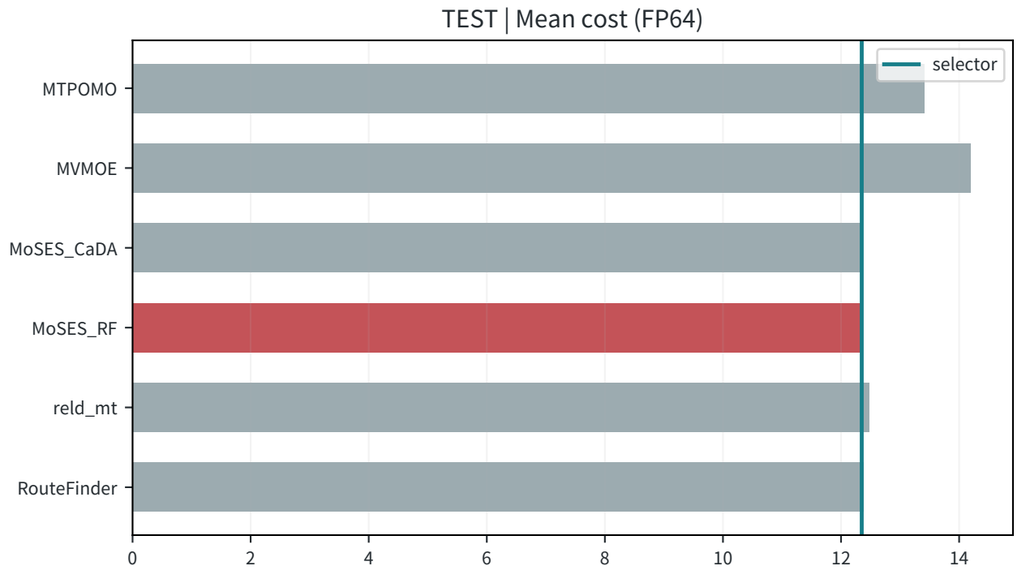



R87/B_private_residual | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

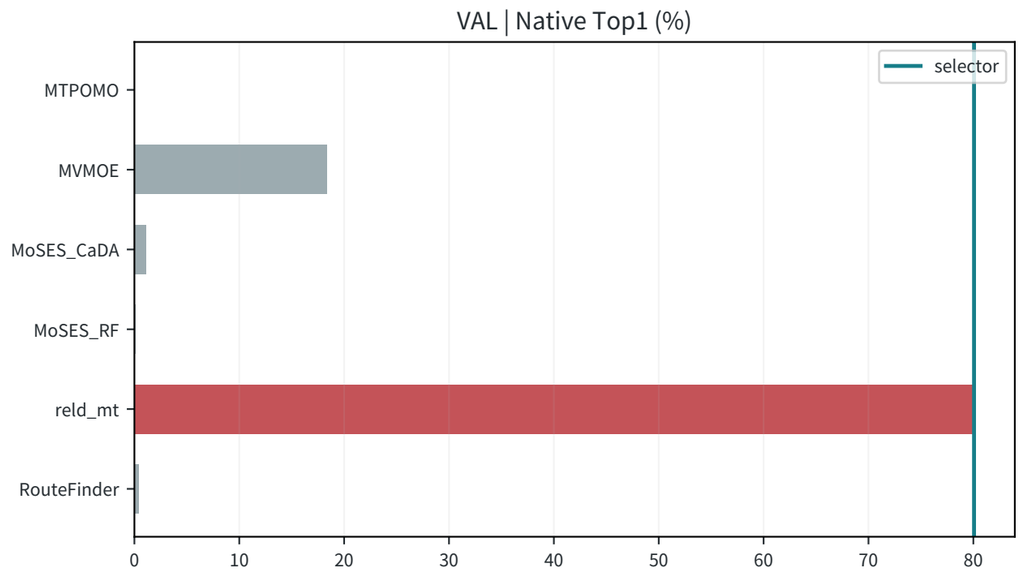

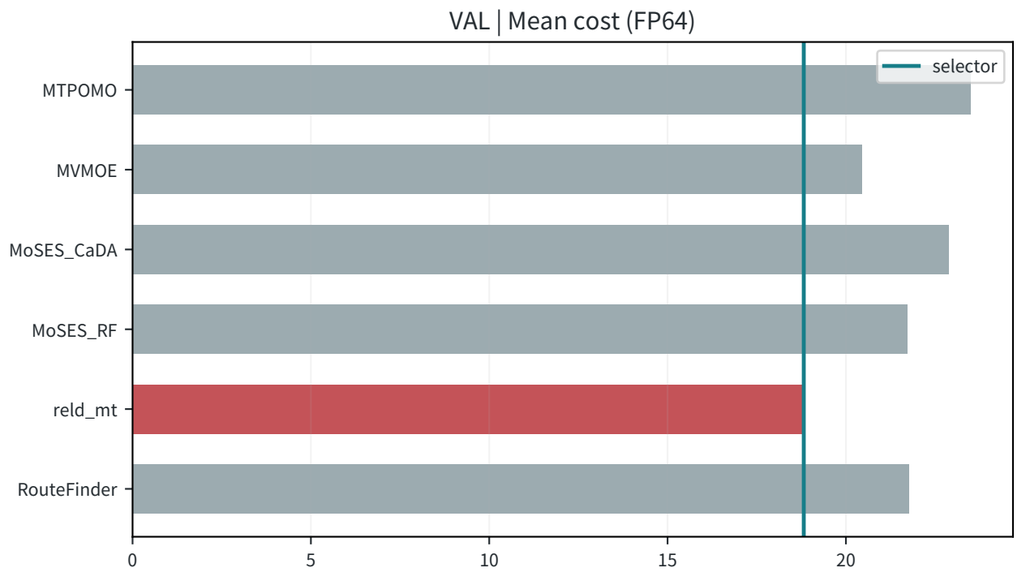


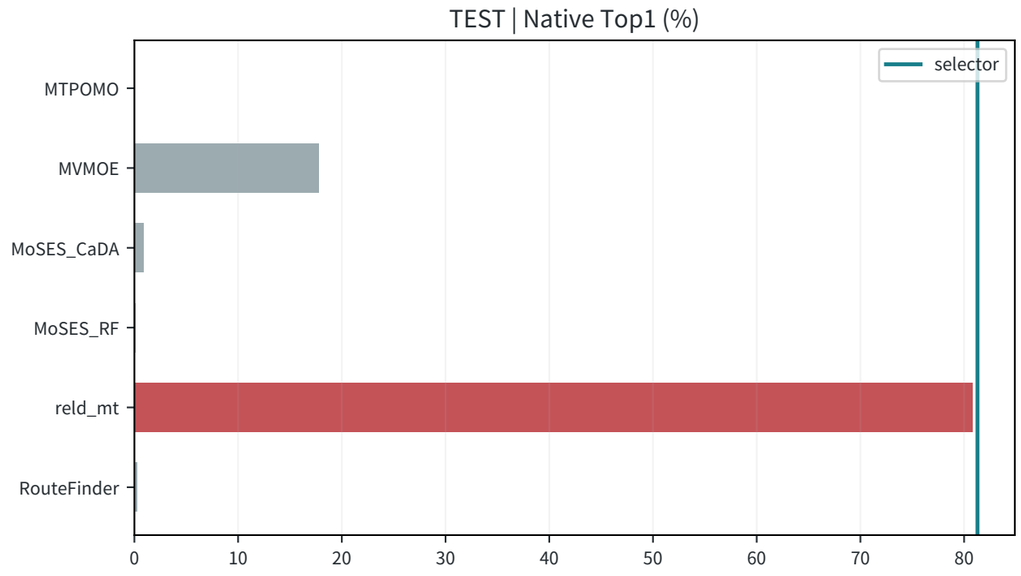


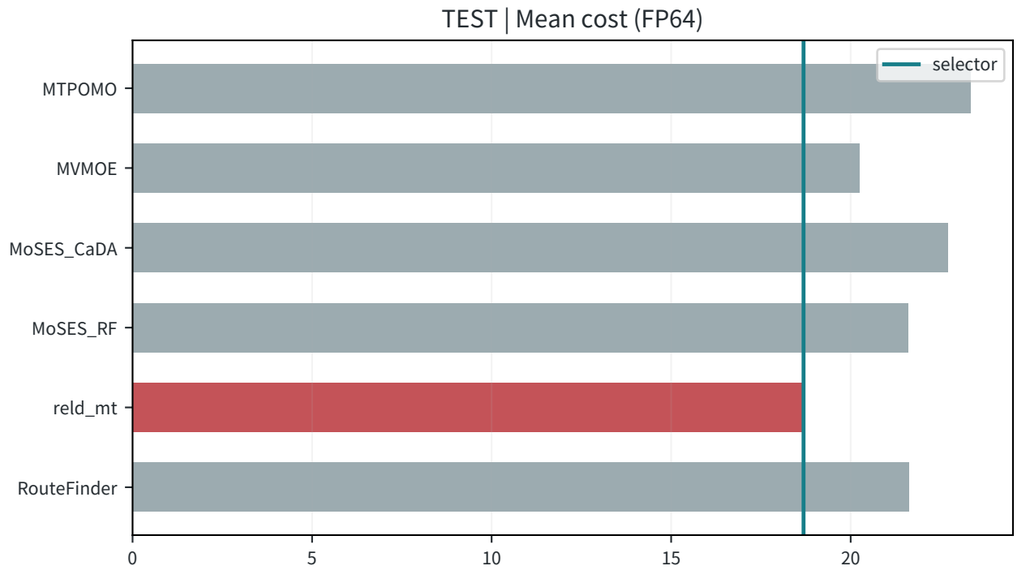



R87/B_private_residual | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

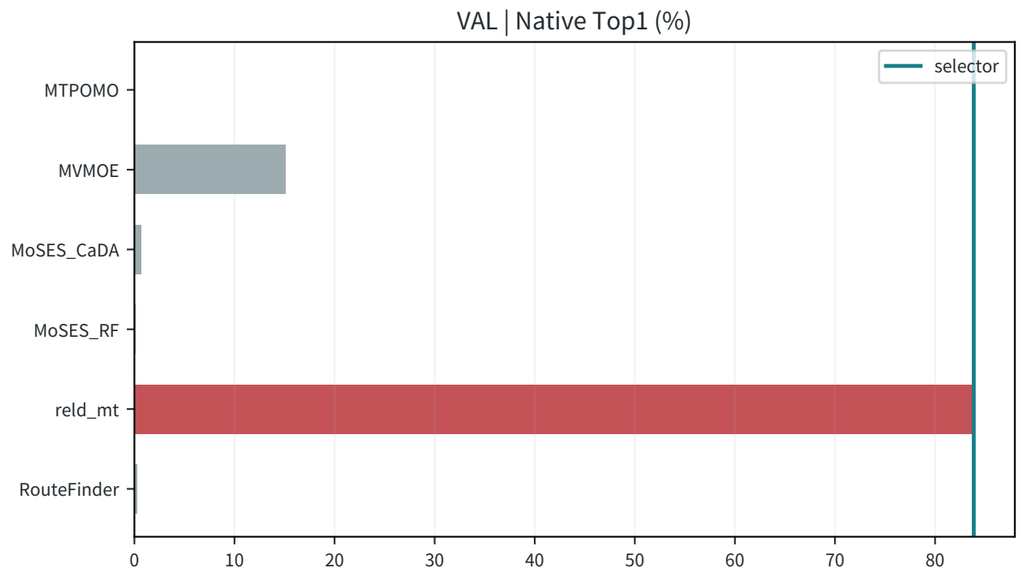

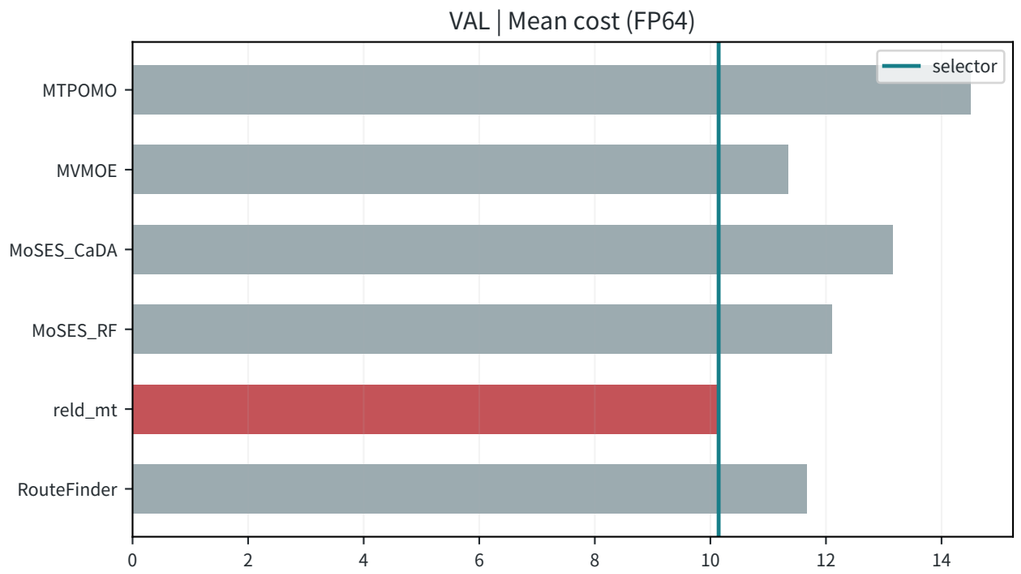


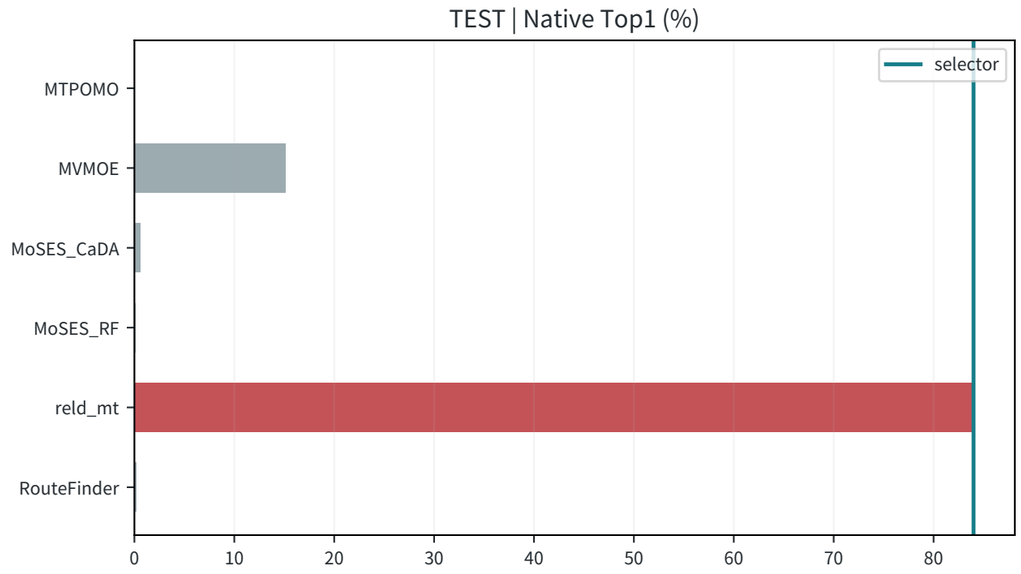


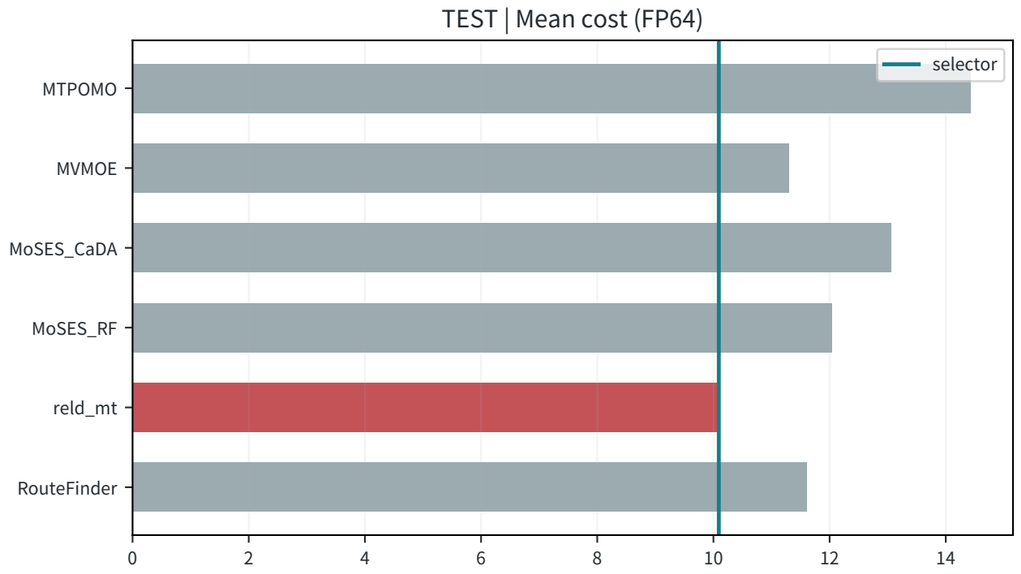



R87/B_private_residual | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

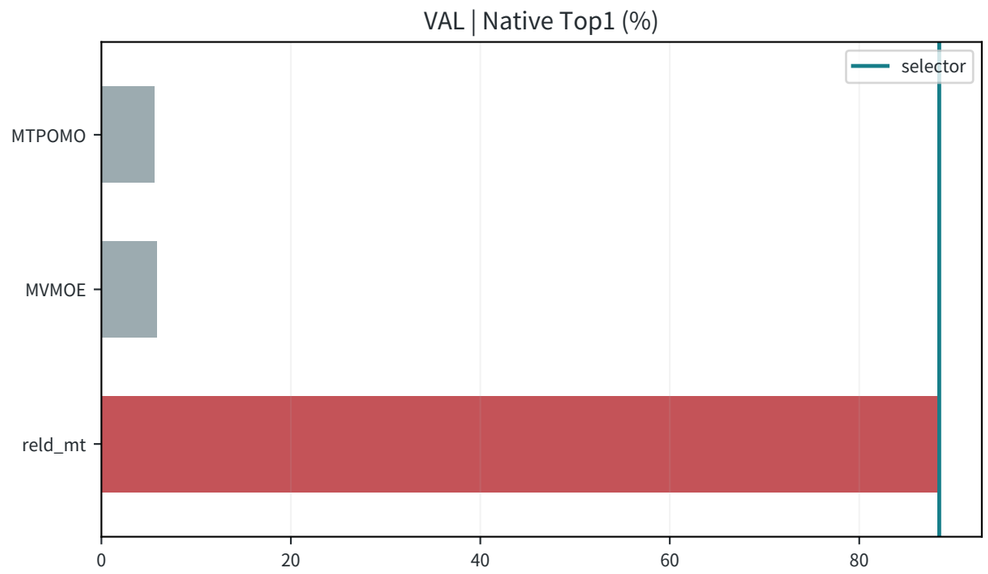

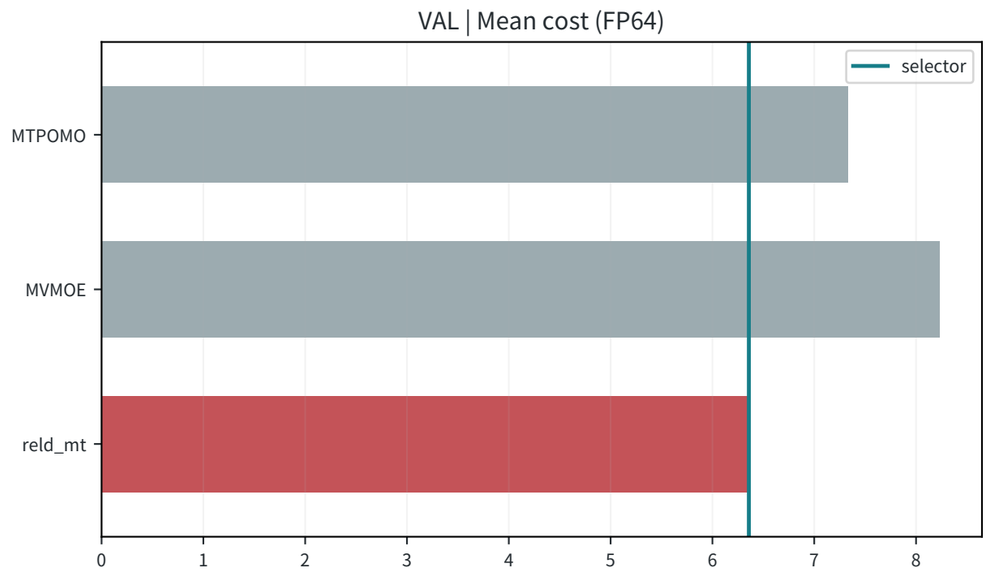


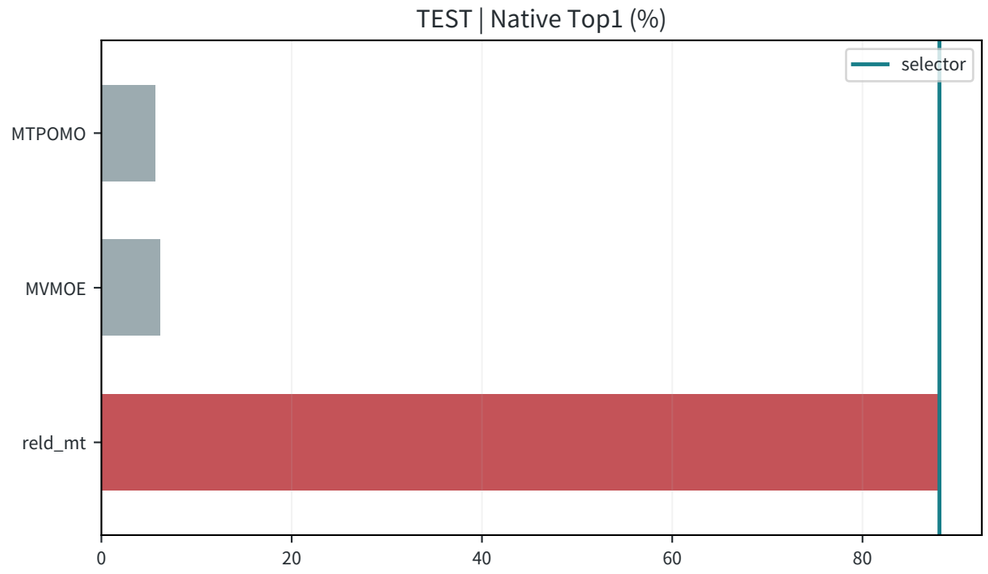


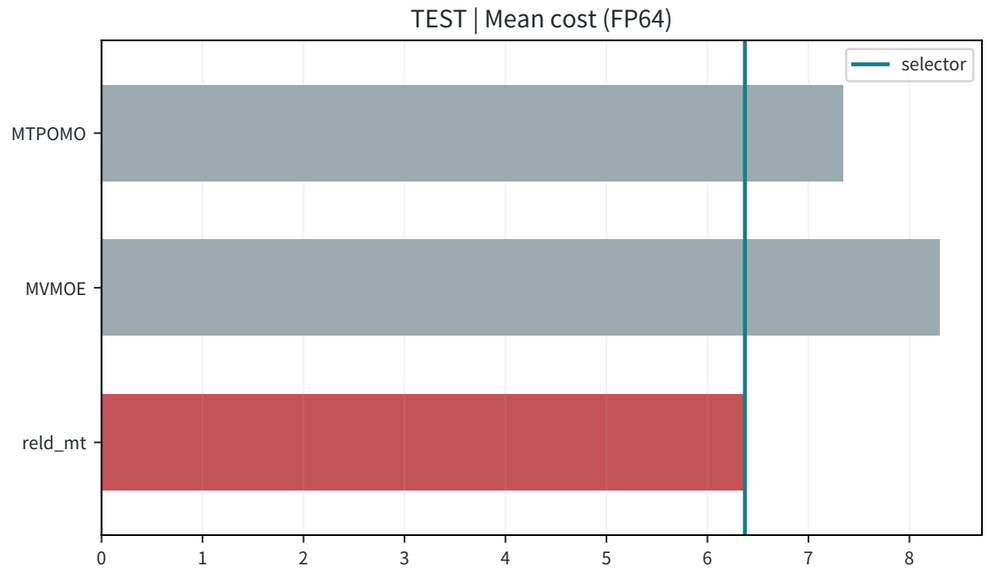


R87/B_private_residual | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

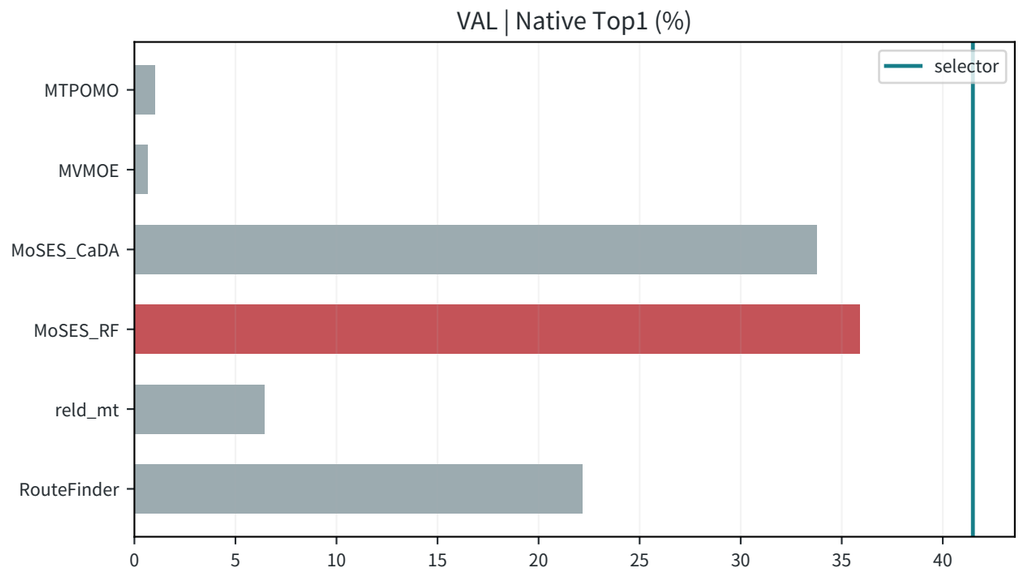

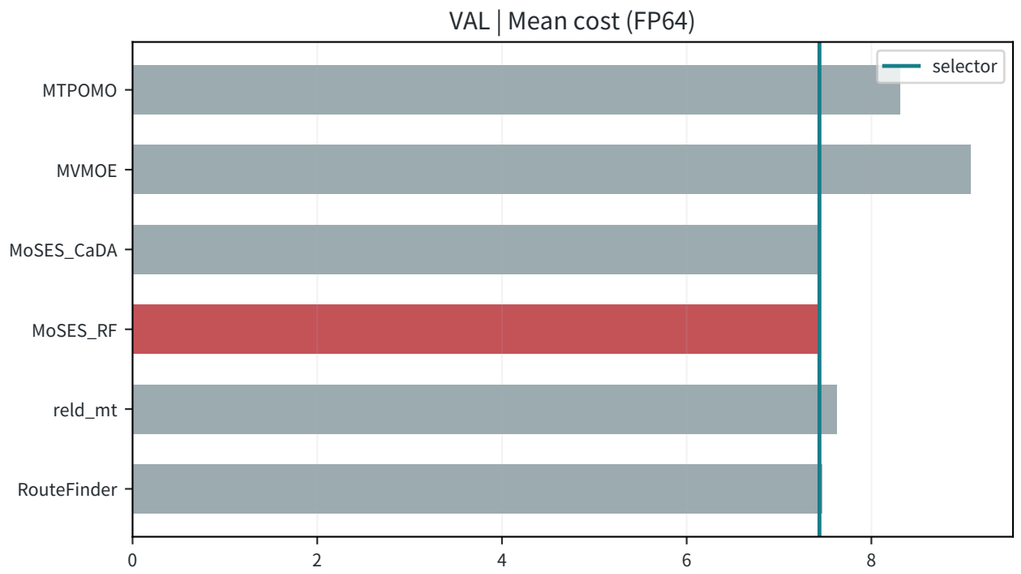


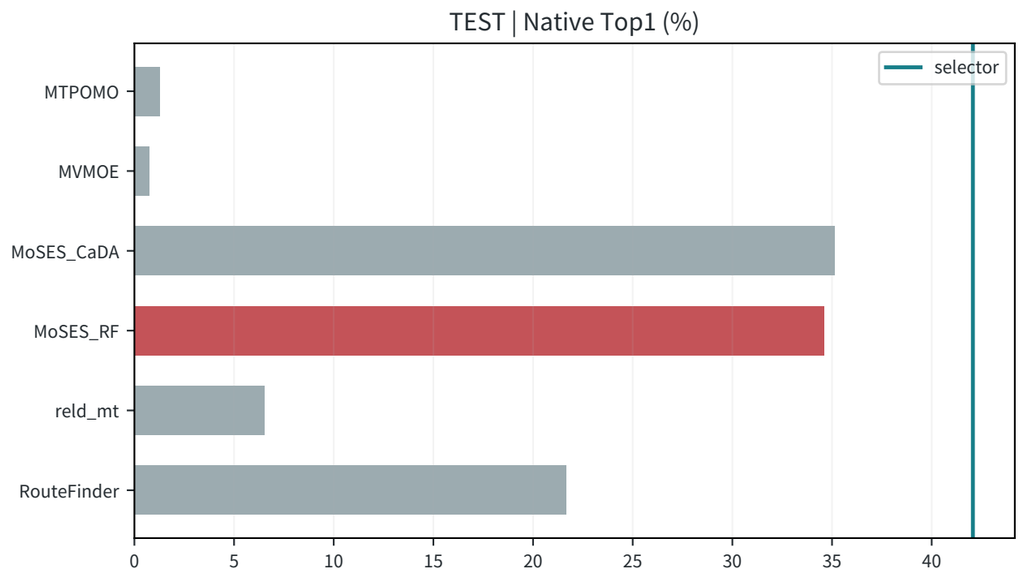






R87/B_private_residual | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

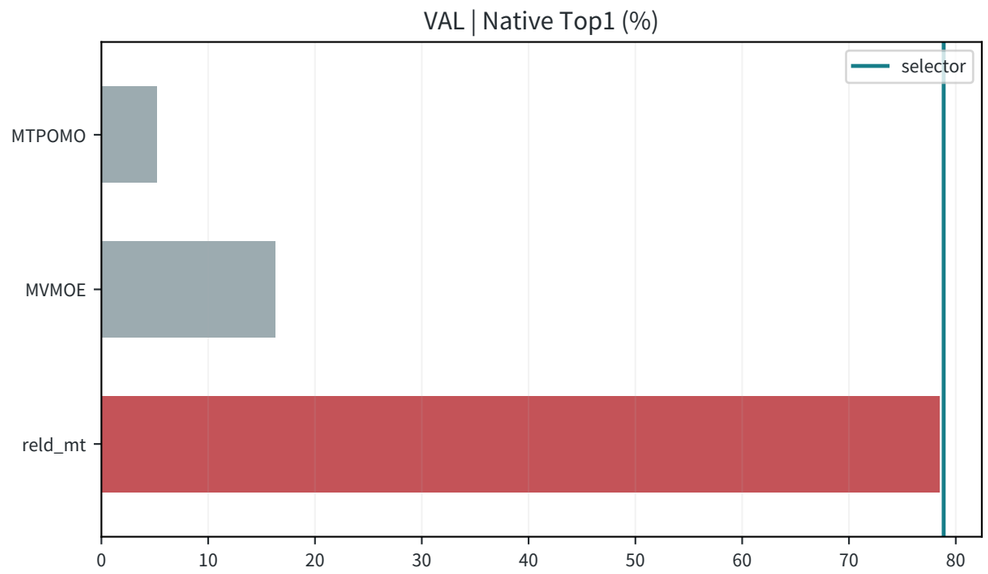

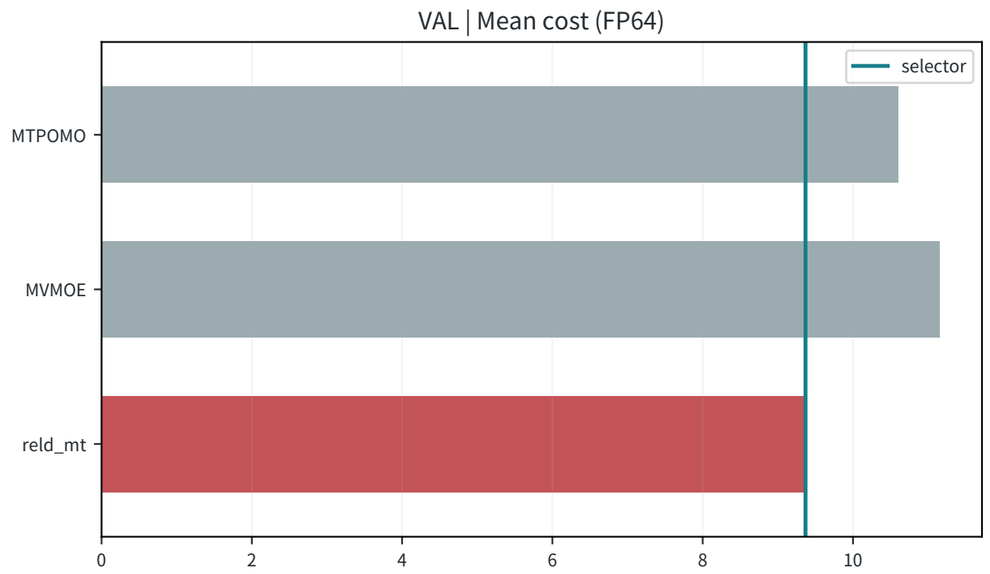


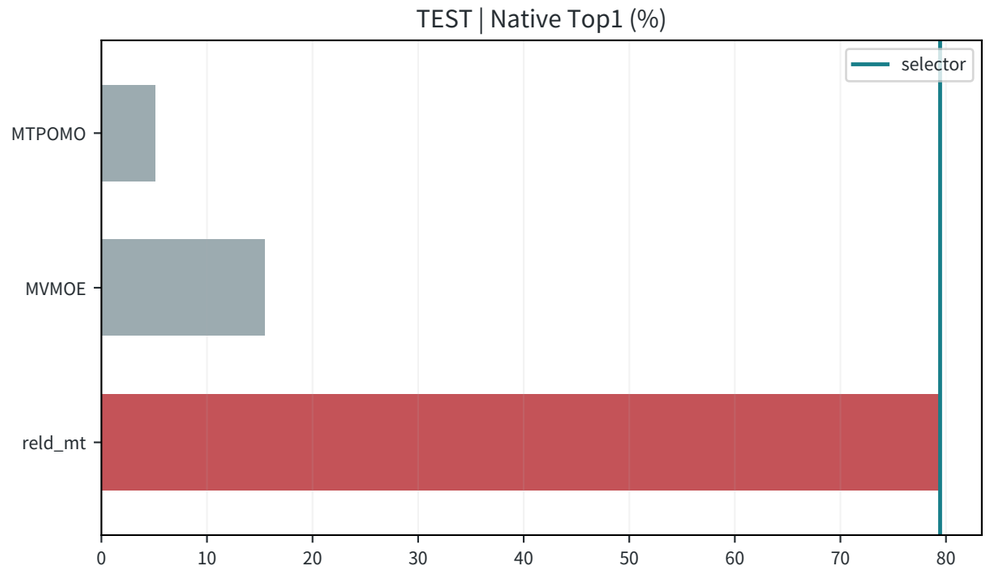


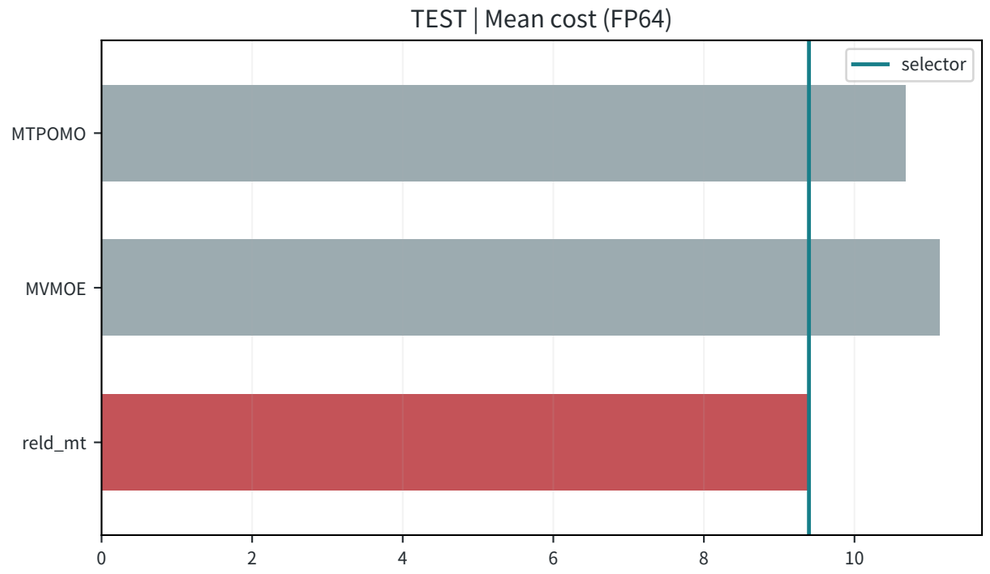



R87/B_private_residual | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

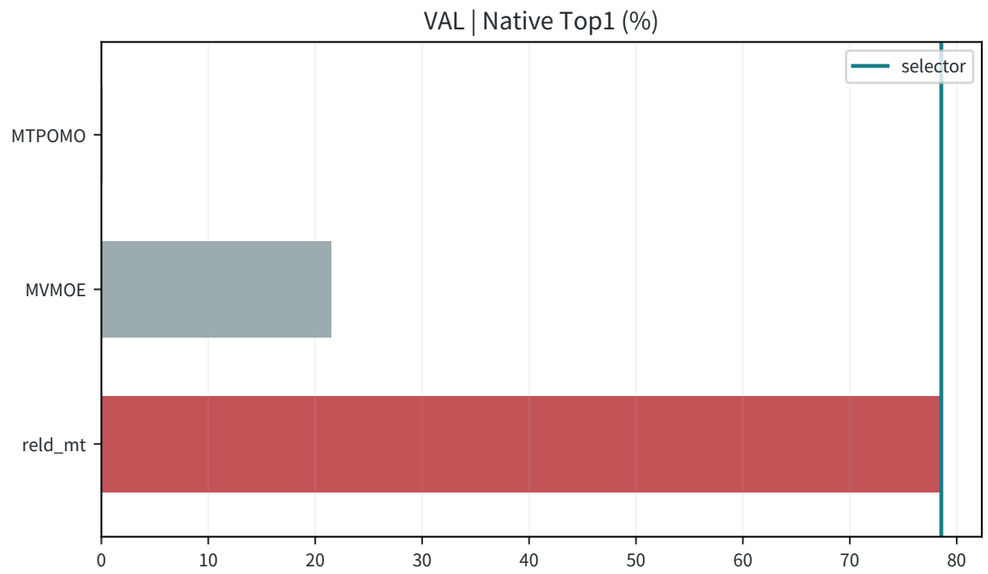

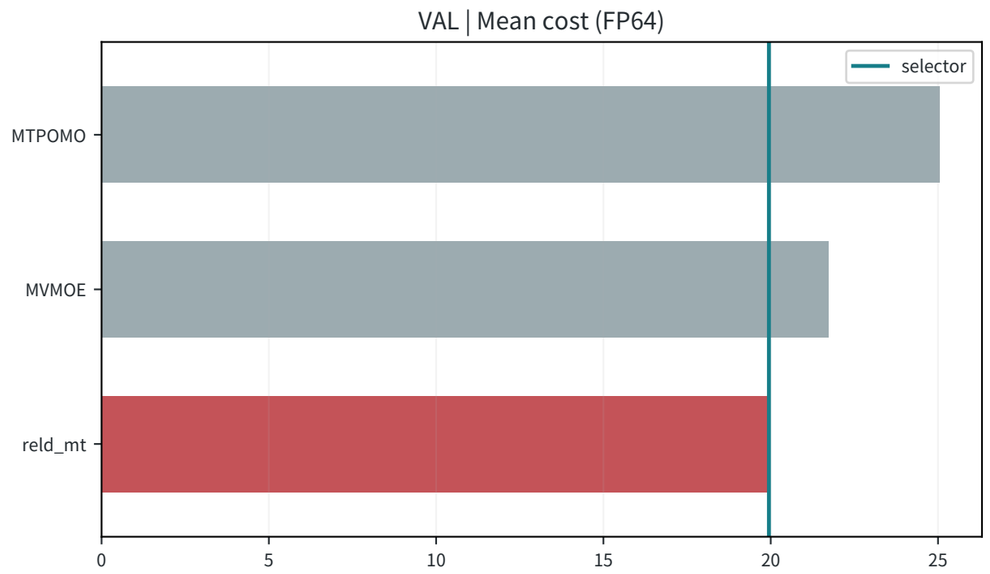


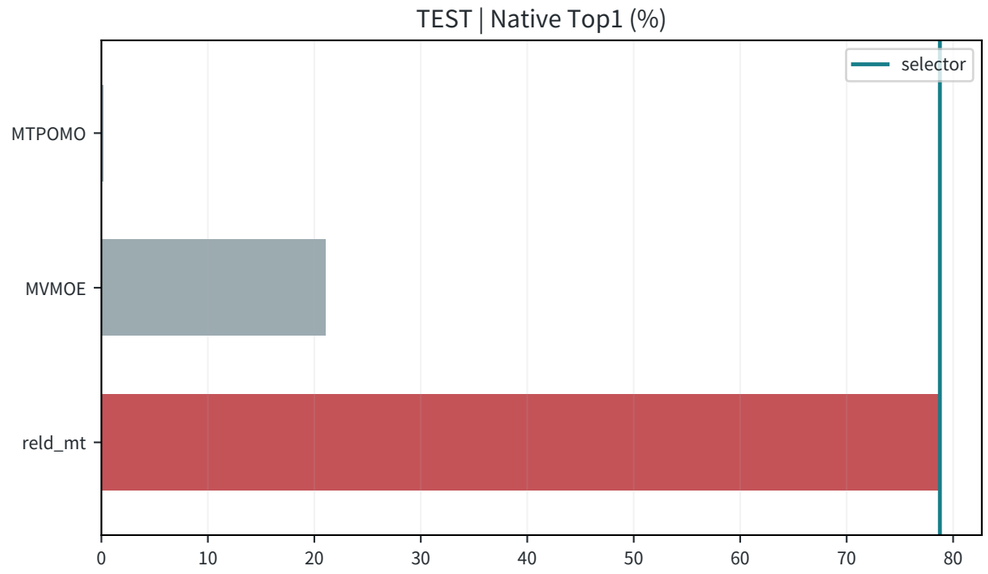


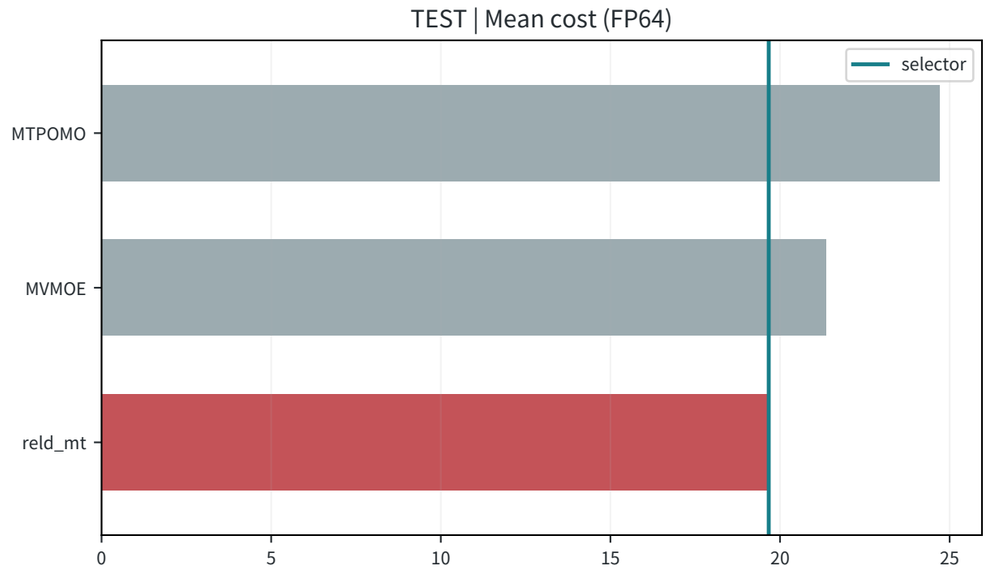



R87/B_private_residual | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

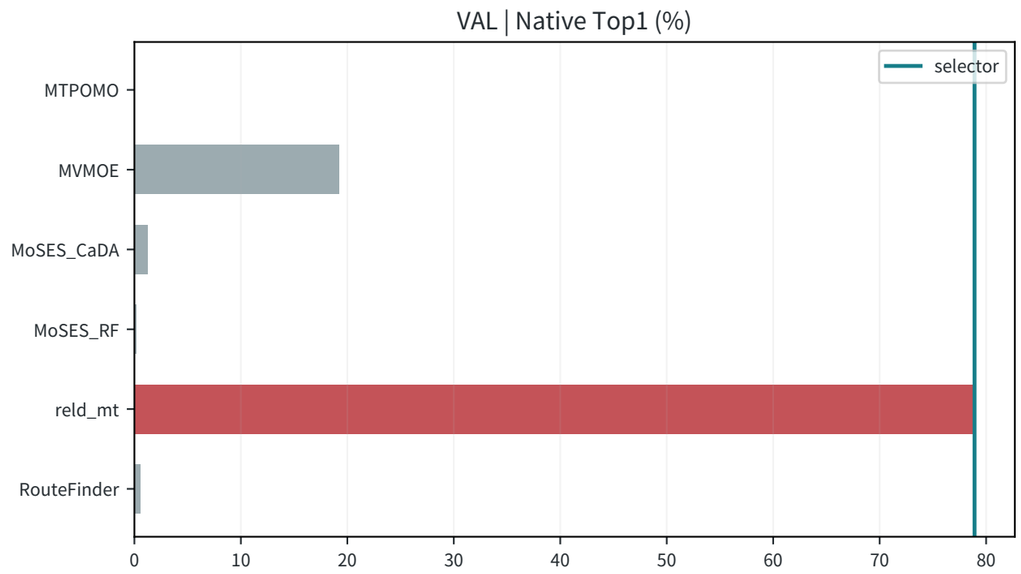

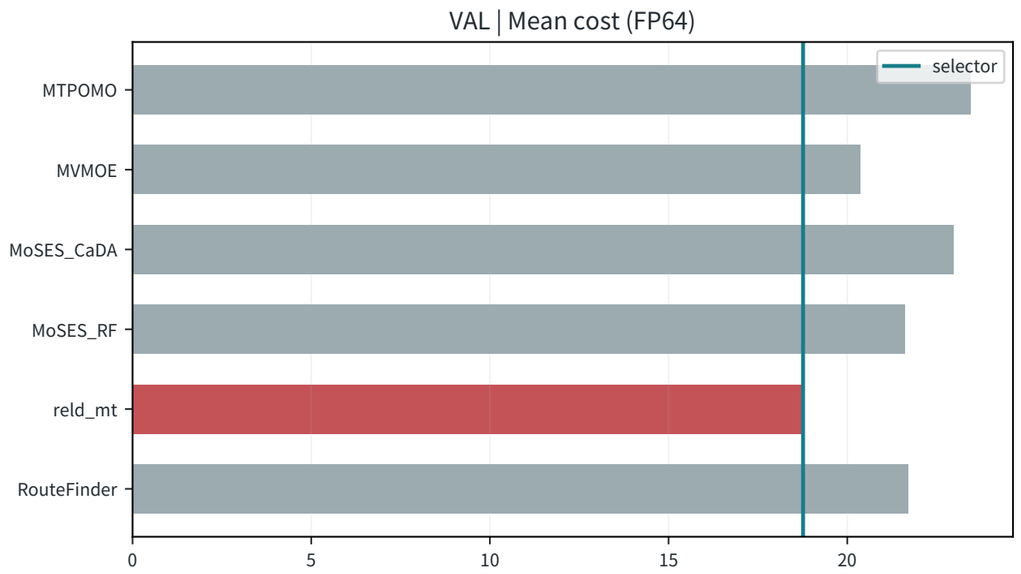


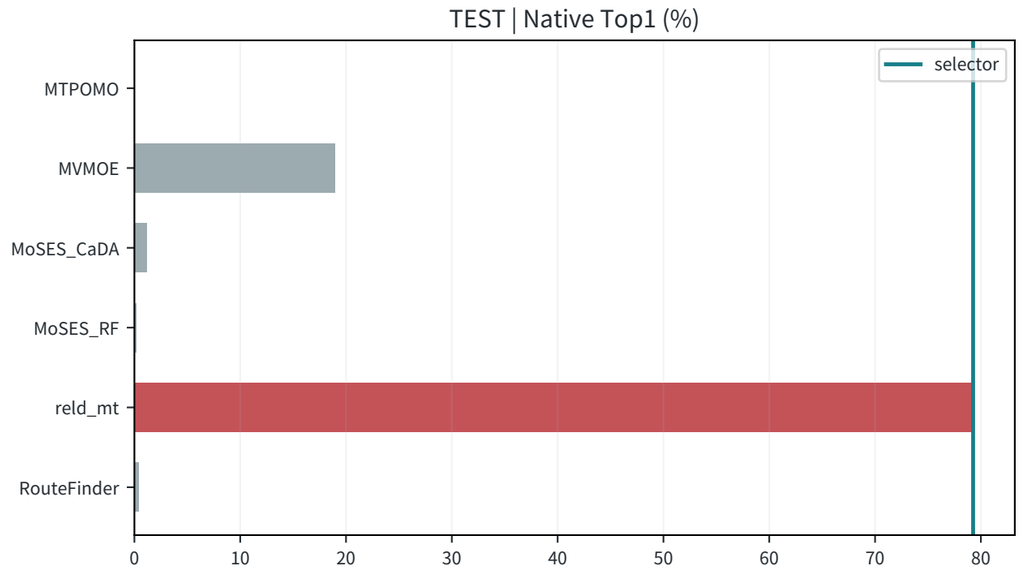


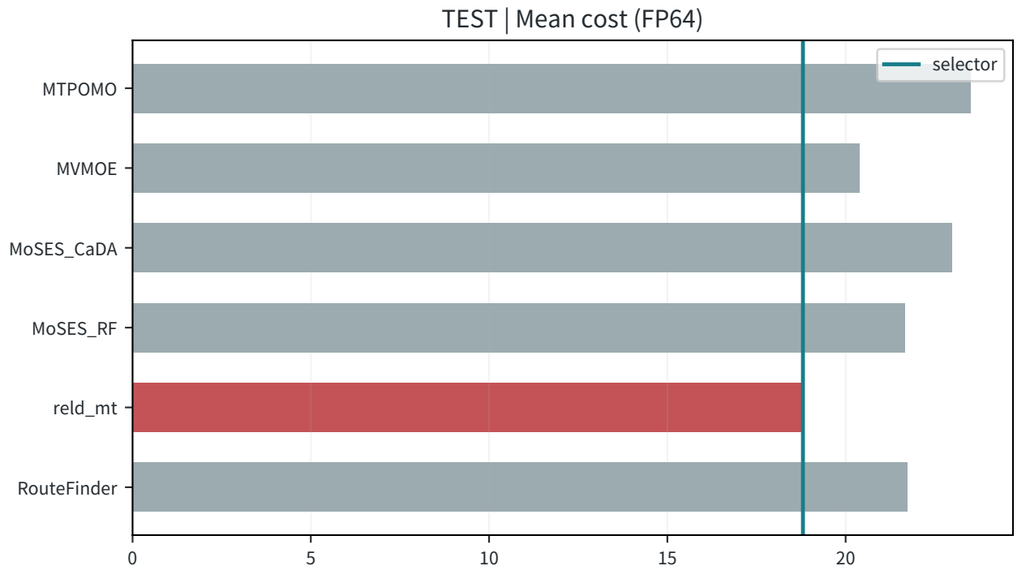



R87/B_private_residual | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

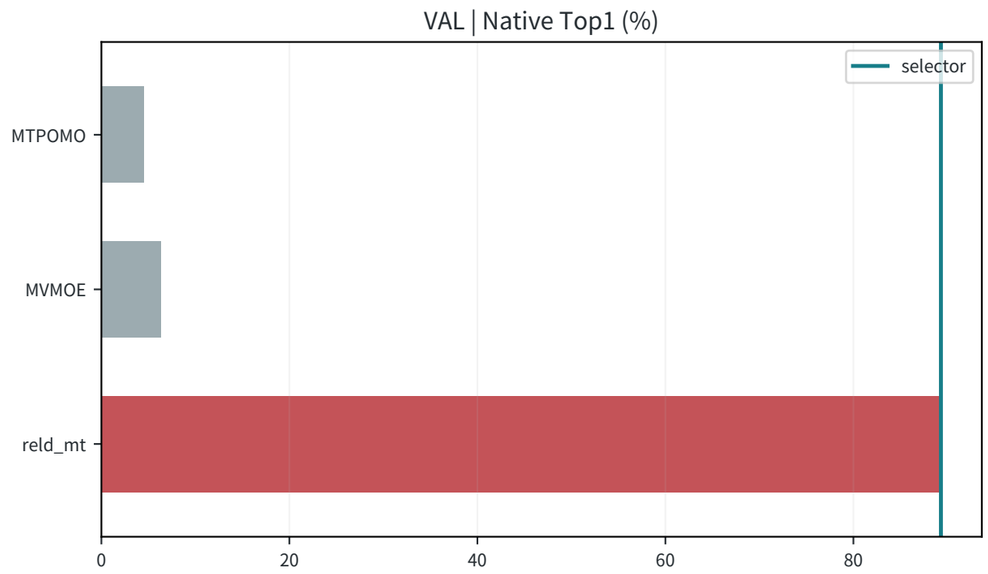

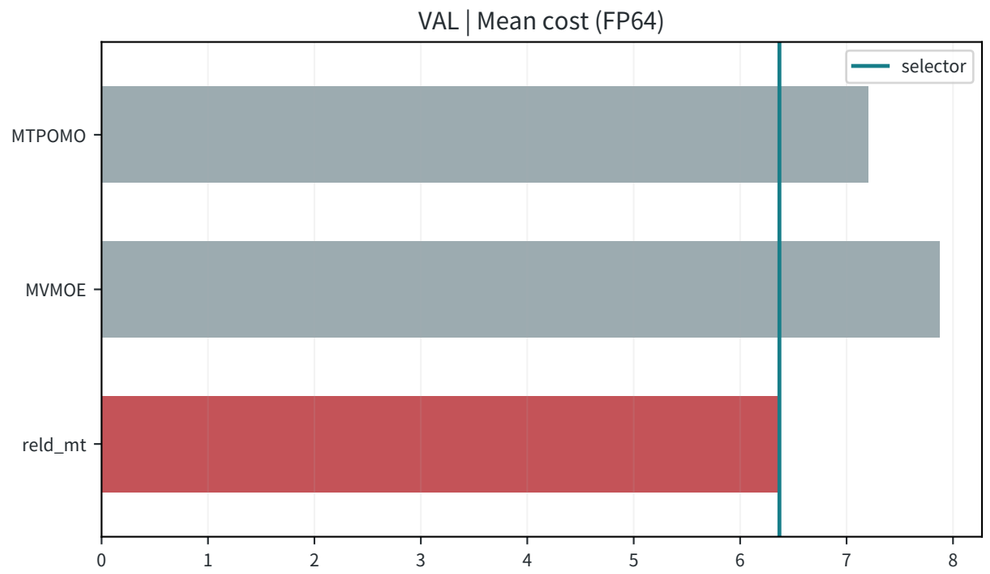


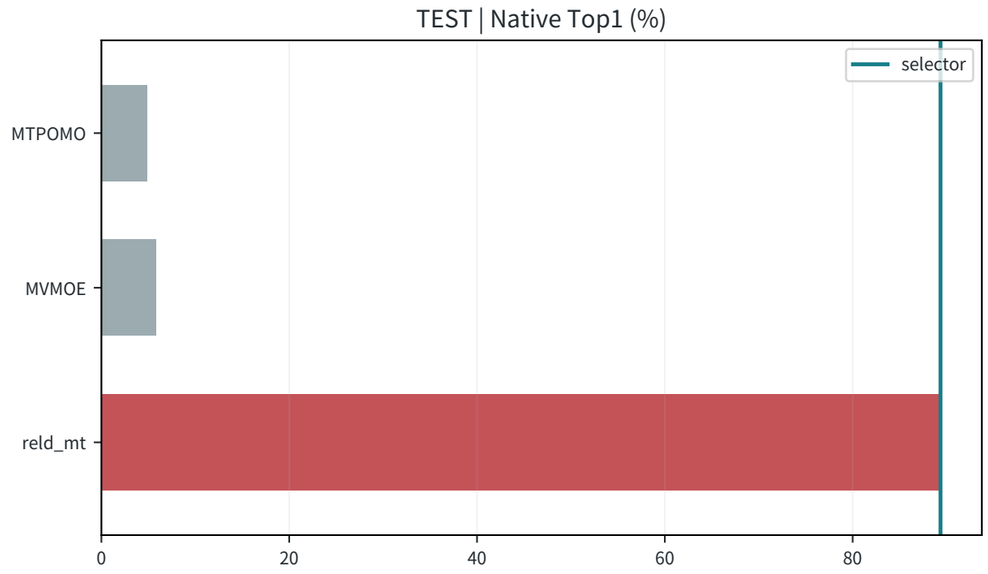


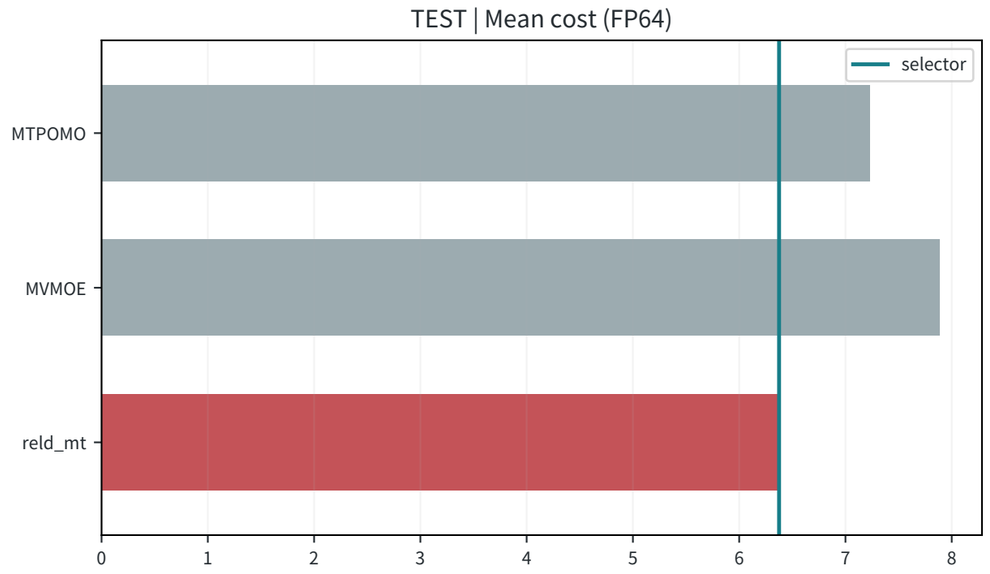



R87/B_private_residual | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

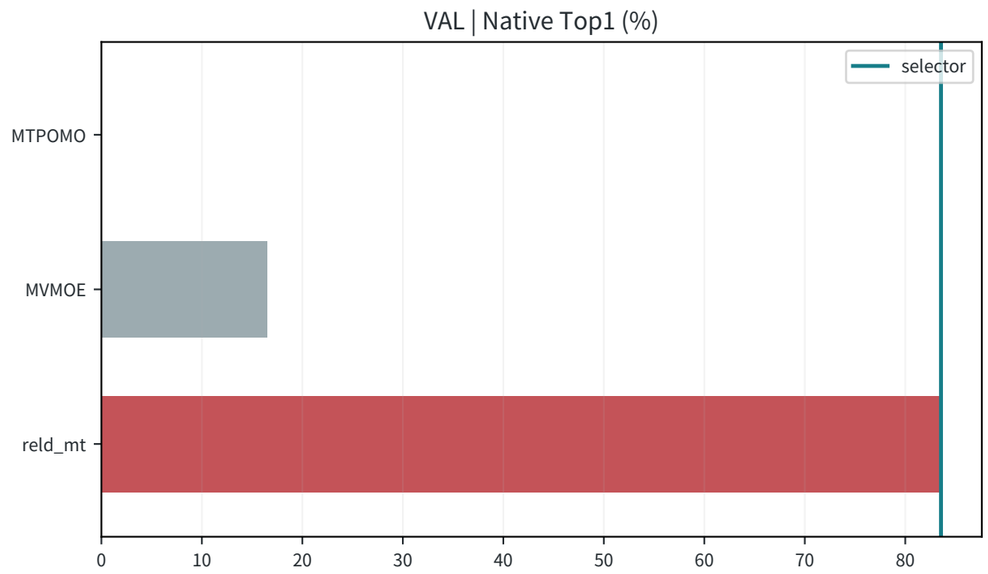

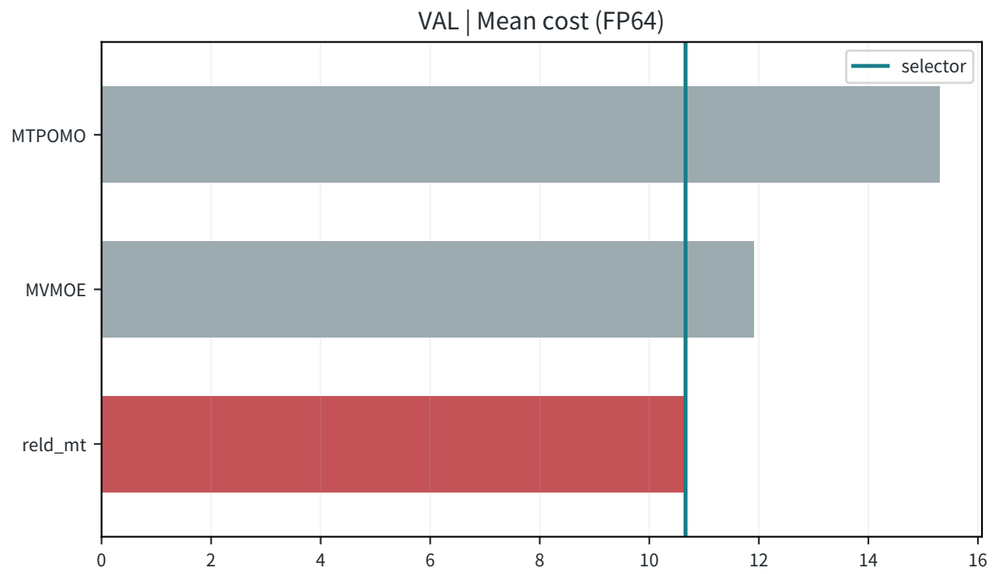


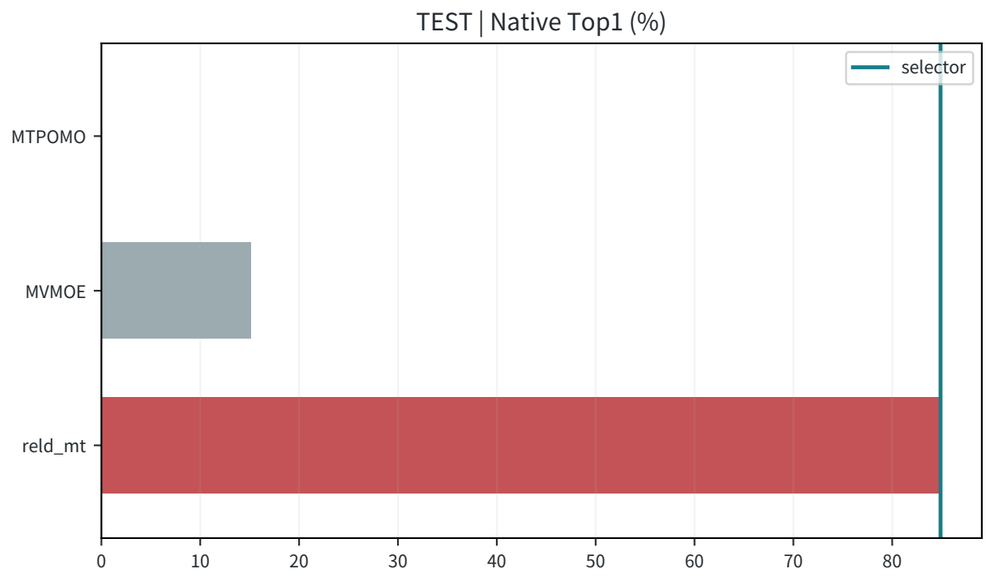


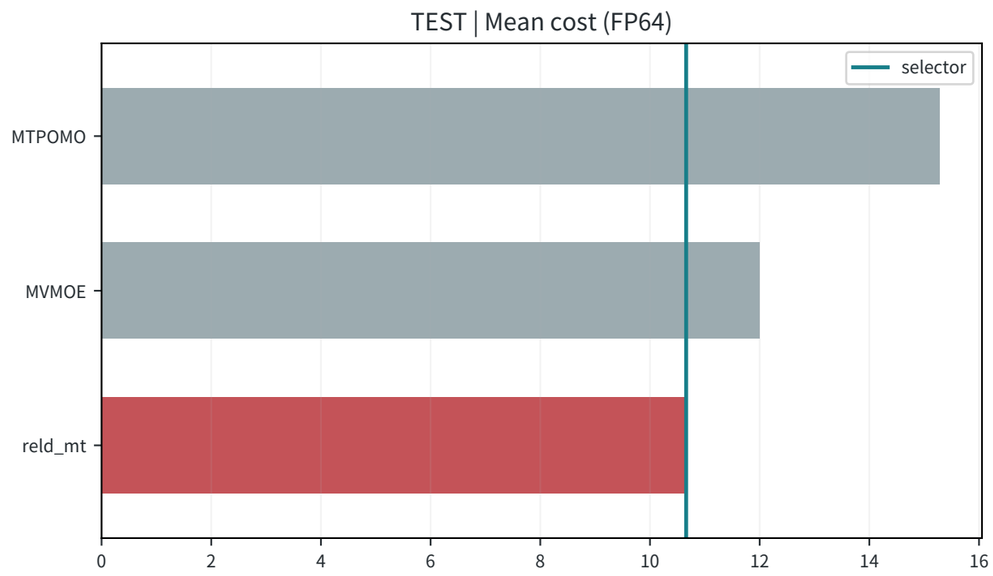



R87/B_private_residual | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

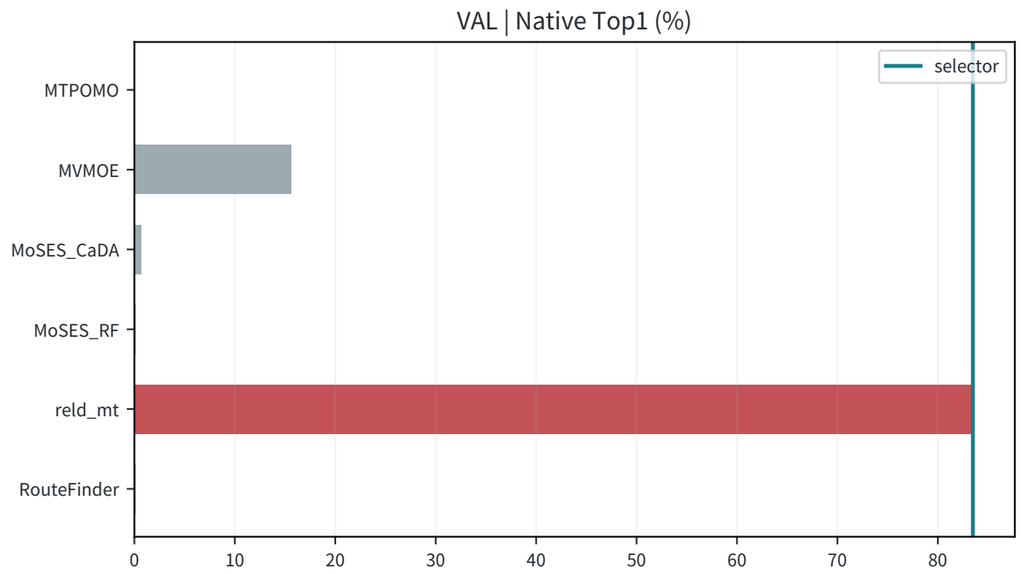

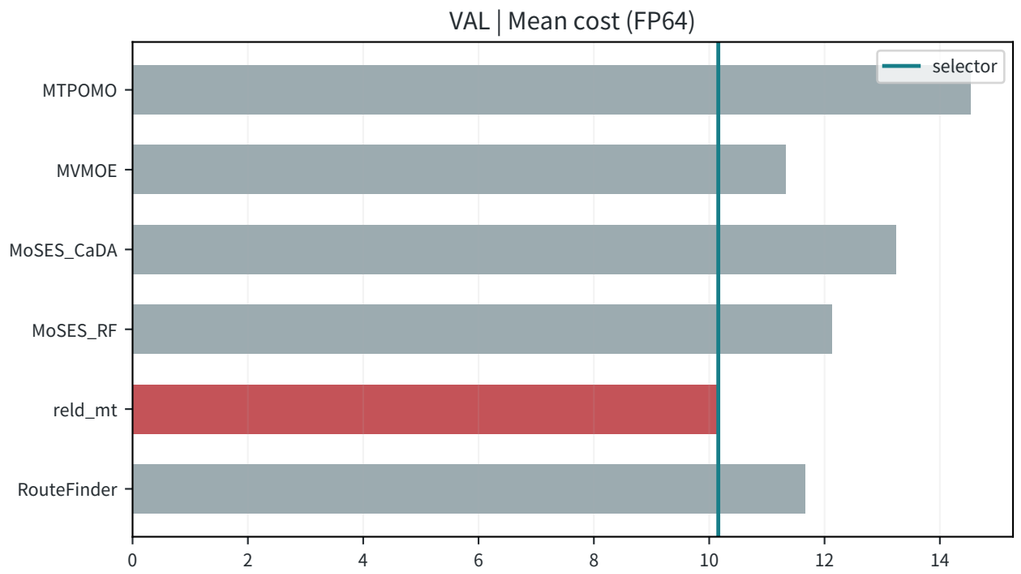


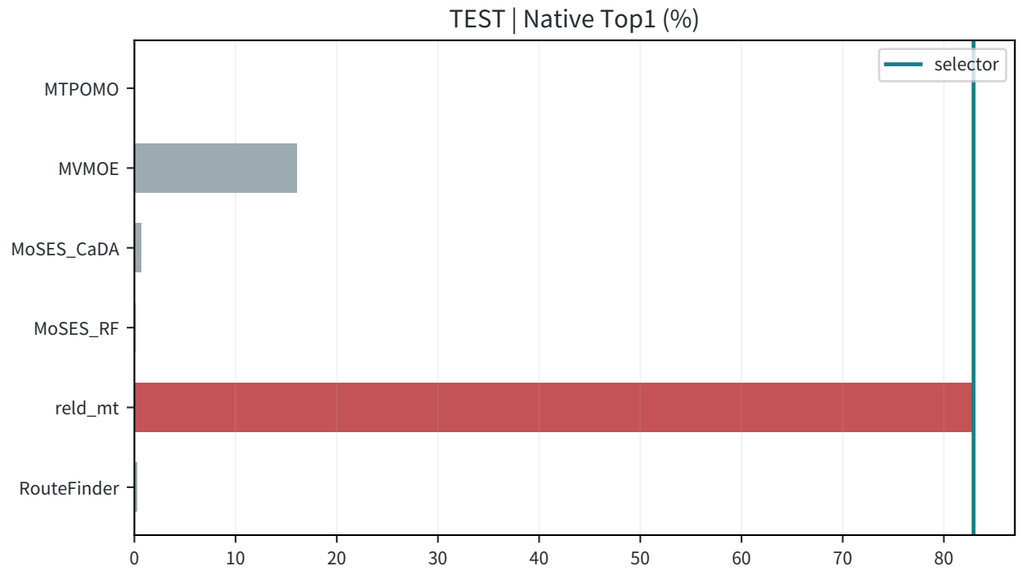


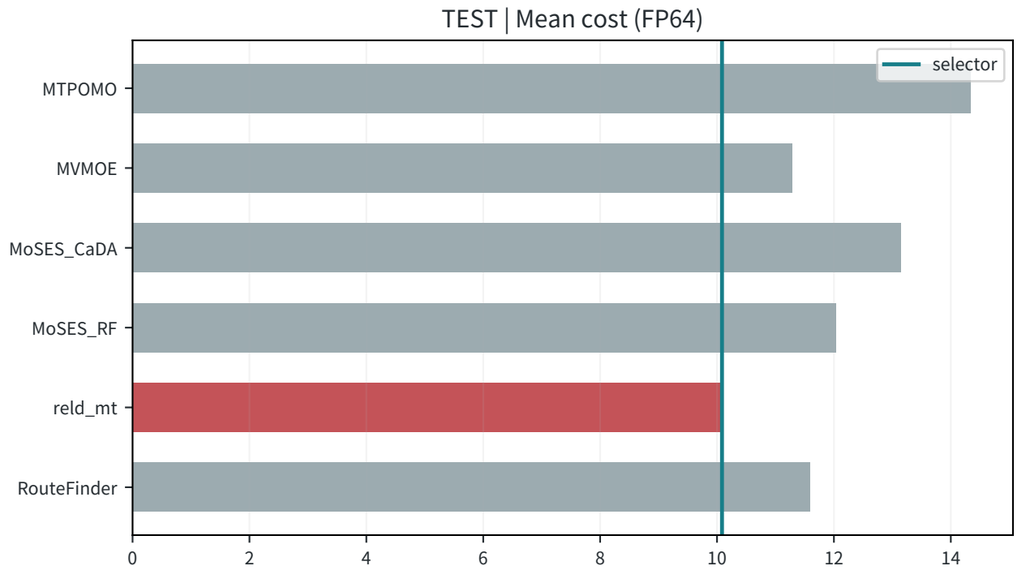



R87/B_private_residual | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

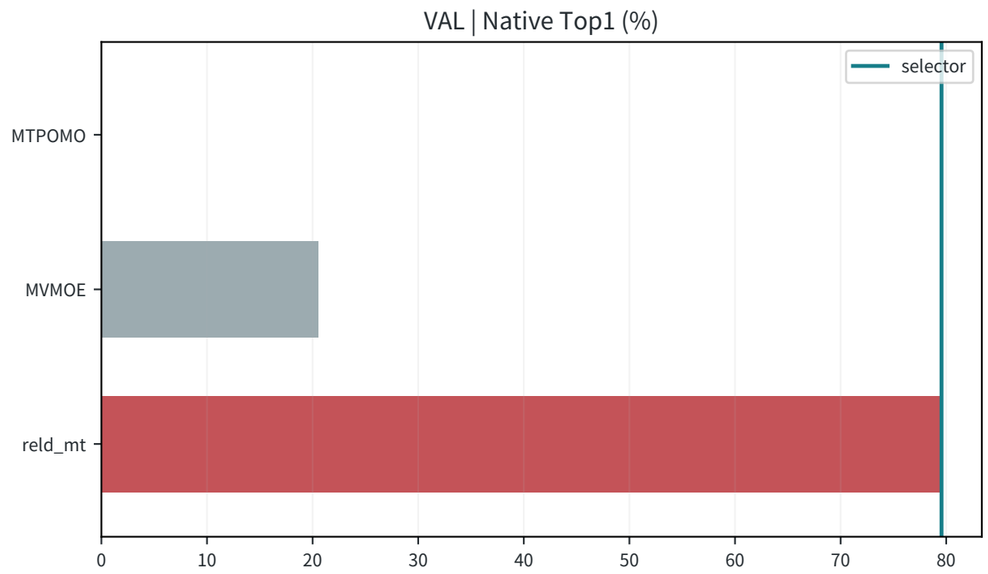

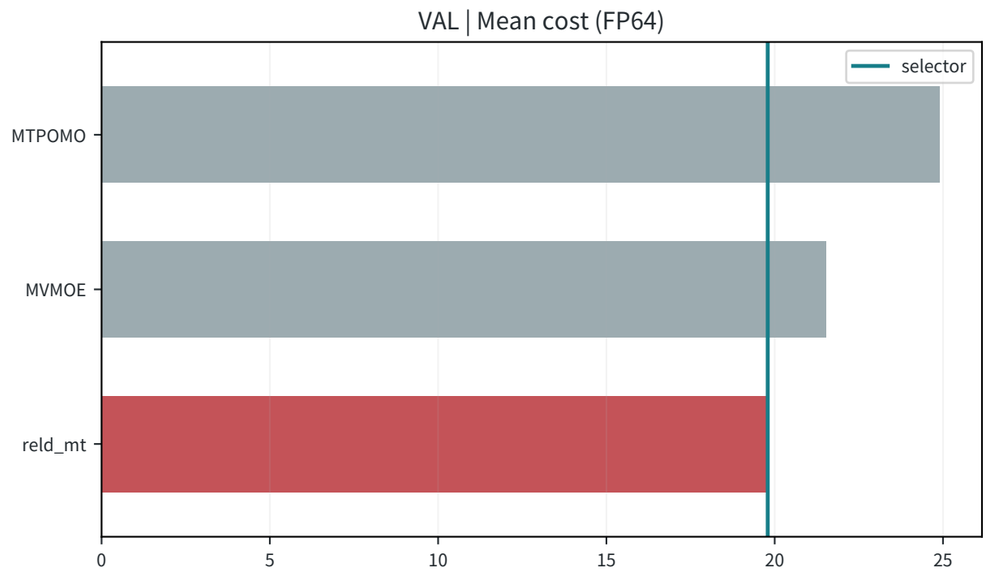

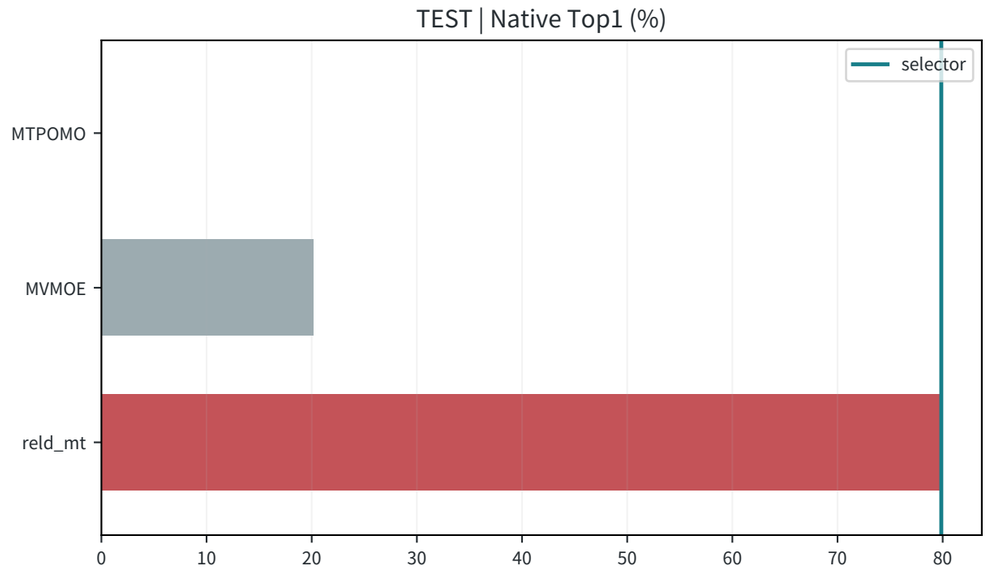

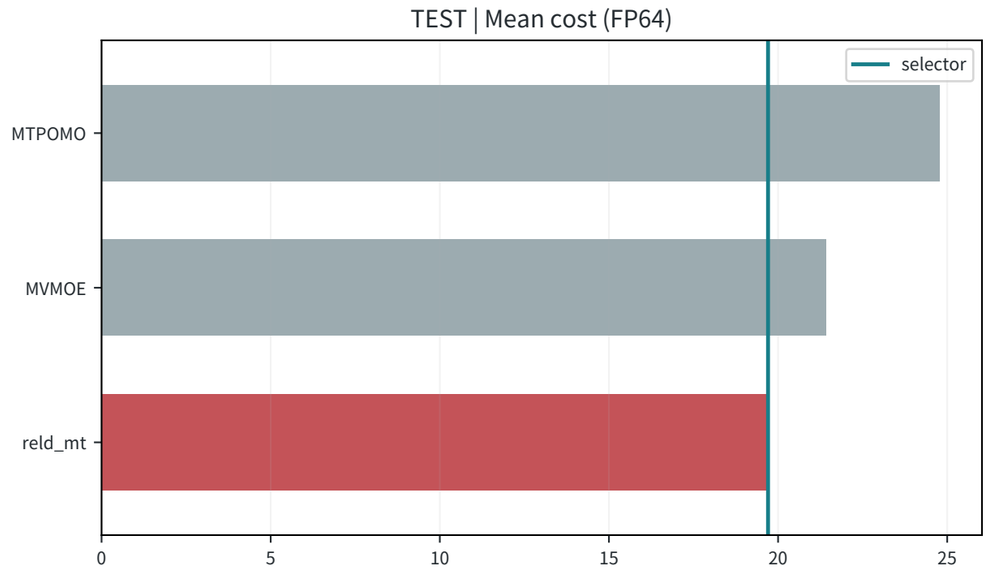

R87/B_private_residual | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

