R88/A_canonical_anchor | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 26 | update 37440 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0580	66.2037	11.416771	11.427978	11.371692	-0.1921	+0.3955	0.4054
TEST ALL	71.2519	66.1802	11.373728	11.385299	11.329932	-0.1984	+0.3847	0.3927

Dataset	n	NSS Top1 (%)	R88 Top1 (%)	NSS cost	R88 cost
TSP TEST	4500	45.888889	46.711111	7.970400719	7.971206304
CVRP TEST	4500	45.977778	46.933333	18.004802368	18.011096423
TSPLIB	49	20.408163	20.408163	8.217907074	8.208625825
CVRPLIB	100	70.000000	63.000000	67.101111717	67.274049807

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original native CE

R88/A_canonical_anchor | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0580	66.2037	11.416771	11.427978	11.371692	-0.1921	+0.3955	0.4054	per-problem TRAIN SBS
TSP	46.9111	33.1111	8.025104	8.045354	7.990533	-0.2517	+0.4327	0.4212	T2T
CVRP	46.7333	18.7111	18.157666	18.269377	18.064087	-0.6115	+0.5180	0.6872	RELD_CVRP
ATSP	76.5333	47.4889	1.638788	1.676905	1.632471	-2.2730	+0.3870	0.3836	UNICO_MatPOENet
OVRP	41.3333	35.7556	7.460911	7.469579	7.415777	-0.1160	+0.6086	0.6219	MoSES_RF
VRPB	81.0667	80.8444	9.355141	9.354876	9.318750	+0.0028	+0.3905	0.3963	reld_mt
VRPL	37.9111	33.0889	12.431638	12.437959	12.383444	-0.0508	+0.3892	0.3958	MoSES_RF
VRPTW	79.9333	79.9556	18.819253	18.819431	18.766139	-0.0009	+0.2830	0.3000	reld_mt
OVRPTW	83.8222	83.7778	10.143263	10.143730	10.116859	-0.0046	+0.2610	0.2579	reld_mt
OVRPB	88.4667	88.5111	6.357877	6.357254	6.341078	+0.0098	+0.2649	0.2778	reld_mt
OVRPL	41.2000	35.9111	7.438528	7.445709	7.390416	-0.0965	+0.6510	0.6660	MoSES_RF
VRPBL	78.9556	78.5111	9.368377	9.371523	9.328366	-0.0336	+0.4289	0.4307	reld_mt
VRPBTW	78.4889	78.4222	19.946186	19.950430	19.851084	-0.0213	+0.4791	0.4596	reld_mt
VRPLTW	78.8222	78.7556	18.764495	18.765871	18.707843	-0.0073	+0.3028	0.3194	reld_mt
OVRPBL	89.2889	89.2000	6.369584	6.370093	6.352824	-0.0080	+0.2638	0.2753	reld_mt
OVRPBTW	83.4889	83.4444	10.662103	10.661098	10.623245	+0.0094	+0.3658	0.3434	reld_mt
OVRPLTW	83.5111	83.4889	10.157482	10.157423	10.129818	+0.0006	+0.2731	0.2761	reld_mt
VRPBLTW	79.4000	79.4000	19.794966	19.797044	19.706420	-0.0105	+0.4493	0.4374	reld_mt
OVRPBLTW	83.1778	83.2889	10.610510	10.609955	10.571302	+0.0052	+0.3709	0.3485	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R88/A_canonical_anchor | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2519	66.1802	11.373728	11.385299	11.329932	-0.1984	+0.3847	0.3927	per-problem TRAIN SBS
TSP	46.7111	34.5333	7.971206	7.989621	7.937593	-0.2305	+0.4235	0.4142	T2T
CVRP	46.9333	17.9333	18.011096	18.124983	17.918509	-0.6283	+0.5167	0.6756	RELD_CVRP
ATSP	76.6222	47.2444	1.635459	1.674207	1.629441	-2.3144	+0.3693	0.3683	UNICO_MatPOENet
OVRP	40.5778	33.6444	7.446028	7.455750	7.400487	-0.1304	+0.6154	0.6251	MoSES_RF
VRPB	80.5778	80.4000	9.349393	9.351810	9.315298	-0.0258	+0.3660	0.3707	reld_mt
VRPL	37.4222	32.2667	12.349907	12.356138	12.300958	-0.0504	+0.3979	0.4061	MoSES_RF
VRPTW	81.1111	80.8444	18.689049	18.690545	18.637408	-0.0080	+0.2771	0.2879	reld_mt
OVRPTW	83.9556	83.9333	10.092713	10.093063	10.068135	-0.0035	+0.2441	0.2352	reld_mt
OVRPB	88.1333	88.1333	6.370529	6.370826	6.352225	-0.0047	+0.2881	0.2947	reld_mt
OVRPL	42.1556	34.6000	7.463656	7.472542	7.418033	-0.1189	+0.6150	0.6226	MoSES_RF
VRPBL	79.5556	79.4222	9.394913	9.396379	9.355967	-0.0156	+0.4163	0.4197	reld_mt
VRPBTW	78.8444	78.7556	19.663900	19.665725	19.577666	-0.0093	+0.4405	0.4357	reld_mt
VRPLTW	79.3333	79.2444	18.801867	18.803136	18.745143	-0.0068	+0.3026	0.3198	reld_mt
OVRPBL	89.2667	89.2889	6.375520	6.375741	6.359310	-0.0035	+0.2549	0.2657	reld_mt
OVRPBTW	84.9778	84.8222	10.658767	10.659591	10.624748	-0.0077	+0.3202	0.2926	reld_mt
OVRPLTW	82.9556	82.8667	10.085636	10.086112	10.059001	-0.0047	+0.2648	0.2651	reld_mt
VRPBLTW	79.7778	79.7333	19.705413	19.707068	19.613284	-0.0084	+0.4697	0.4497	reld_mt
OVRPBLTW	83.6222	83.5778	10.662041	10.662149	10.625574	-0.0010	+0.3432	0.3204	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R88/A_canonical_anchor | LIB and locked provenance

Current R88 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	20.4082	10.2041	8.208626	8.240435	8.142167	-0.3860	+0.8162	0.8236
CVRPLIB	63.0000	45.0000	67.274050	67.245364	66.945093	+0.0427	+0.4914	0.5876

SHA256: 38dd57441afcfe90a27e13cb8af6b698d2b4fc6b84759e4e74508c885dfddff2

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, input-derived TSP role in slot3, original R77 score MLP/pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R88/A_canonical_anchor | TSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

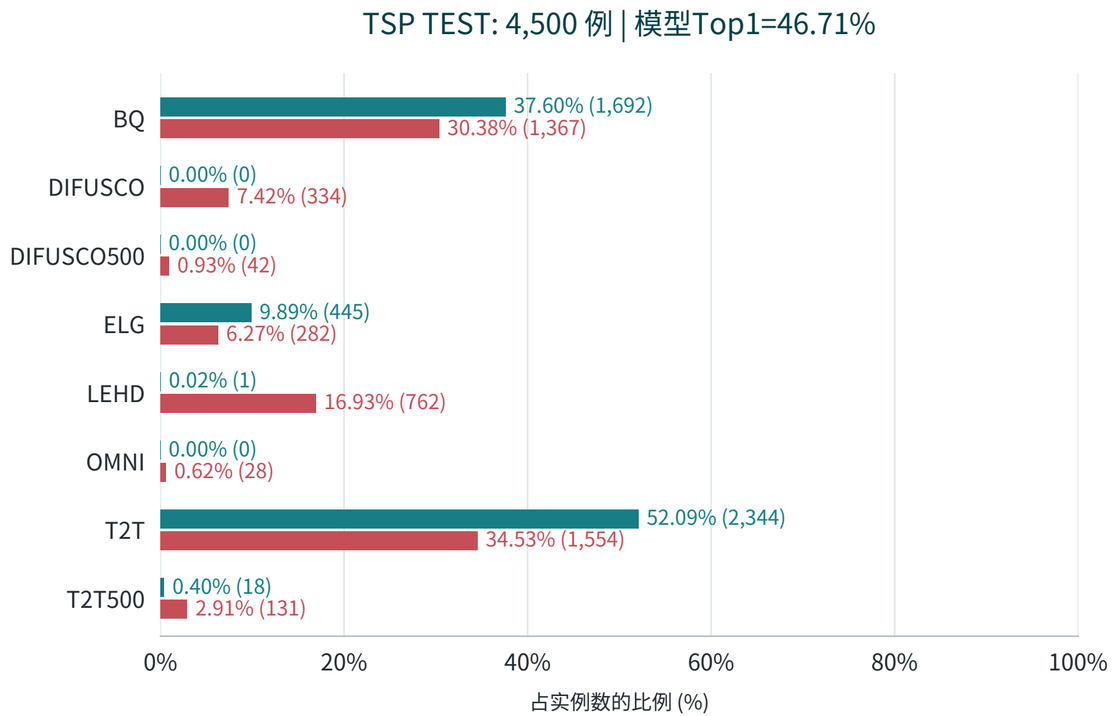

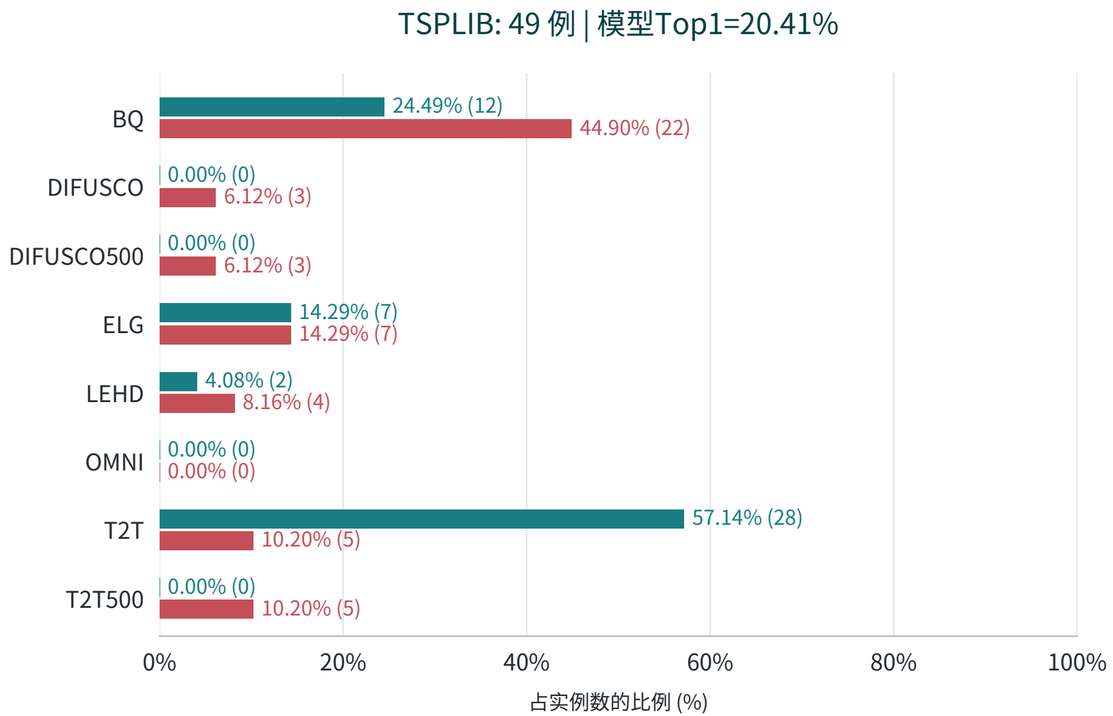

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.


R88/A_canonical_anchor | CVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

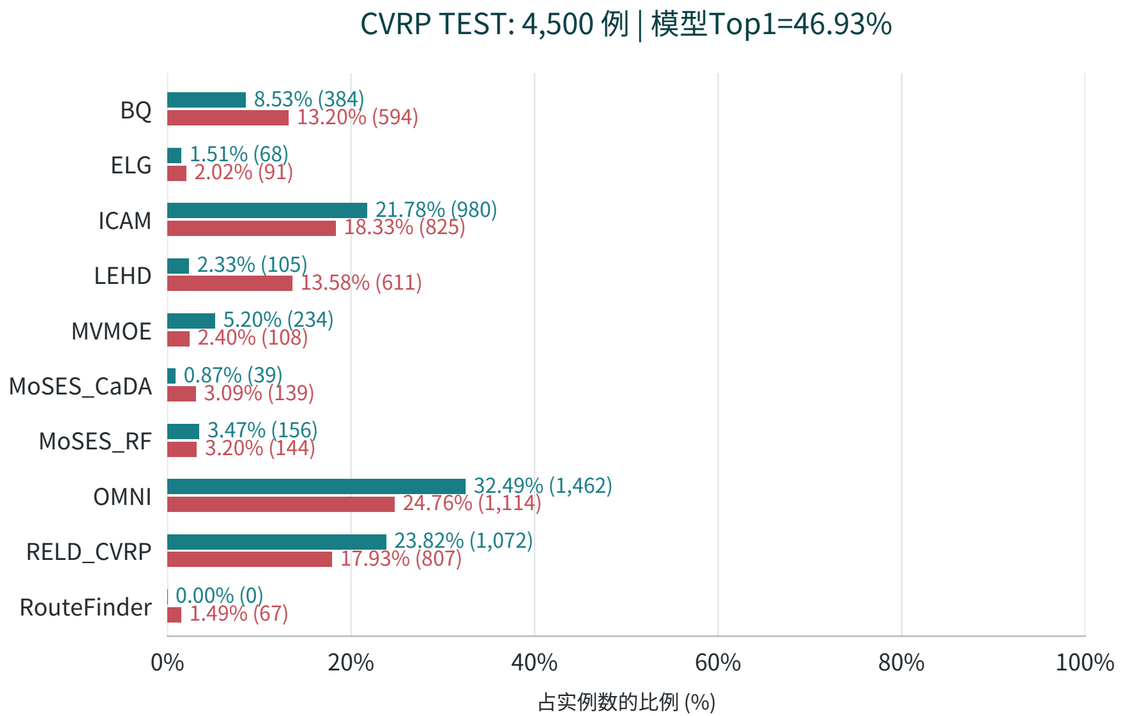

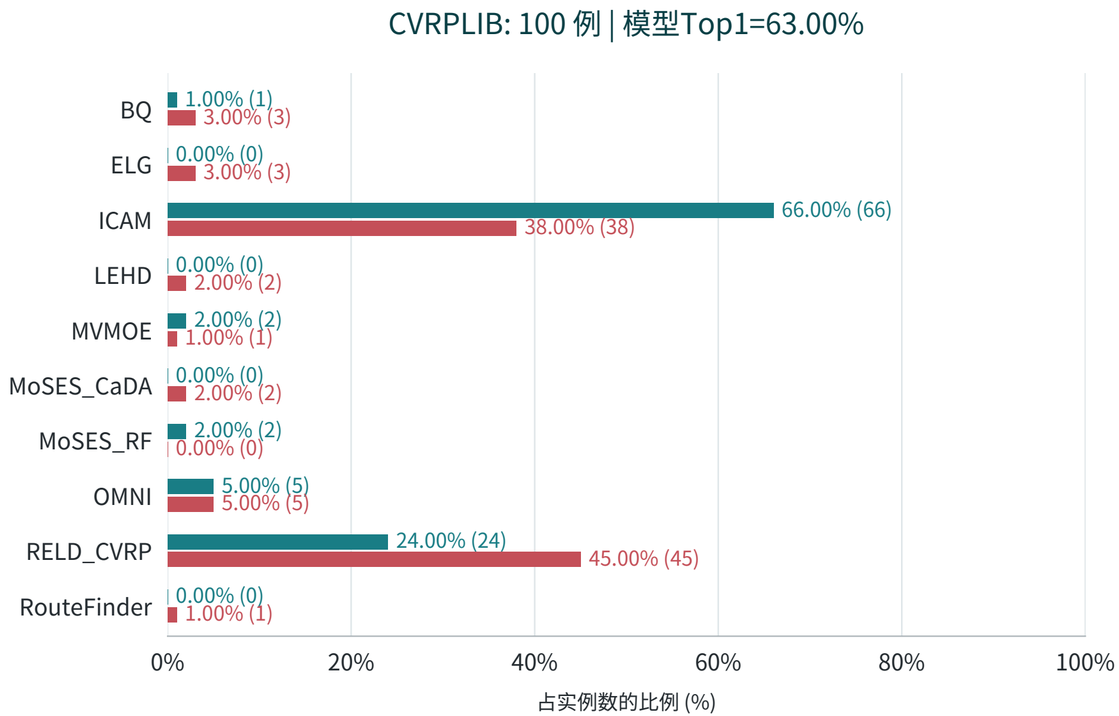

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | ATSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

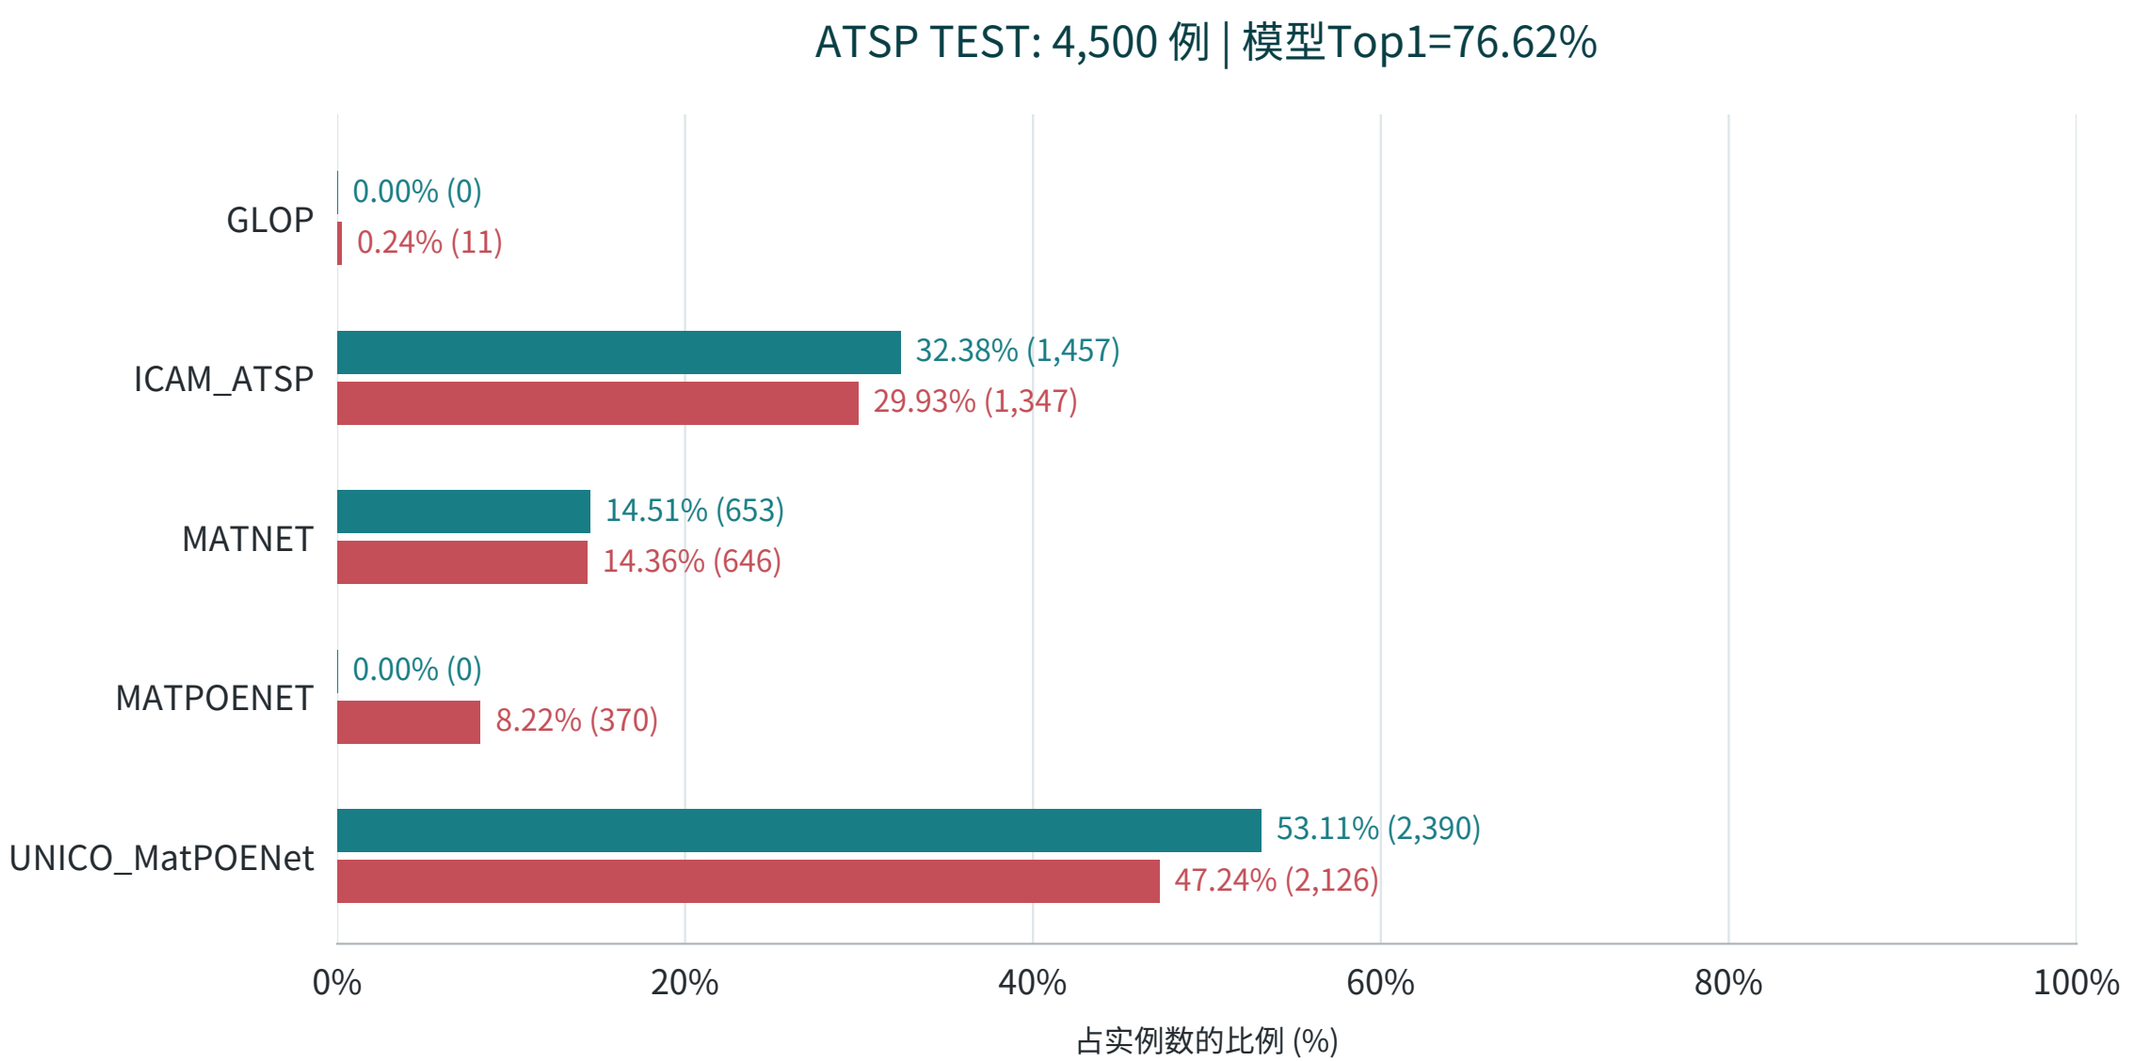

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

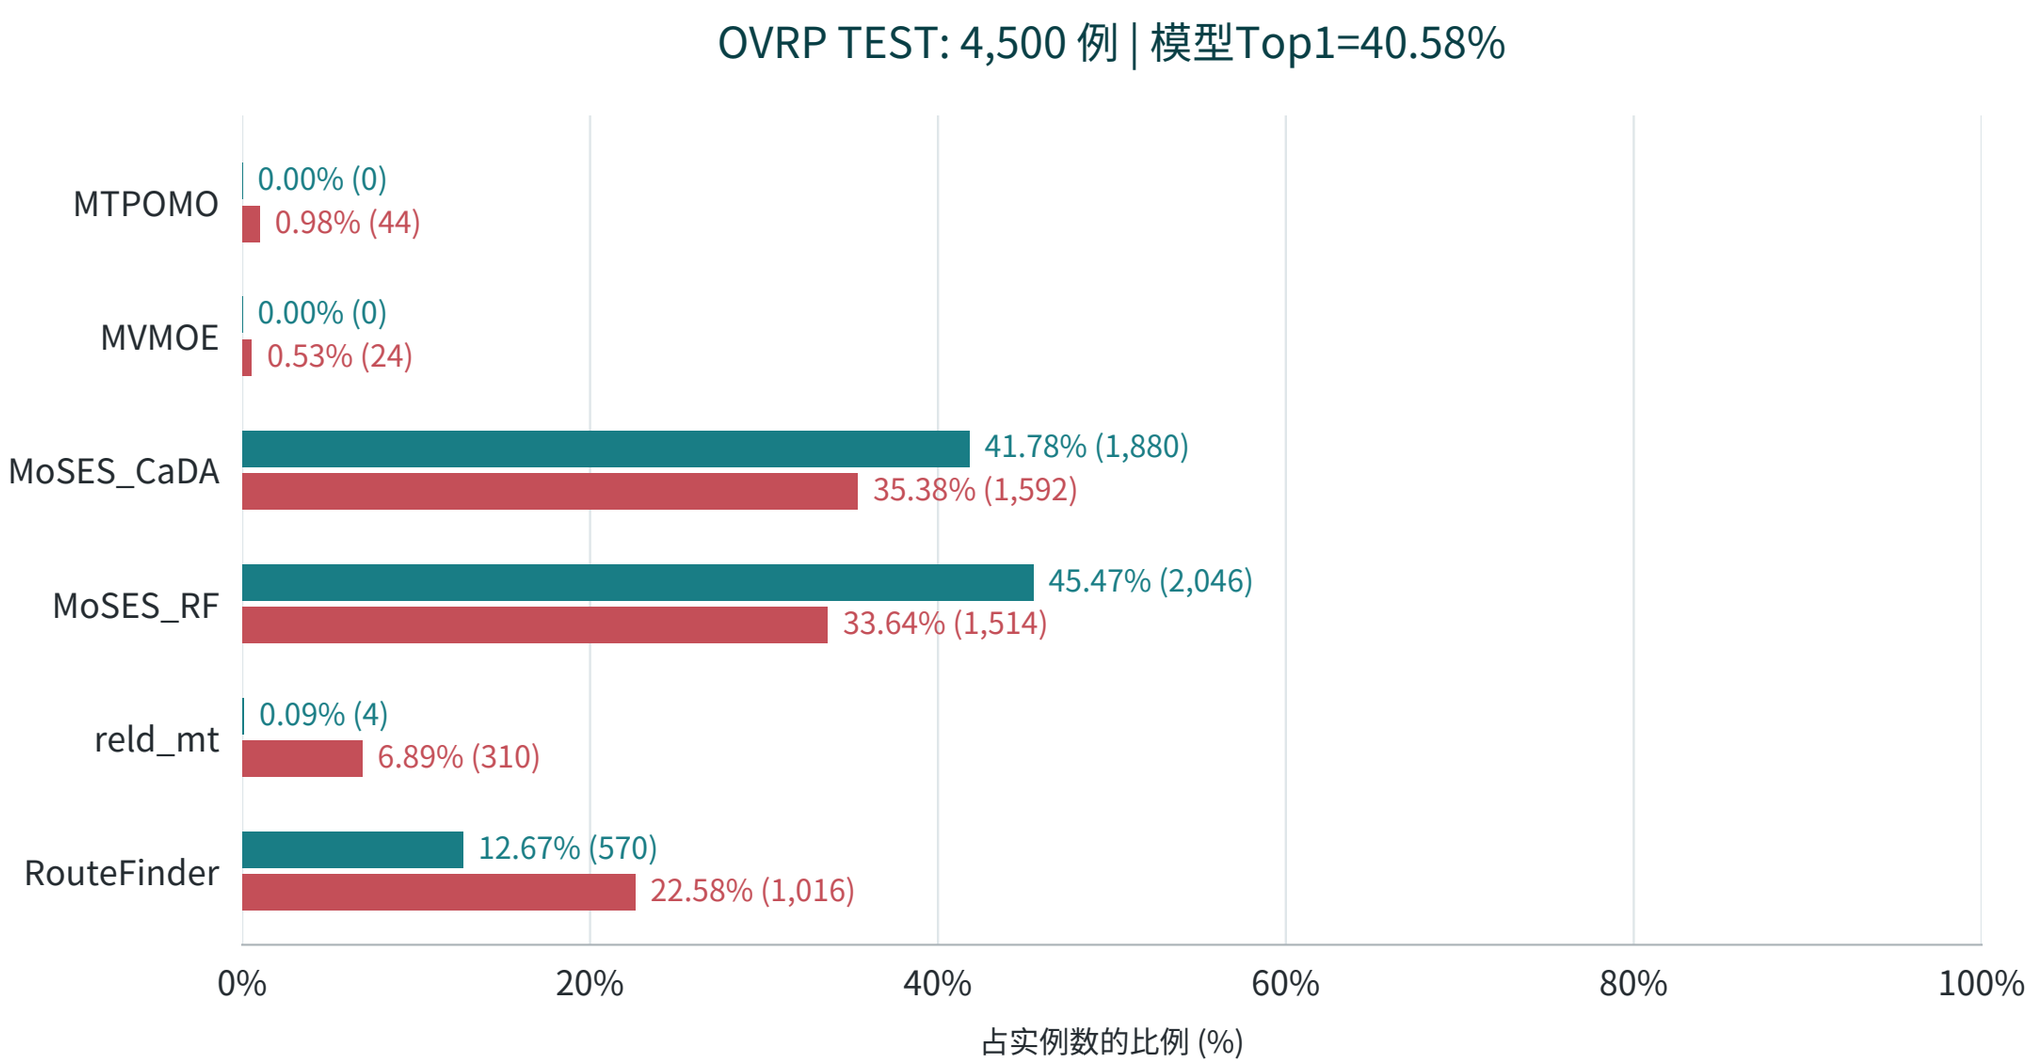

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

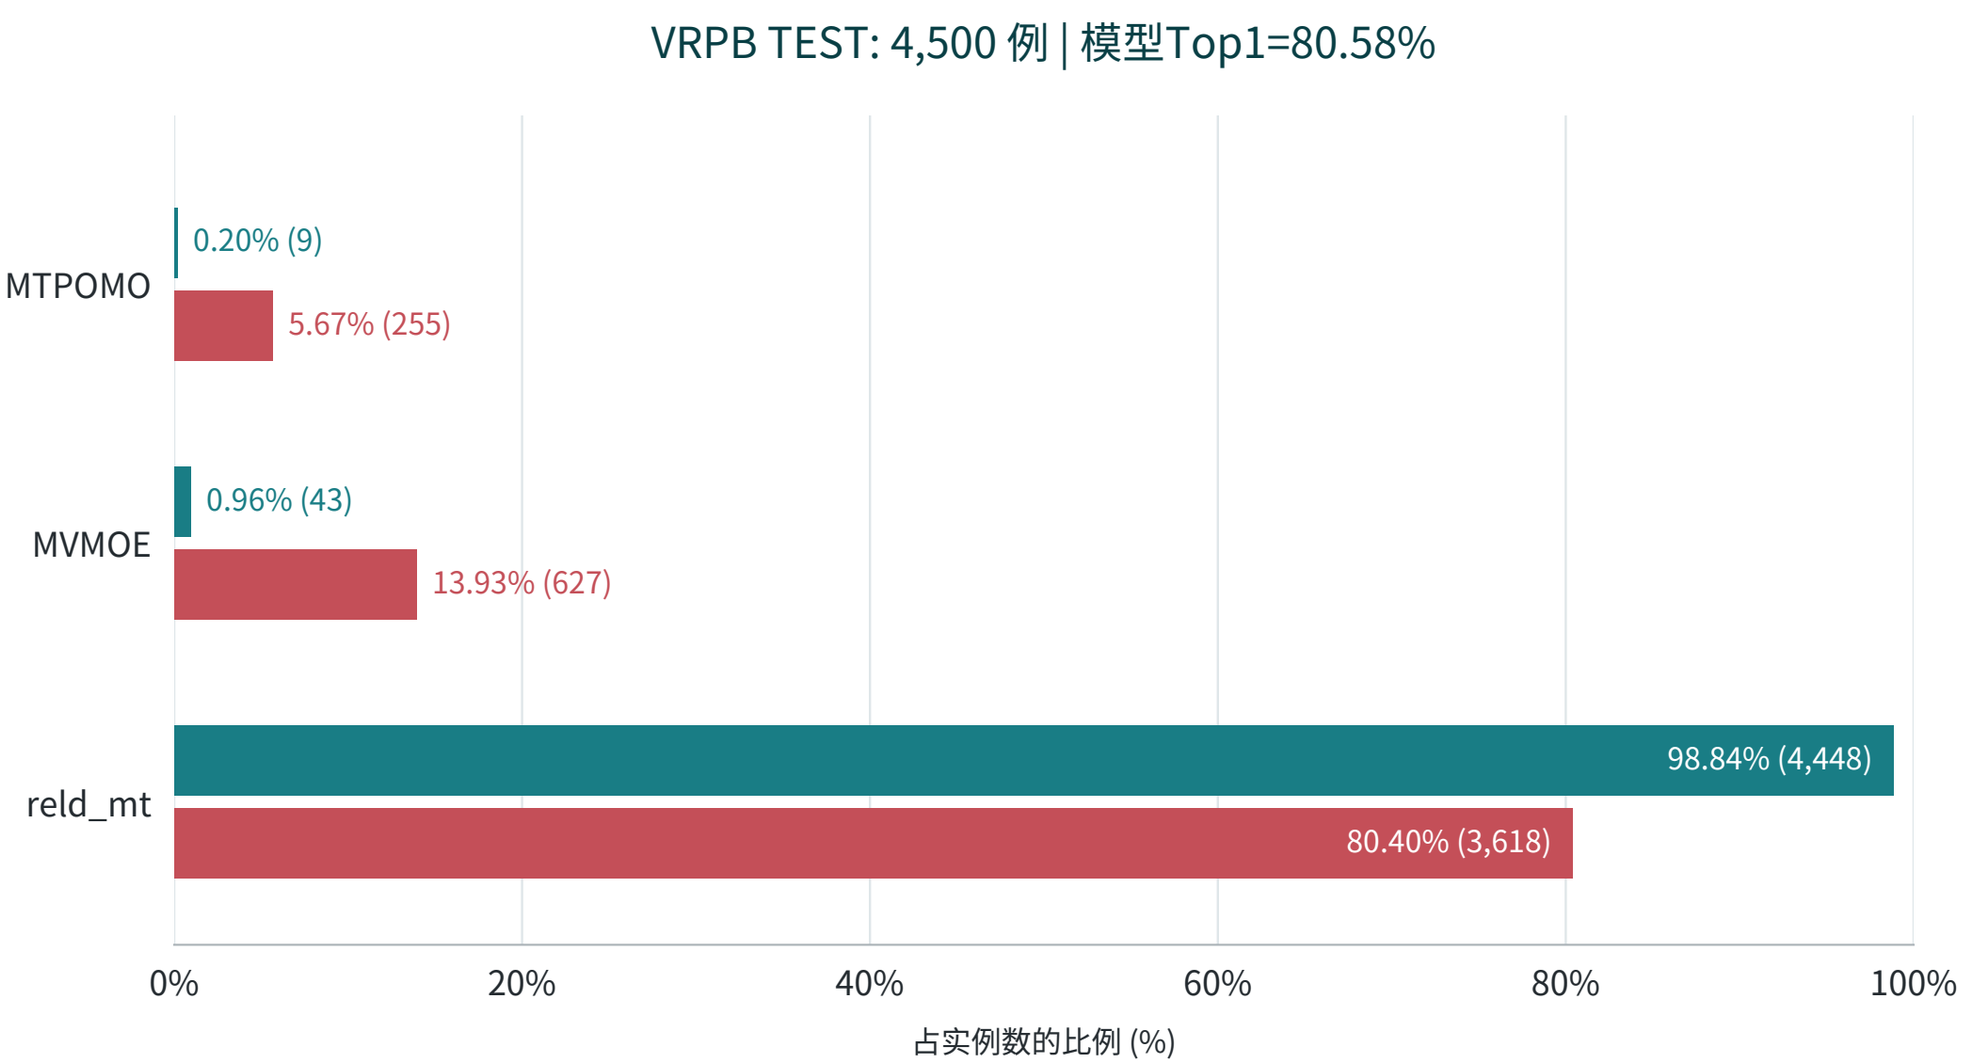

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

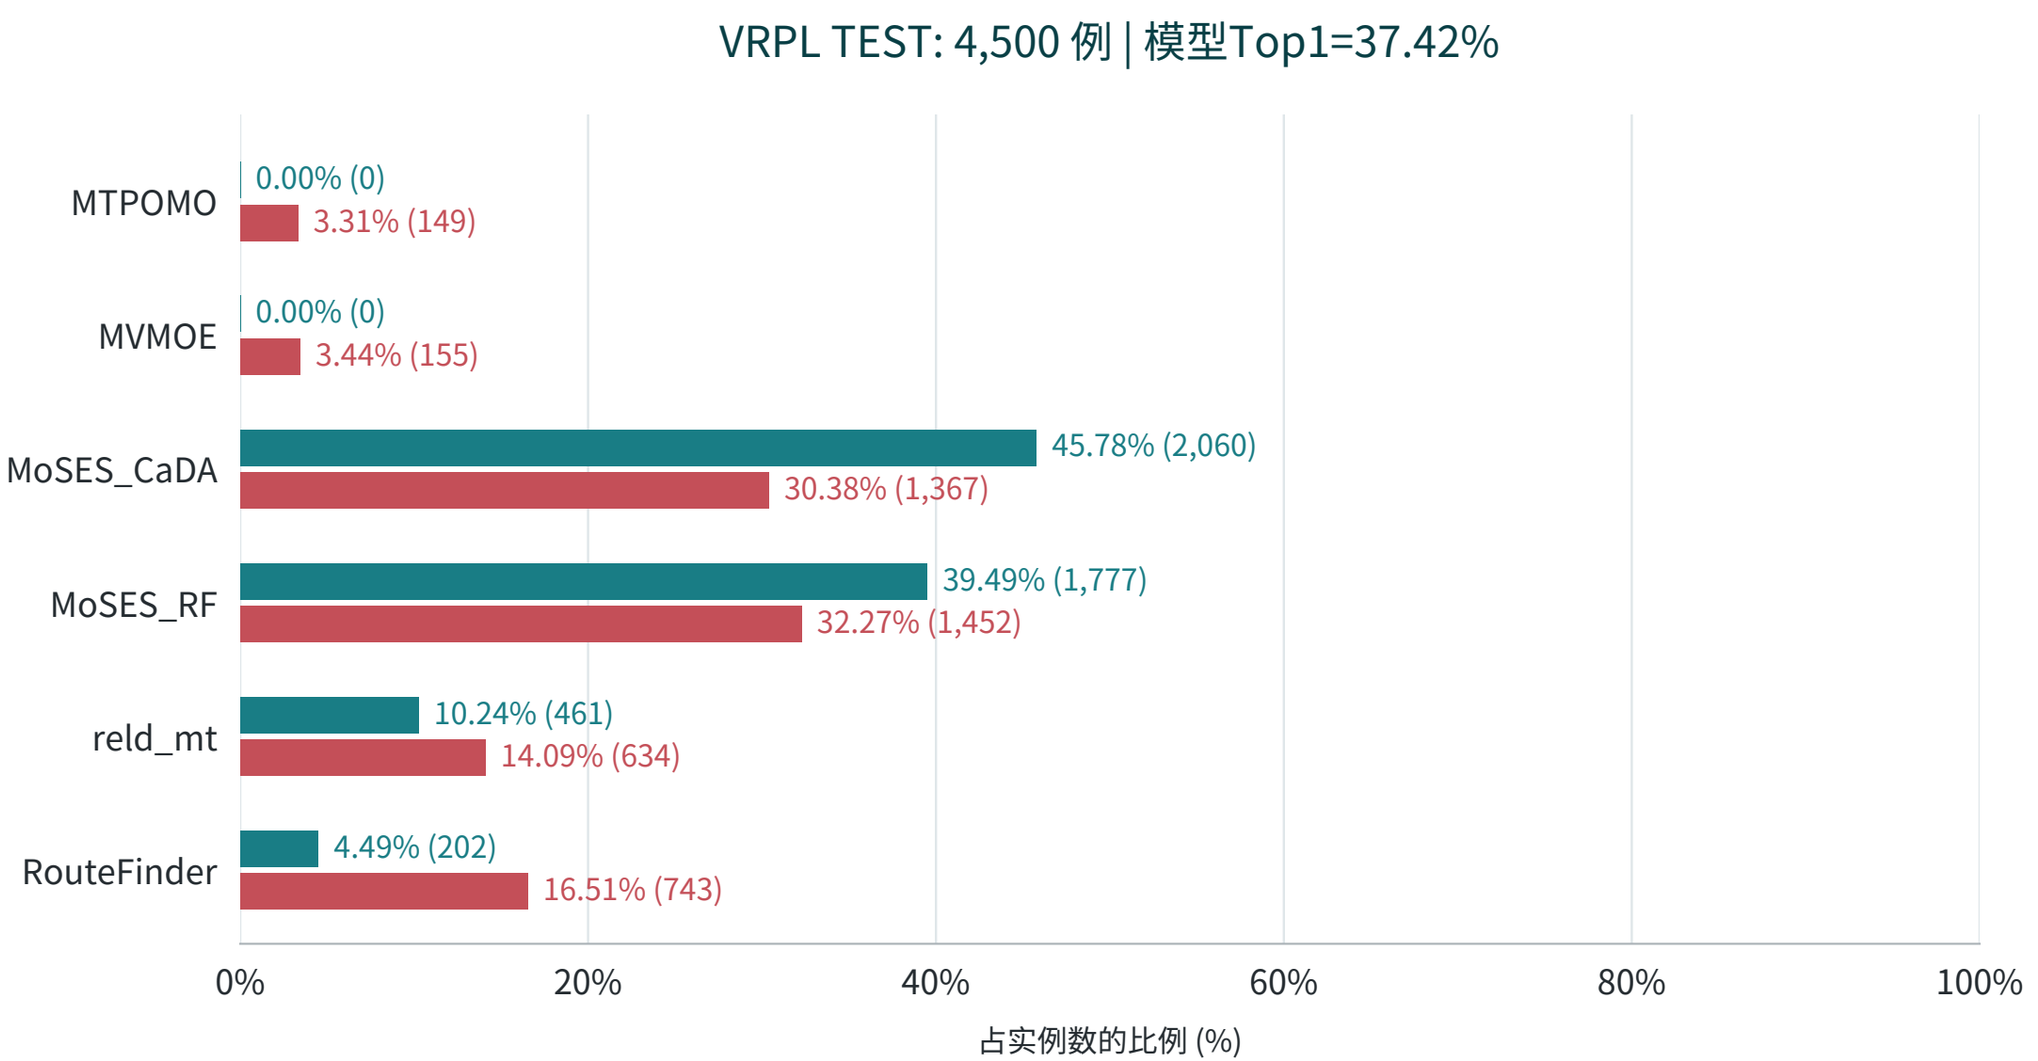

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

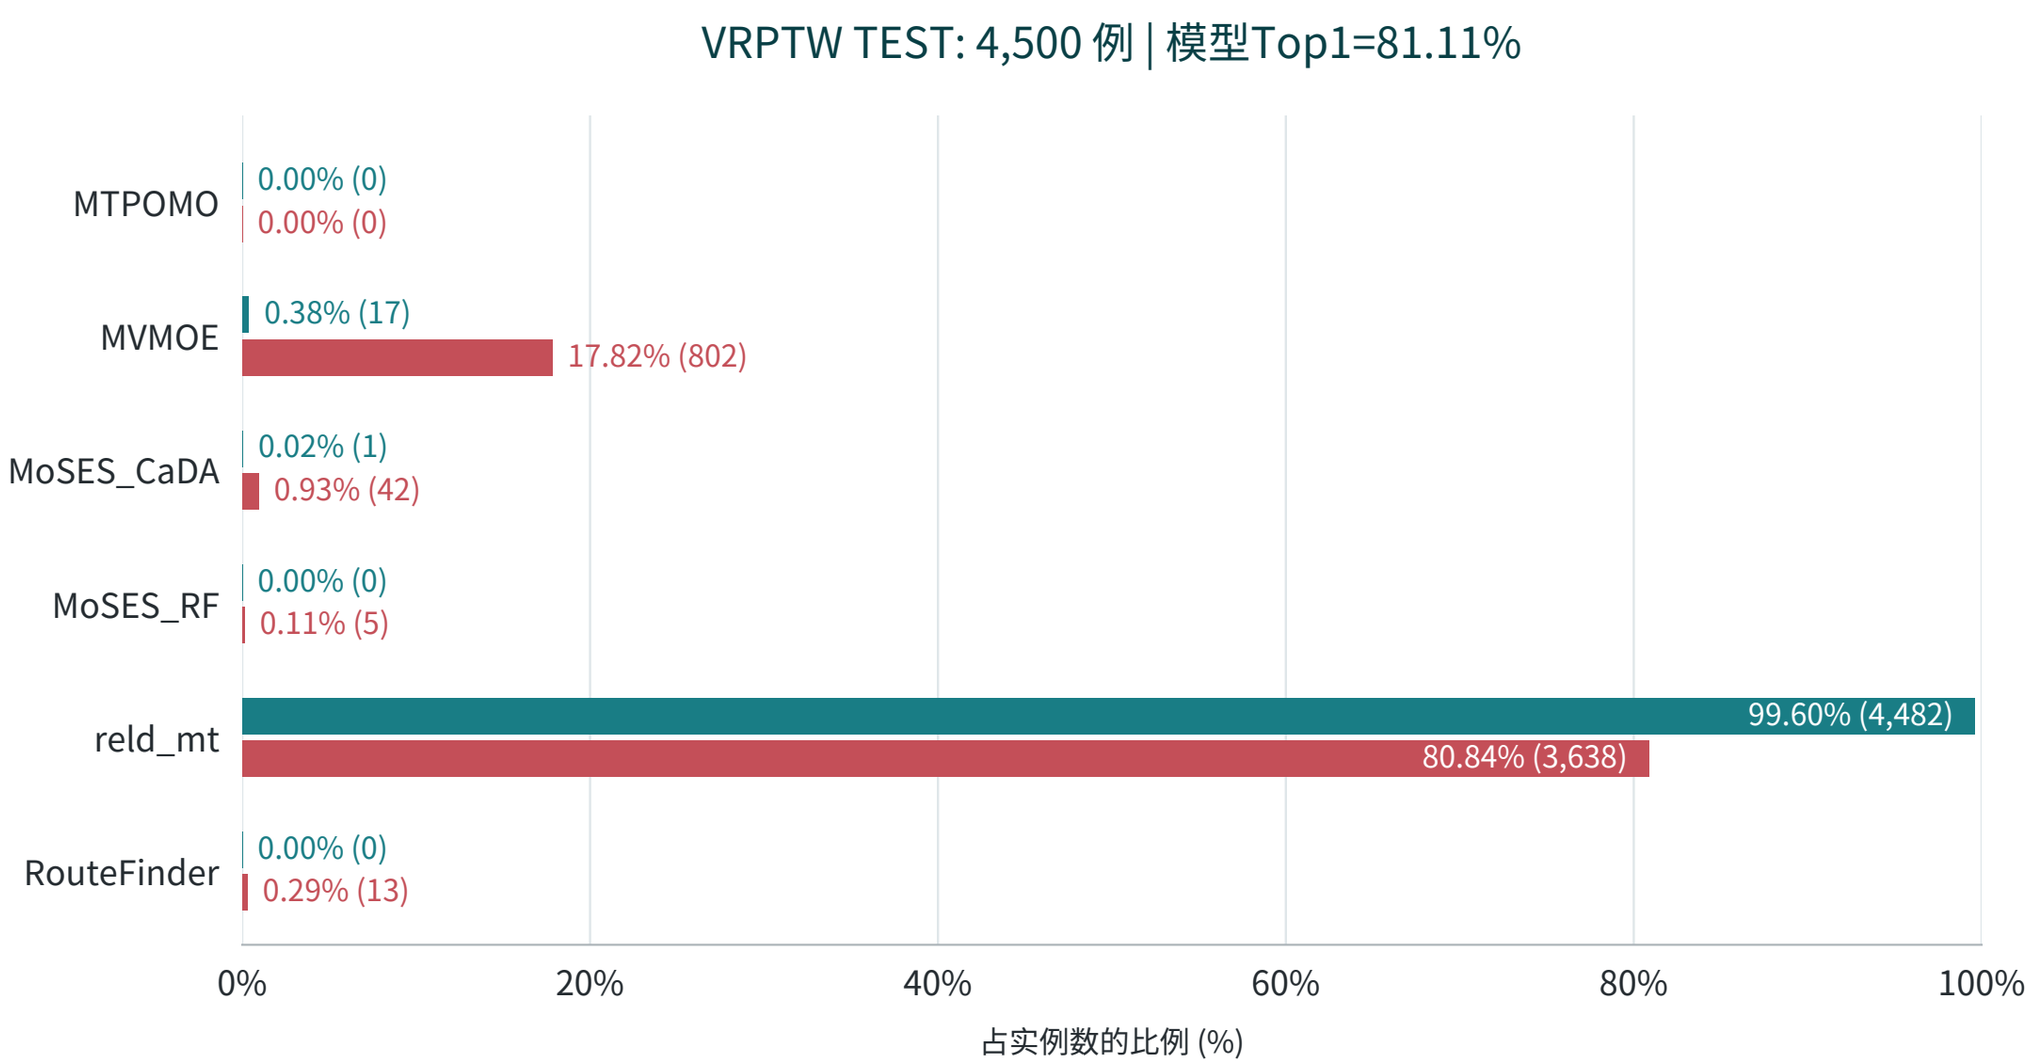

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

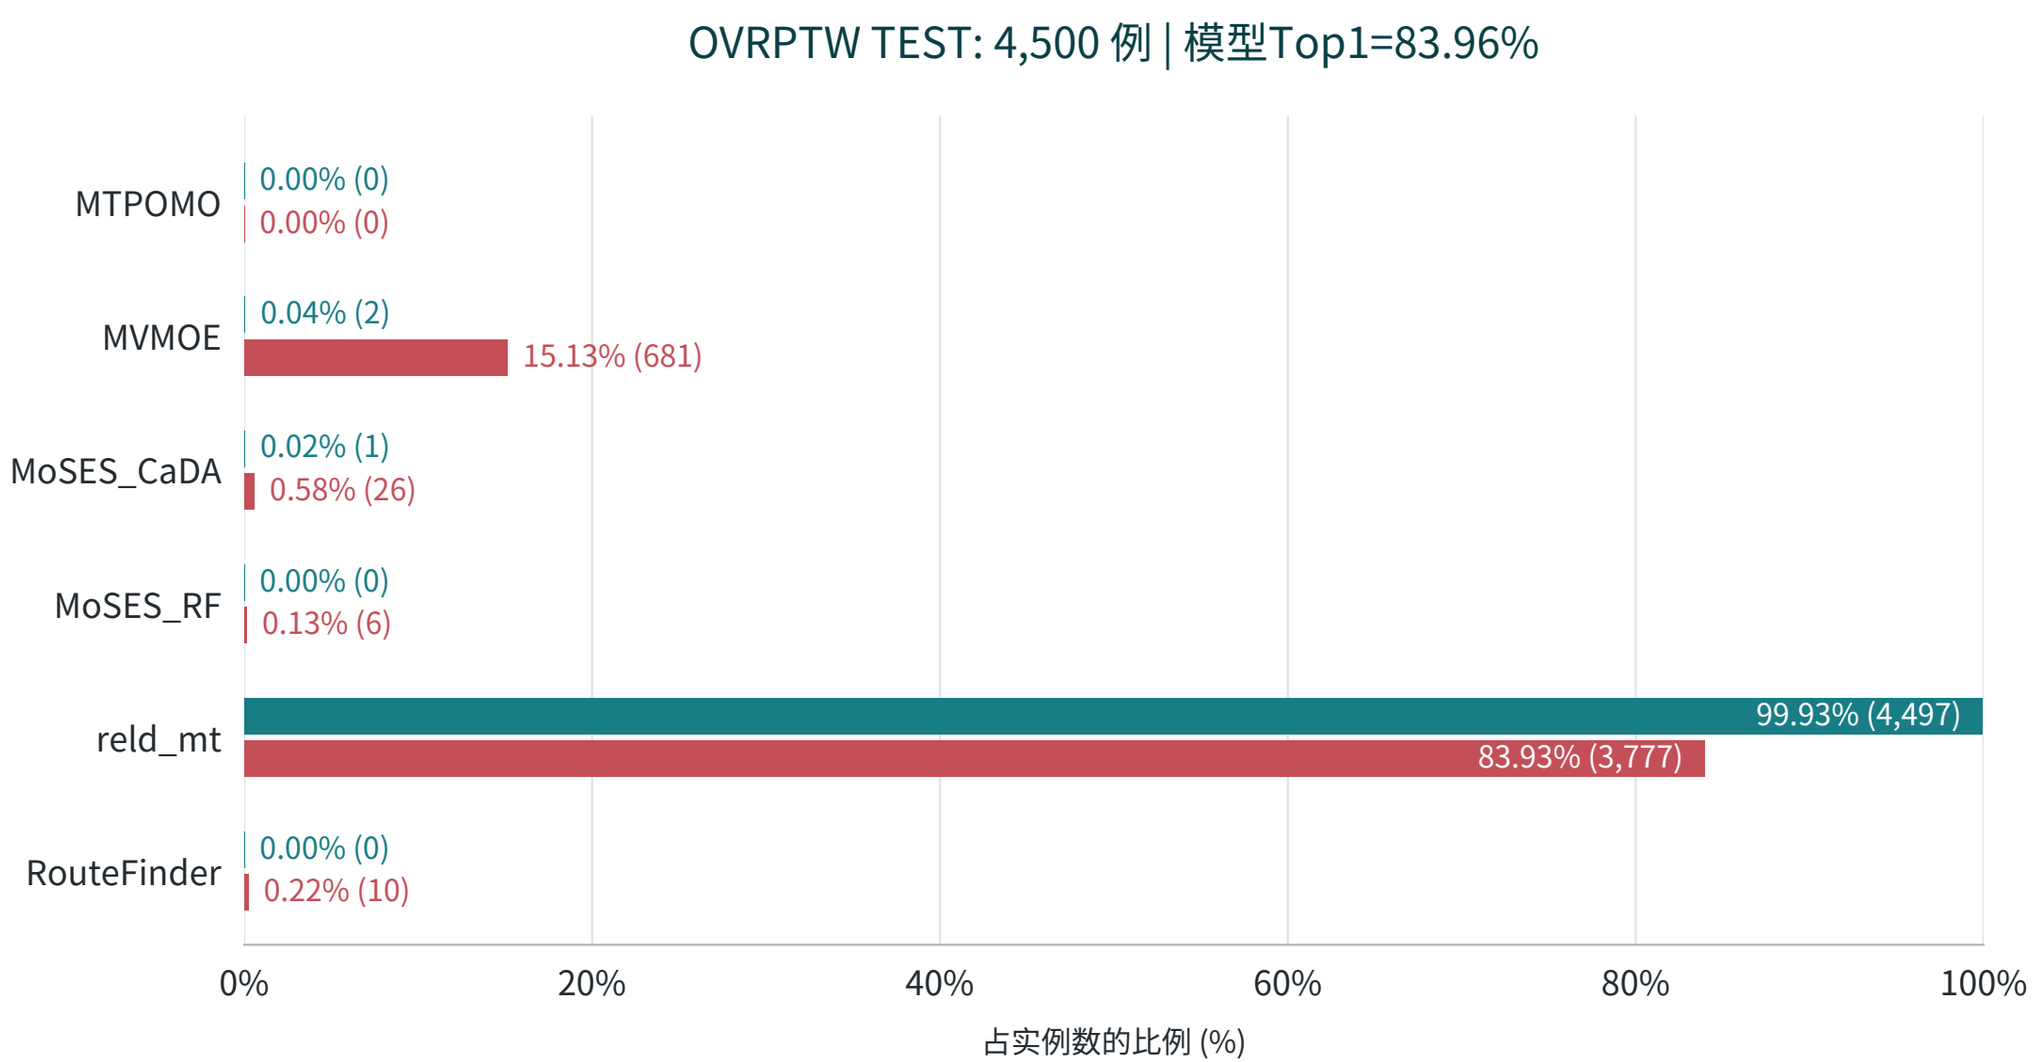

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

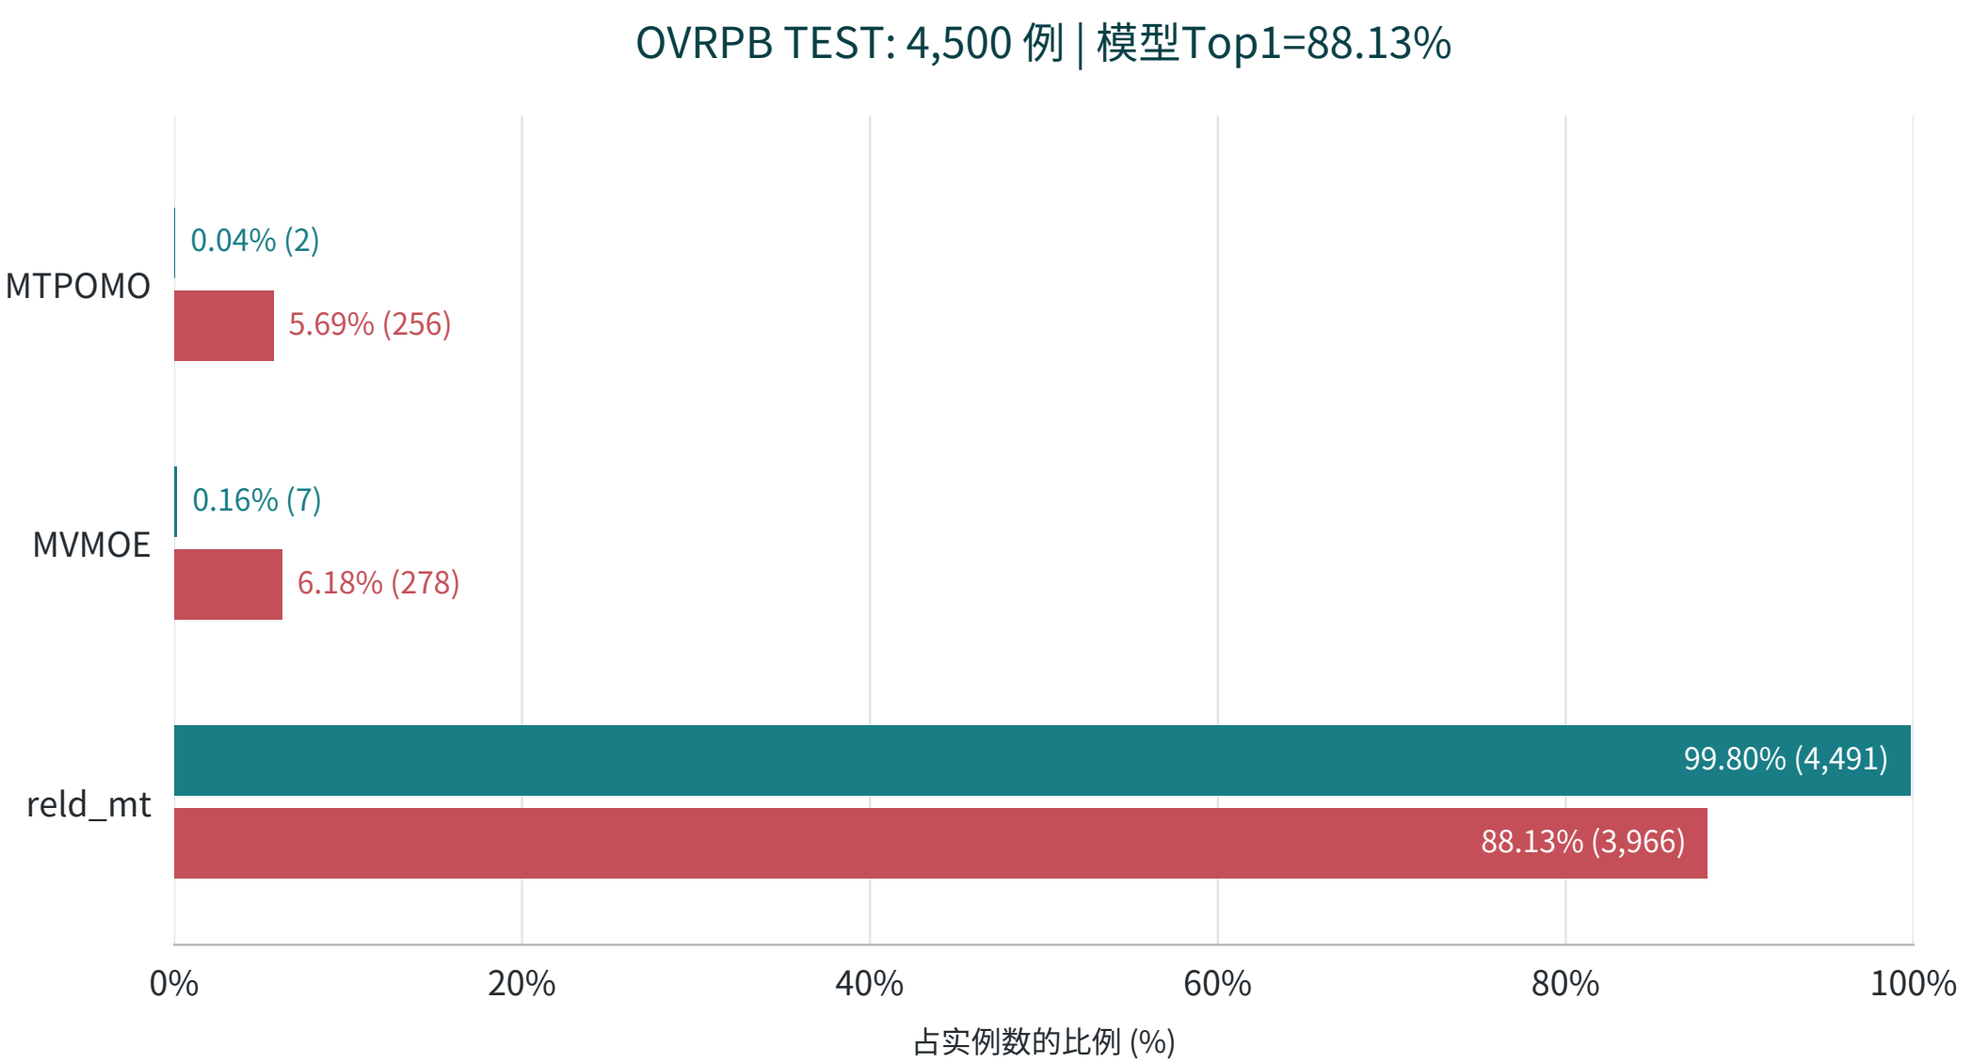

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

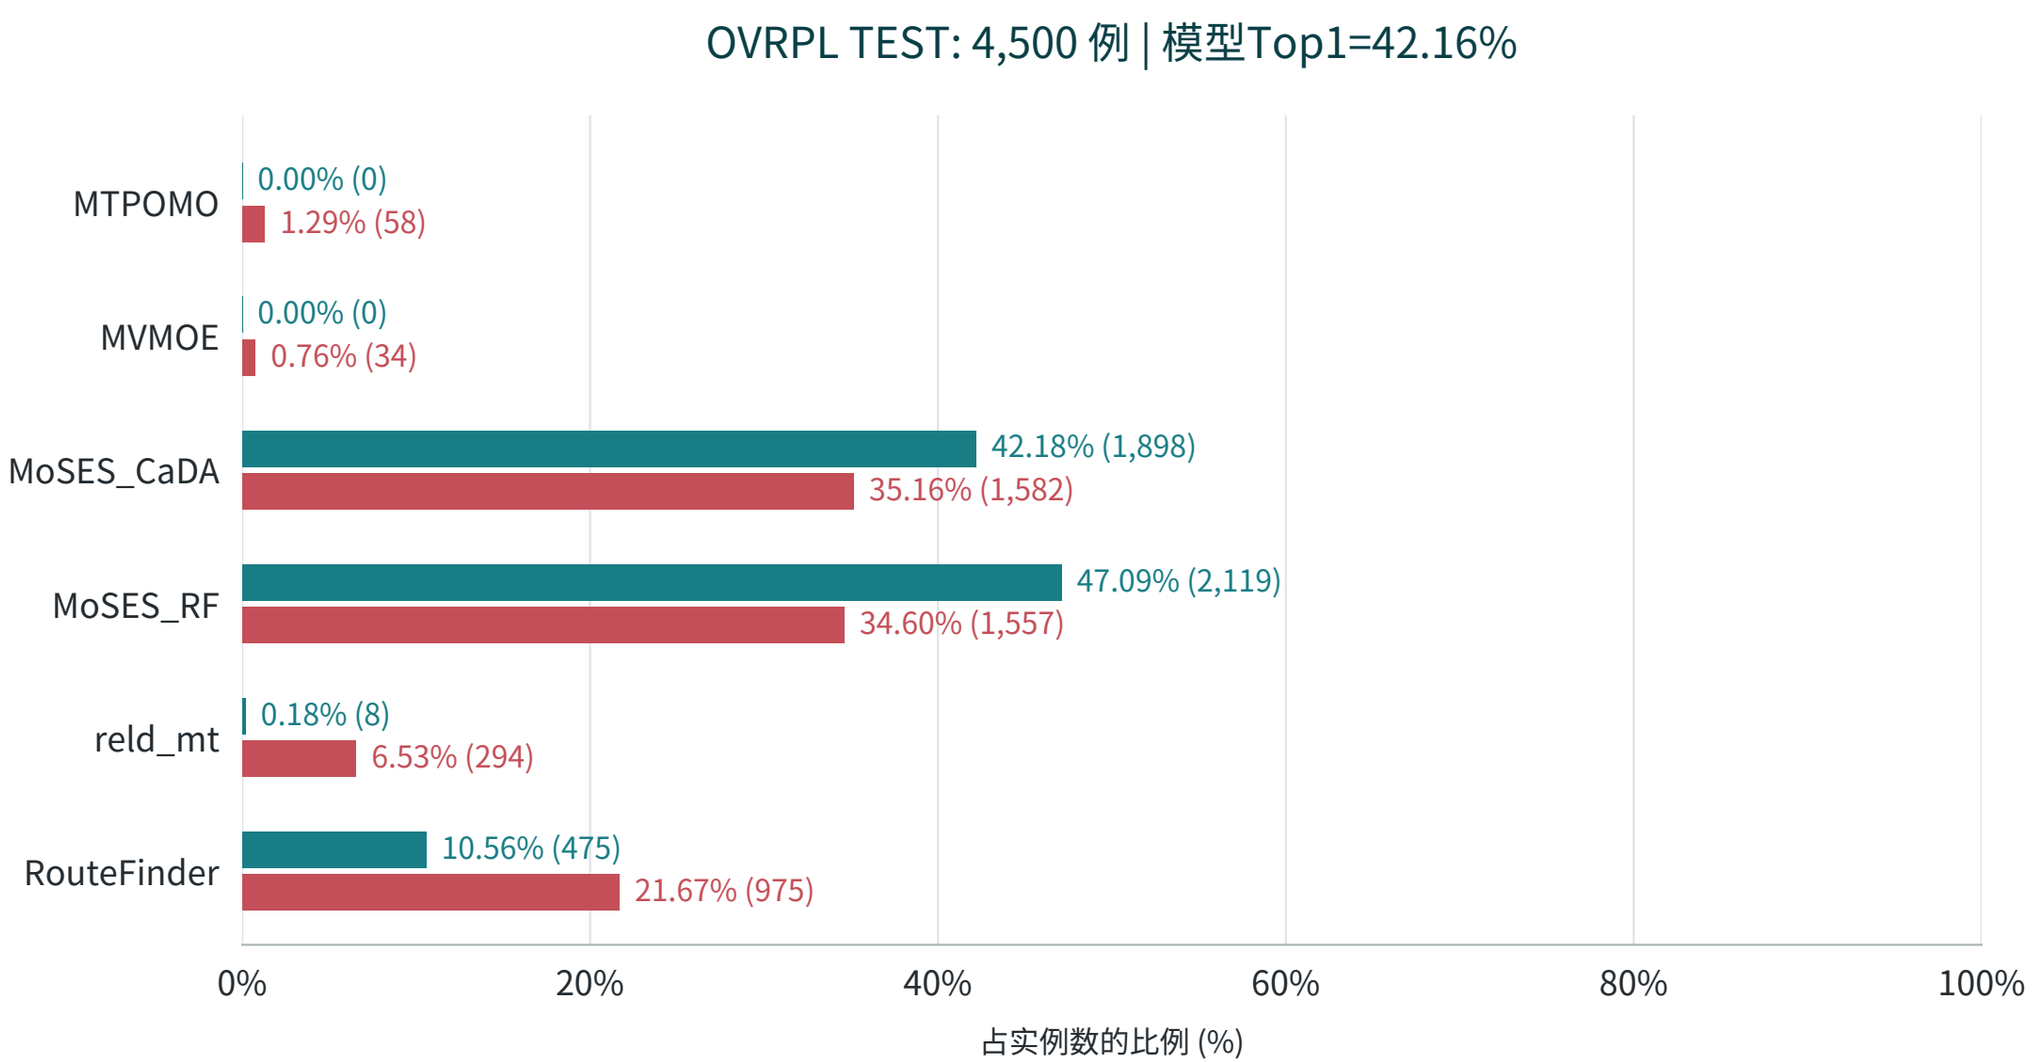

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

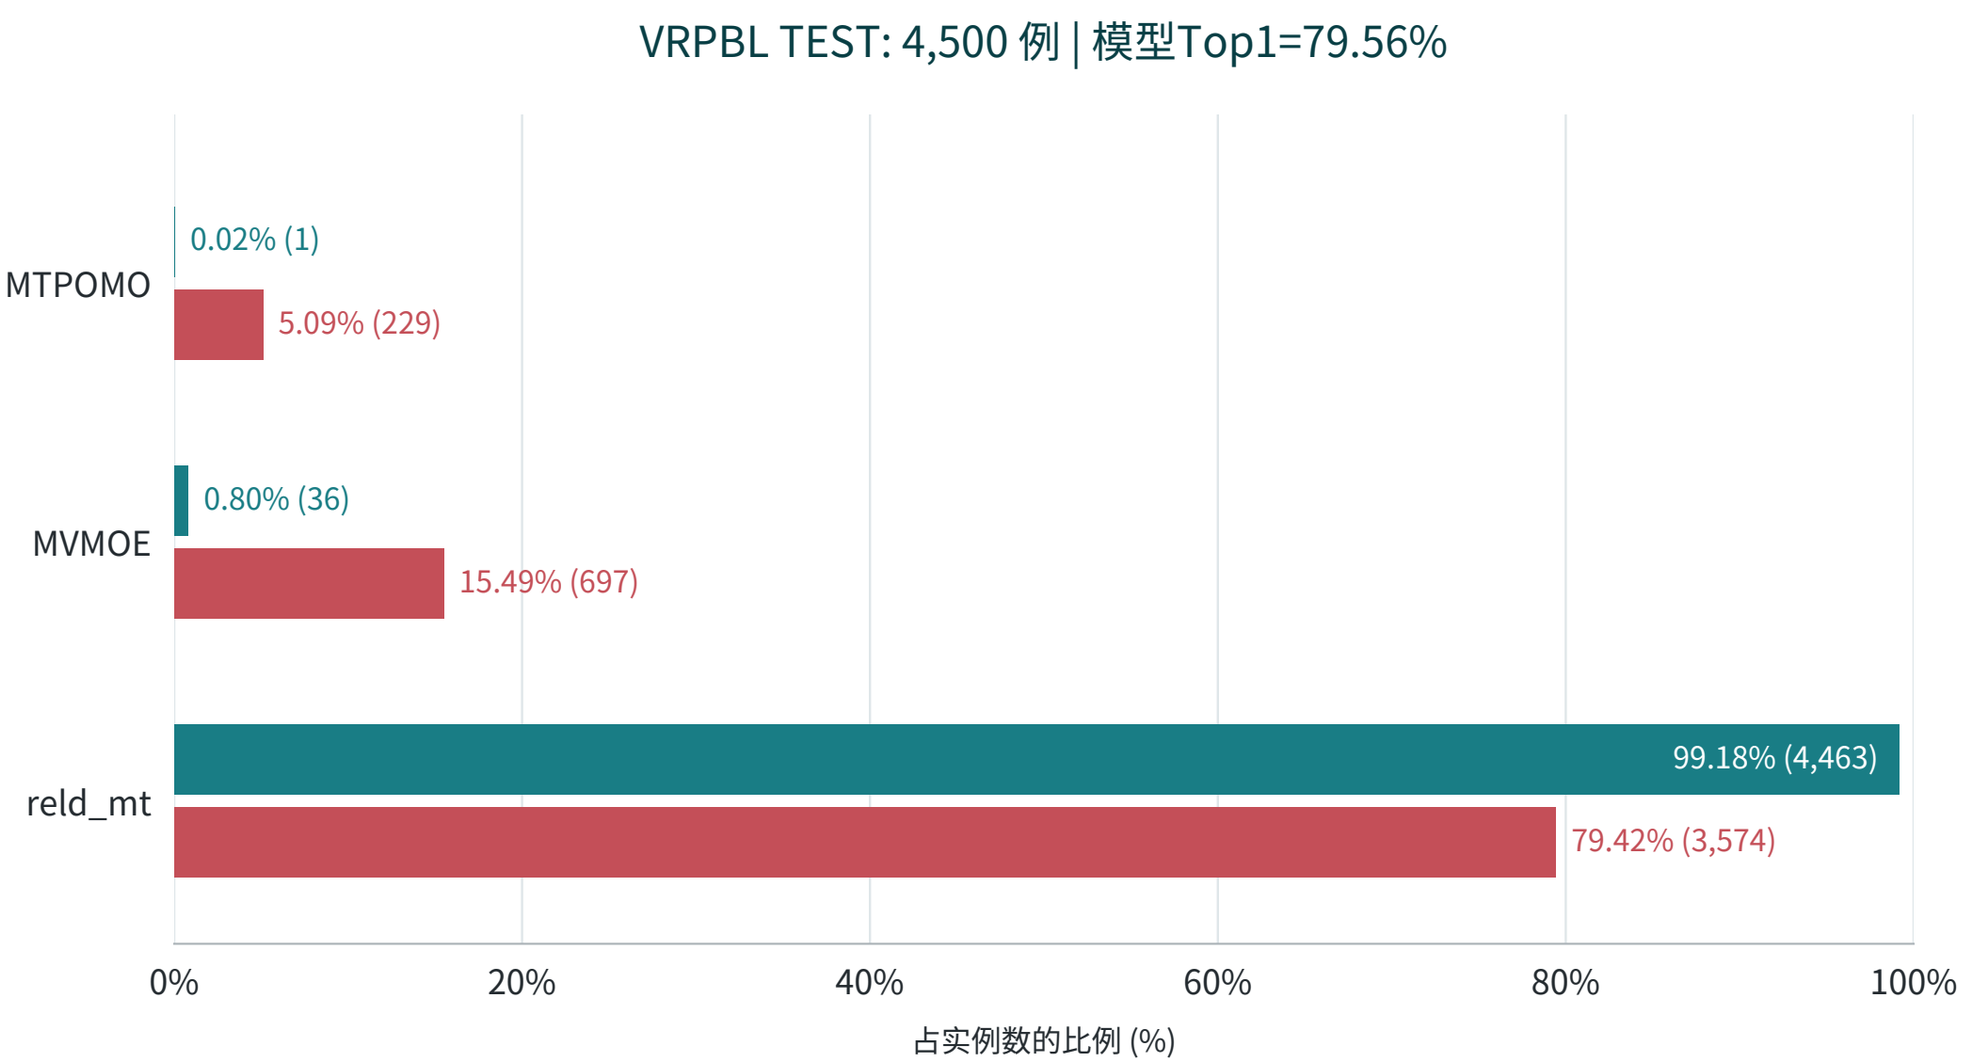

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

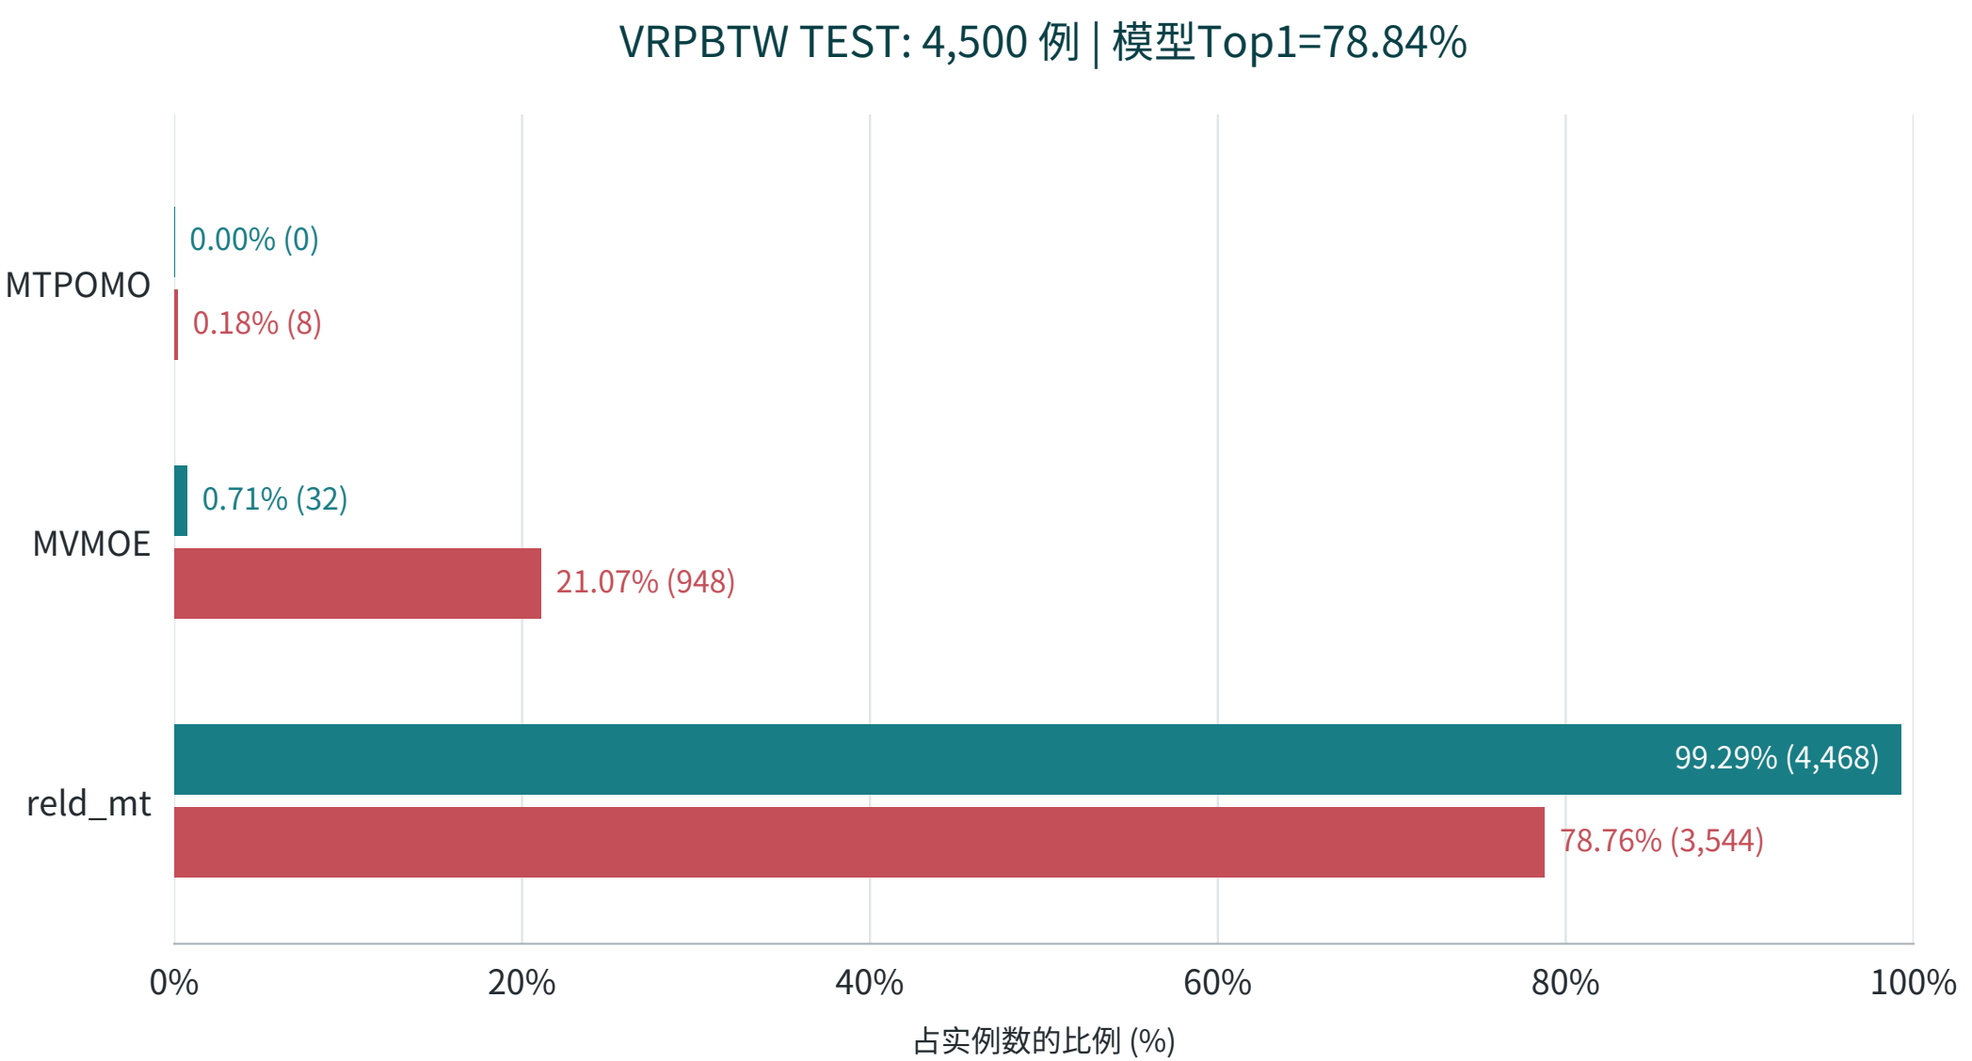

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

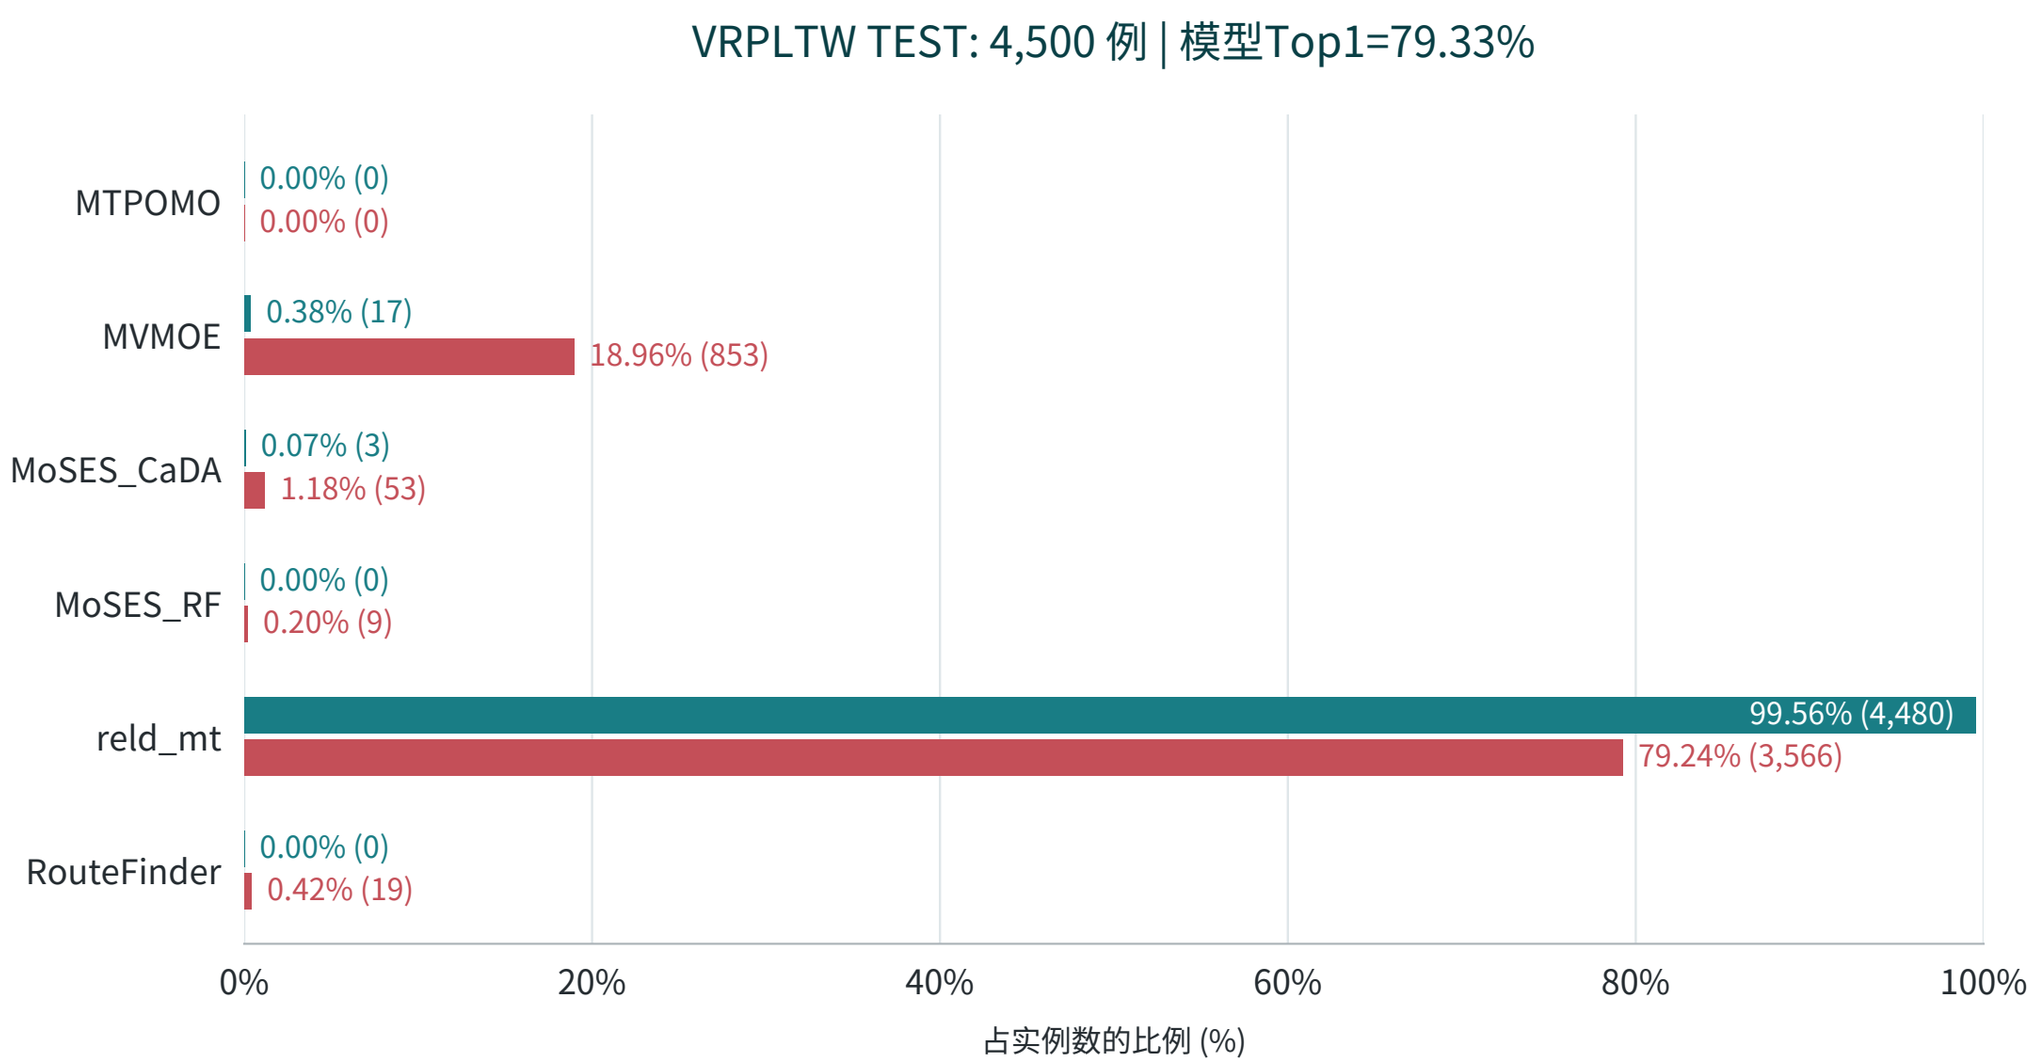

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

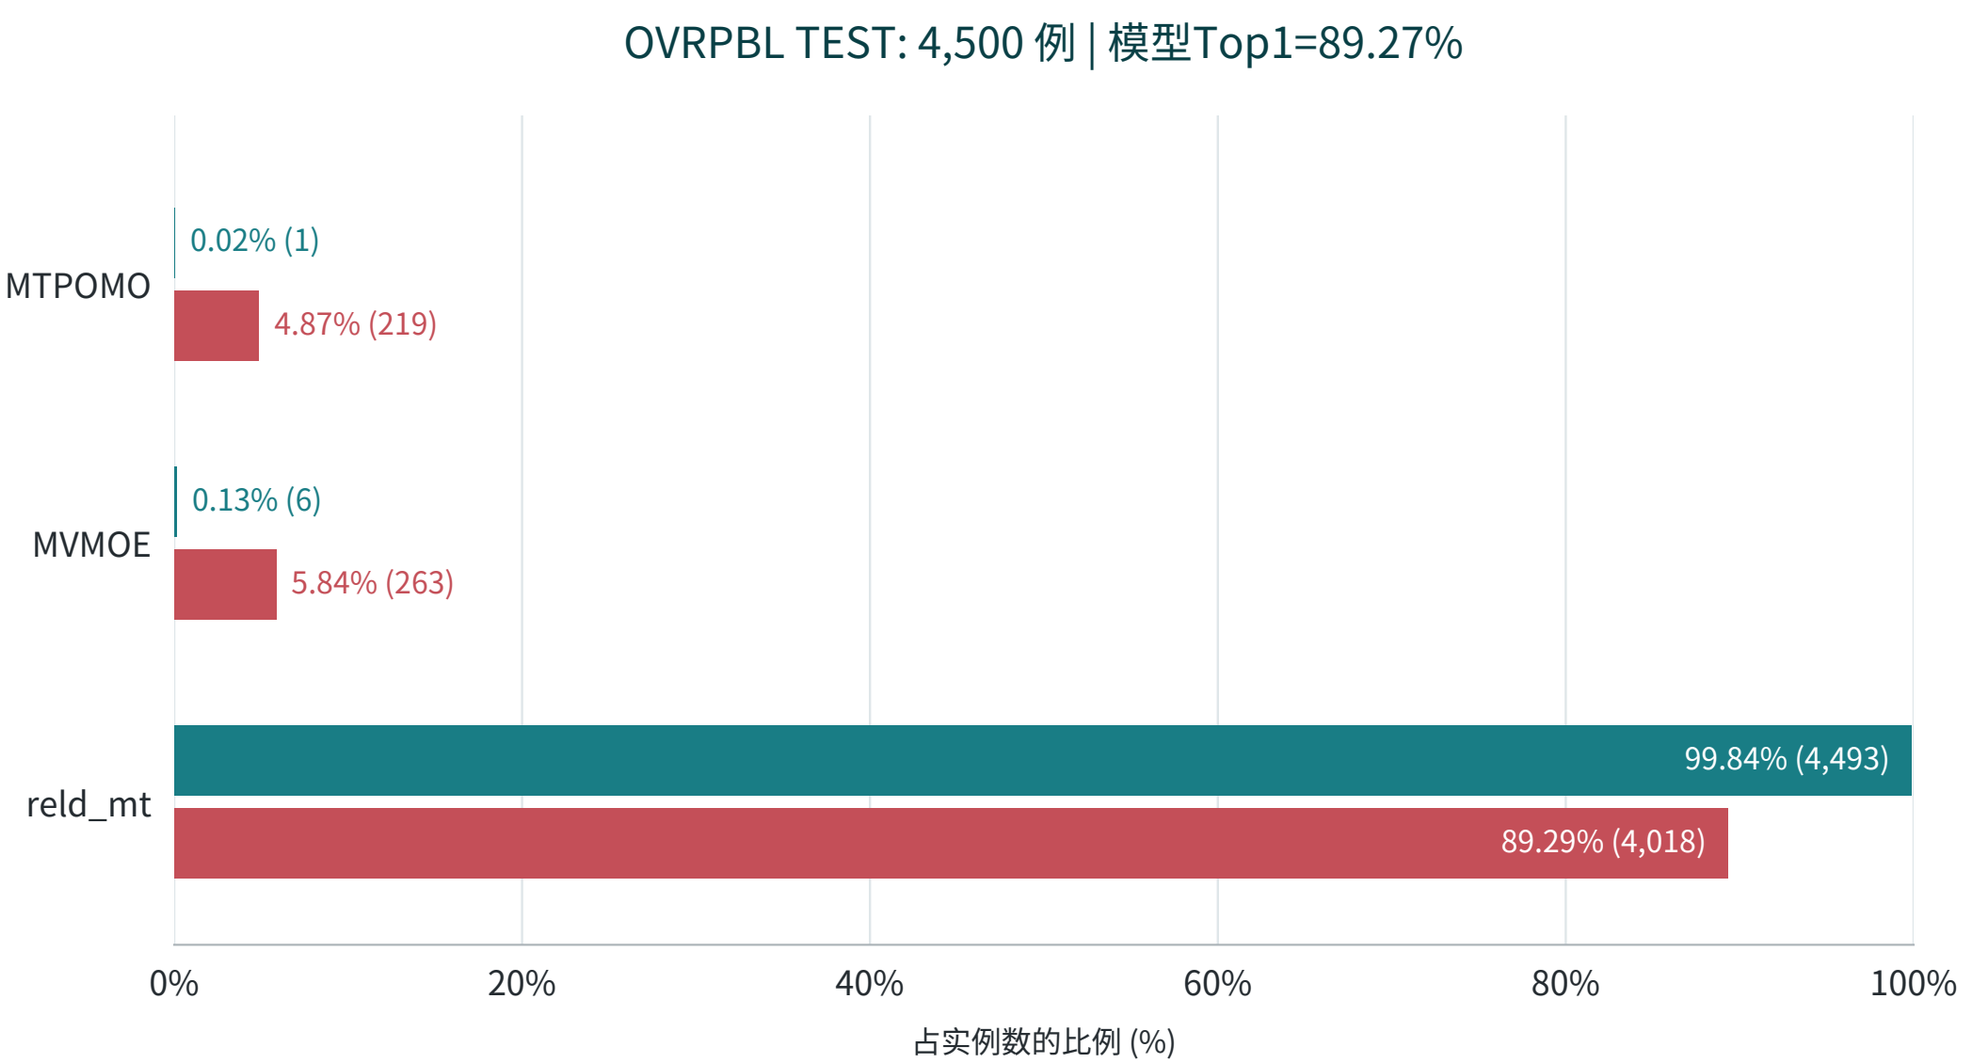

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

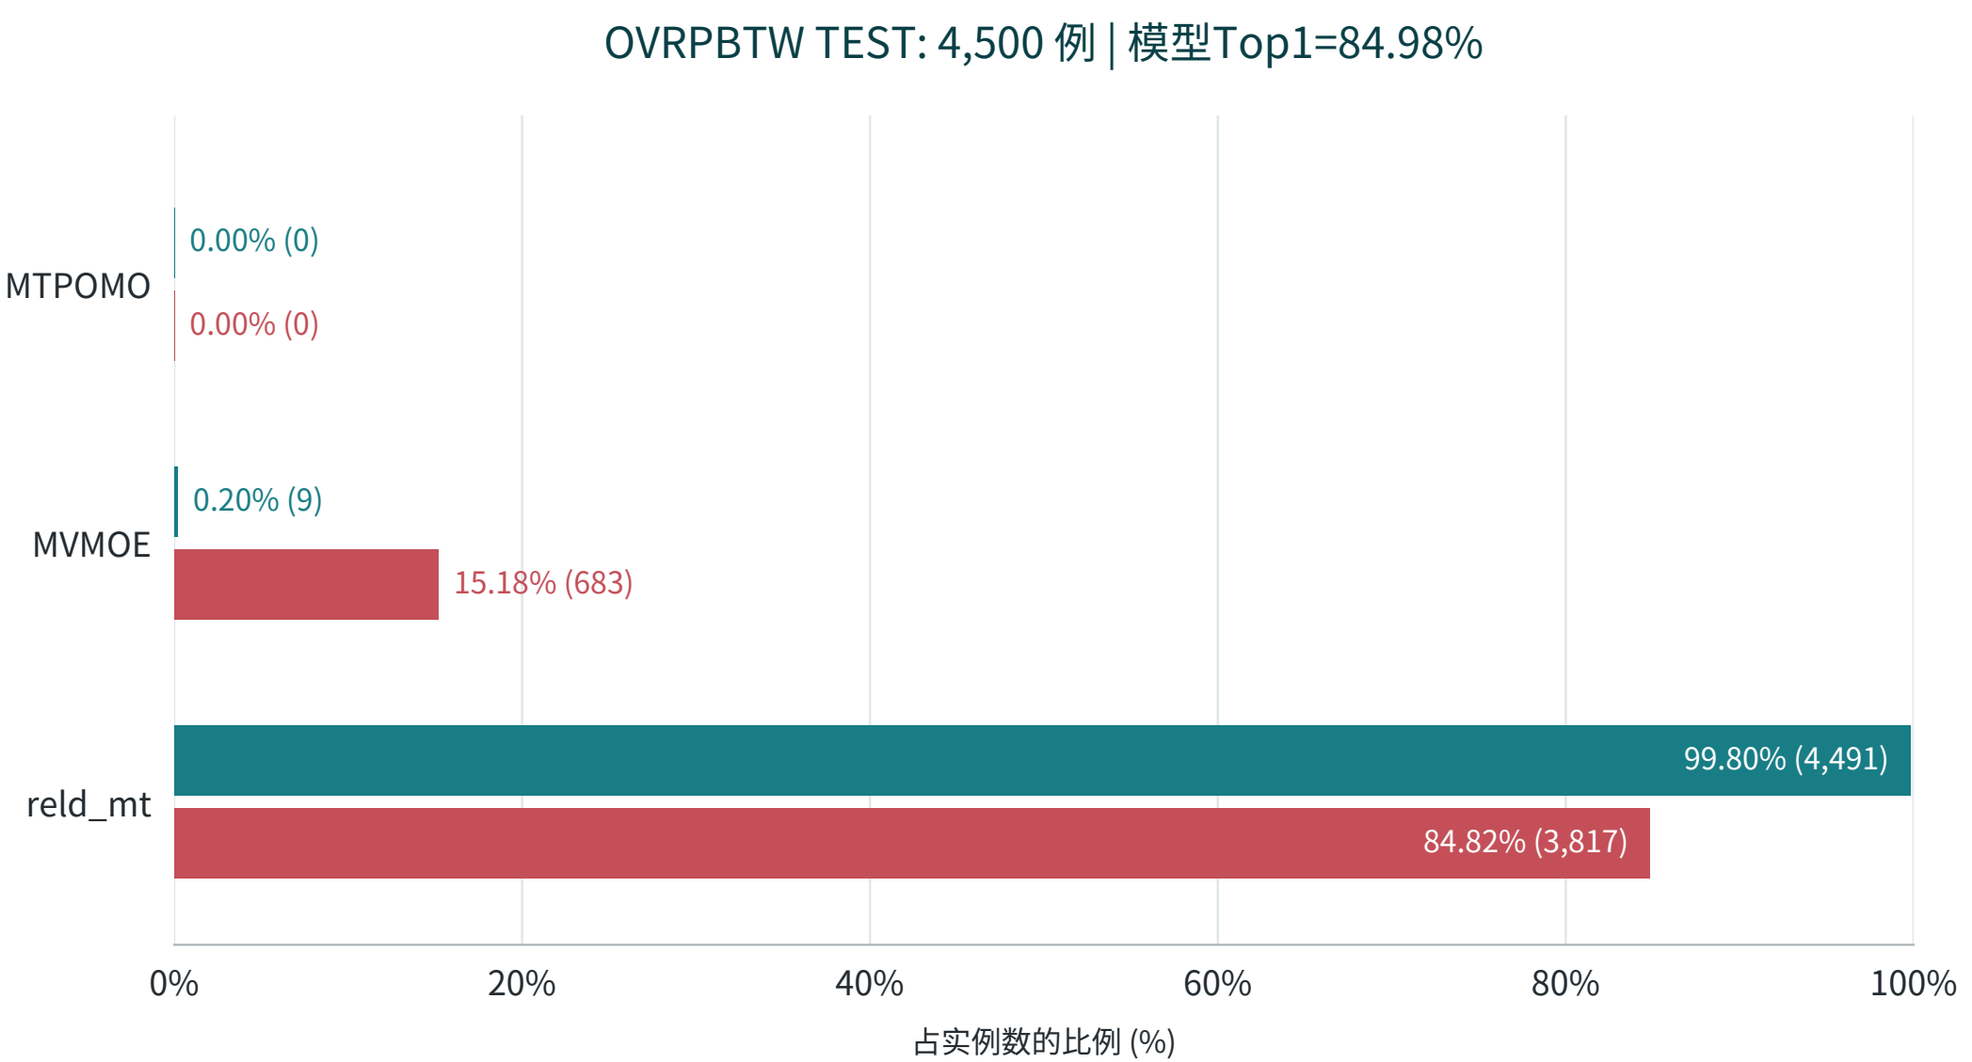

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

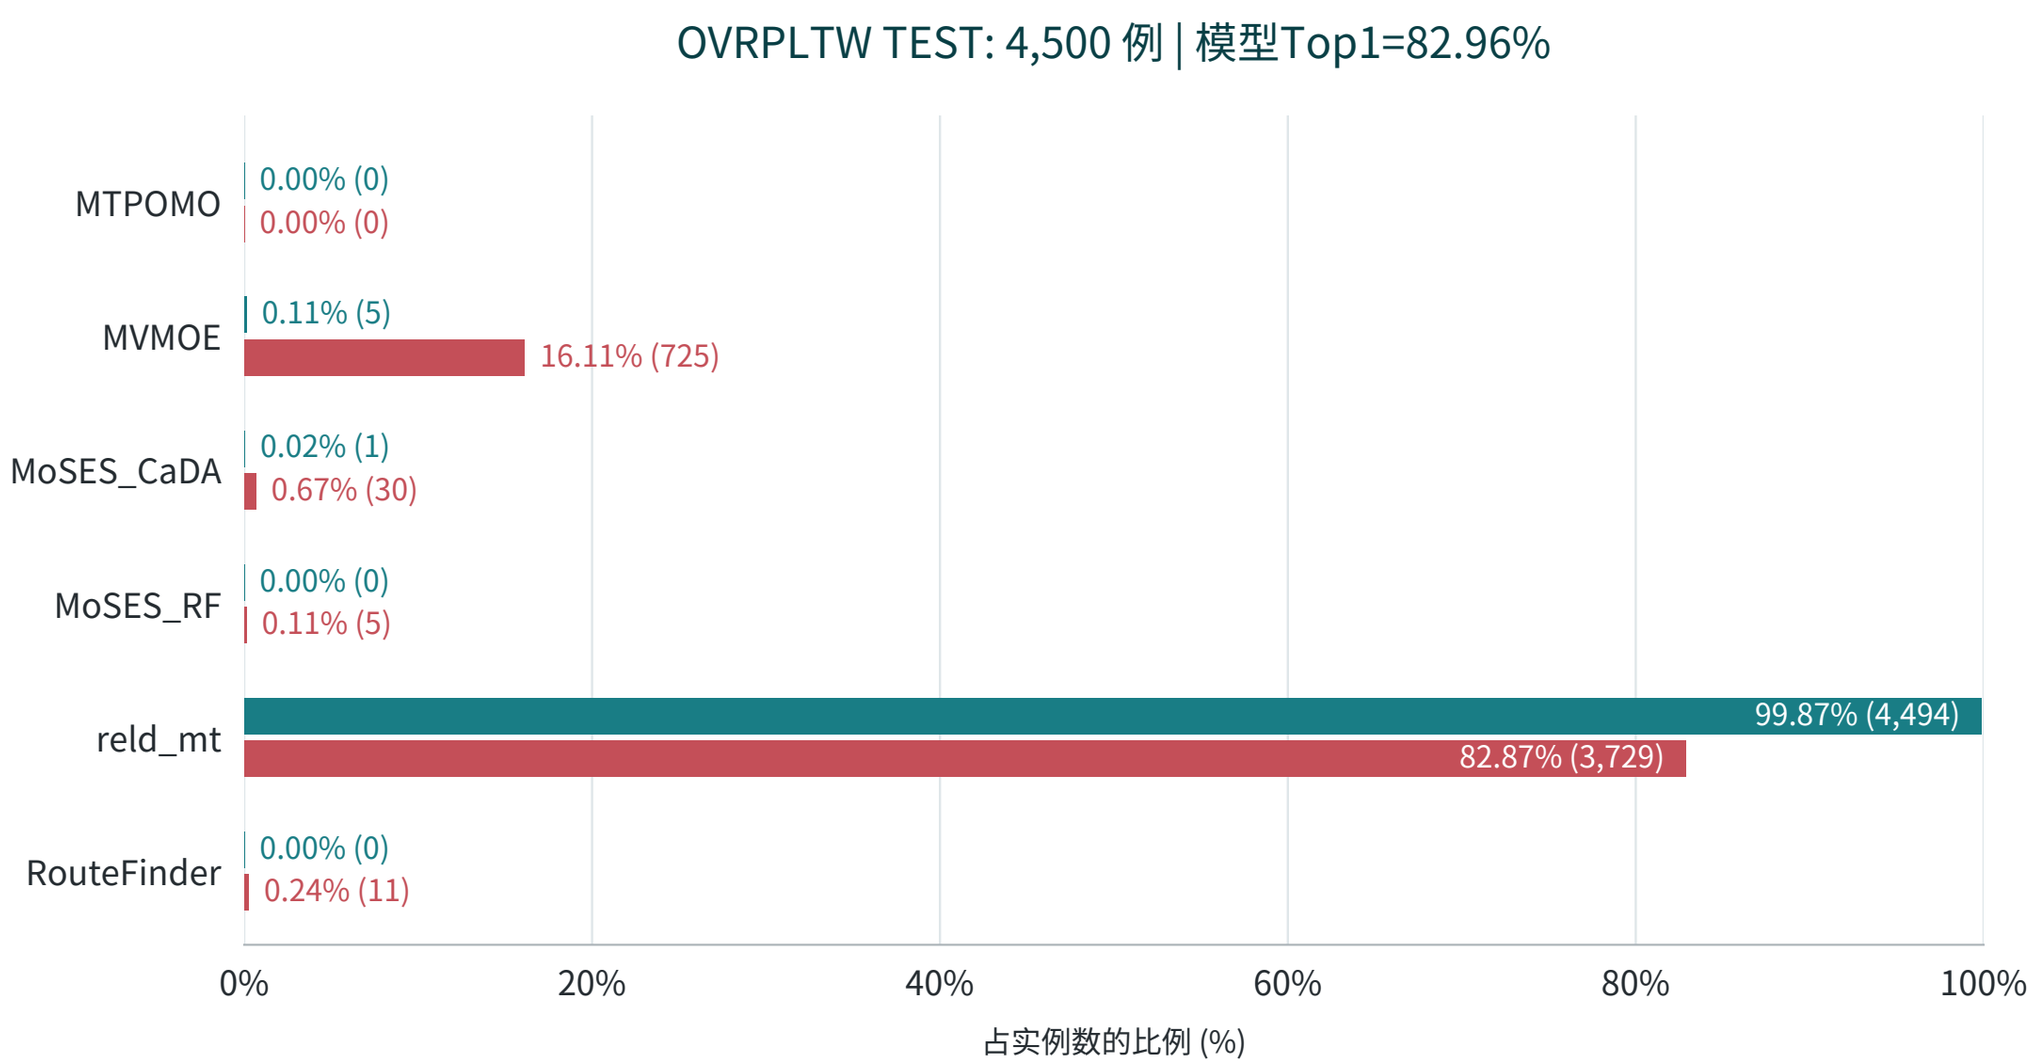

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

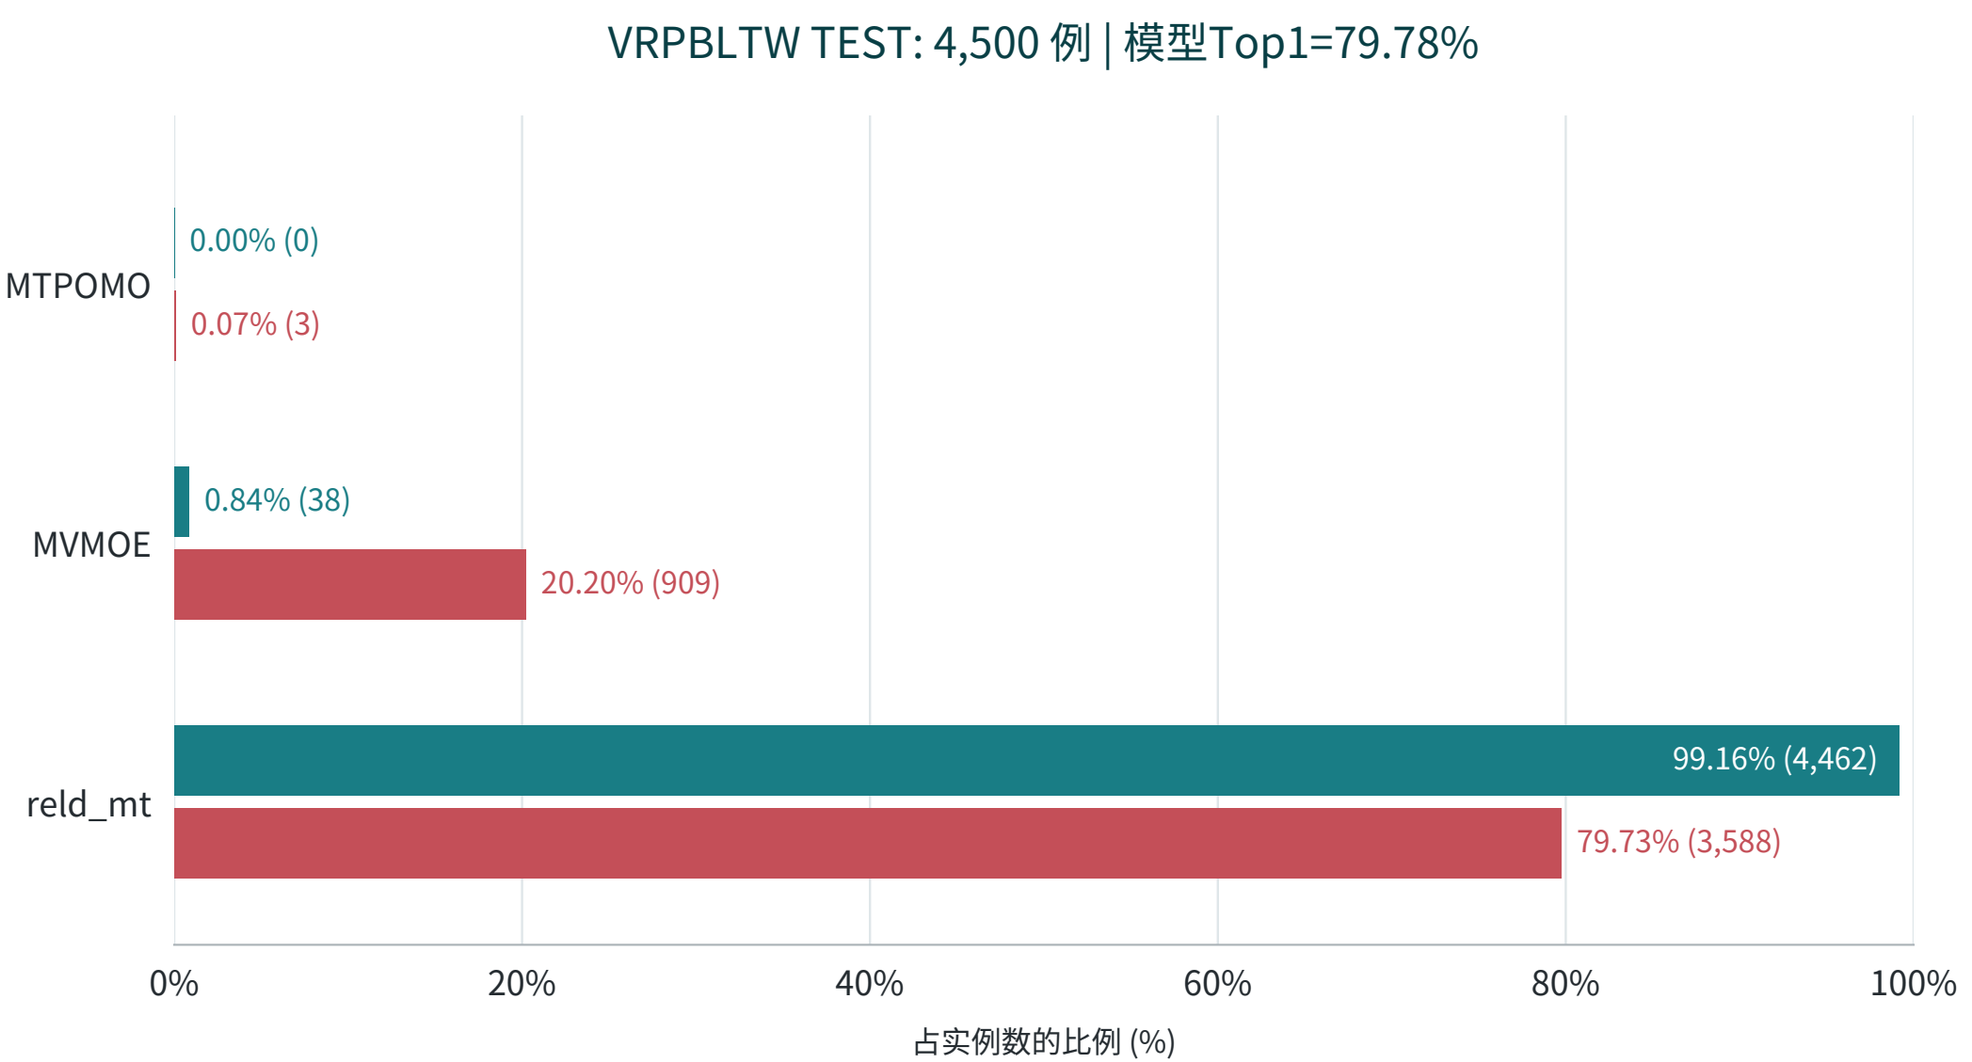

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/A_canonical_anchor | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 38dd57441afcfe90

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

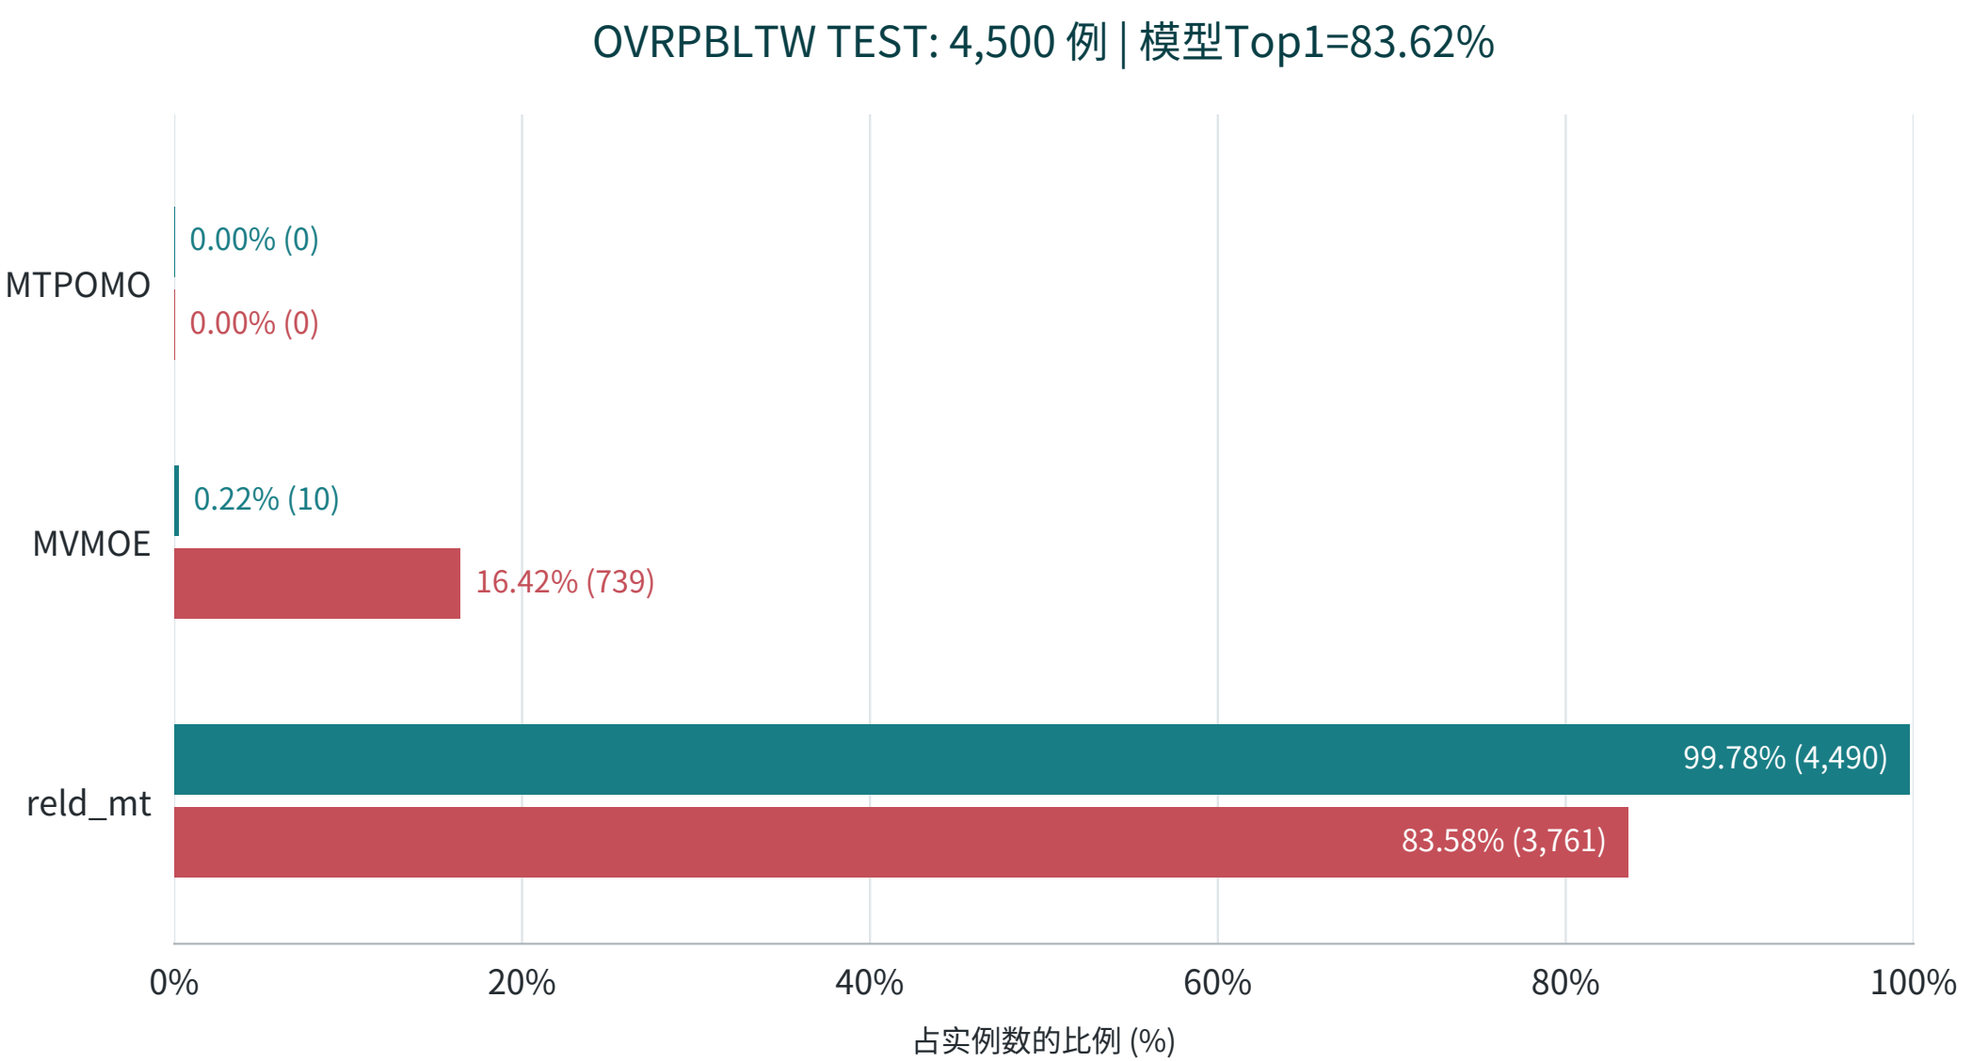

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R88/A_canonical_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.