



R88/A_canonical_anchor | Saved Training History

Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.

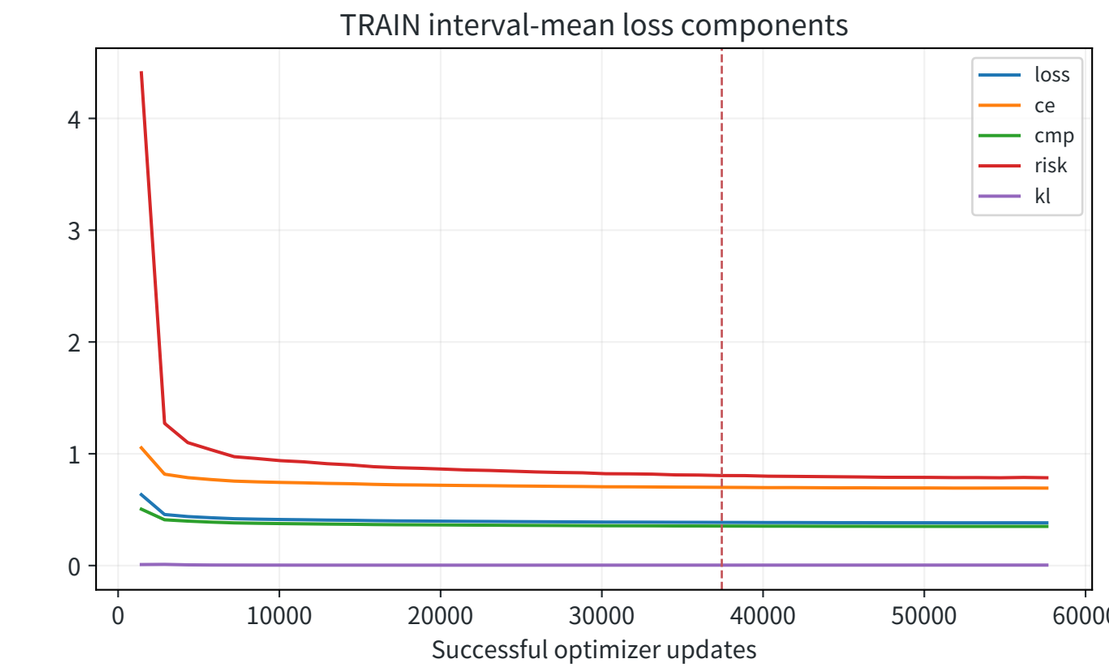

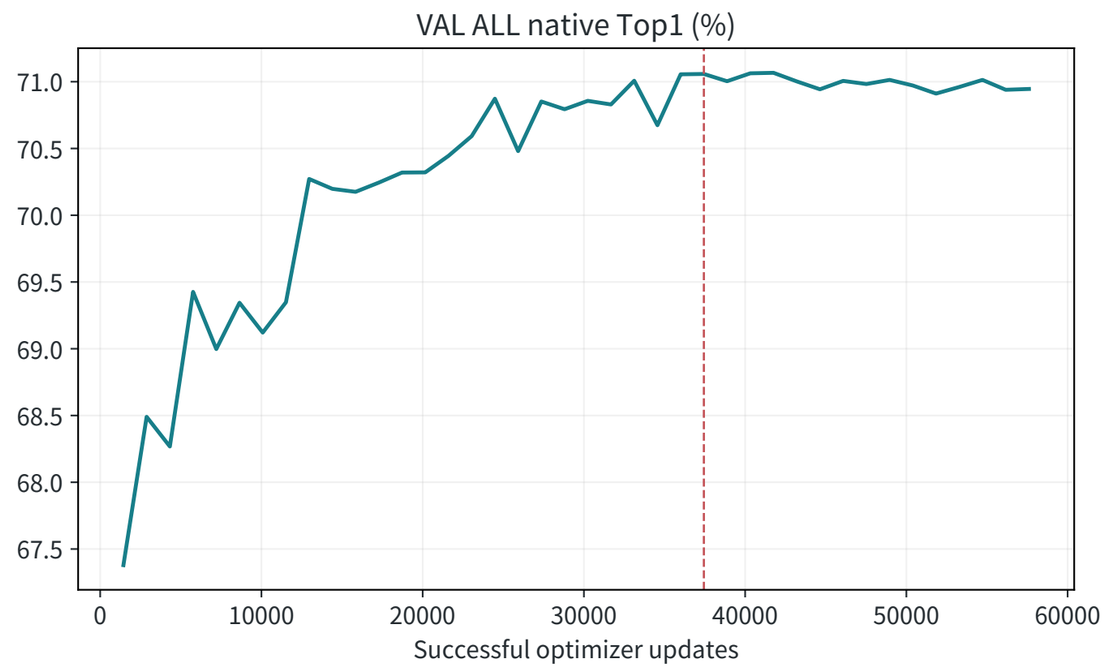


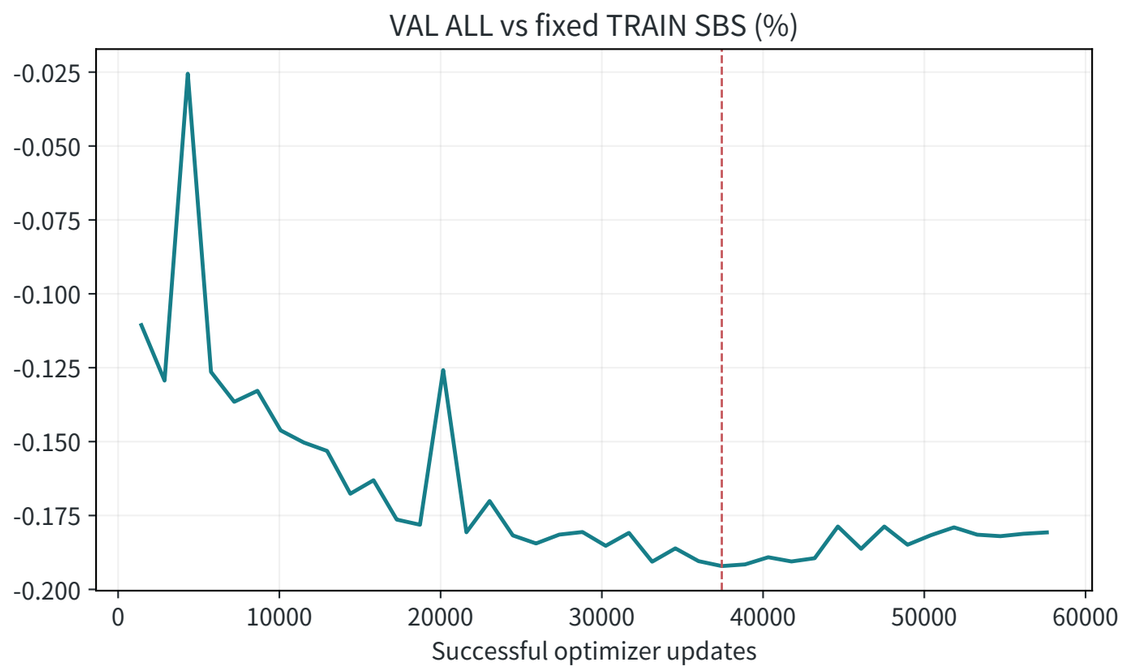


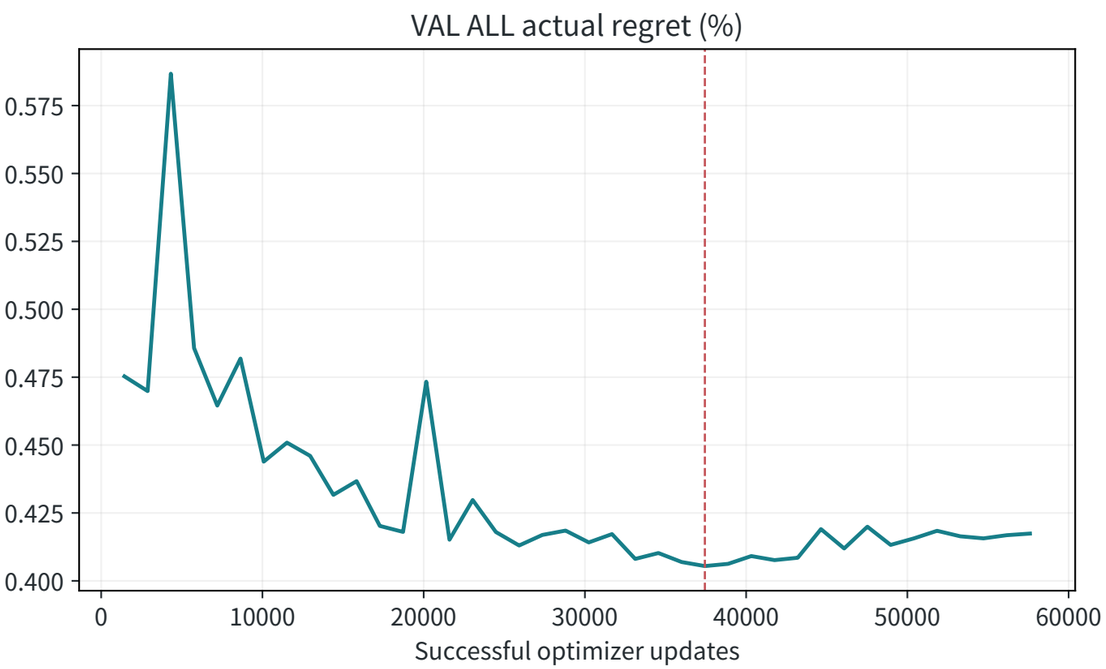



R88/A_canonical_anchor | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

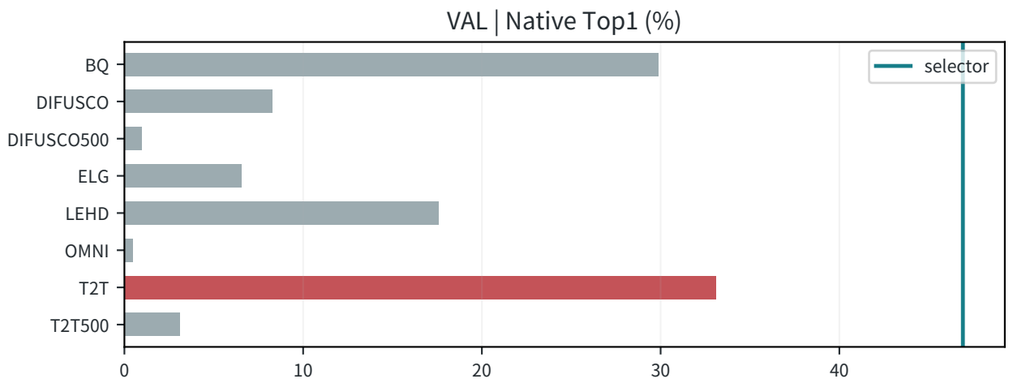


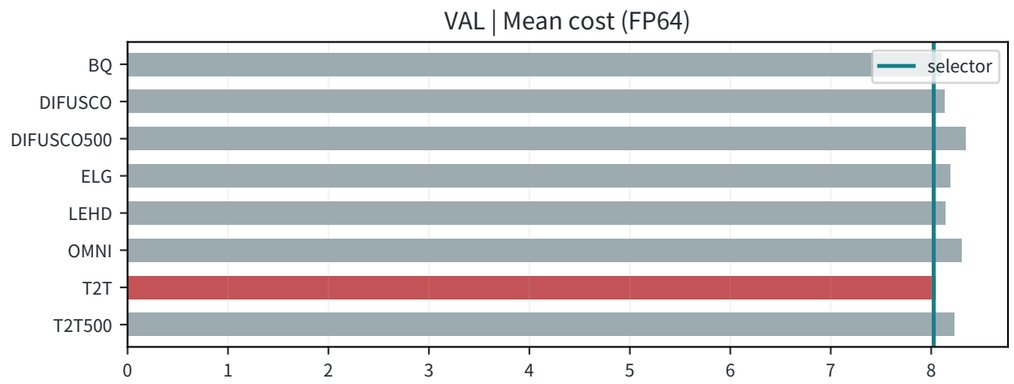

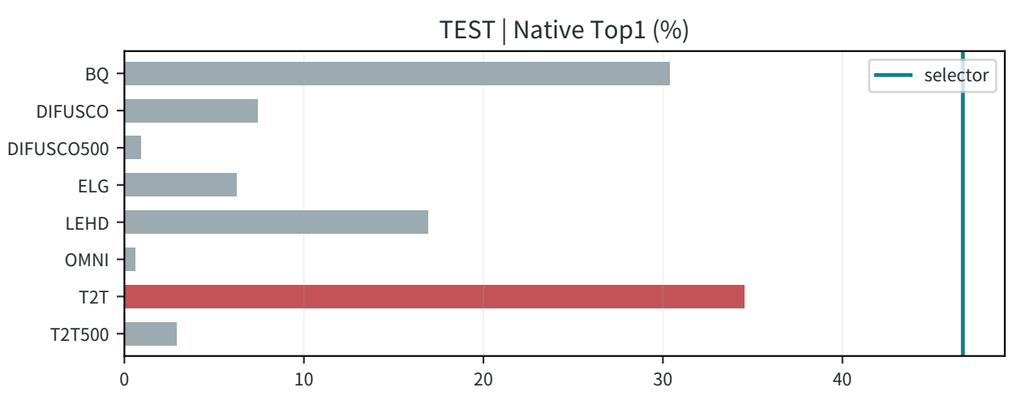

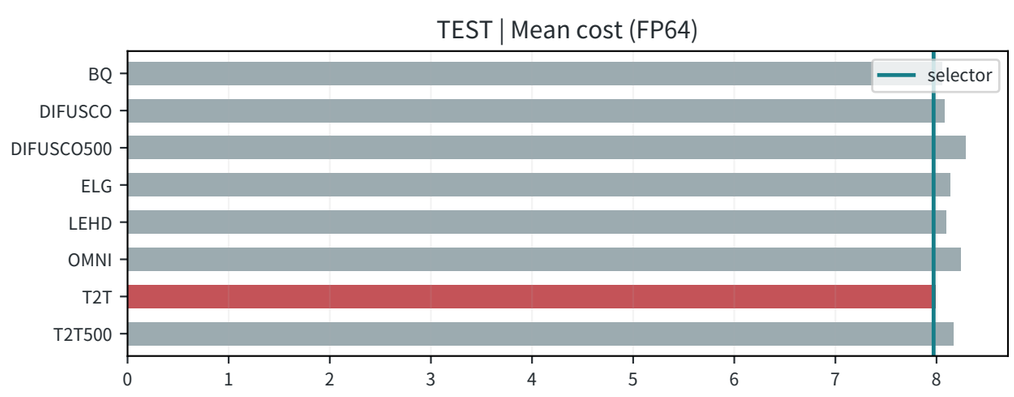


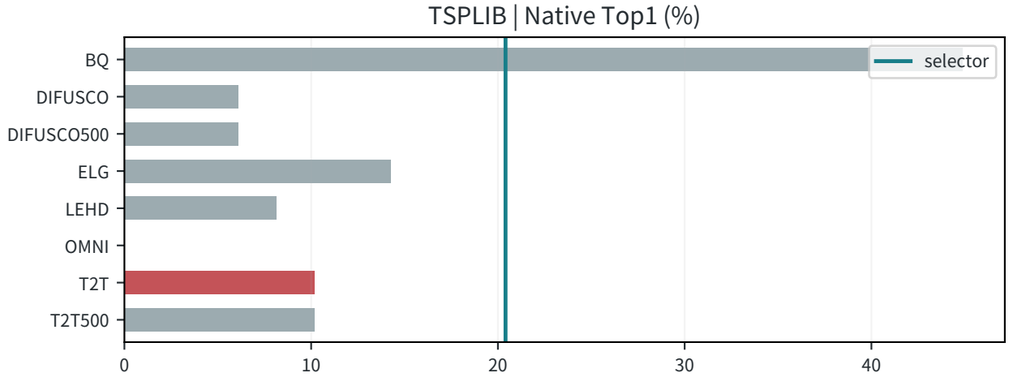


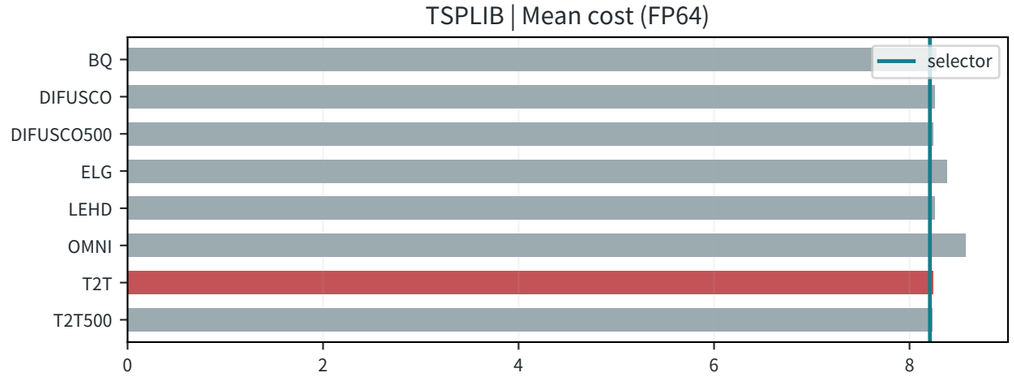



R88/A_canonical_anchor | CVRP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

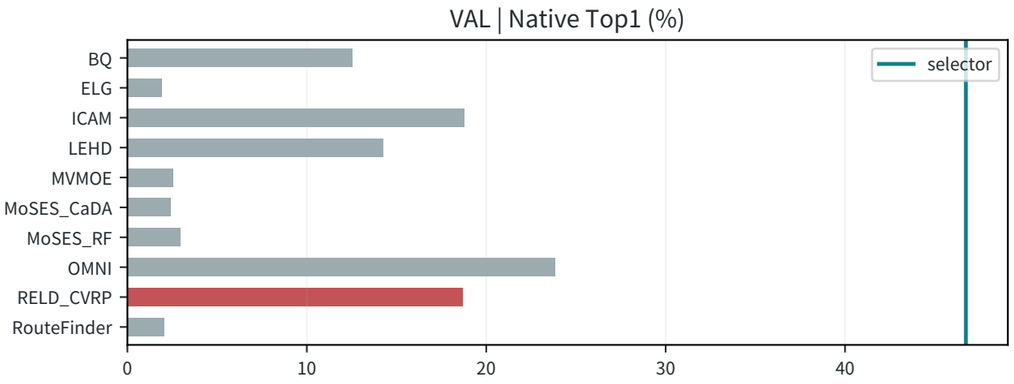


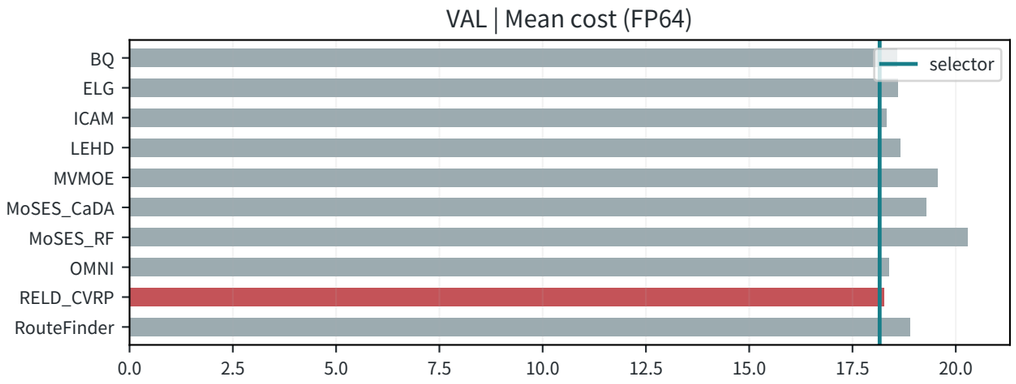

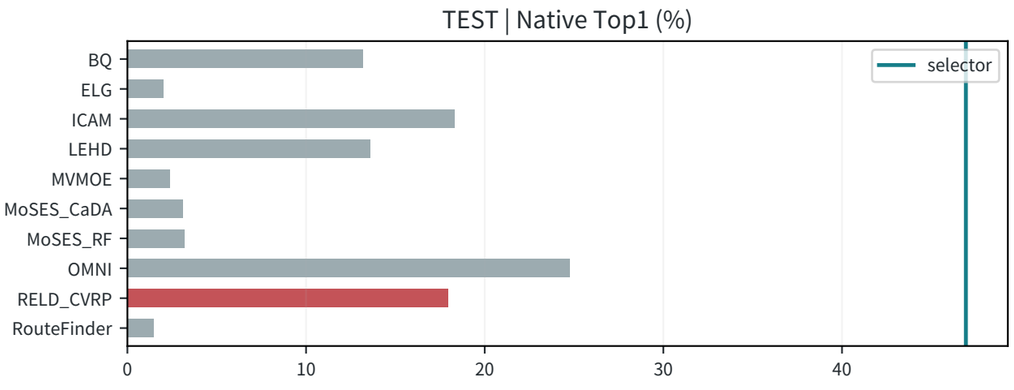

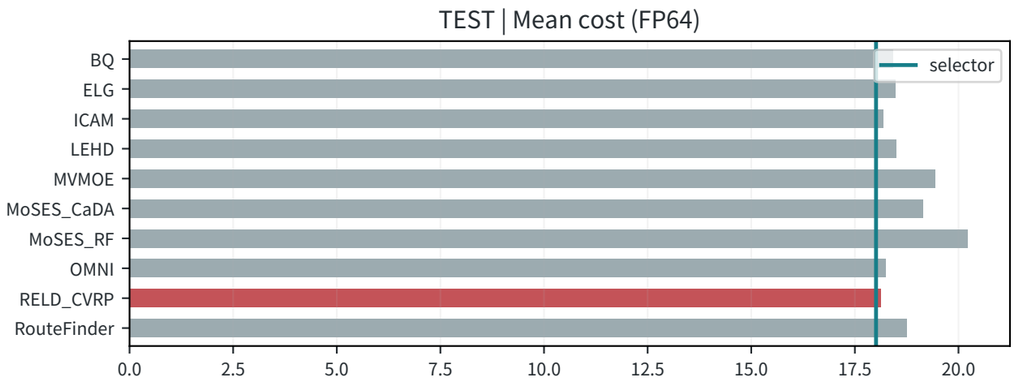


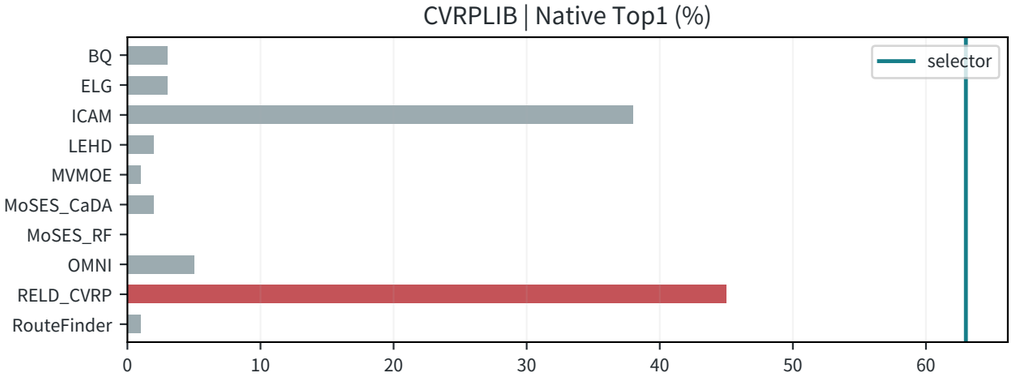


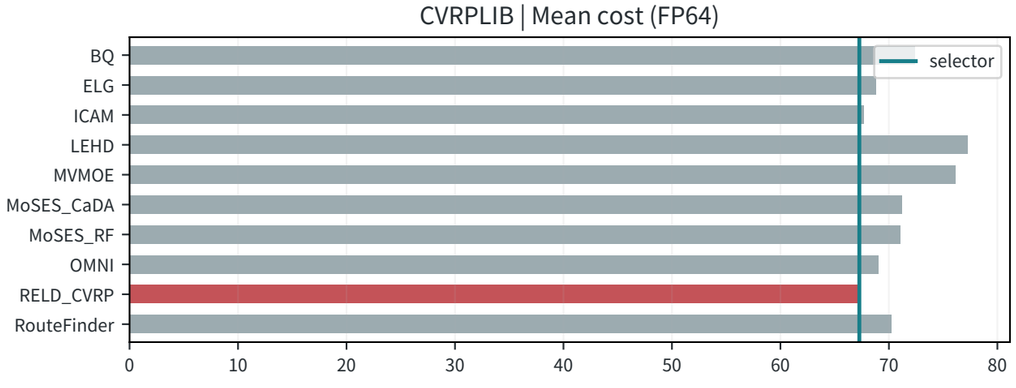



R88/A_canonical_anchor | ATSP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

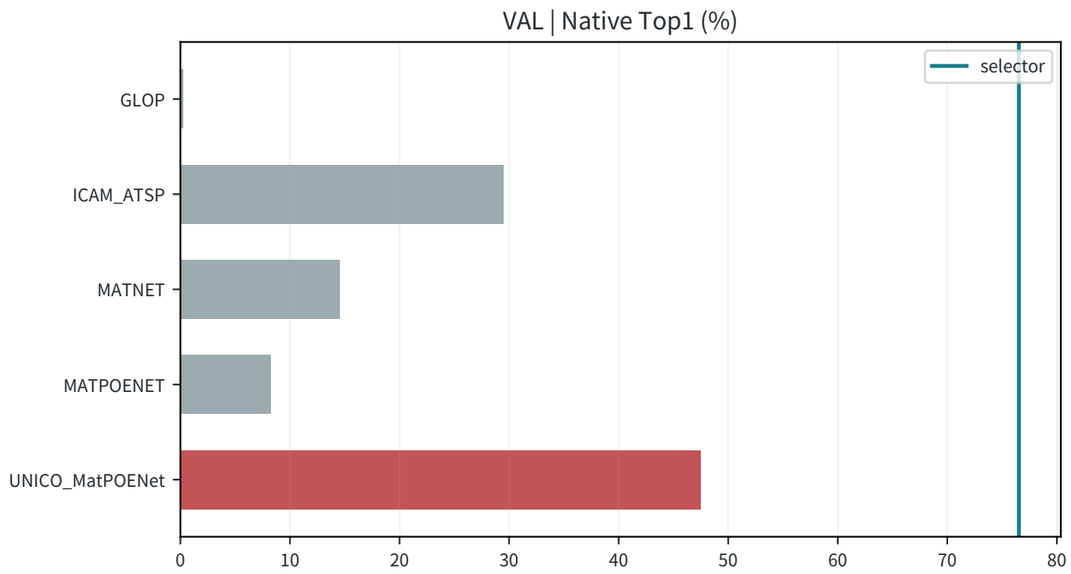

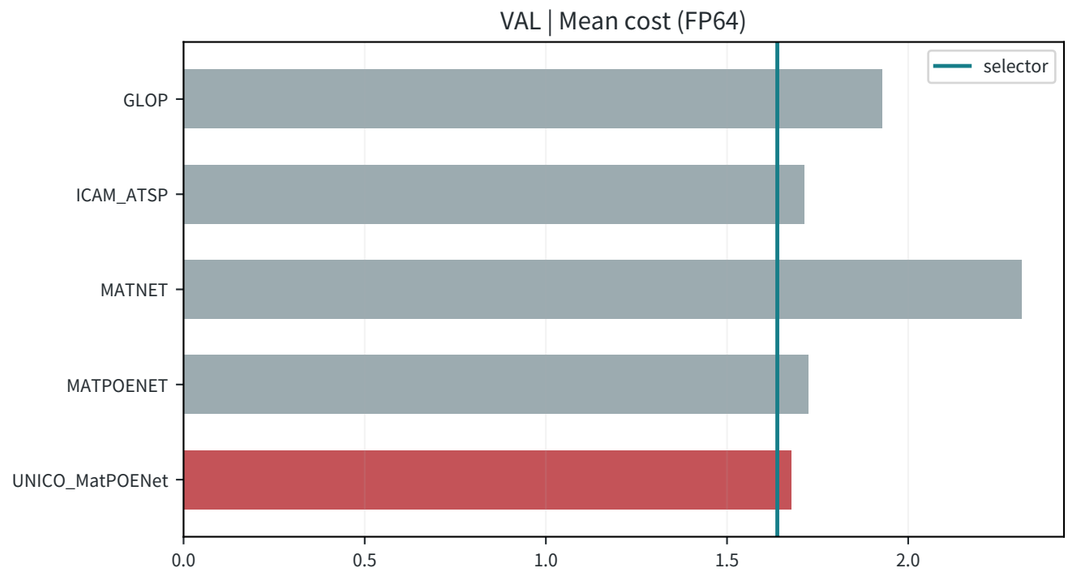


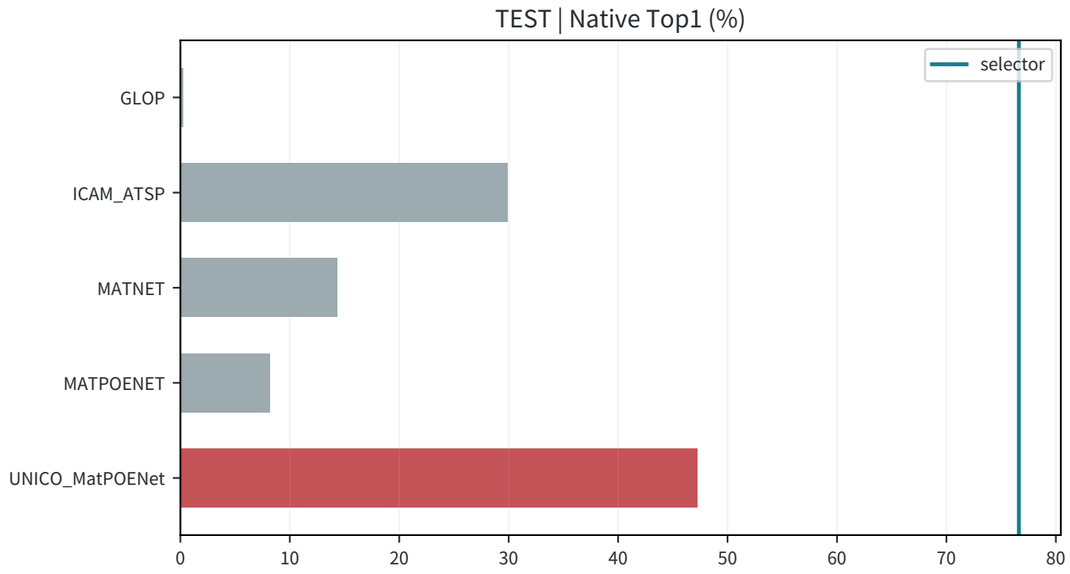


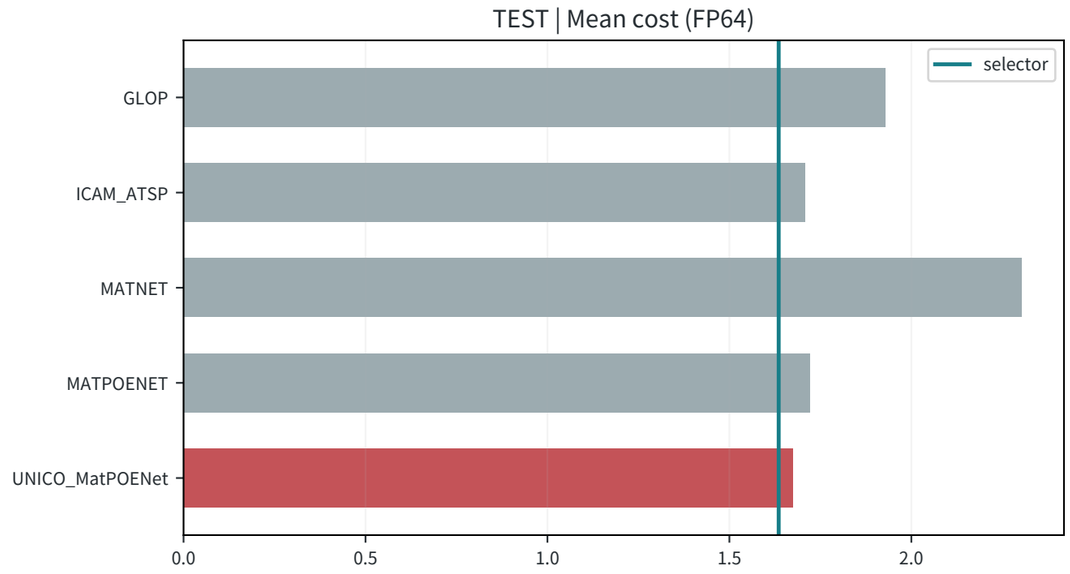



R88/A_canonical_anchor | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

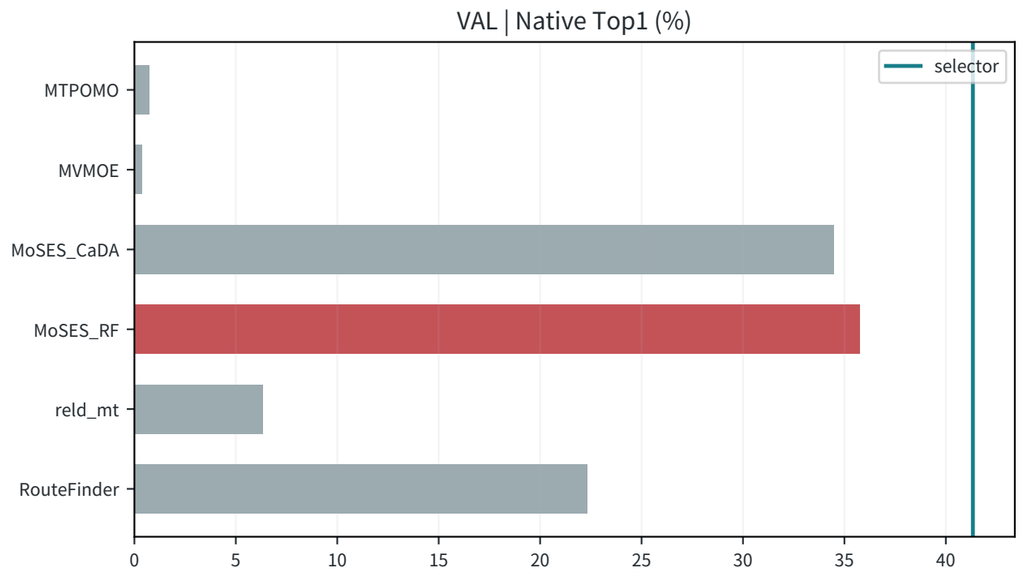

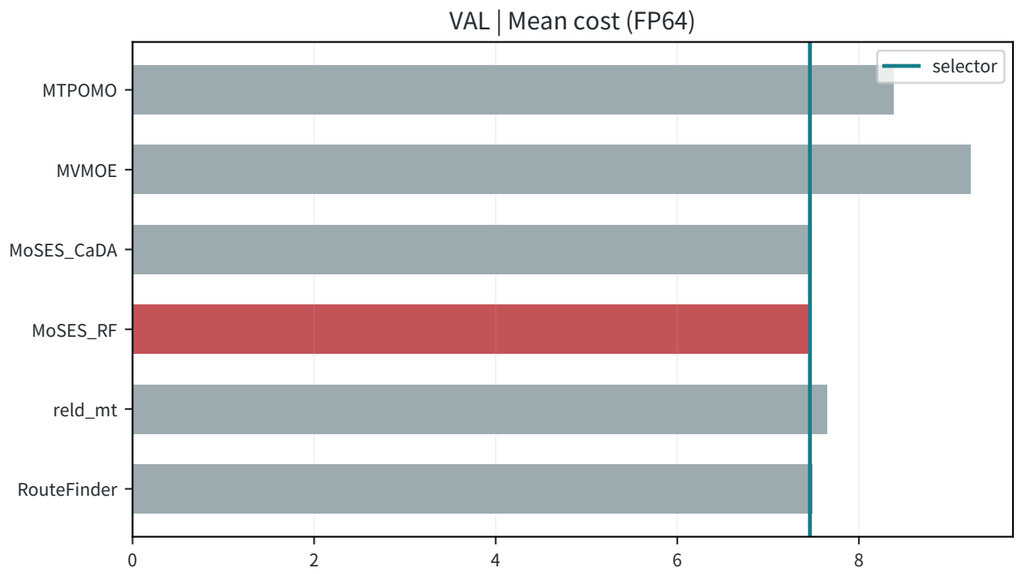


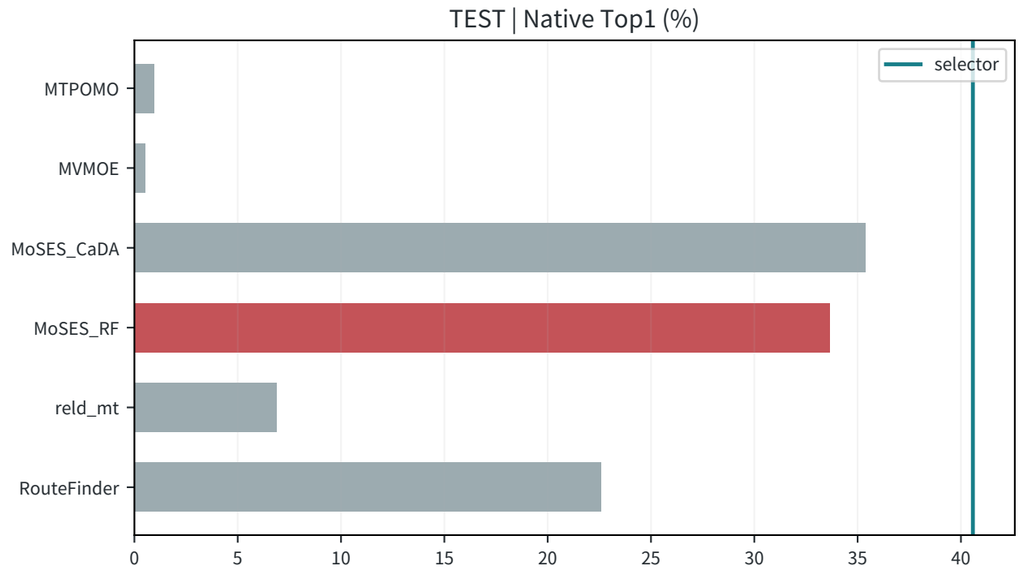


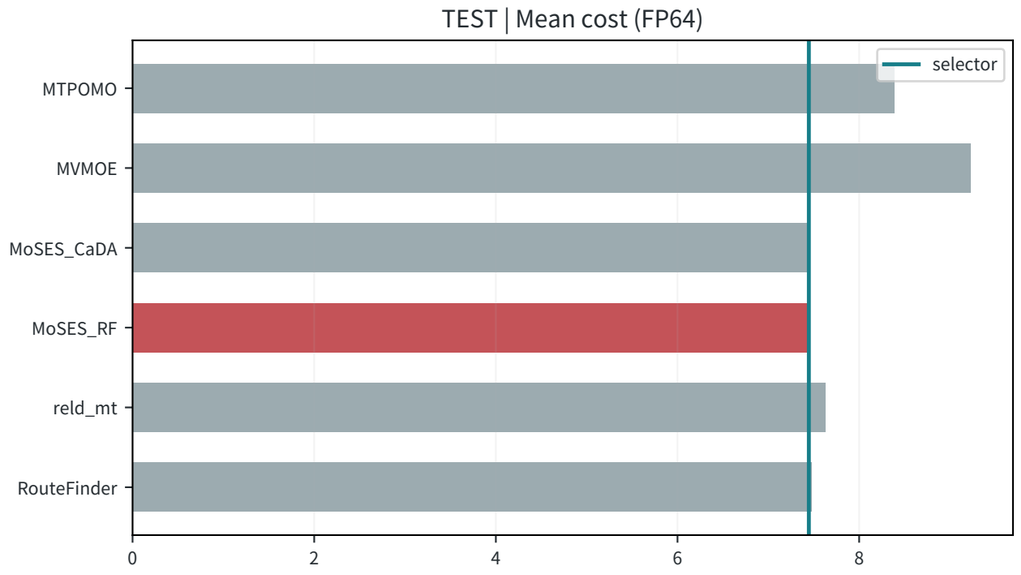



R88/A_canonical_anchor | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

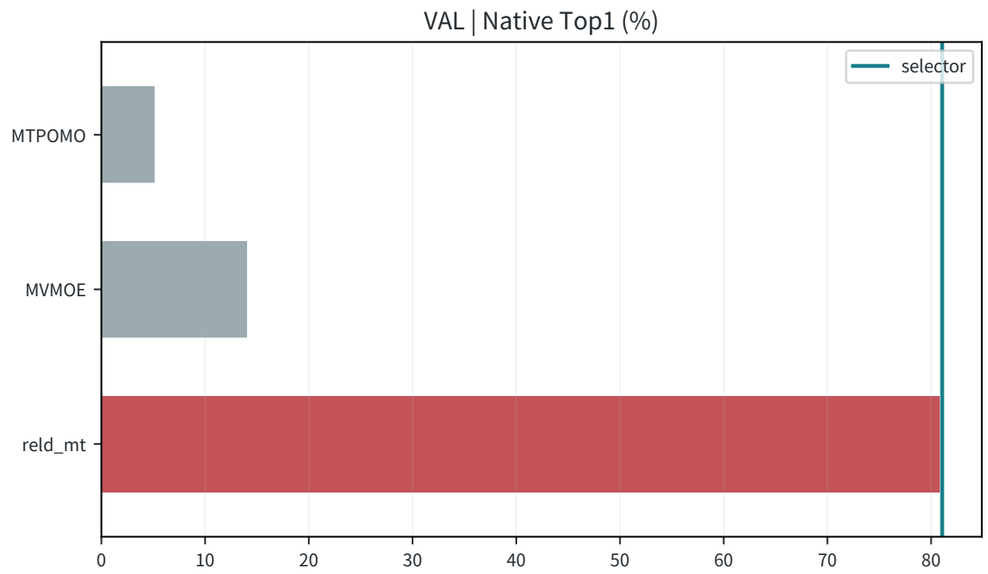

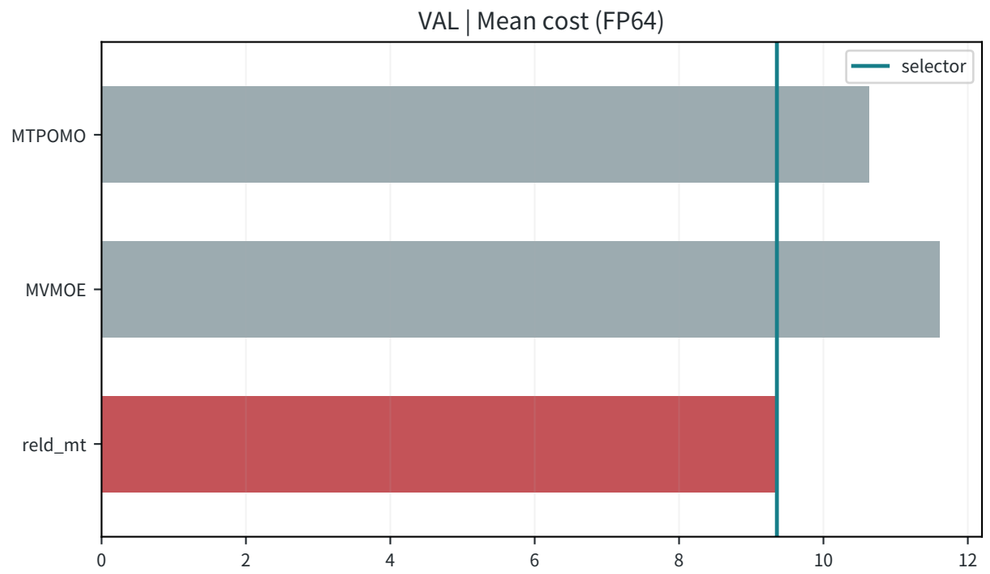


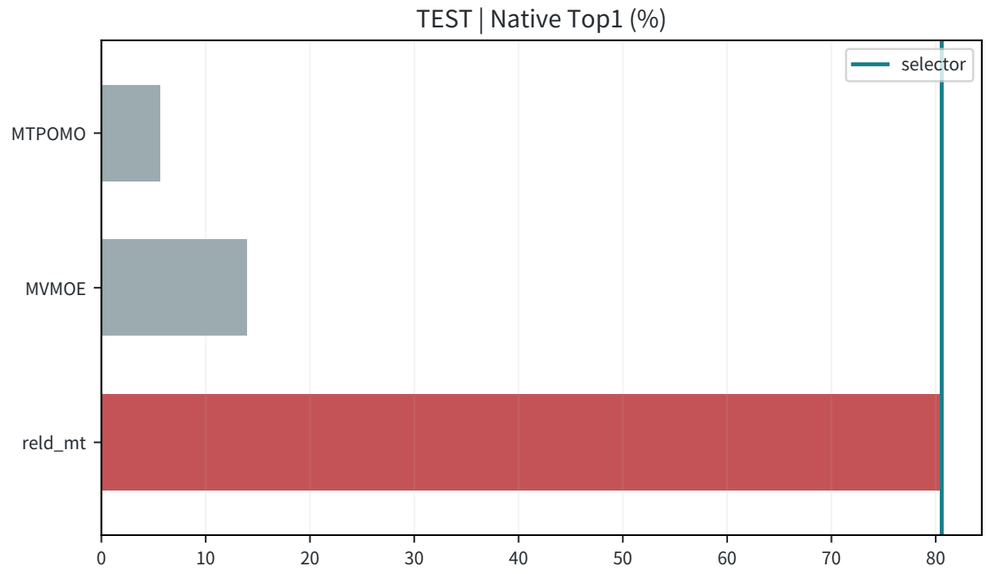


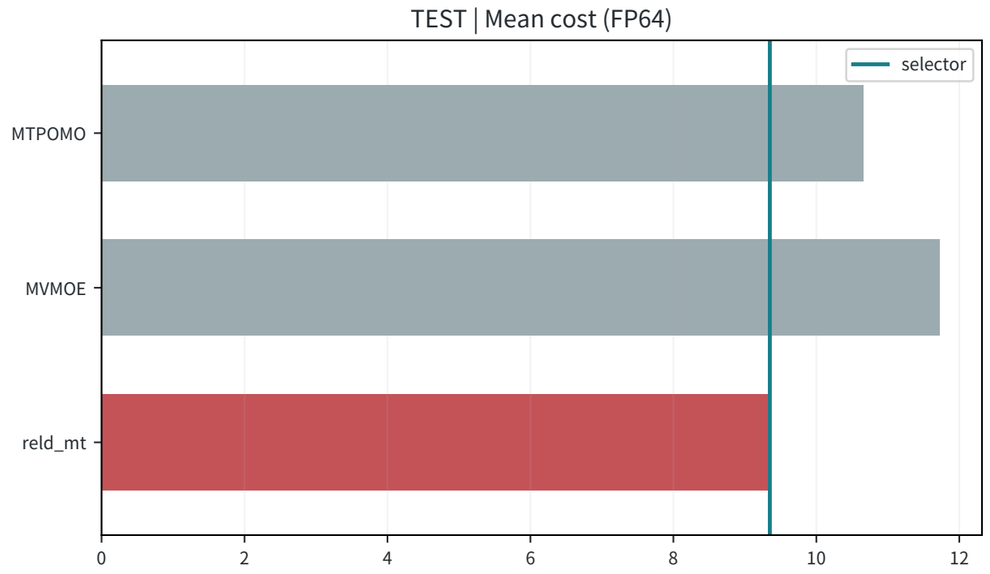



R88/A_canonical_anchor | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

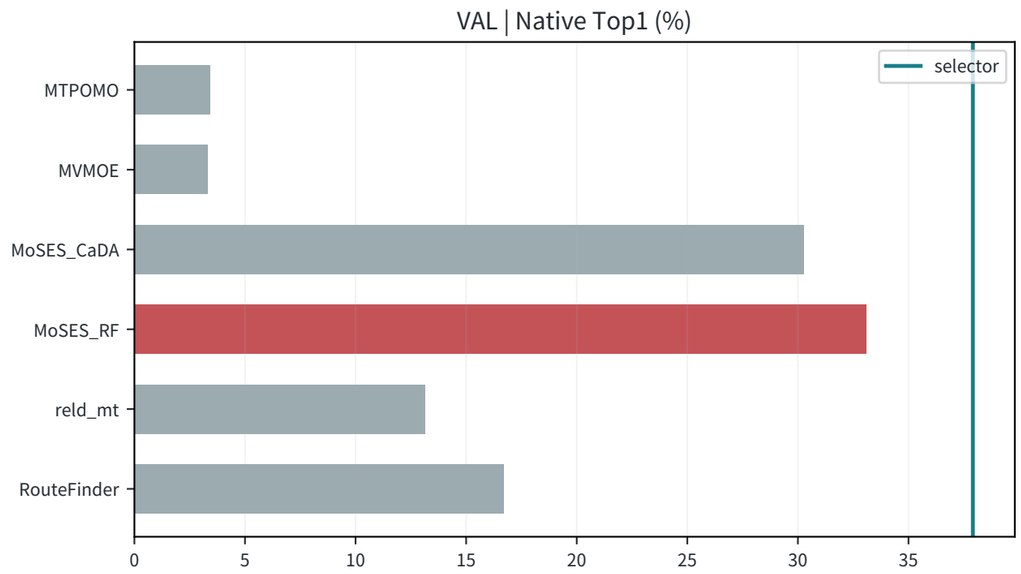

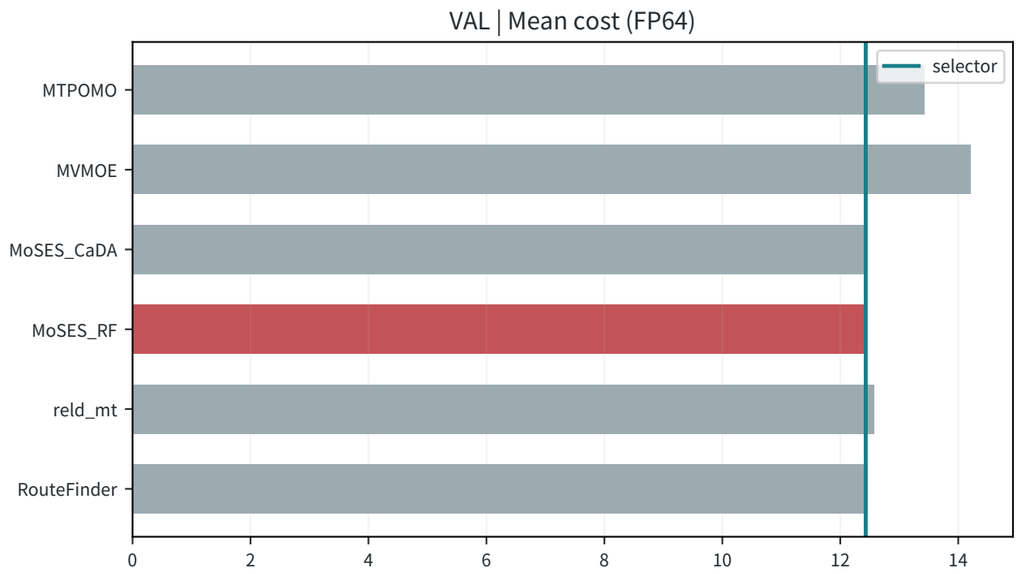


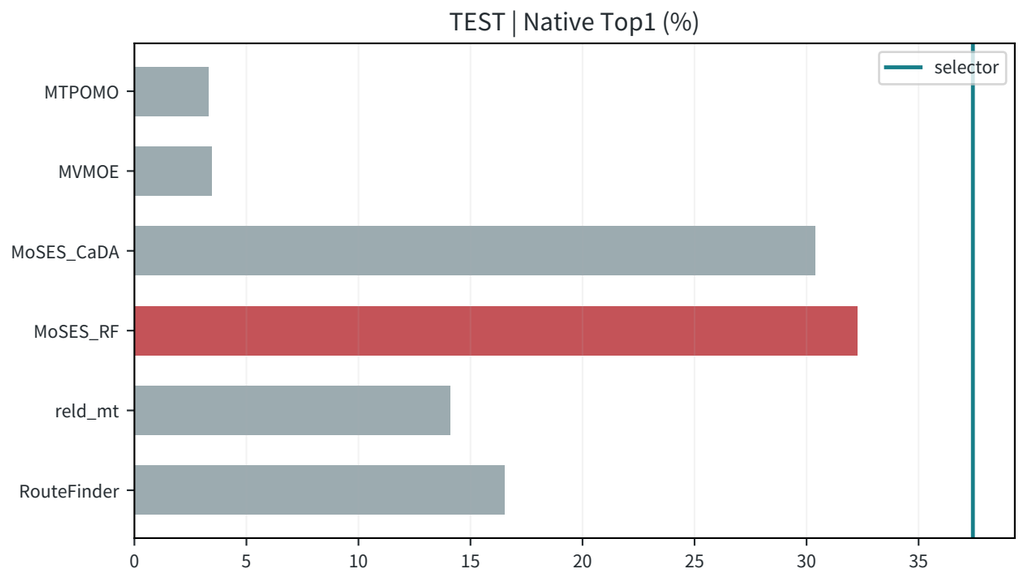


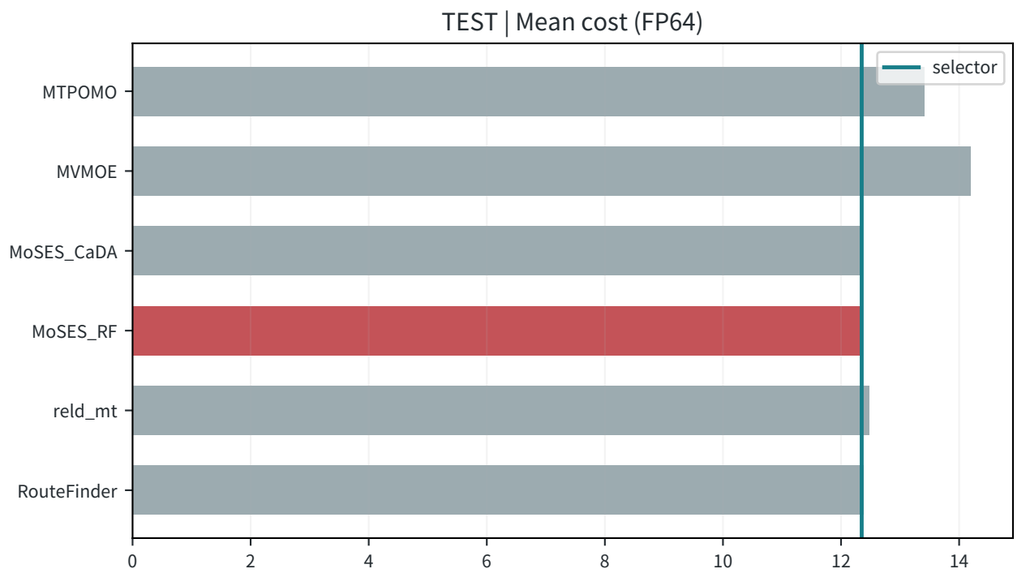



R88/A_canonical_anchor | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

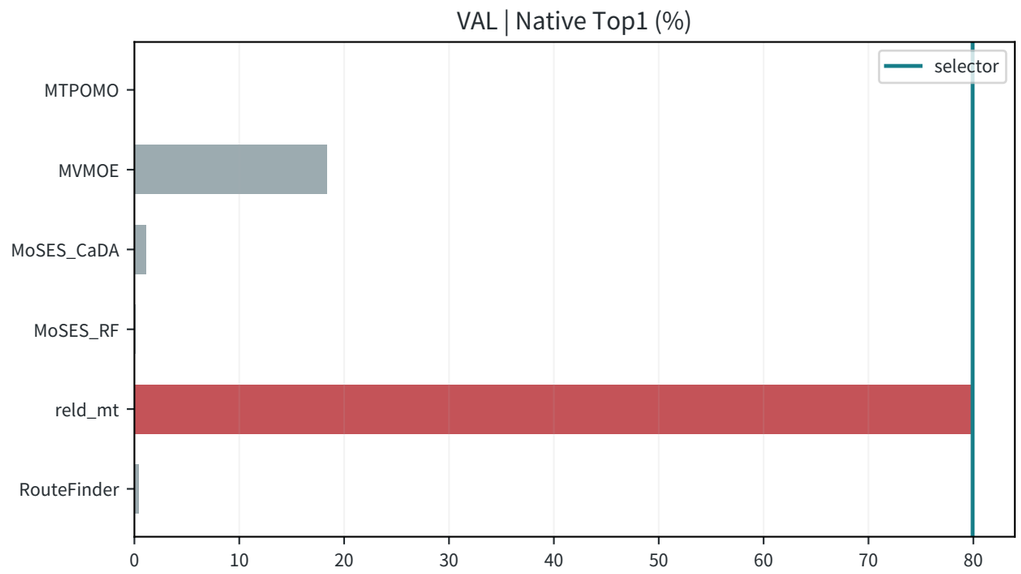

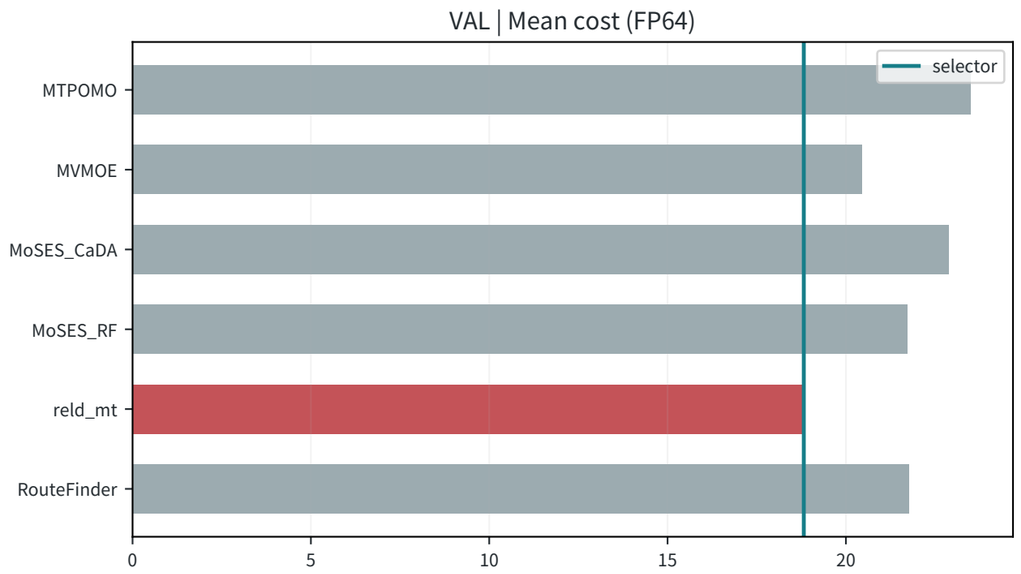


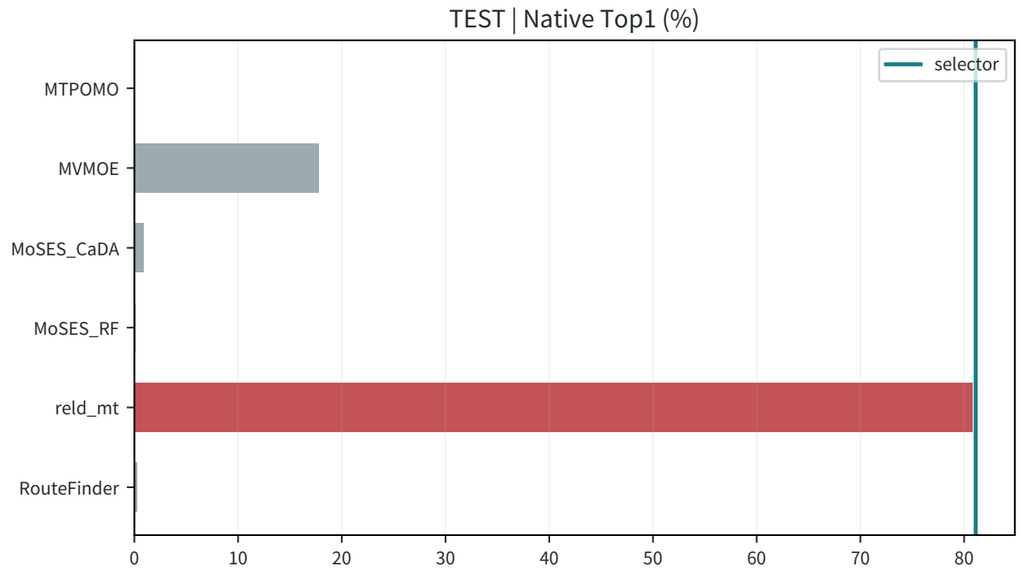


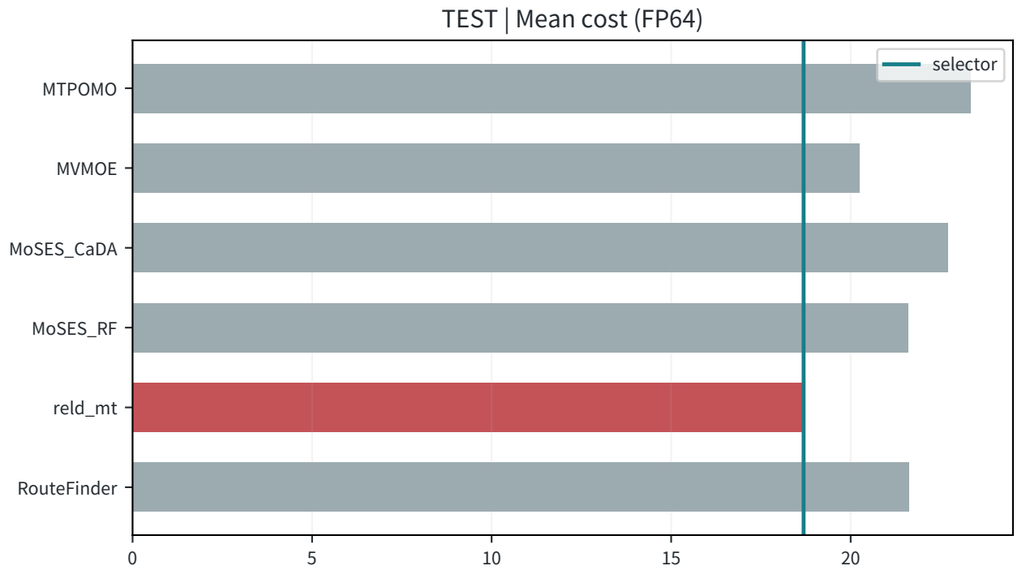



R88/A_canonical_anchor | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

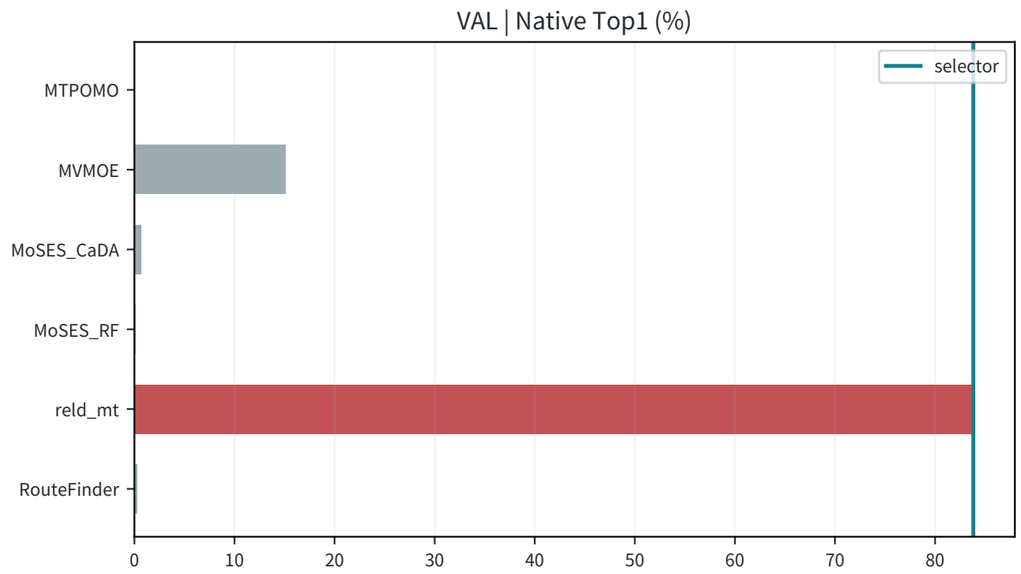

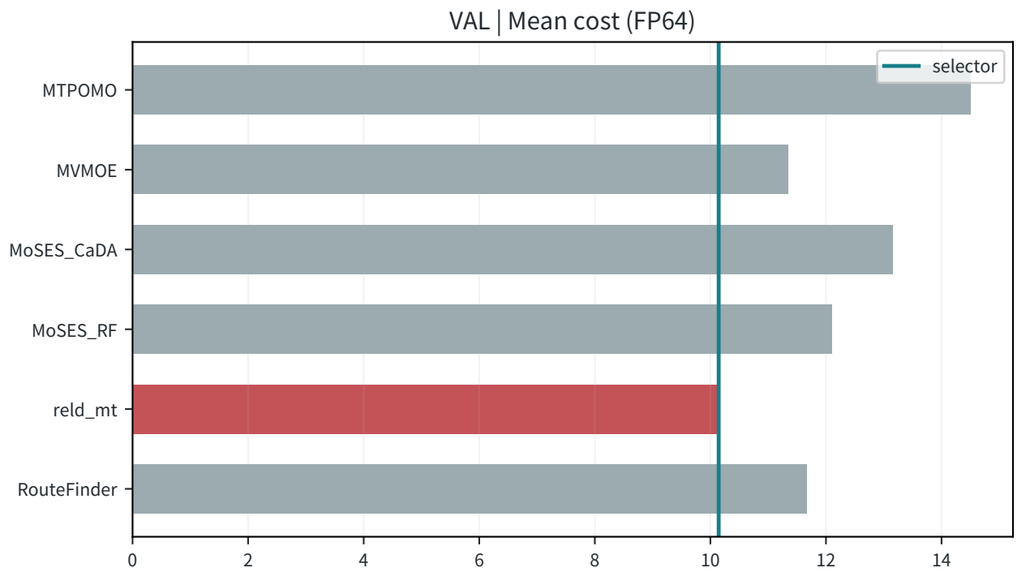


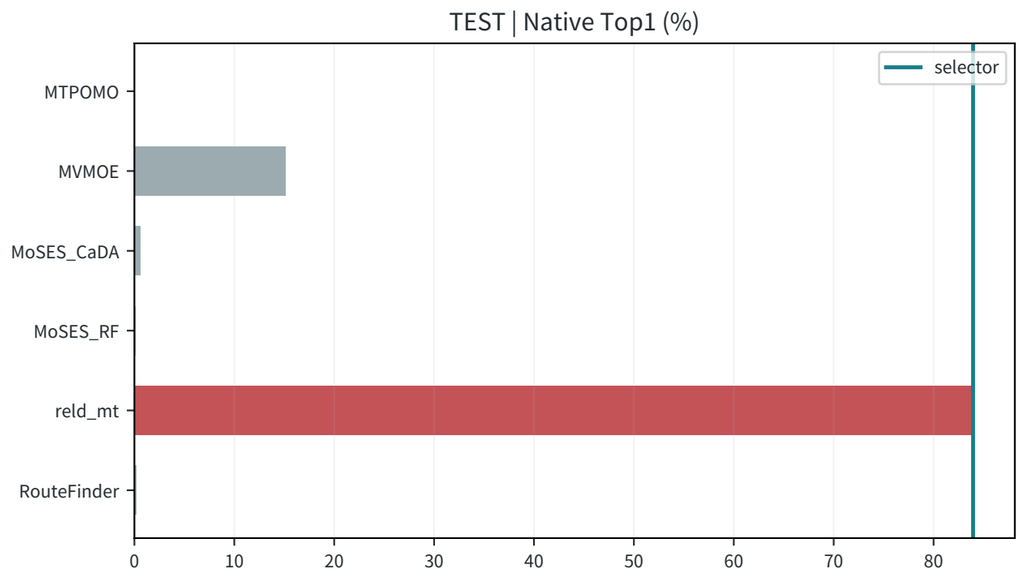


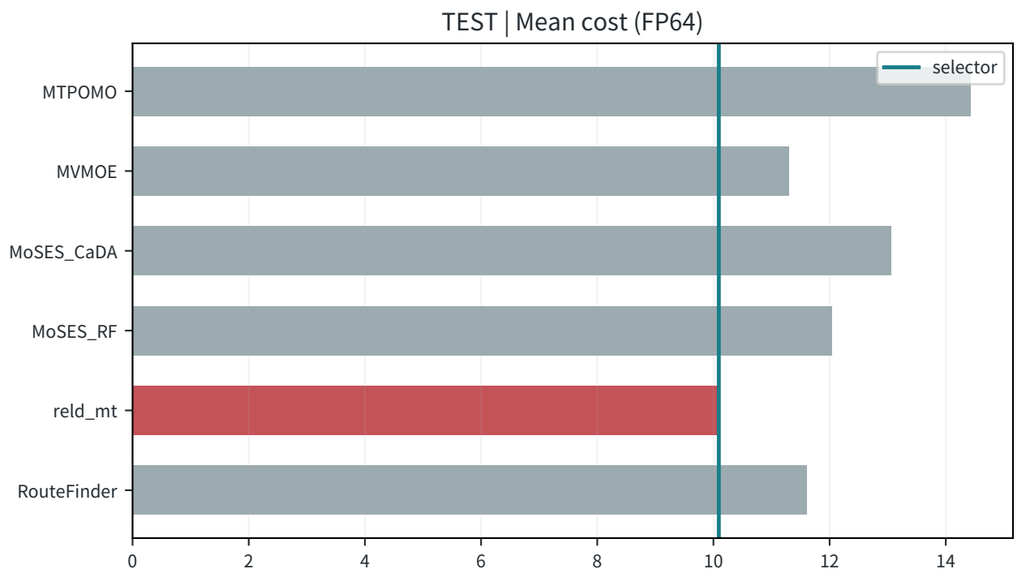



R88/A_canonical_anchor | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

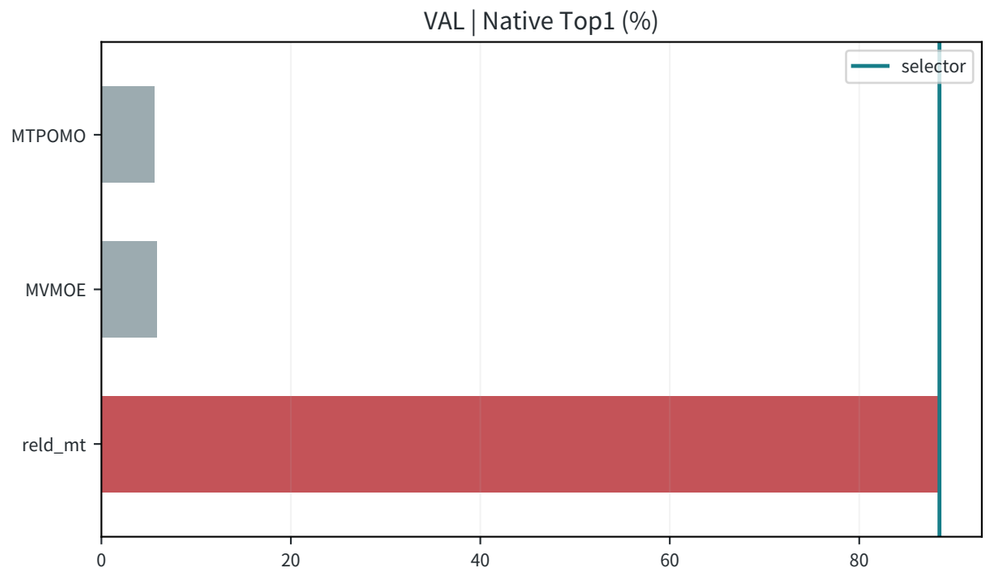

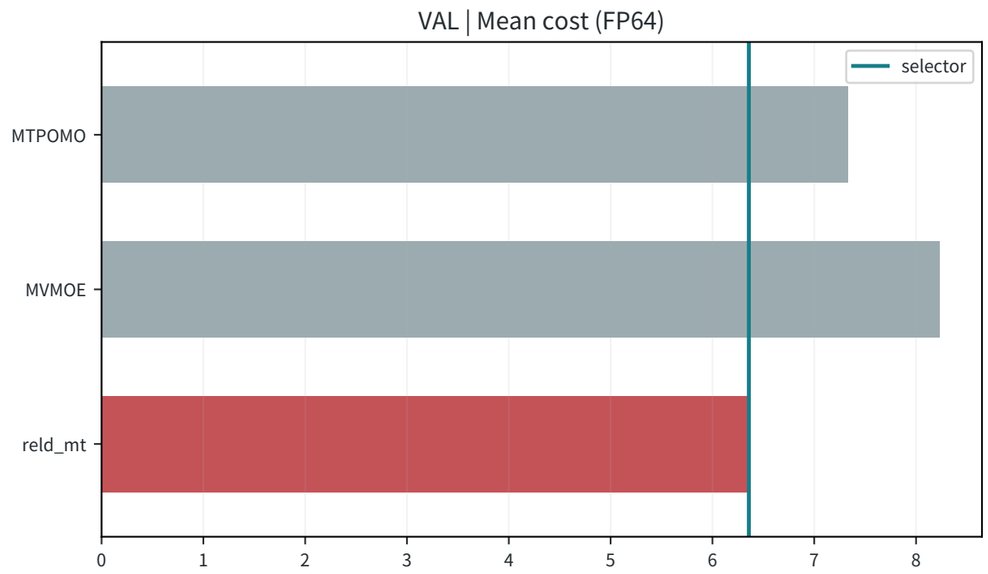


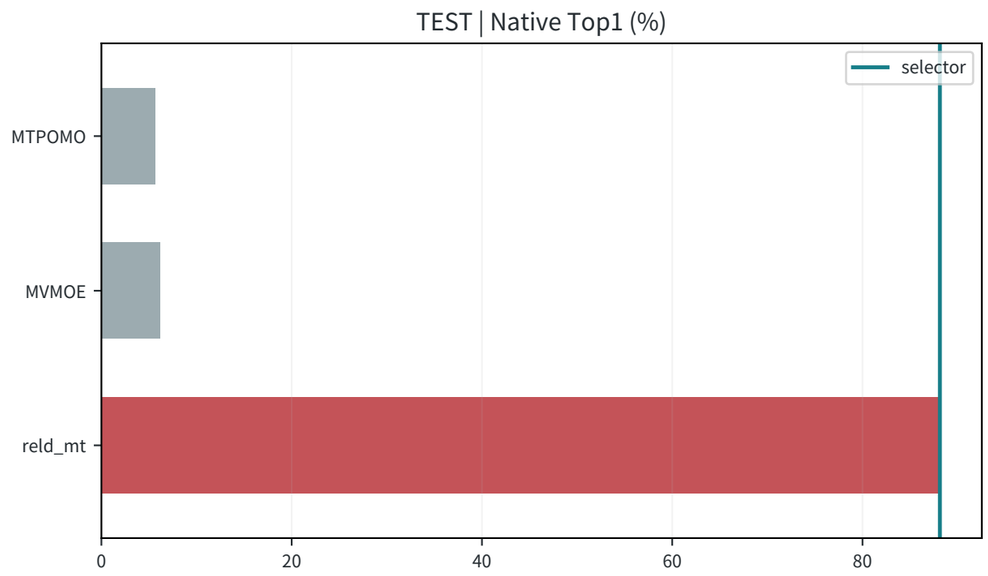


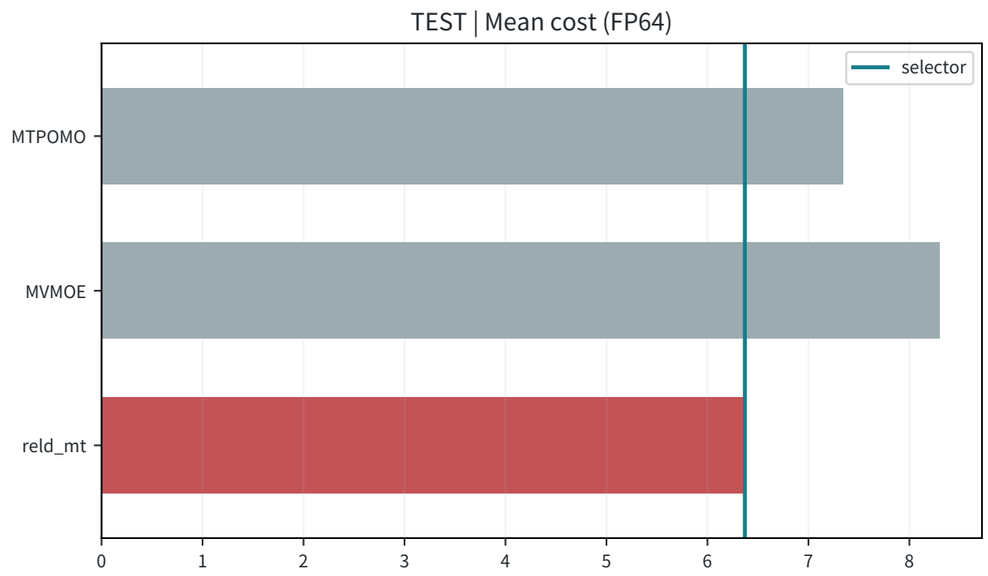


R88/A_canonical_anchor | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

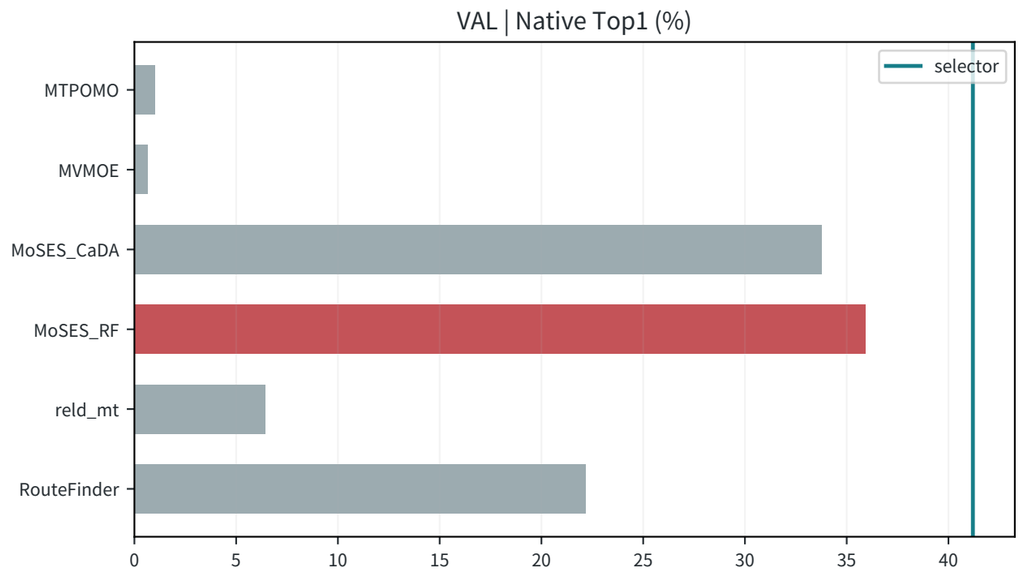

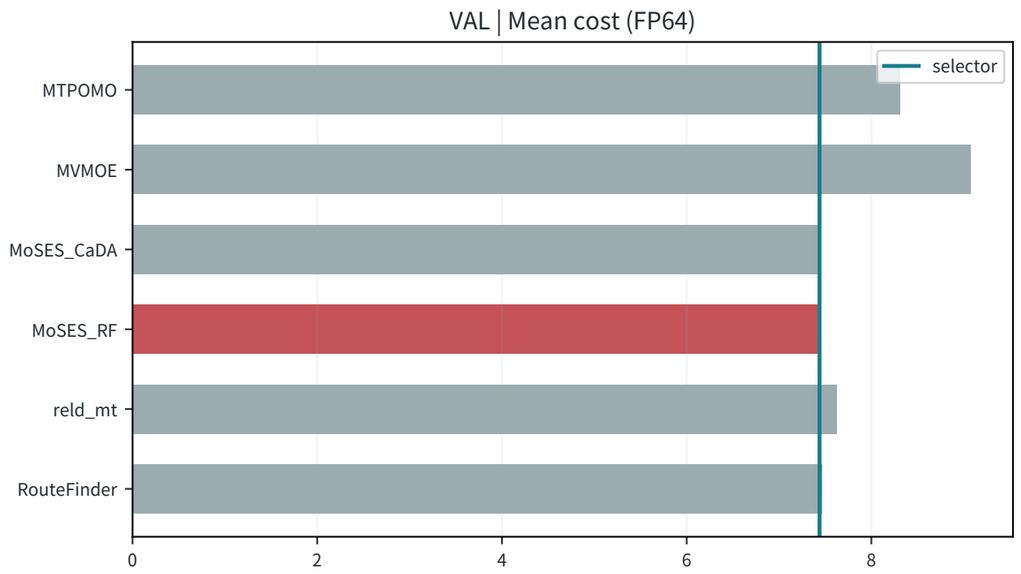


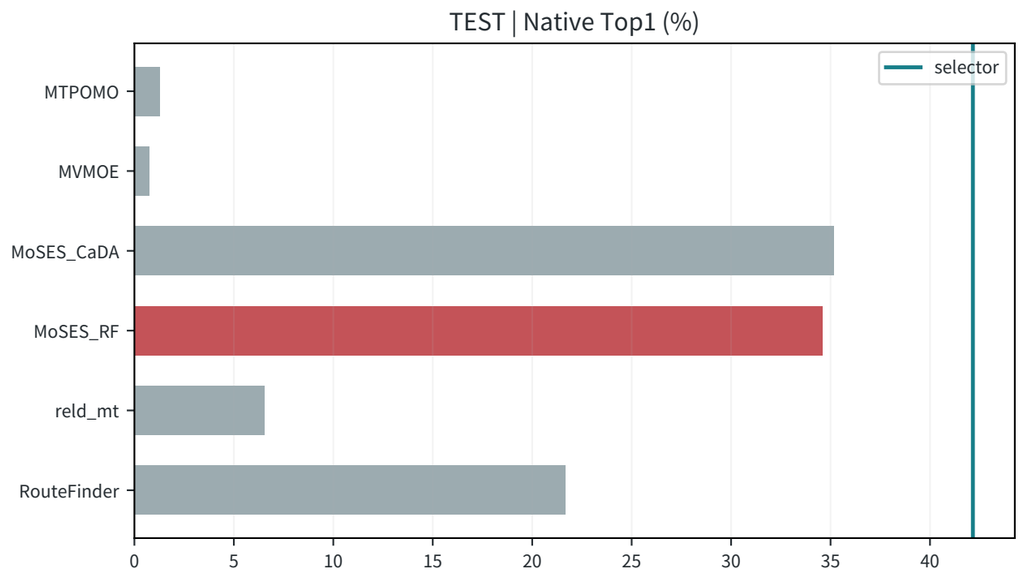






R88/A_canonical_anchor | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

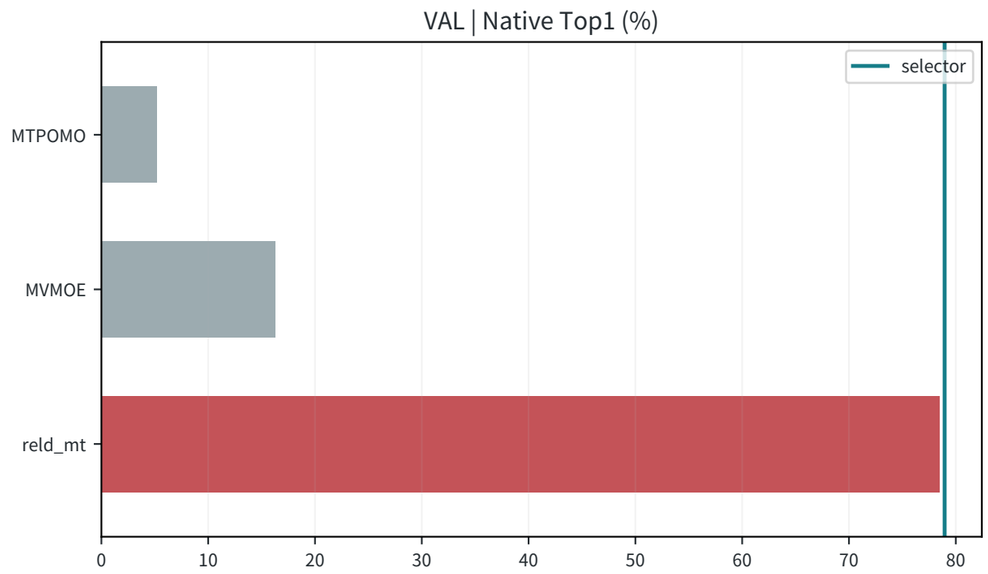

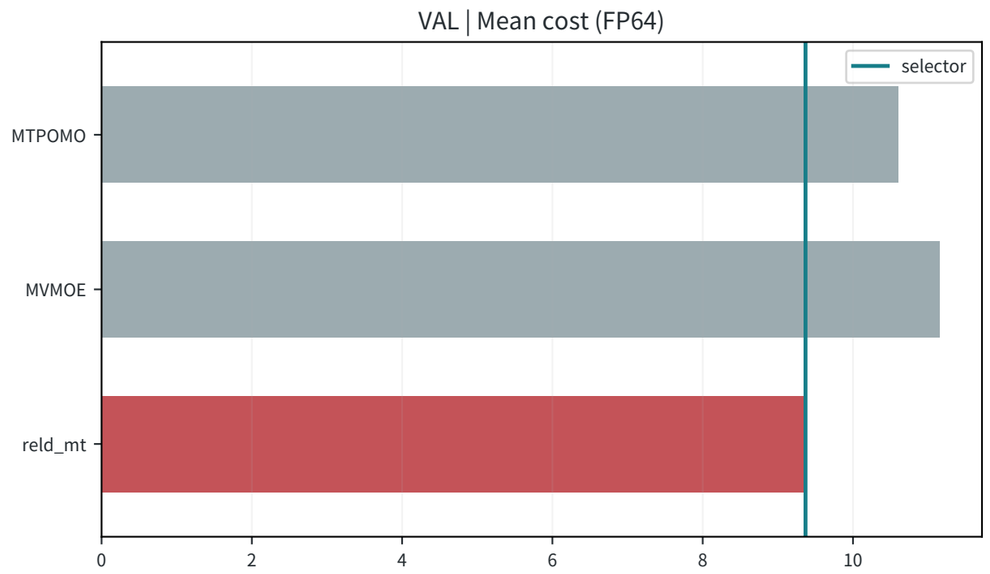


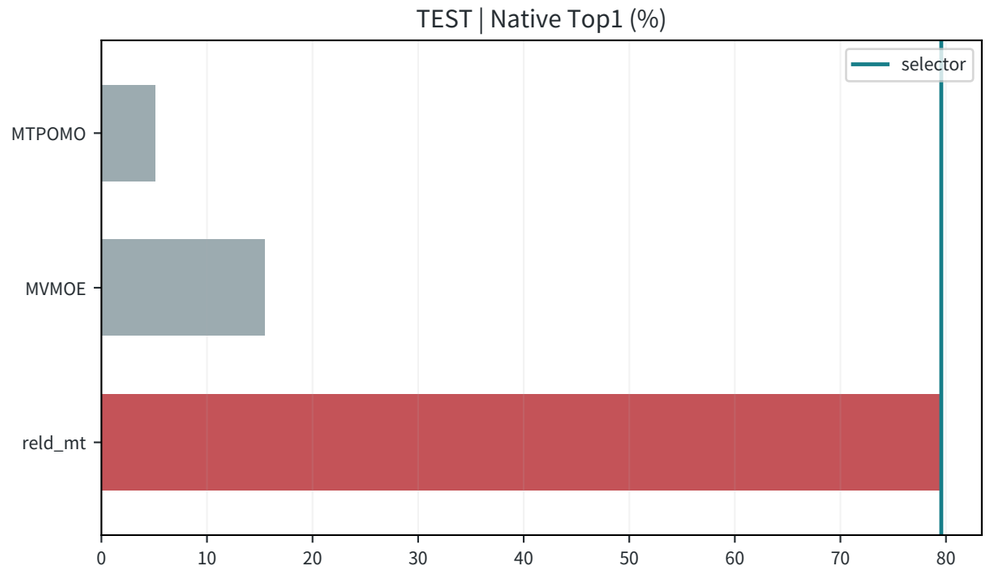


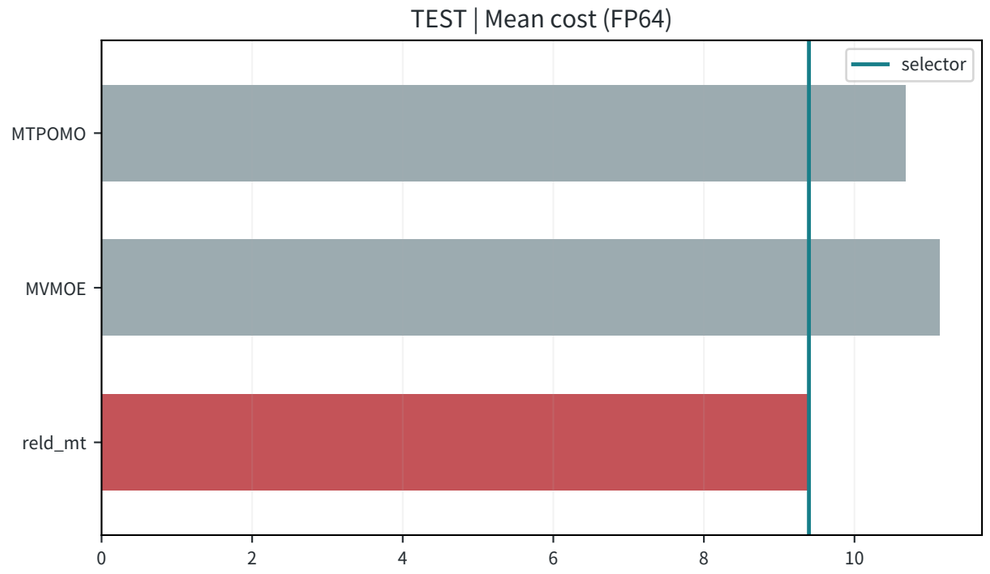



R88/A_canonical_anchor | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

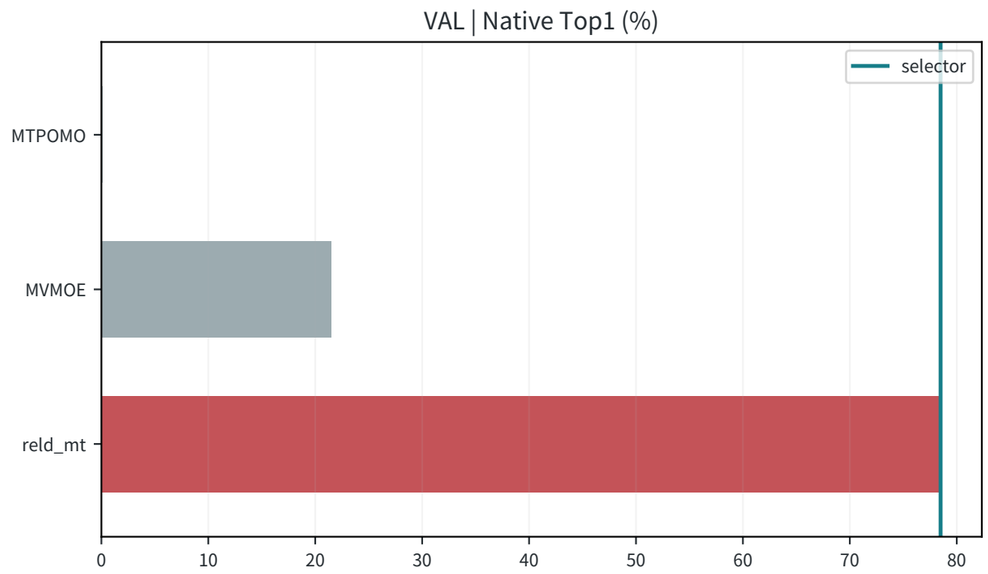

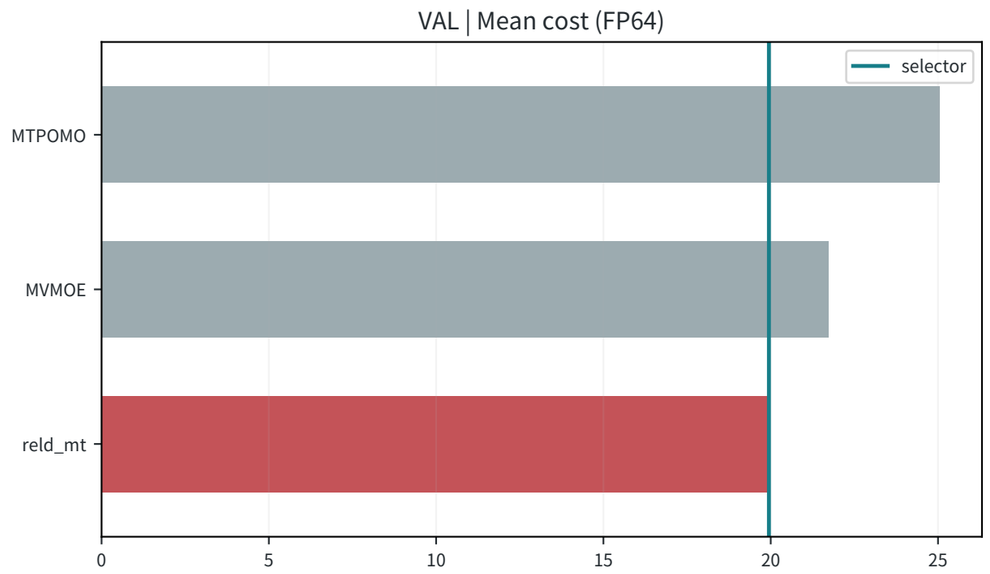


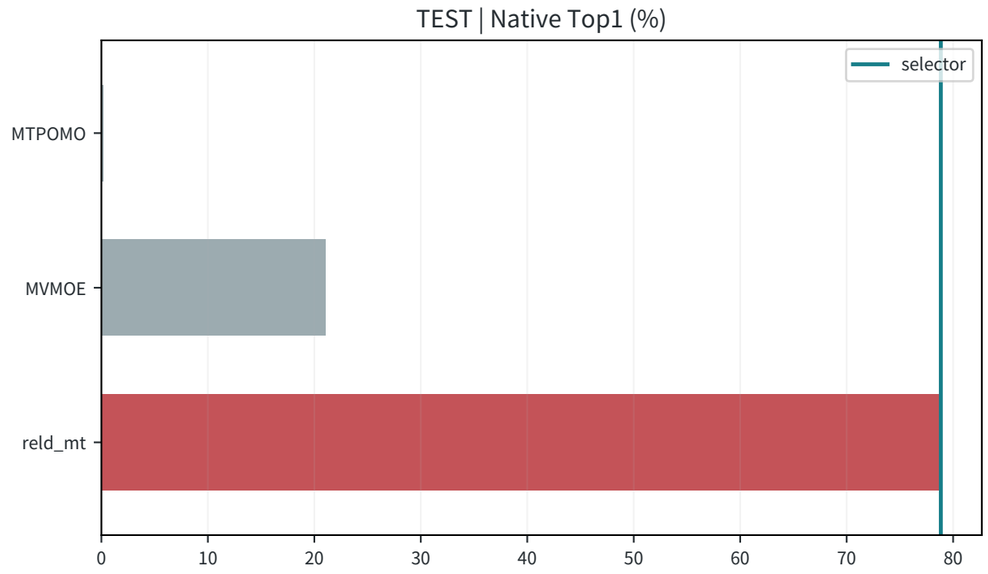


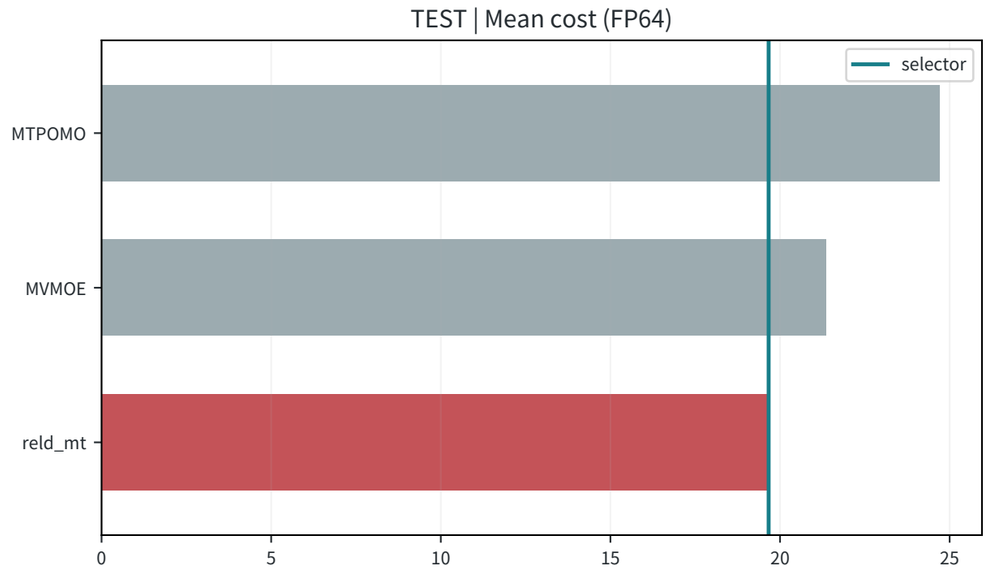



R88/A_canonical_anchor | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

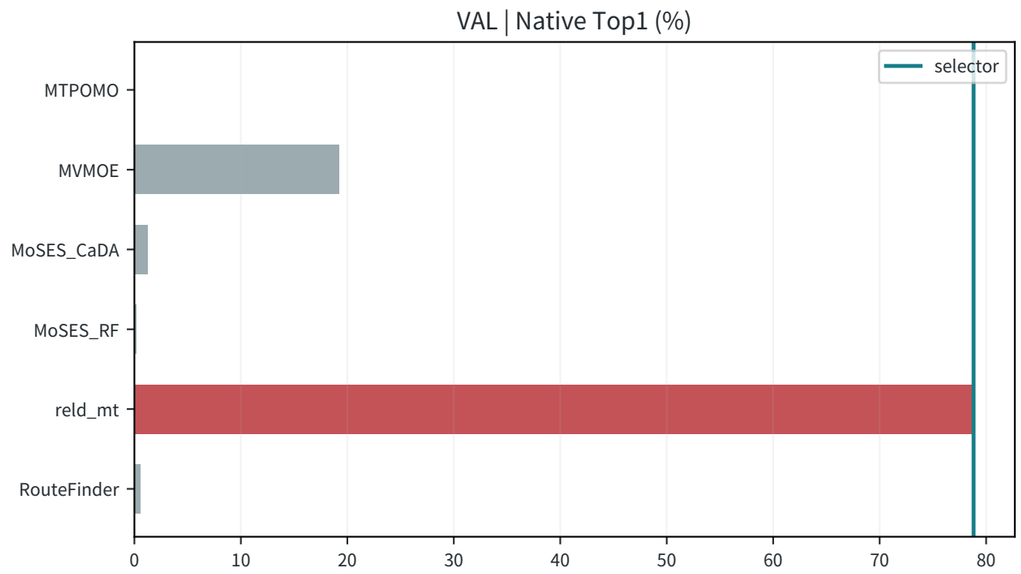

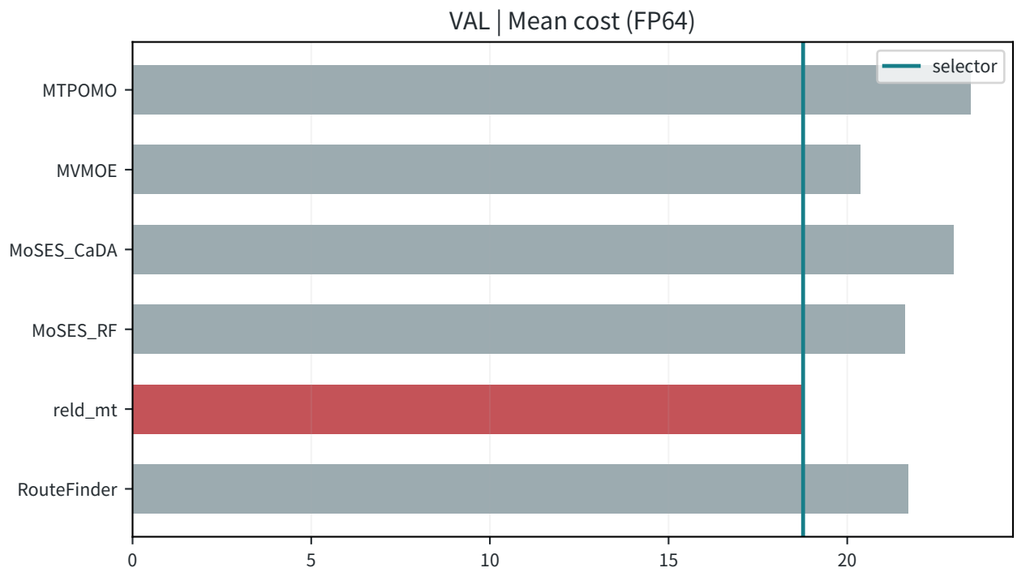


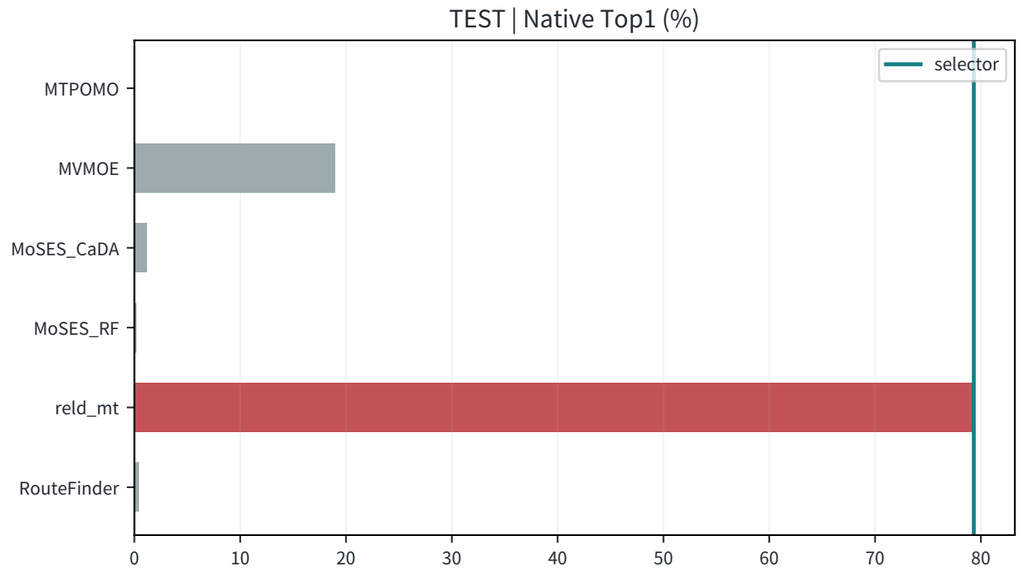


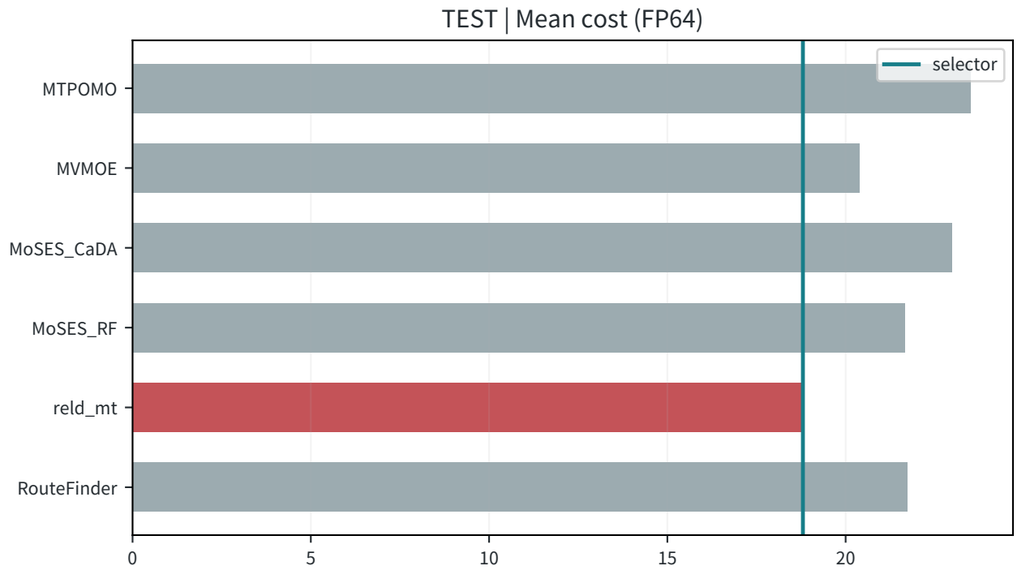



R88/A_canonical_anchor | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

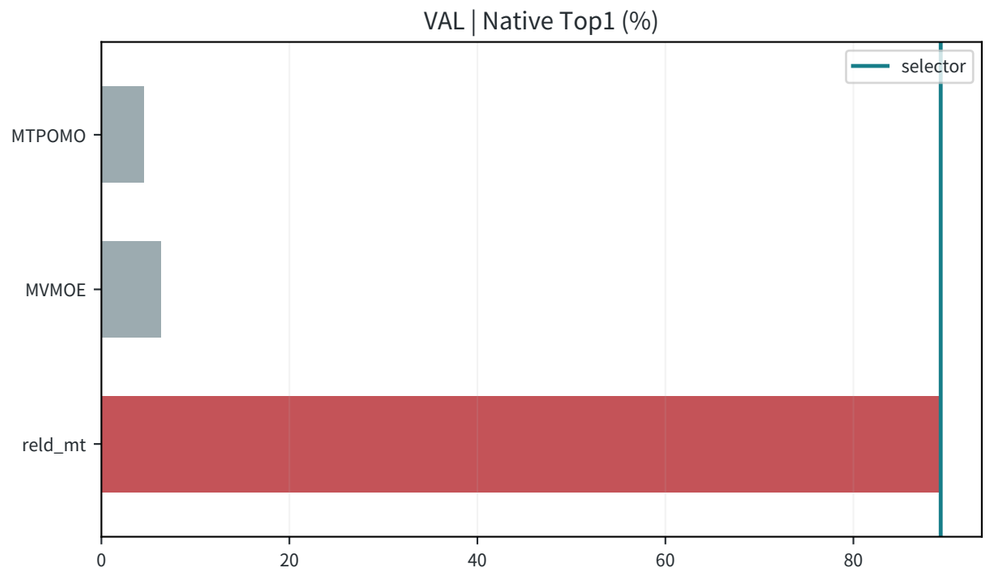

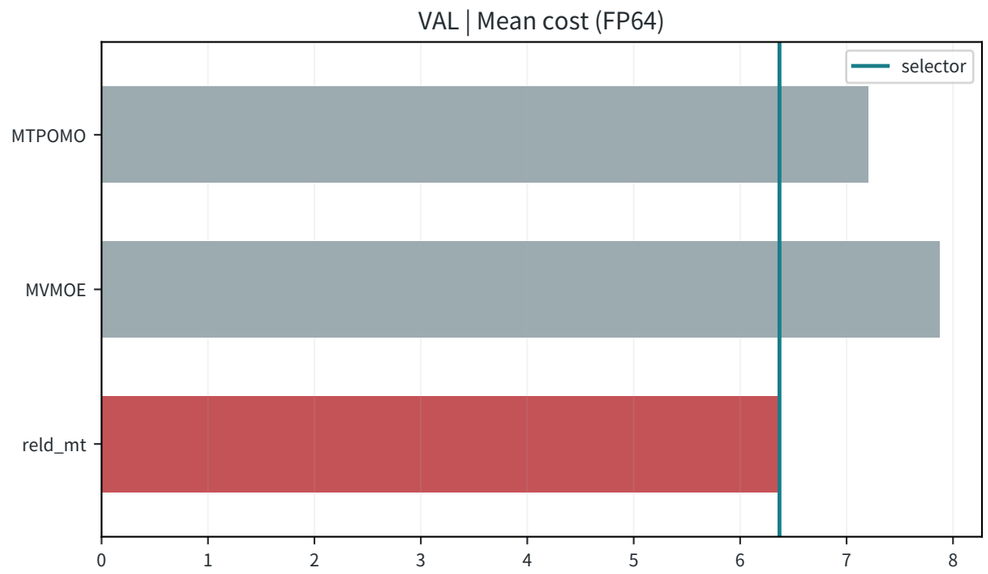


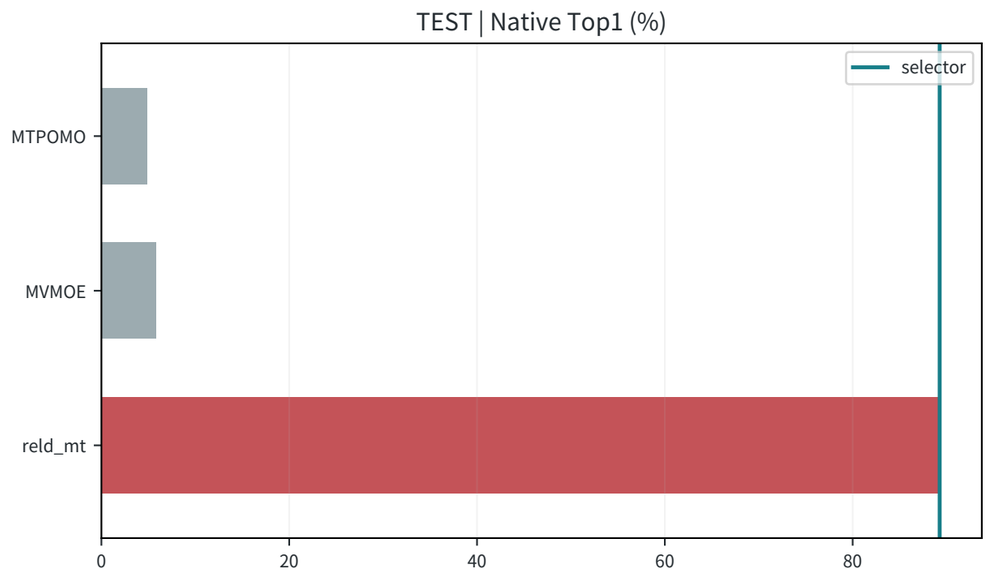


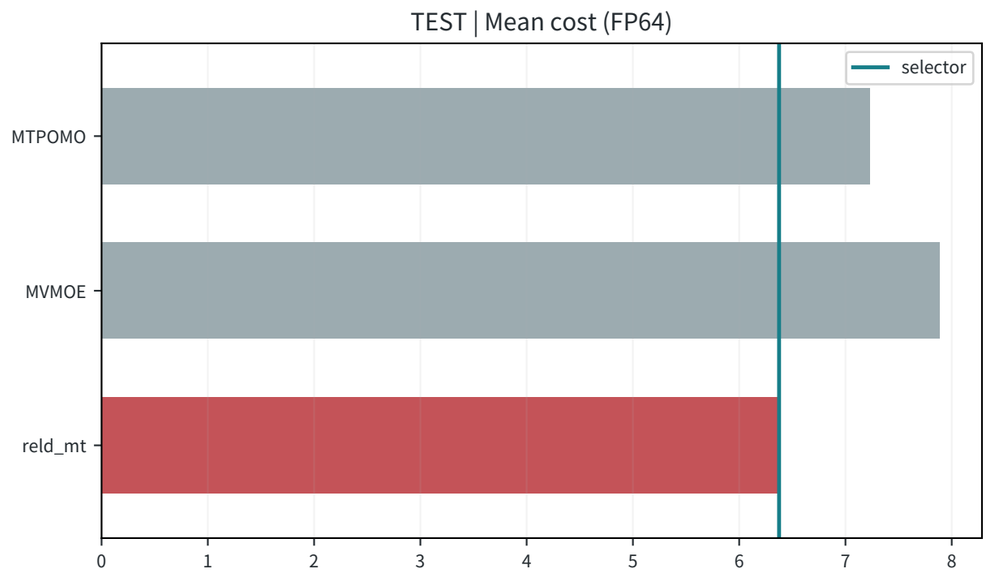



R88/A_canonical_anchor | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

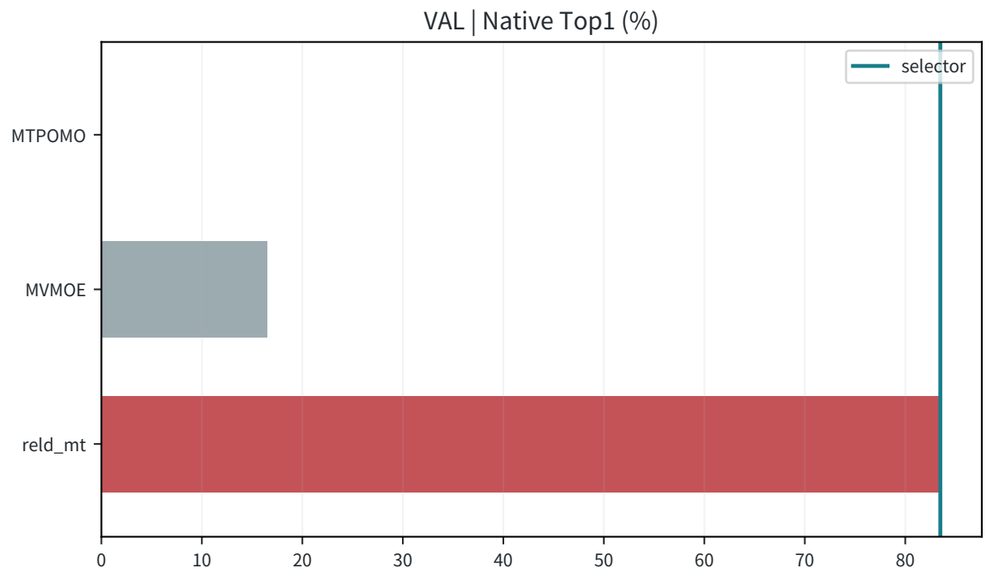

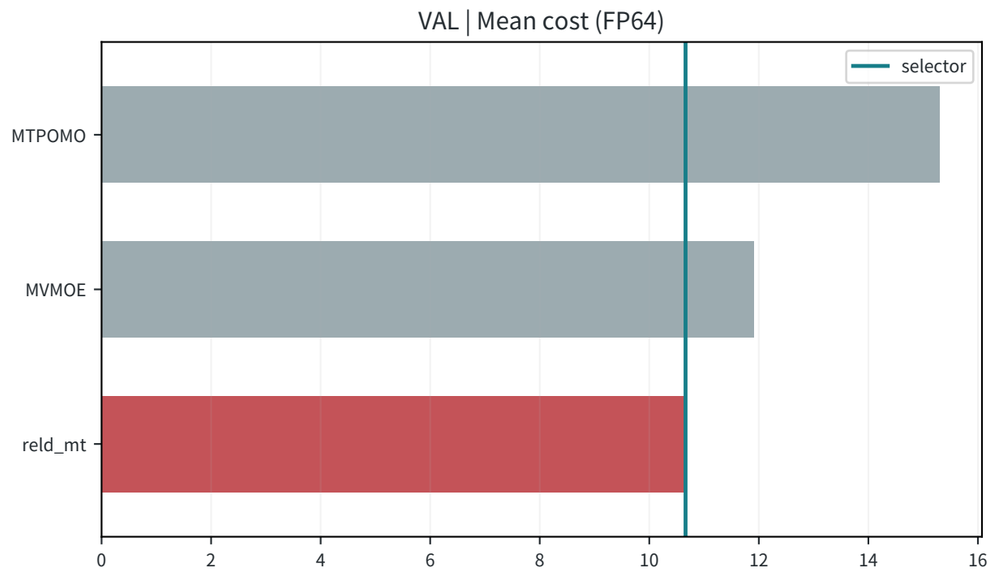


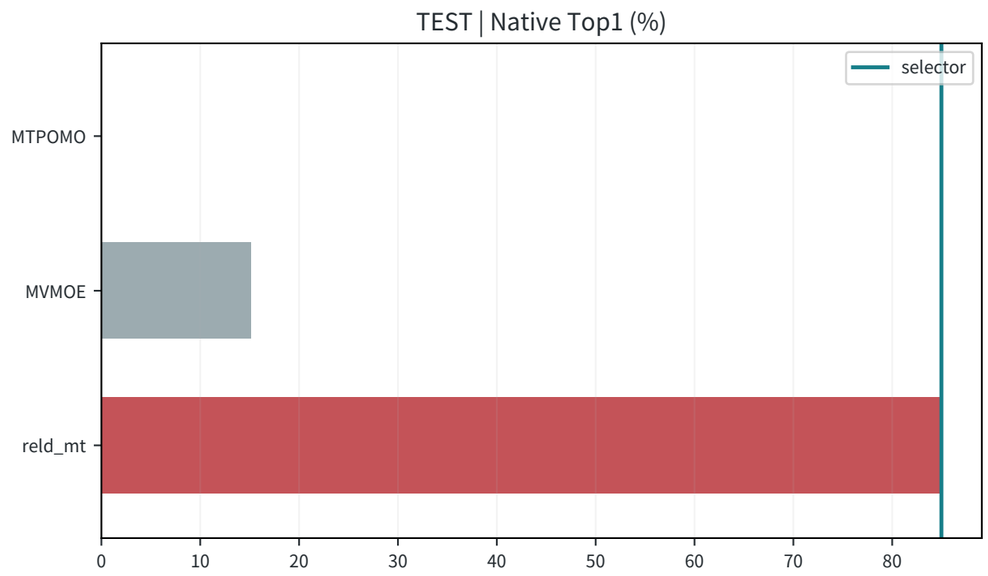


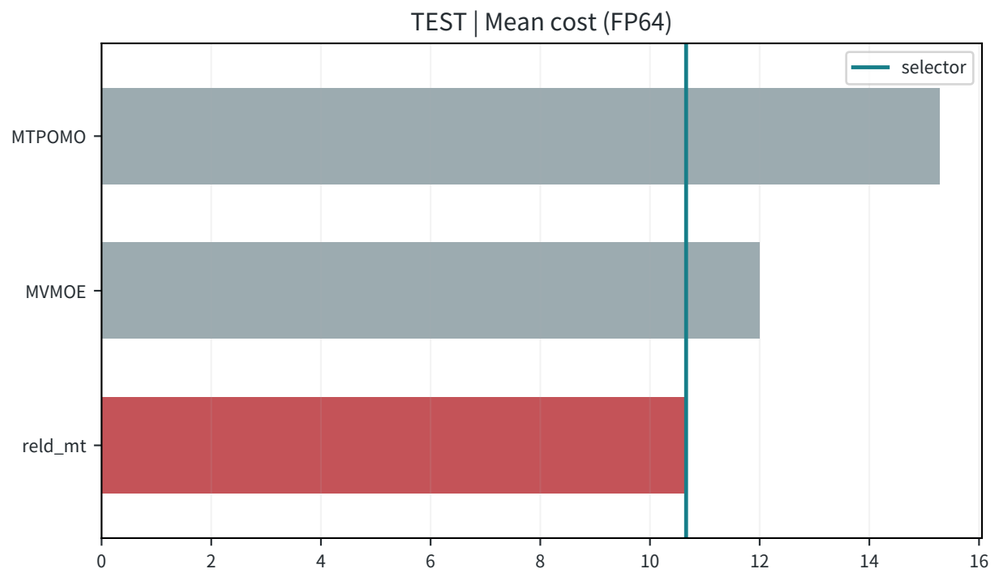



R88/A_canonical_anchor | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

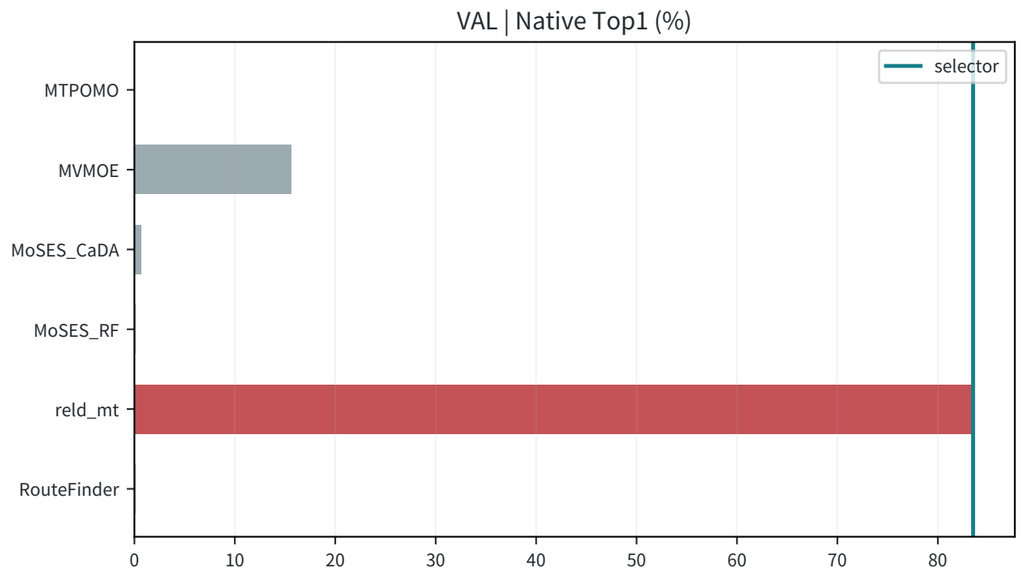

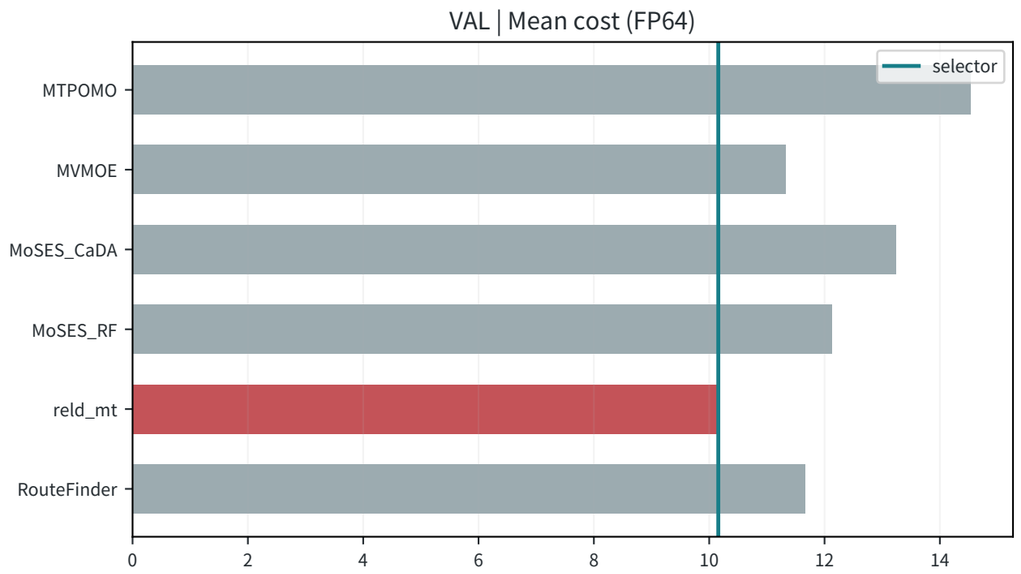


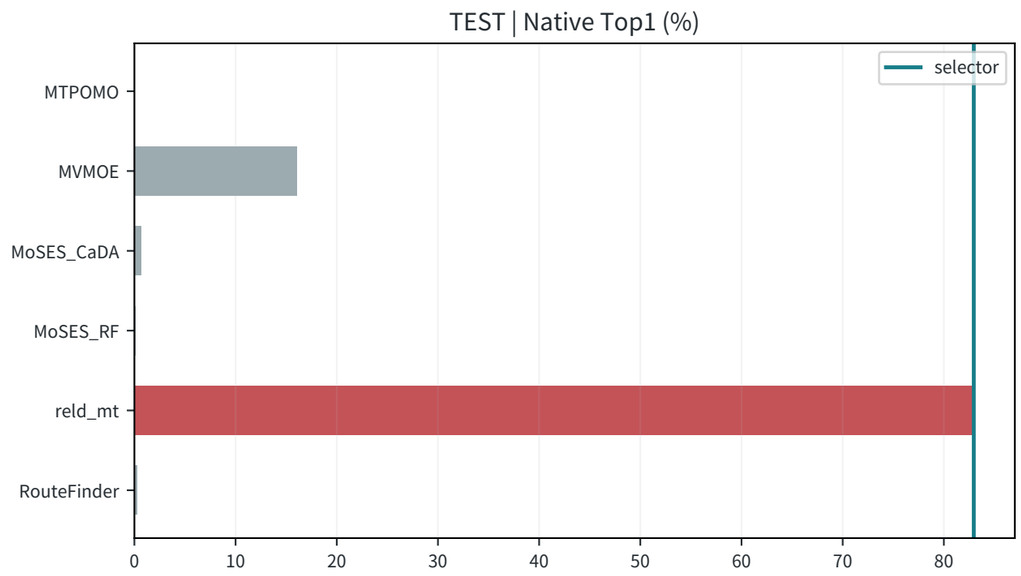


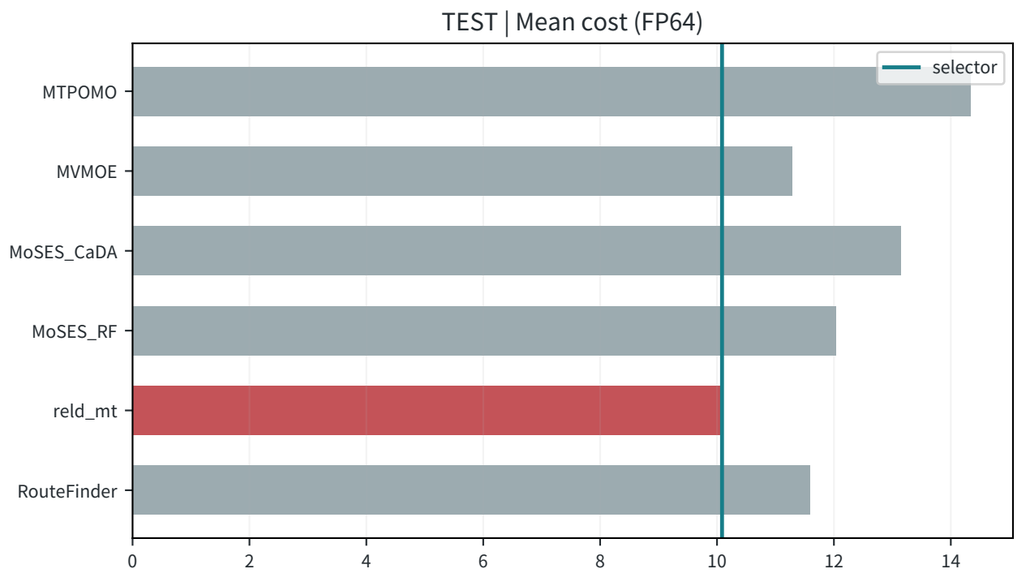



R88/A_canonical_anchor | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

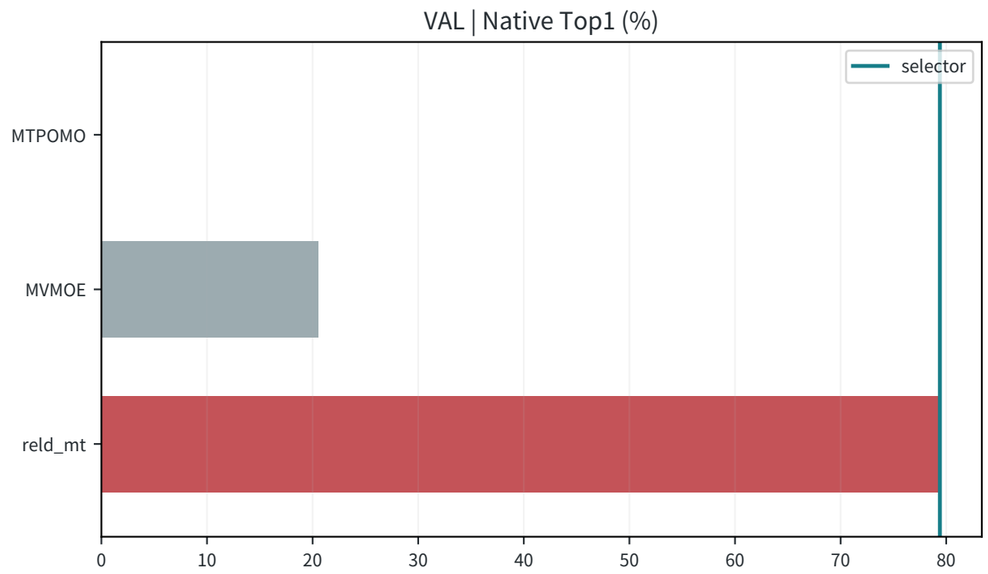

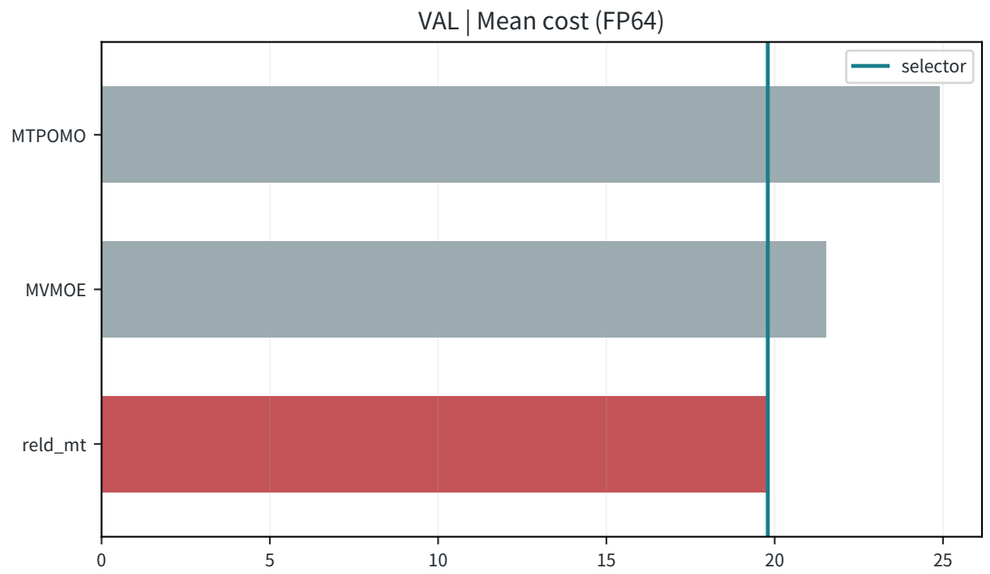

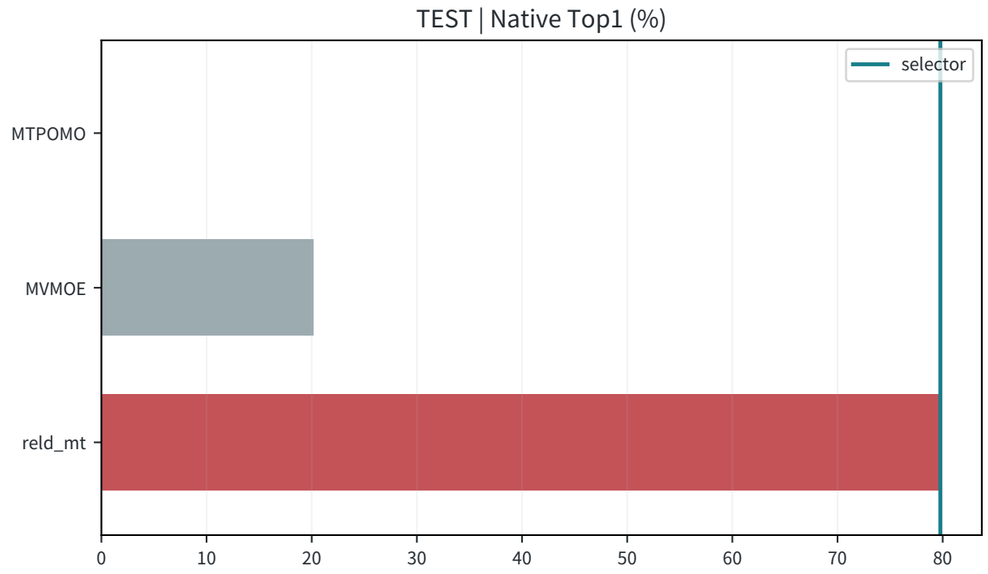

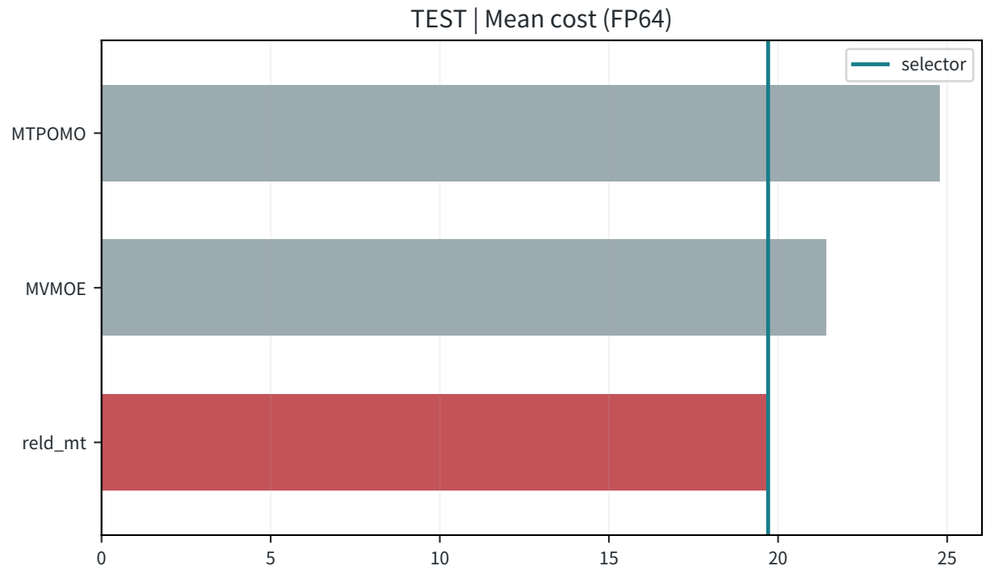

R88/A_canonical_anchor | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

