R88/B_execution_anchor | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 27 | update 38880 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0580	66.2037	11.416634	11.427978	11.371692	-0.1925	+0.3952	0.4051
TEST ALL	71.2210	66.1802	11.373838	11.385299	11.329932	-0.1956	+0.3876	0.3963

Dataset	n	NSS Top1 (%)	R88 Top1 (%)	NSS cost	R88 cost
TSP TEST	4500	45.888889	46.733333	7.970400719	7.970892965
CVRP TEST	4500	45.977778	47.177778	18.004802368	18.011684197
TSPLIB	49	20.408163	18.367347	8.217907074	8.210471722
CVRPLIB	100	70.000000	64.000000	67.101111717	67.274179354

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original native CE

R88/B_execution_anchor | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0580	66.2037	11.416634	11.427978	11.371692	-0.1925	+0.3952	0.4051	per-problem TRAIN SBS
TSP	46.8000	33.1111	8.025466	8.045354	7.990533	-0.2472	+0.4372	0.4248	T2T
CVRP	47.2222	18.7111	18.157185	18.269377	18.064087	-0.6141	+0.5154	0.6844	RELD_CVRP
ATSP	76.6889	47.4889	1.639109	1.676905	1.632471	-2.2539	+0.4066	0.4059	UNICO_MatPOENet
OVRP	40.8000	35.7556	7.461366	7.469579	7.415777	-0.1100	+0.6148	0.6284	MoSES_RF
VRPB	81.0222	80.8444	9.353706	9.354876	9.318750	-0.0125	+0.3751	0.3814	reld_mt
VRPL	38.0889	33.0889	12.431931	12.437959	12.383444	-0.0485	+0.3915	0.3992	MoSES_RF
VRPTW	79.9333	79.9556	18.819747	18.819431	18.766139	+0.0017	+0.2857	0.3035	reld_mt
OVRPTW	83.8222	83.7778	10.143115	10.143730	10.116859	-0.0061	+0.2595	0.2559	reld_mt
OVRPB	88.4889	88.5111	6.357841	6.357254	6.341078	+0.0092	+0.2644	0.2773	reld_mt
OVRPL	41.1111	35.9111	7.437956	7.445709	7.390416	-0.1041	+0.6433	0.6593	MoSES_RF
VRPBL	78.8000	78.5111	9.368781	9.371523	9.328366	-0.0293	+0.4332	0.4355	reld_mt
VRPBTW	78.5111	78.4222	19.946828	19.950430	19.851084	-0.0181	+0.4823	0.4621	reld_mt
VRPLTW	78.7778	78.7556	18.764577	18.765871	18.707843	-0.0069	+0.3033	0.3197	reld_mt
OVRPBL	89.2889	89.2000	6.369659	6.370093	6.352824	-0.0068	+0.2650	0.2762	reld_mt
OVRPBTW	83.5778	83.4444	10.660417	10.661098	10.623245	-0.0064	+0.3499	0.3220	reld_mt
OVRPLTW	83.4667	83.4889	10.157504	10.157423	10.129818	+0.0008	+0.2733	0.2772	reld_mt
VRPBLTW	79.4000	79.4000	19.793935	19.797044	19.706420	-0.0157	+0.4441	0.4324	reld_mt
OVRPBLTW	83.2444	83.2889	10.610288	10.609955	10.571302	+0.0031	+0.3688	0.3471	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R88/B_execution_anchor | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2210	66.1802	11.373838	11.385299	11.329932	-0.1956	+0.3876	0.3963	per-problem TRAIN SBS
TSP	46.7333	34.5333	7.970893	7.989621	7.937593	-0.2344	+0.4195	0.4112	T2T
CVRP	47.1778	17.9333	18.011684	18.124983	17.918509	-0.6251	+0.5200	0.6870	RELD_CVRP
ATSP	76.2222	47.2444	1.636064	1.674207	1.629441	-2.2783	+0.4064	0.4082	UNICO_MatPOENet
OVRP	39.9333	33.6444	7.446859	7.455750	7.400487	-0.1193	+0.6266	0.6360	MoSES_RF
VRPB	80.6000	80.4000	9.349512	9.351810	9.315298	-0.0246	+0.3673	0.3715	reld_mt
VRPL	37.4667	32.2667	12.350636	12.356138	12.300958	-0.0445	+0.4039	0.4140	MoSES_RF
VRPTW	81.0667	80.8444	18.689263	18.690545	18.637408	-0.0069	+0.2782	0.2893	reld_mt
OVRPTW	83.9778	83.9333	10.092688	10.093063	10.068135	-0.0037	+0.2439	0.2348	reld_mt
OVRPB	88.1556	88.1333	6.370714	6.370826	6.352225	-0.0017	+0.2911	0.2977	reld_mt
OVRPL	42.2889	34.6000	7.463351	7.472542	7.418033	-0.1230	+0.6109	0.6211	MoSES_RF
VRPBL	79.4889	79.4222	9.395198	9.396379	9.355967	-0.0126	+0.4193	0.4232	reld_mt
VRPBTW	78.8222	78.7556	19.663565	19.665725	19.577666	-0.0110	+0.4388	0.4343	reld_mt
VRPLTW	79.4000	79.2444	18.801592	18.803136	18.745143	-0.0082	+0.3011	0.3164	reld_mt
OVRPBL	89.3111	89.2889	6.375464	6.375741	6.359310	-0.0043	+0.2540	0.2647	reld_mt
OVRPBTW	84.9333	84.8222	10.658850	10.659591	10.624748	-0.0070	+0.3210	0.2934	reld_mt
OVRPLTW	82.9556	82.8667	10.085636	10.086112	10.059001	-0.0047	+0.2648	0.2651	reld_mt
VRPBLTW	79.8000	79.7333	19.705157	19.707068	19.613284	-0.0097	+0.4684	0.4470	reld_mt
OVRPBLTW	83.6444	83.5778	10.661964	10.662149	10.625574	-0.0017	+0.3425	0.3193	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R88/B_execution_anchor | LIB and locked provenance

Current R88 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	18.3673	10.2041	8.210472	8.240435	8.142167	-0.3636	+0.8389	0.8113
CVRPLIB	64.0000	45.0000	67.274179	67.245364	66.945093	+0.0429	+0.4916	0.5911

SHA256: 1e23f0dce7677334c938fe24866378aea49cc927f42a4f5287760cd6c31d06fa

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, input-derived TSP role in slot3, original R77 score MLP/pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R88/B_execution_anchor | TSP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

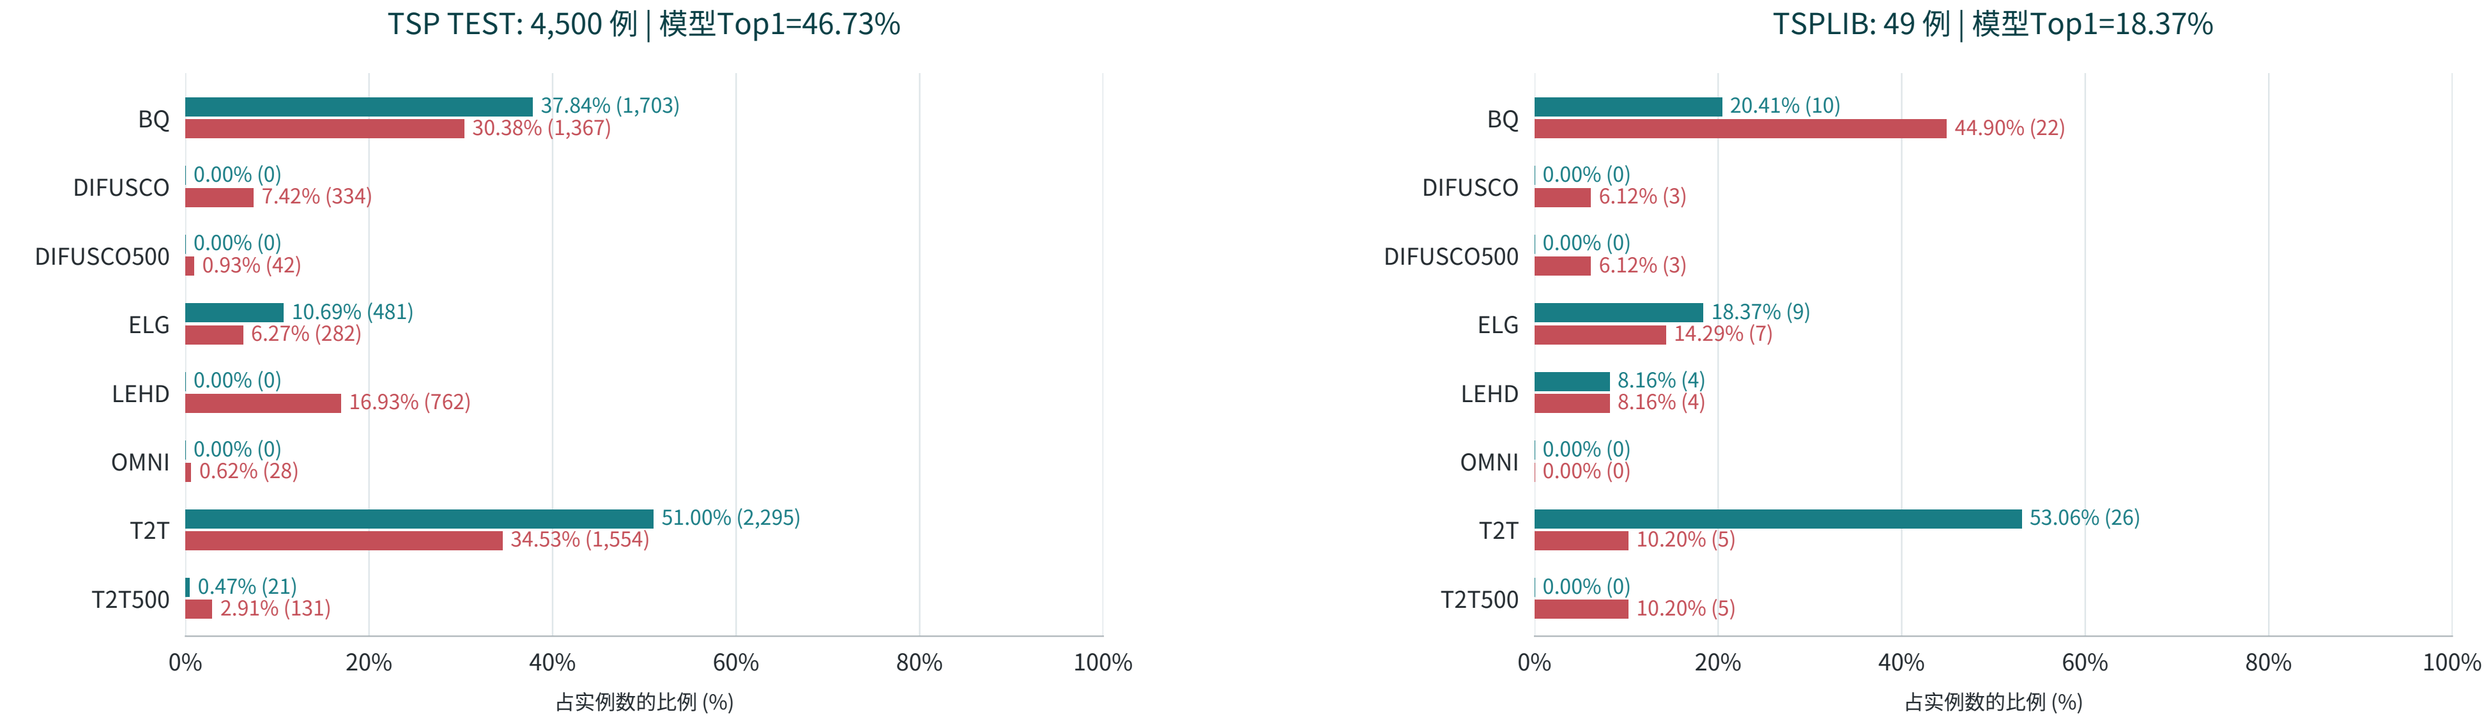

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | CVRP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

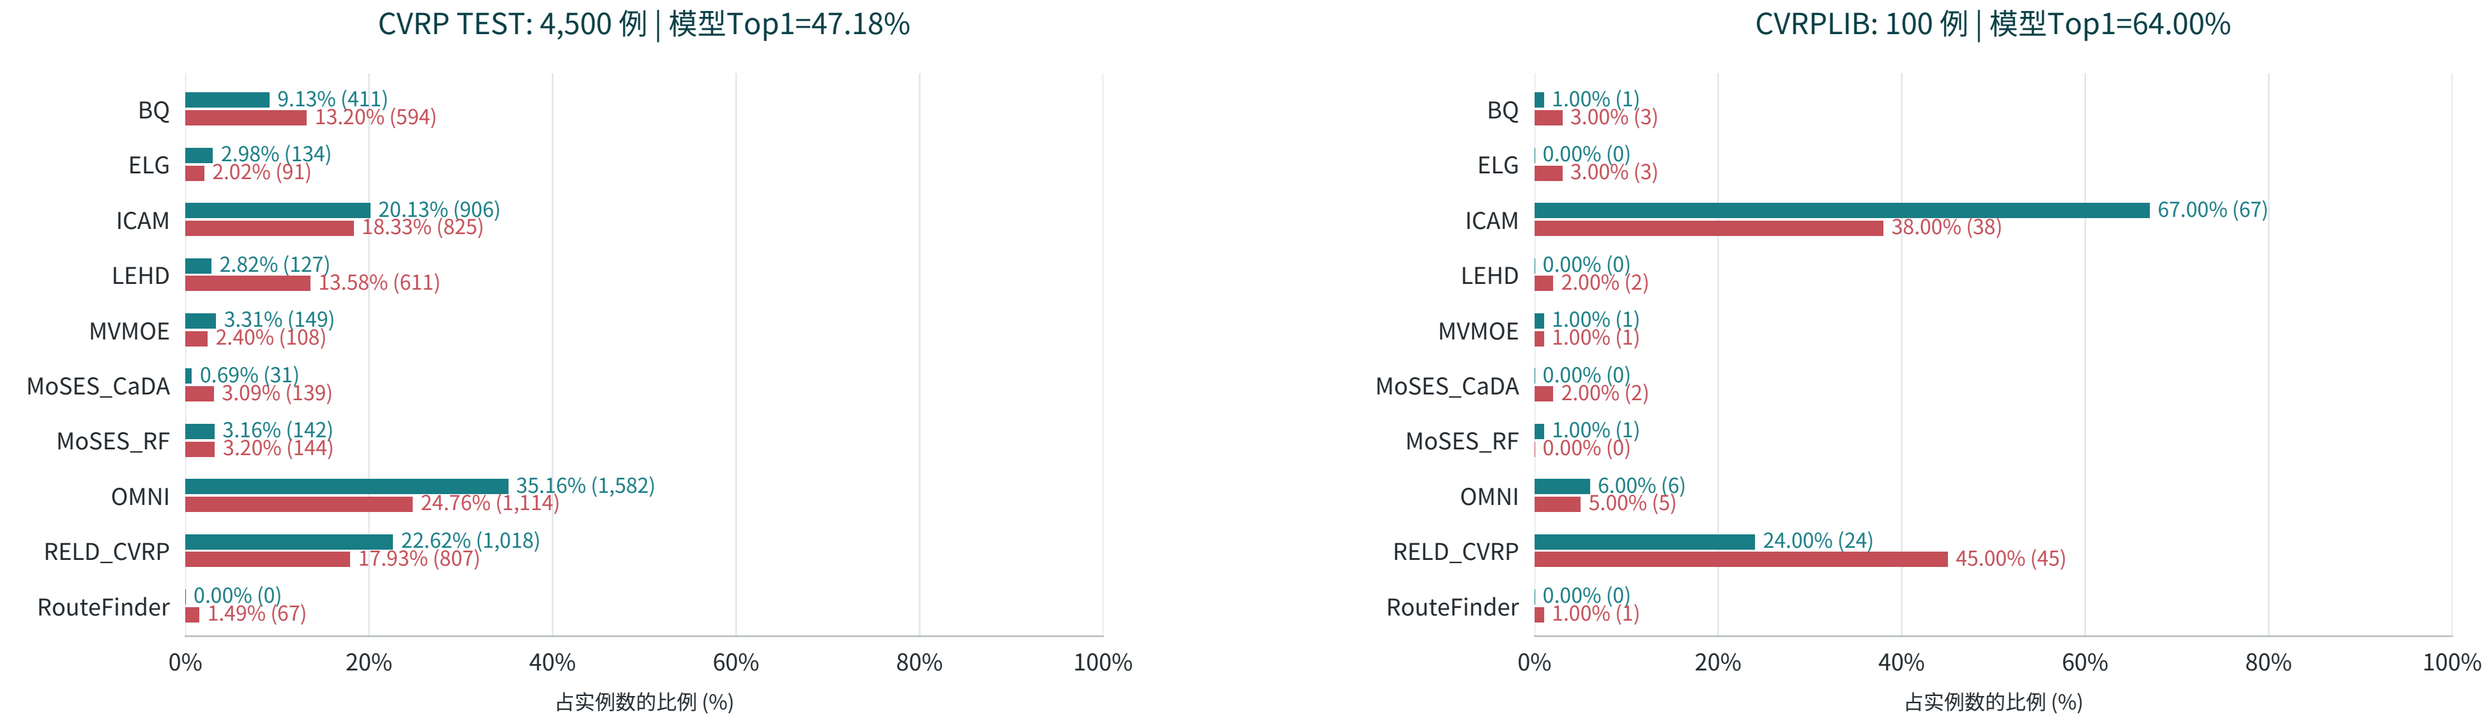

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | ATSP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

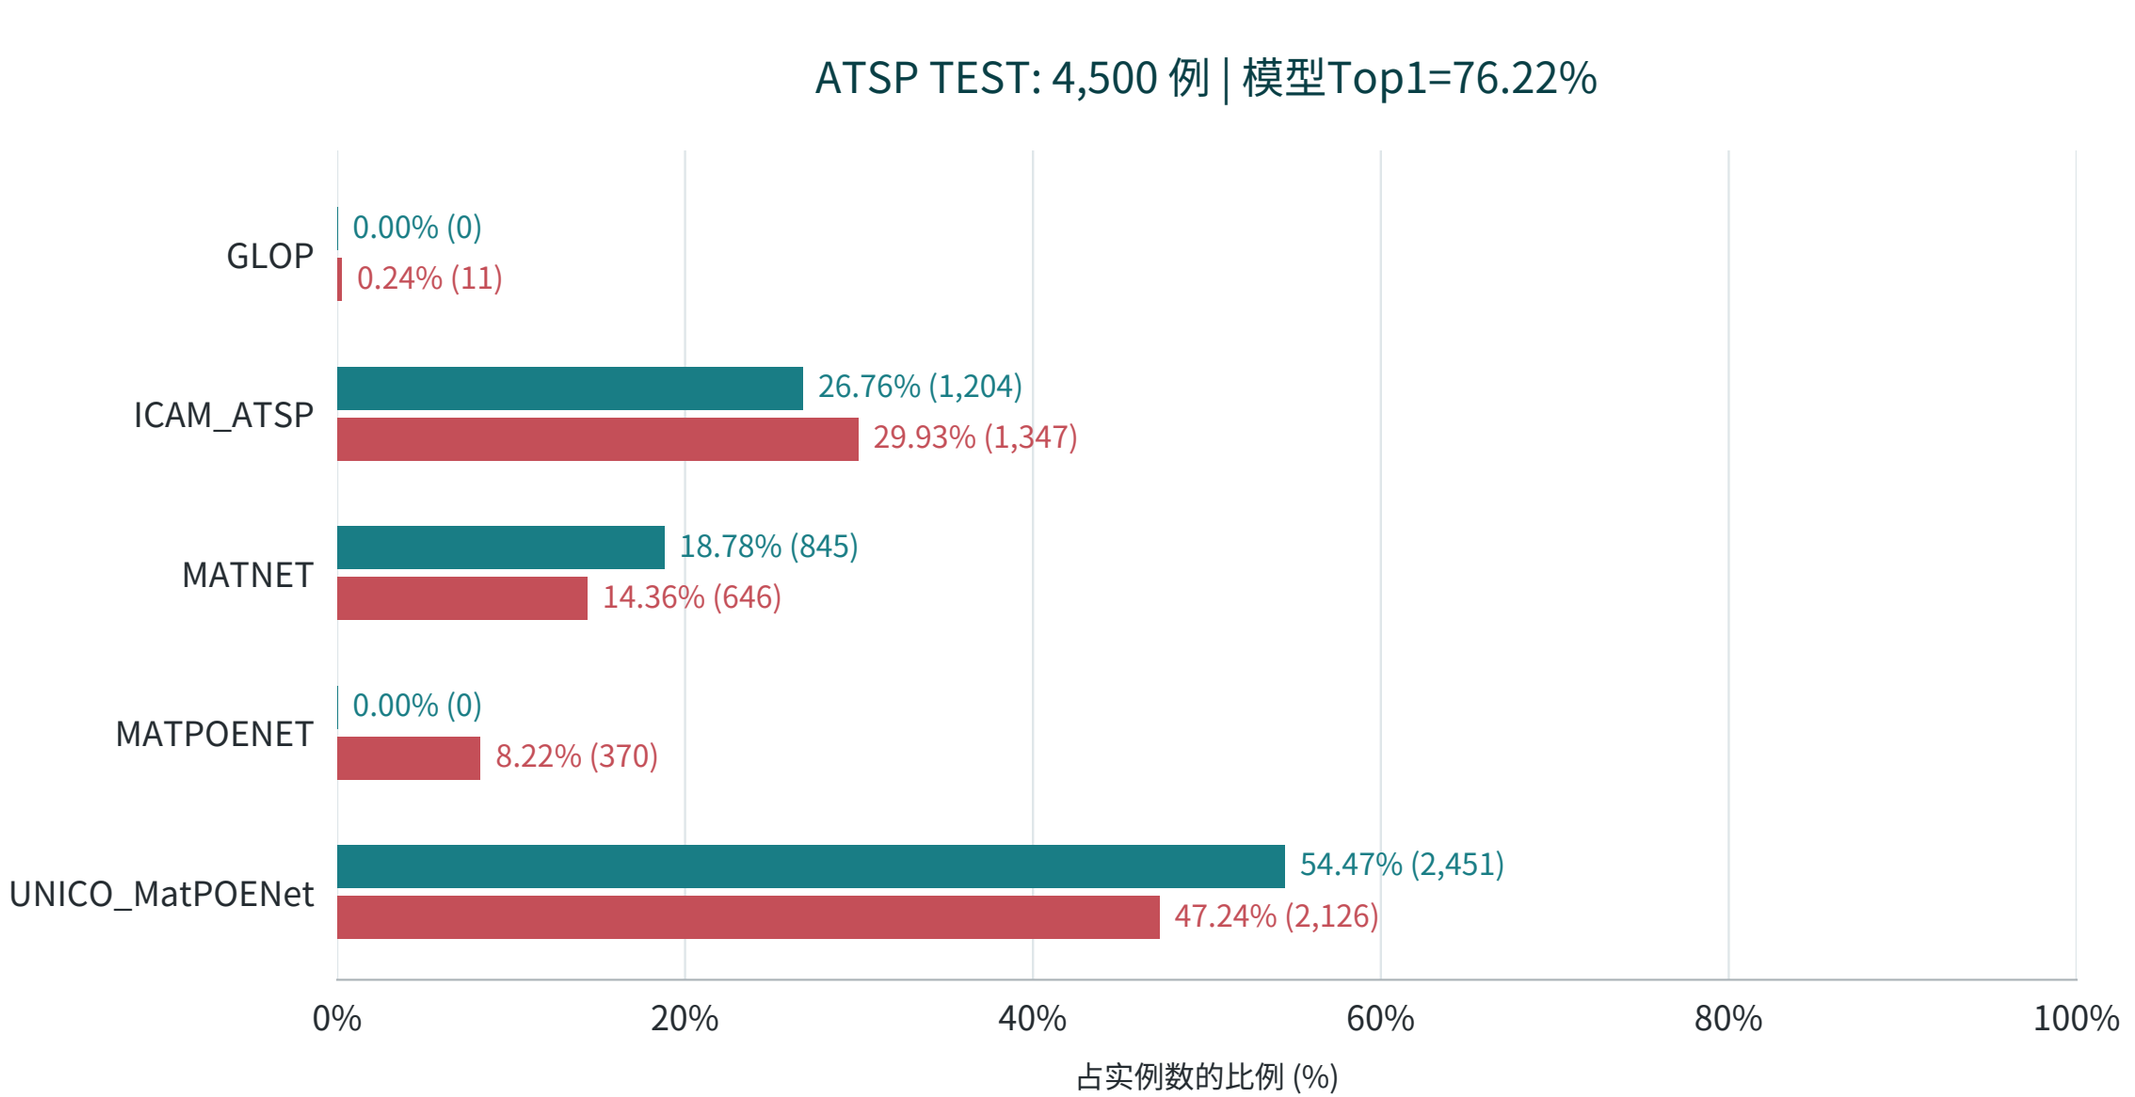

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

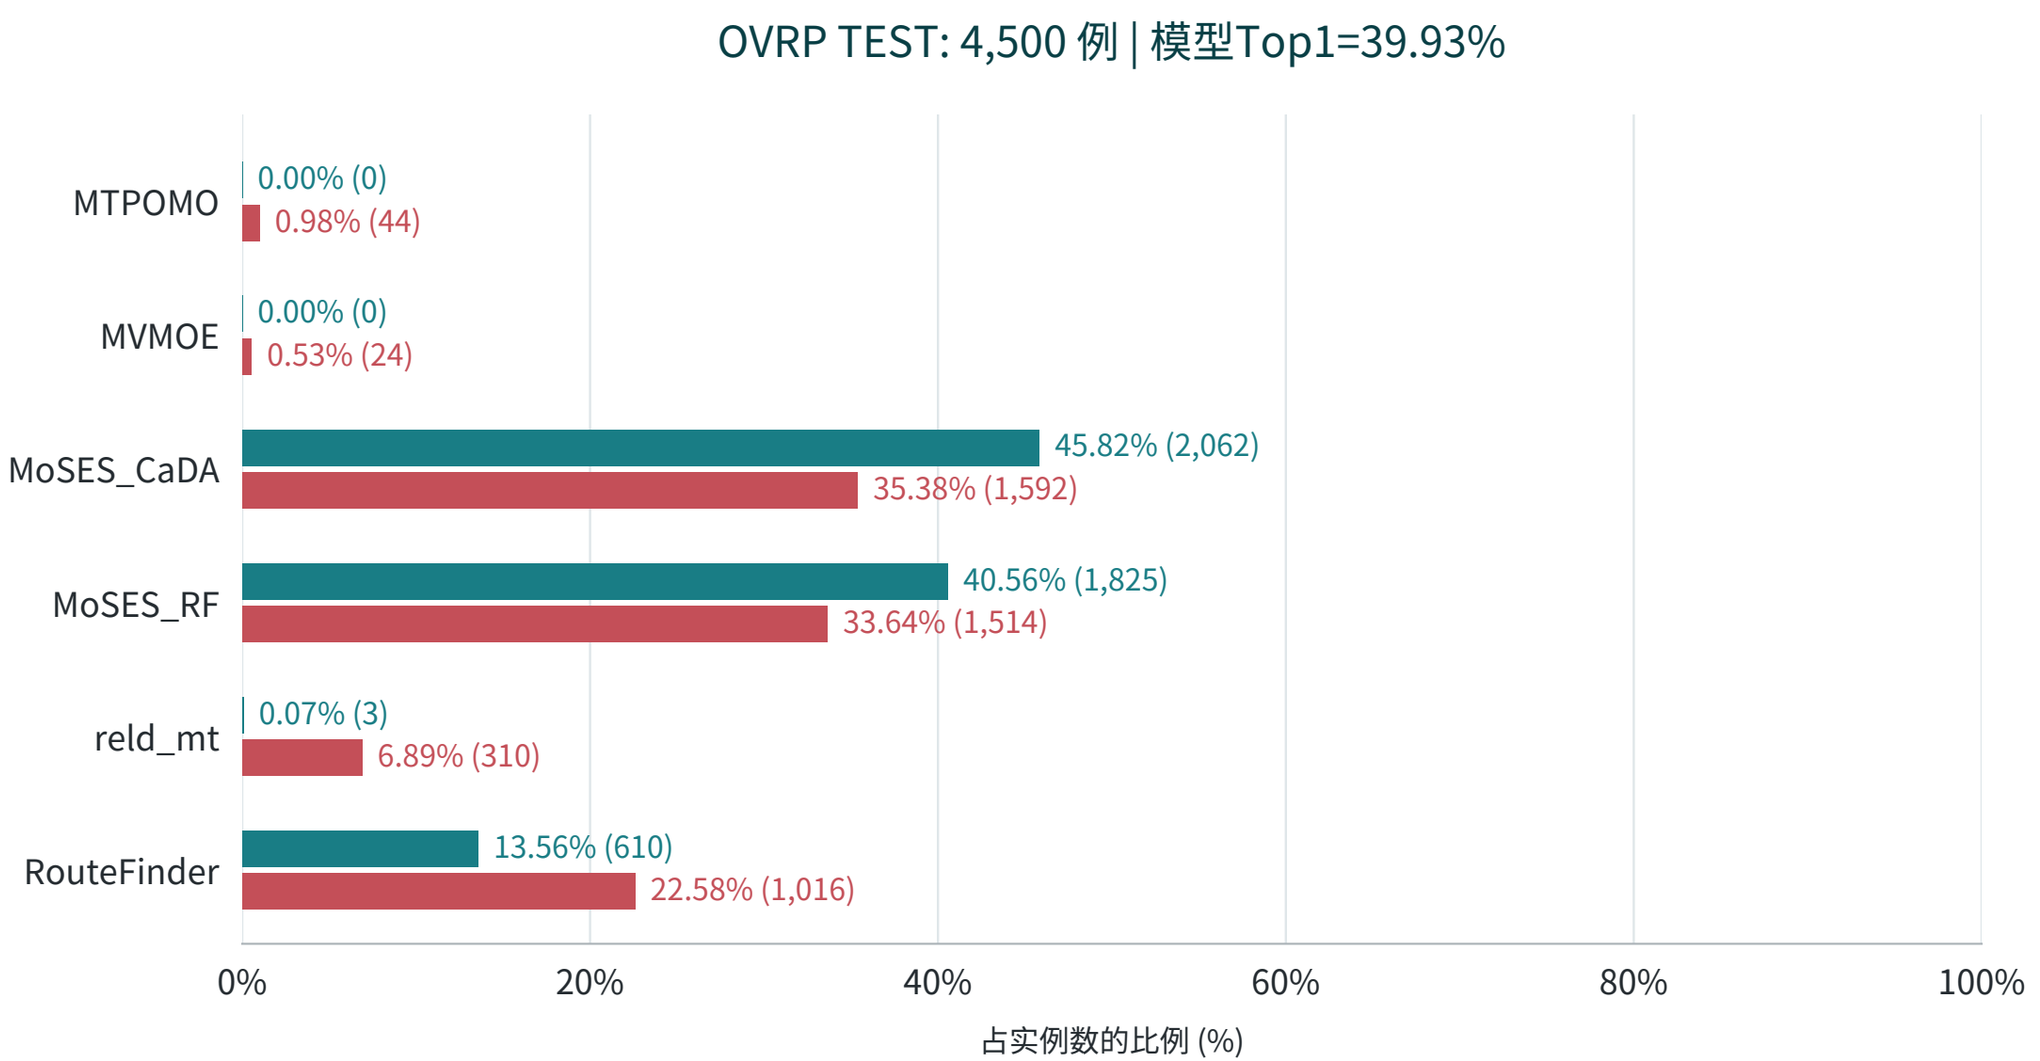

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPB | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

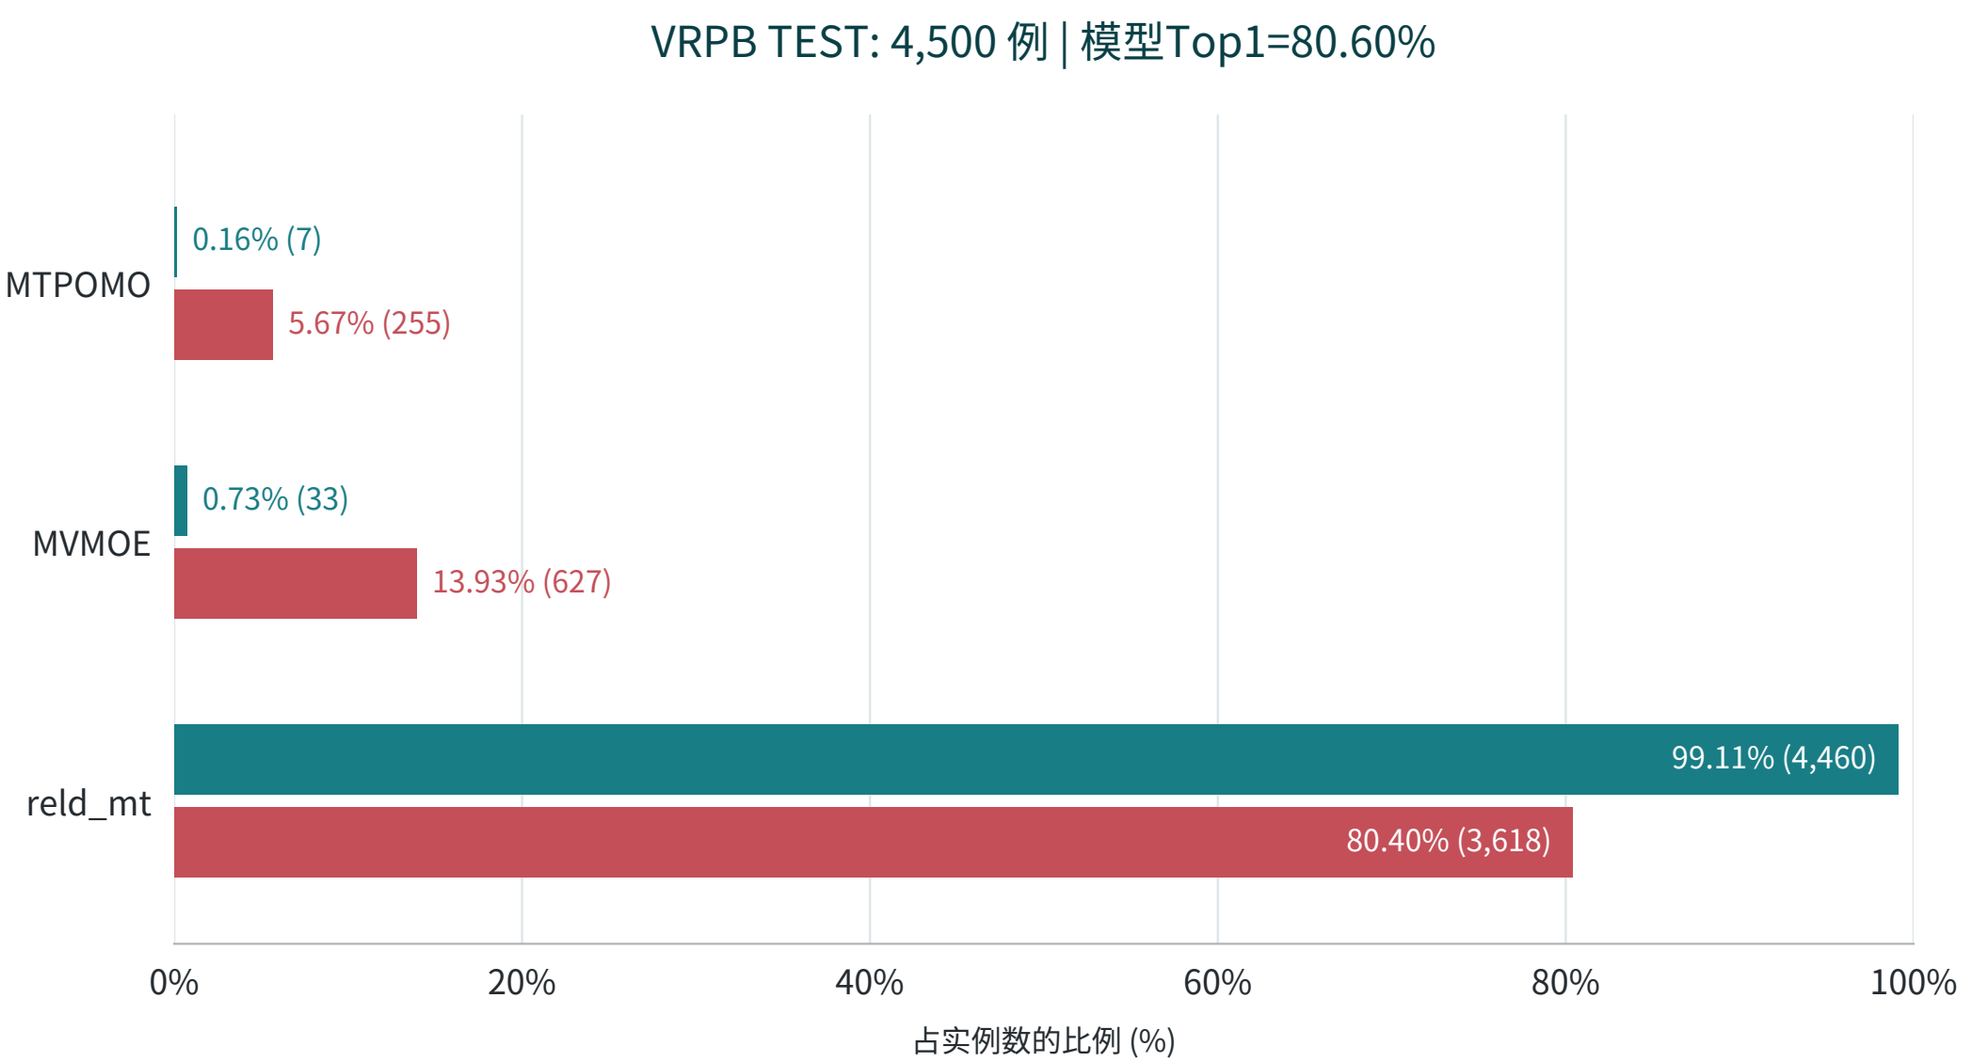

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

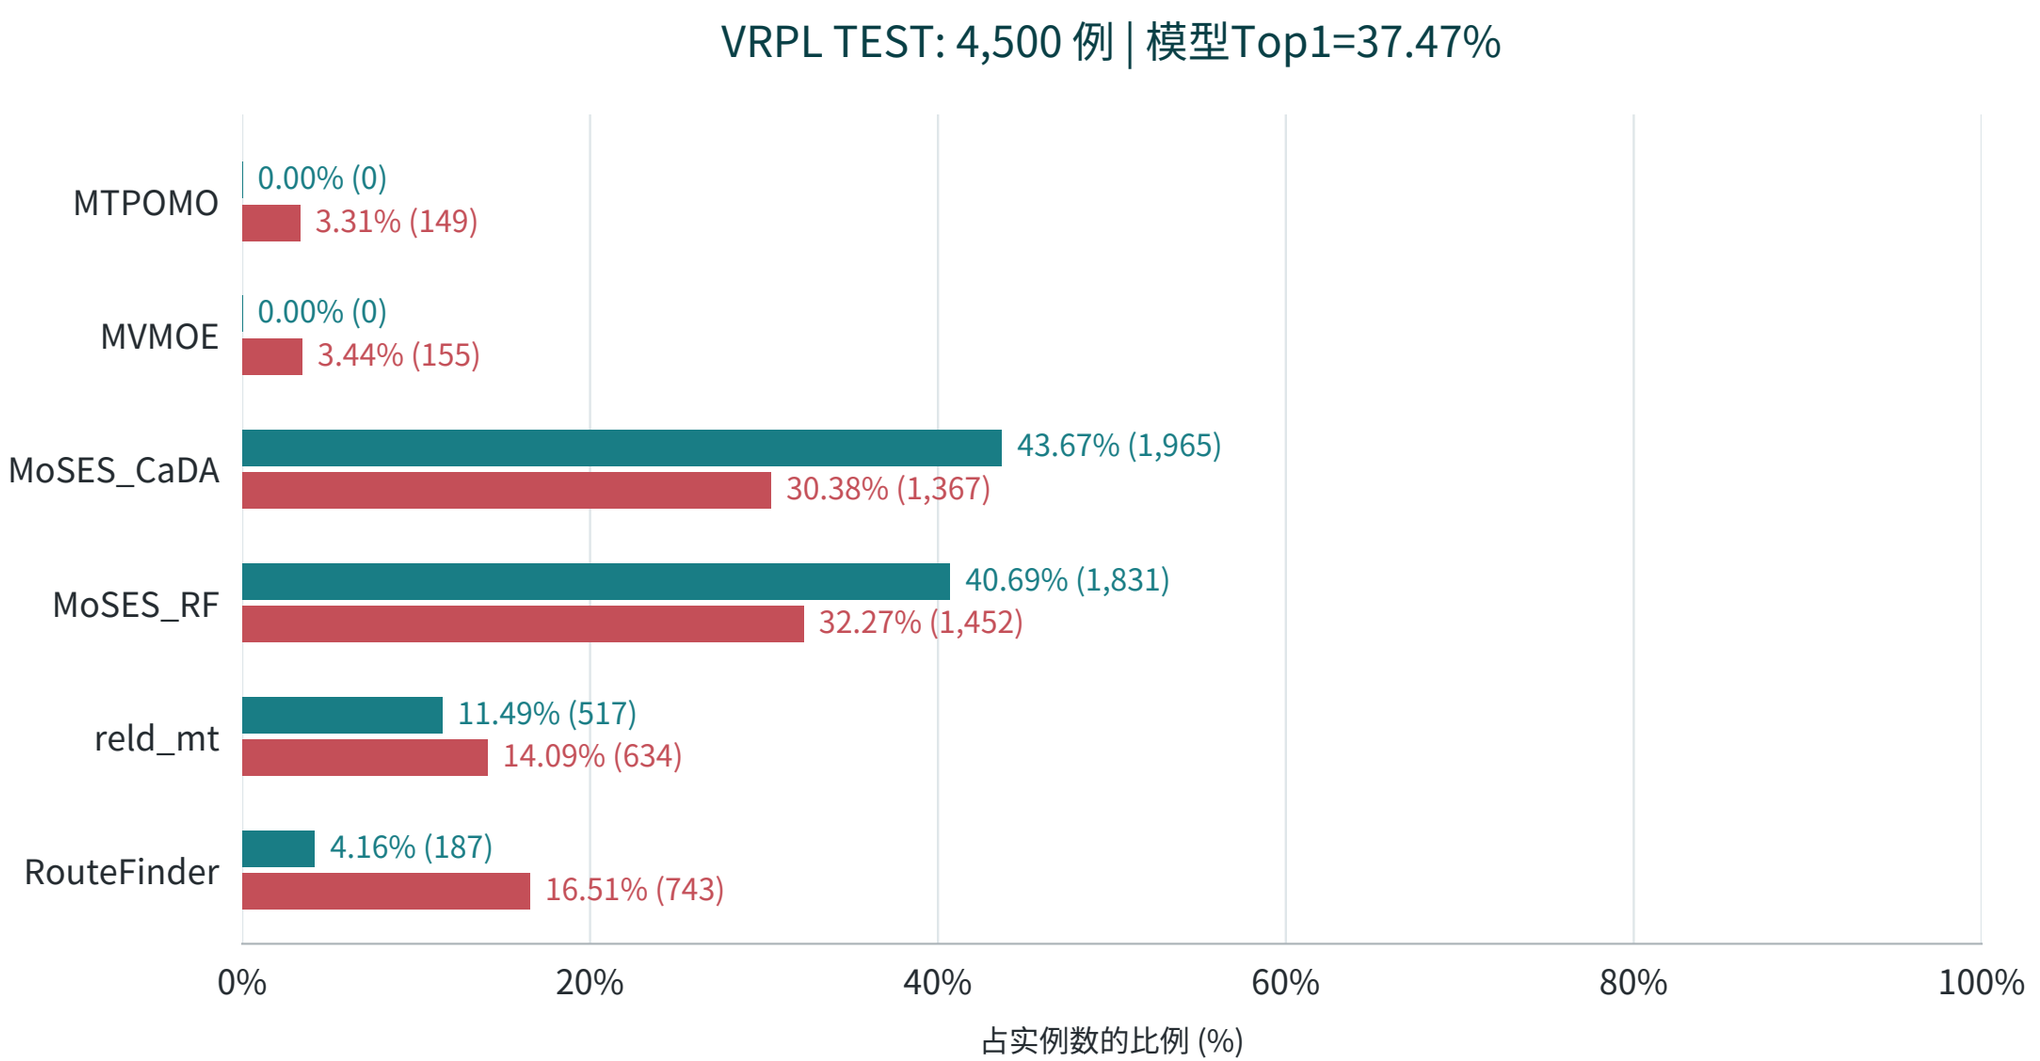

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

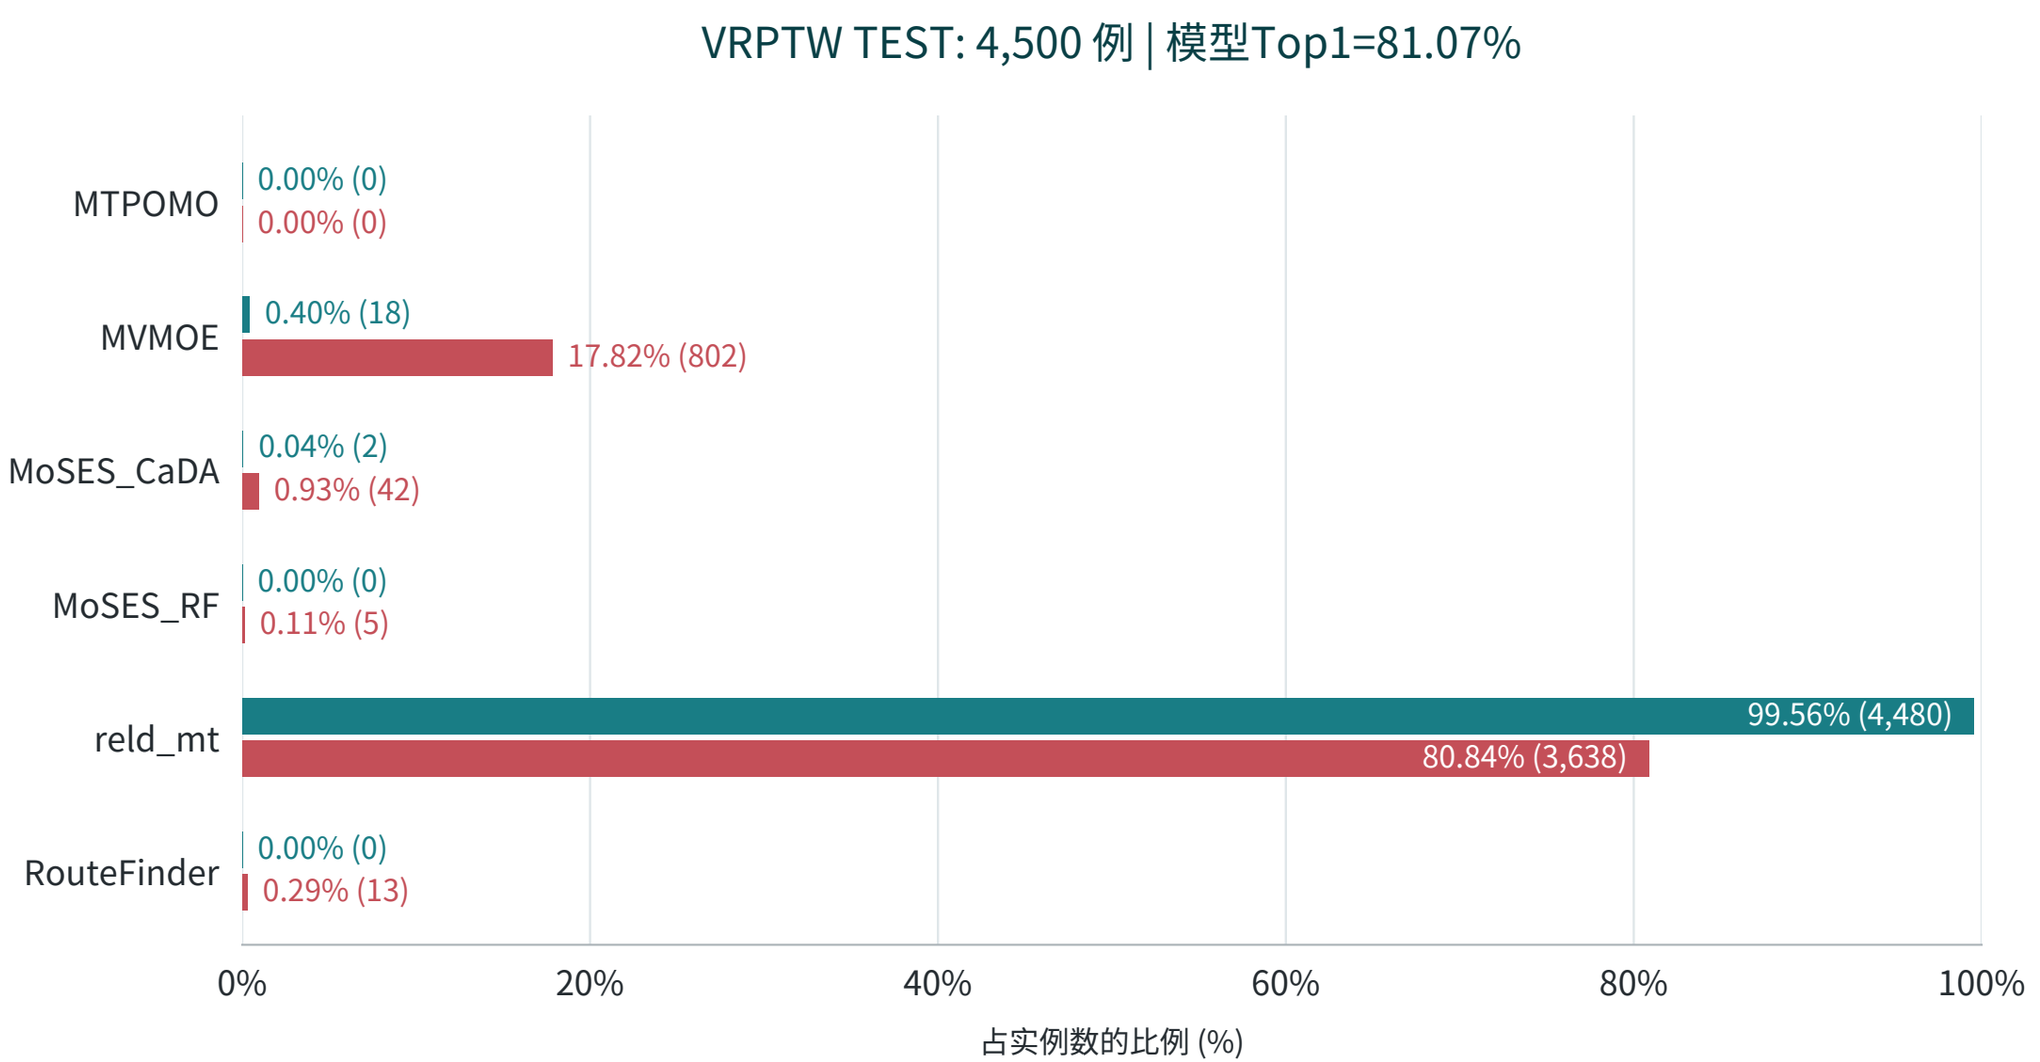

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

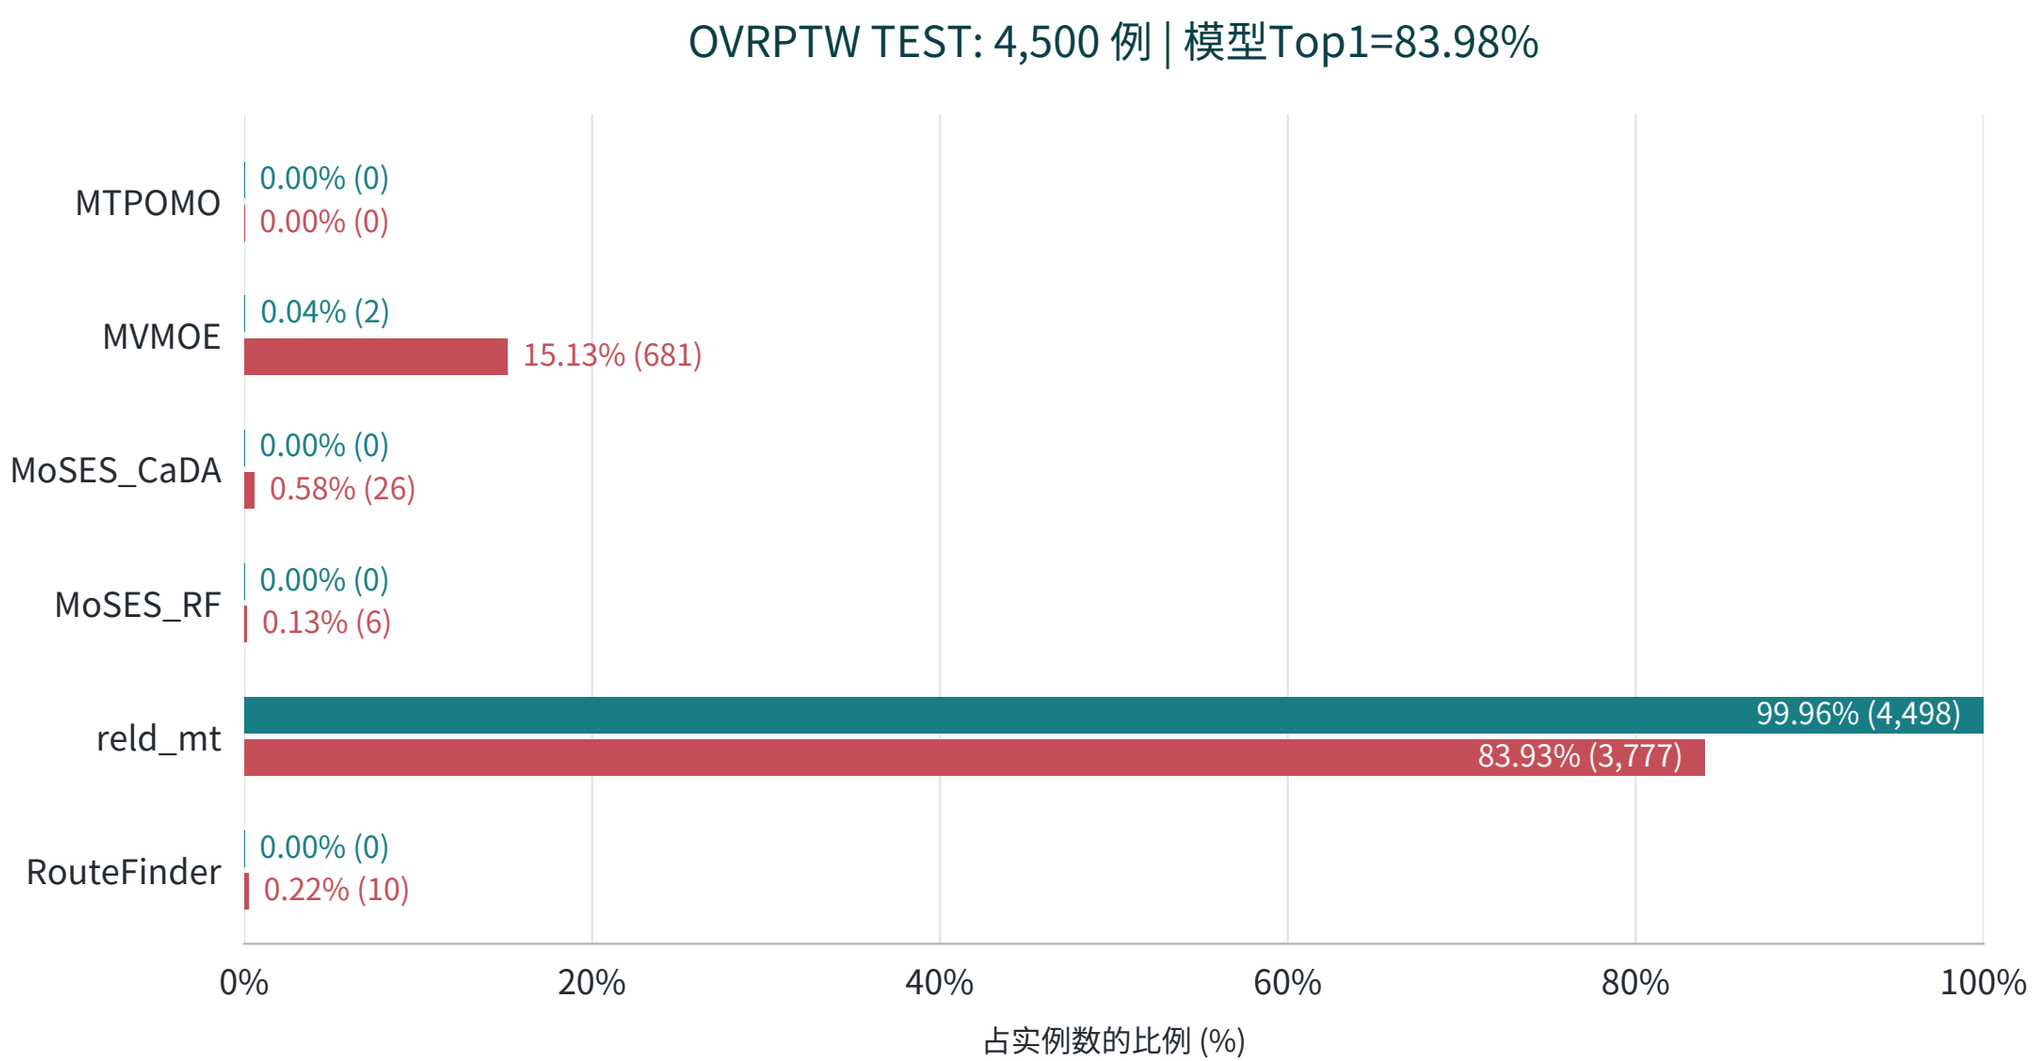

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPB | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

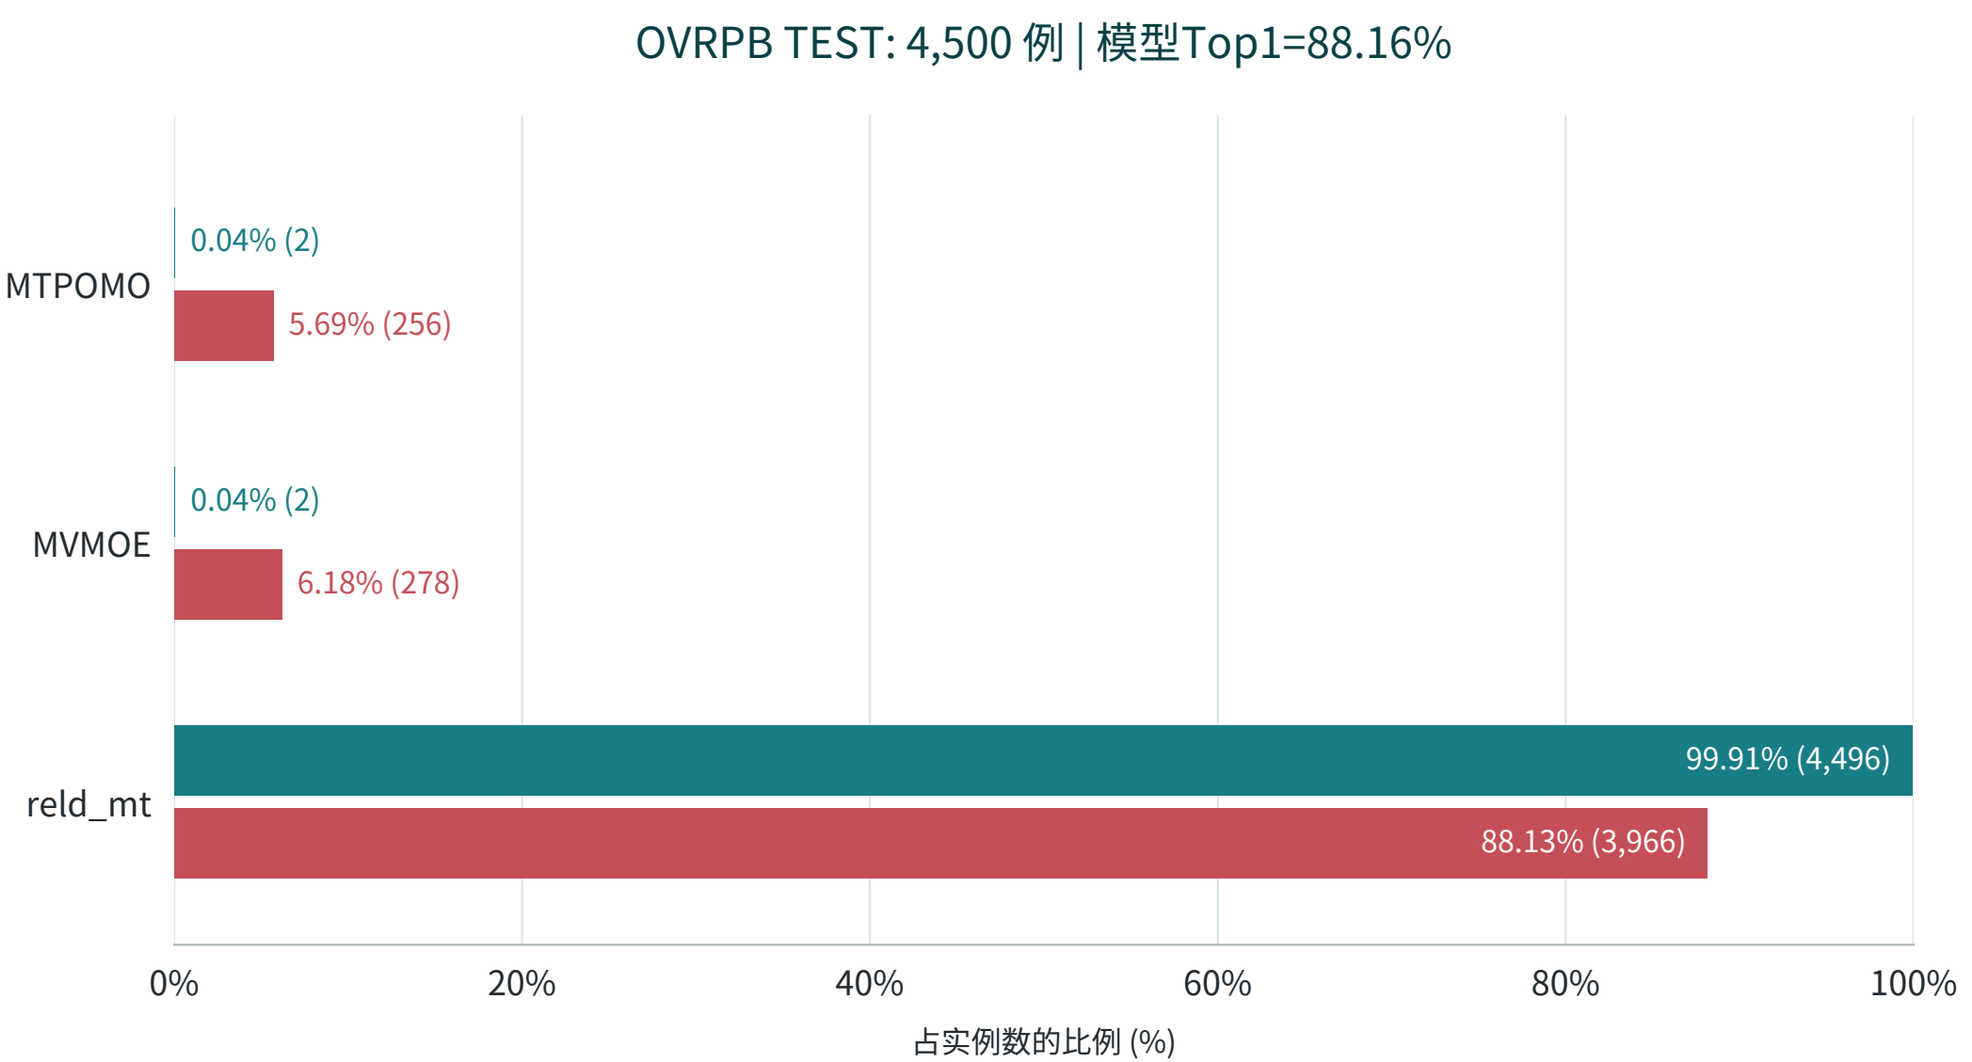

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

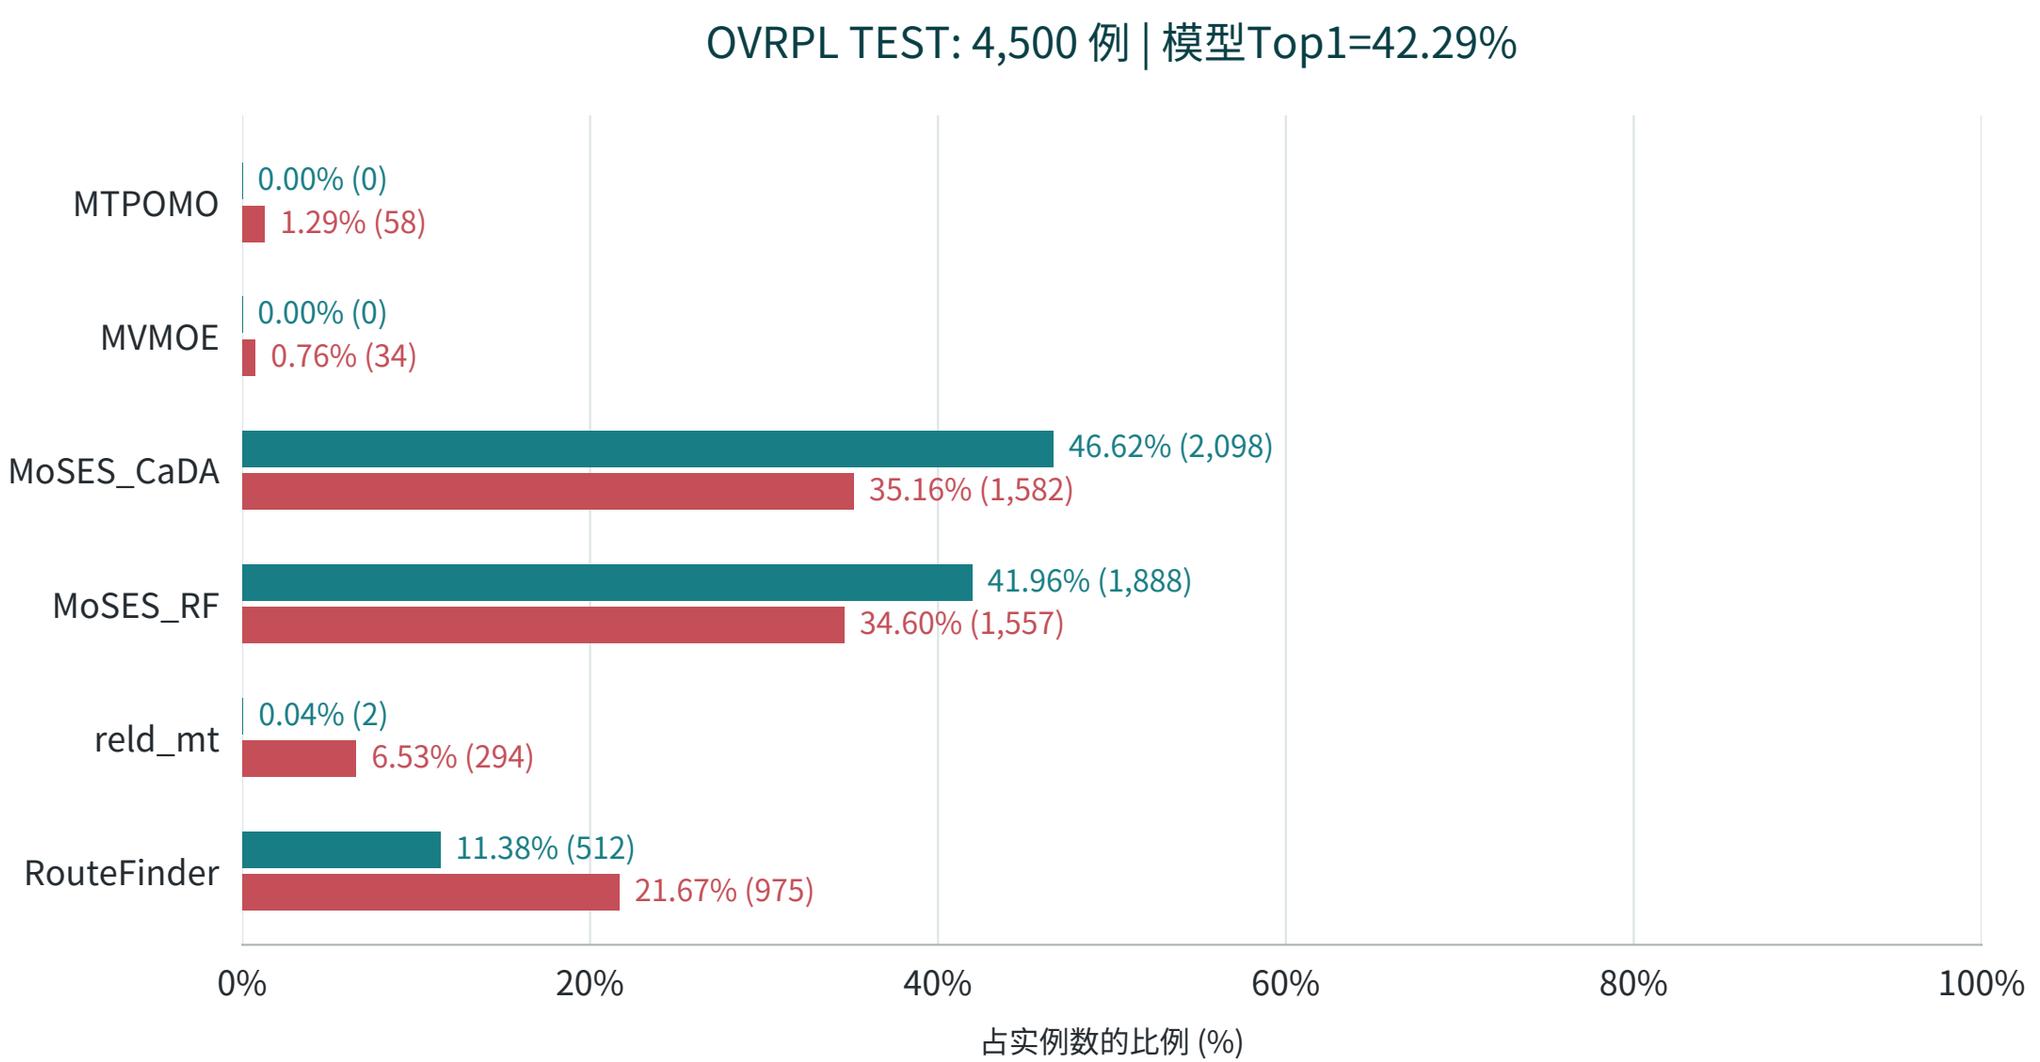

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPBL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

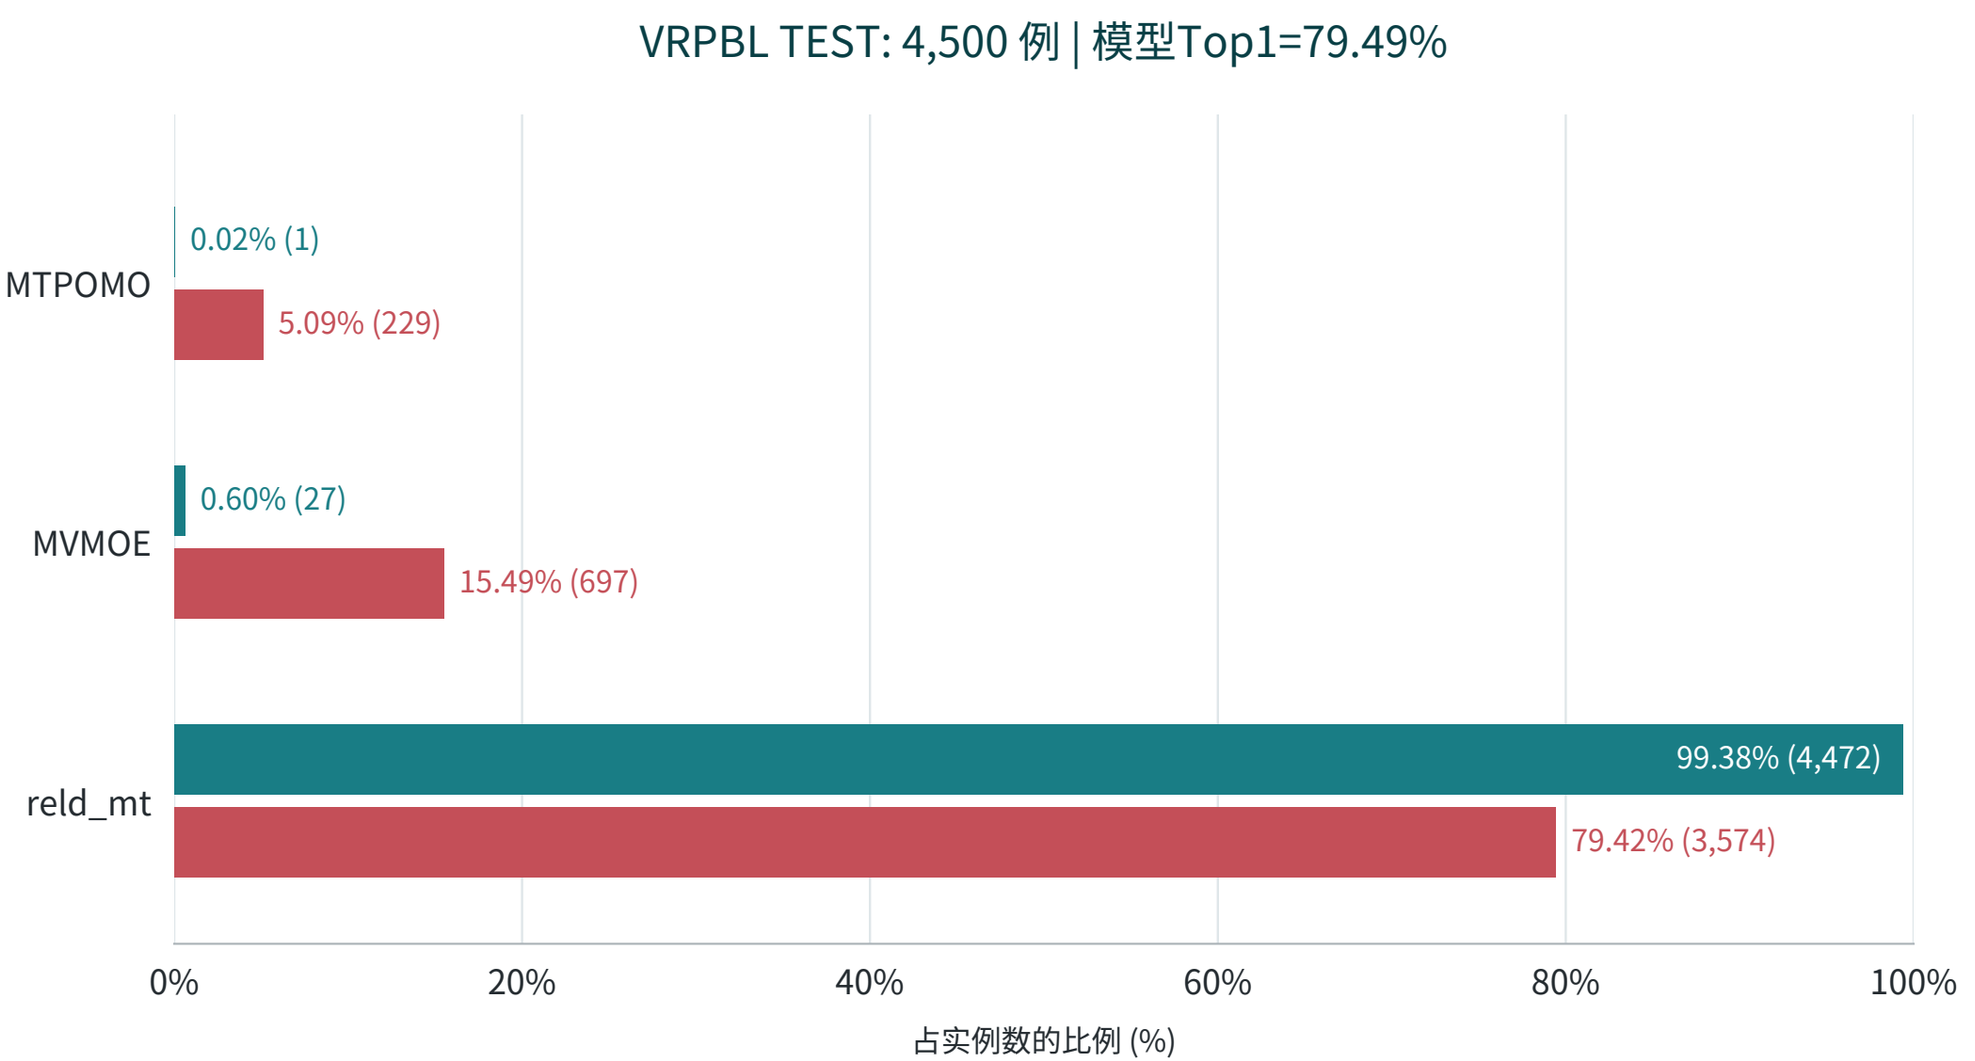

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPBTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

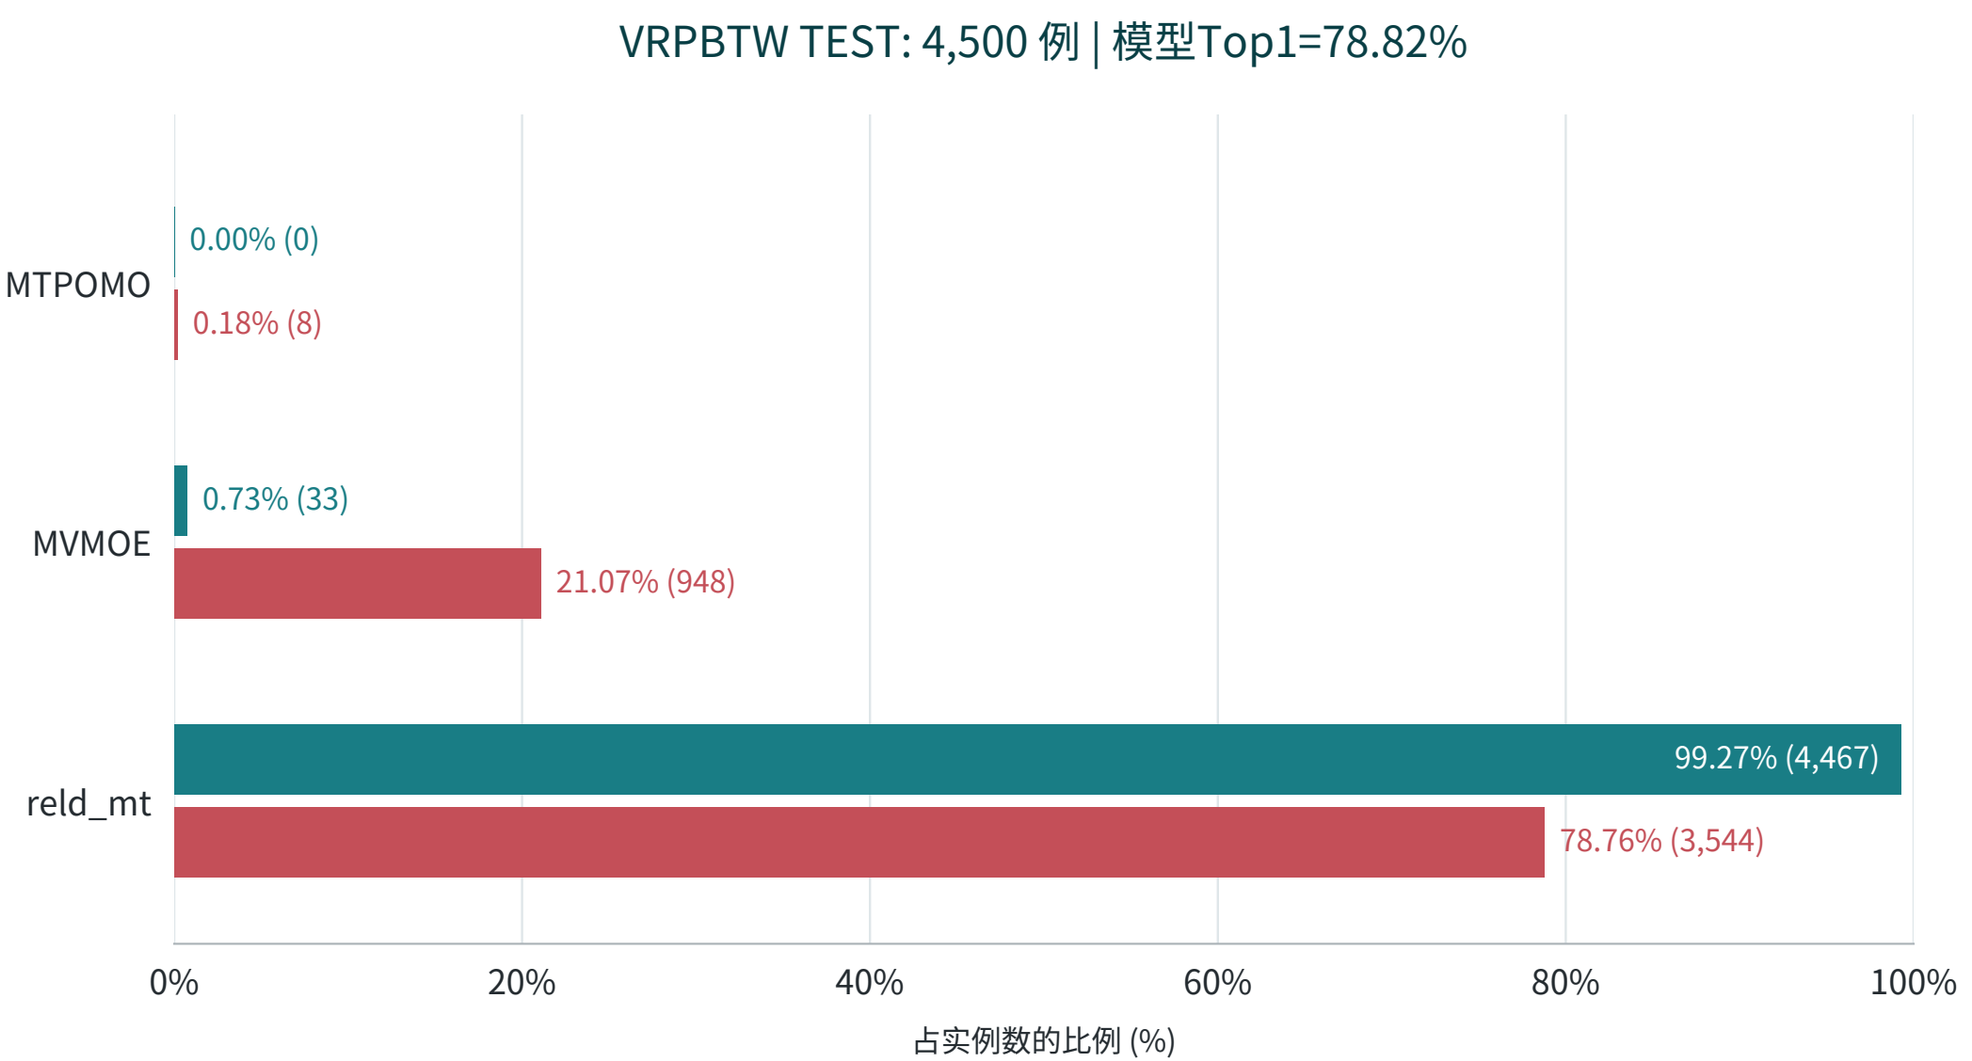

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

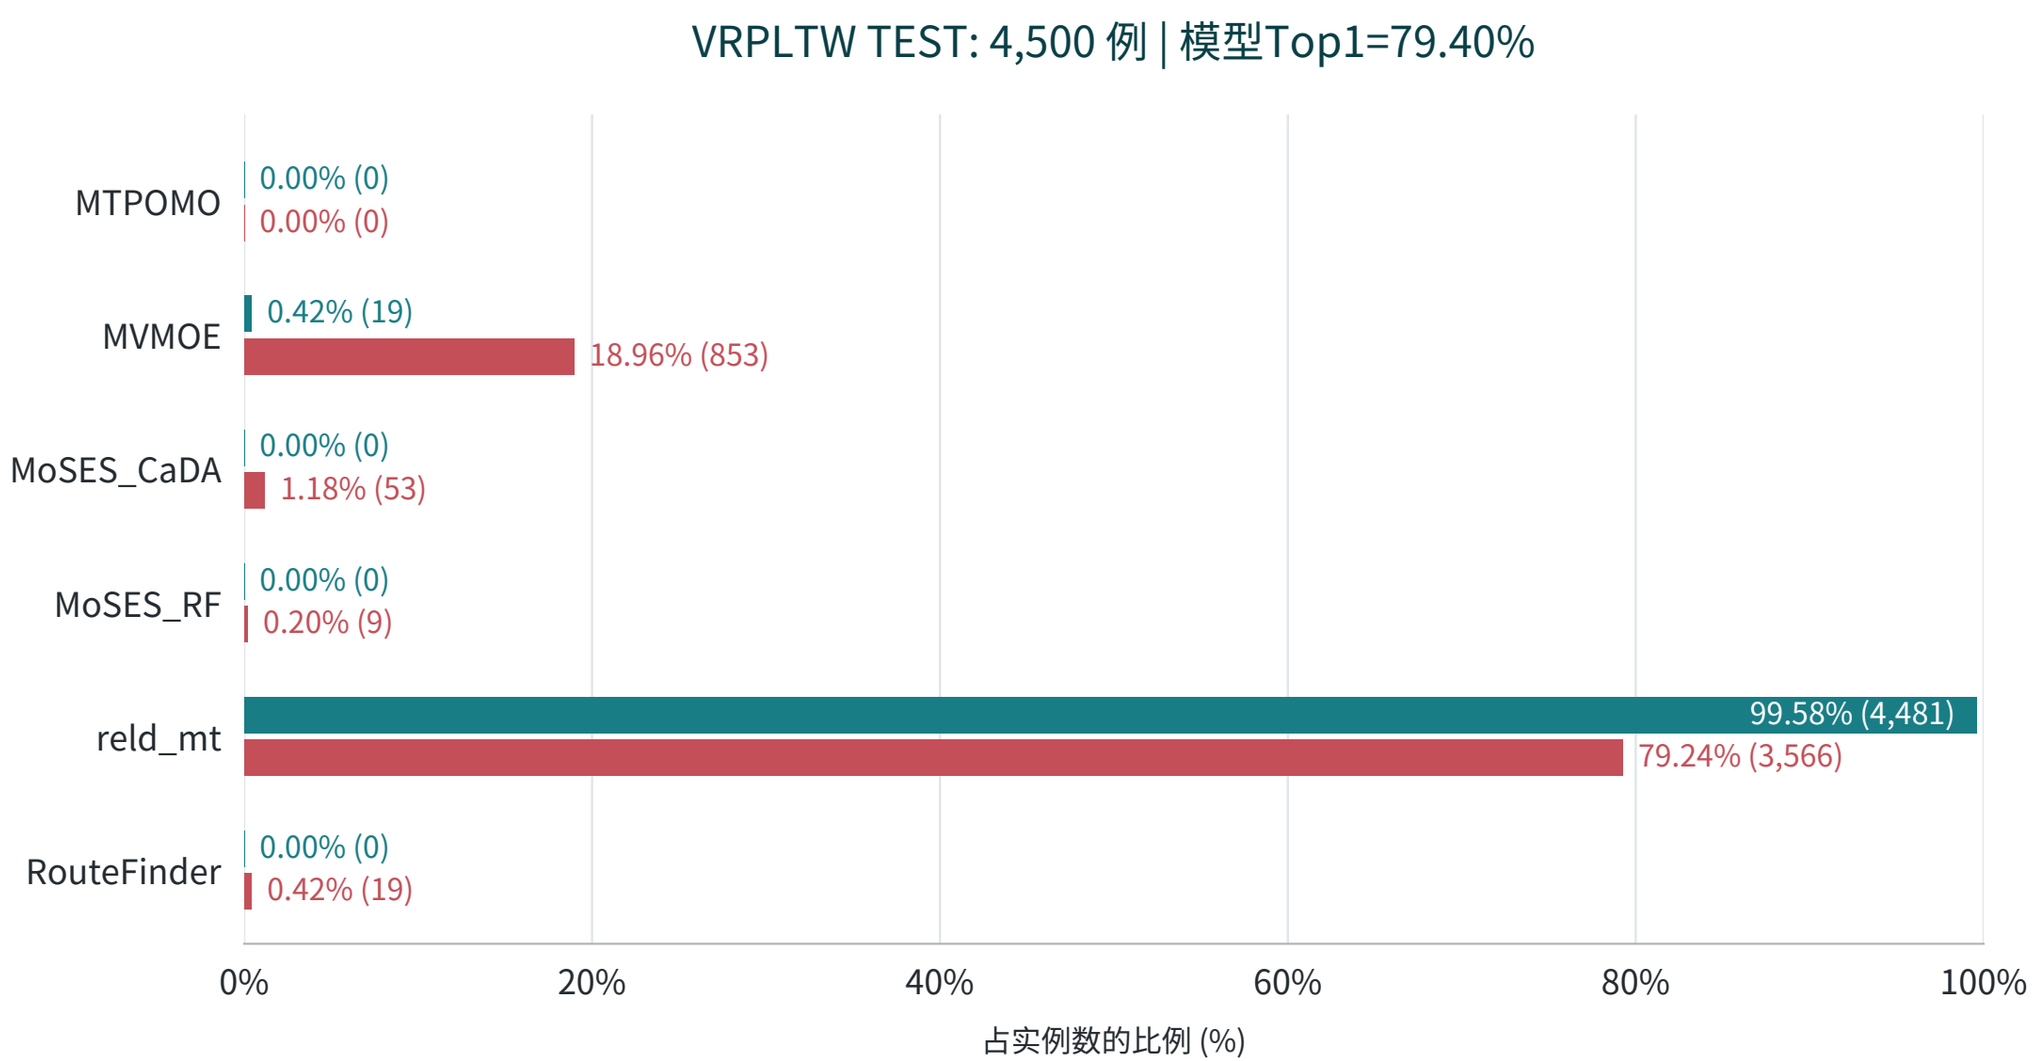

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPBL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

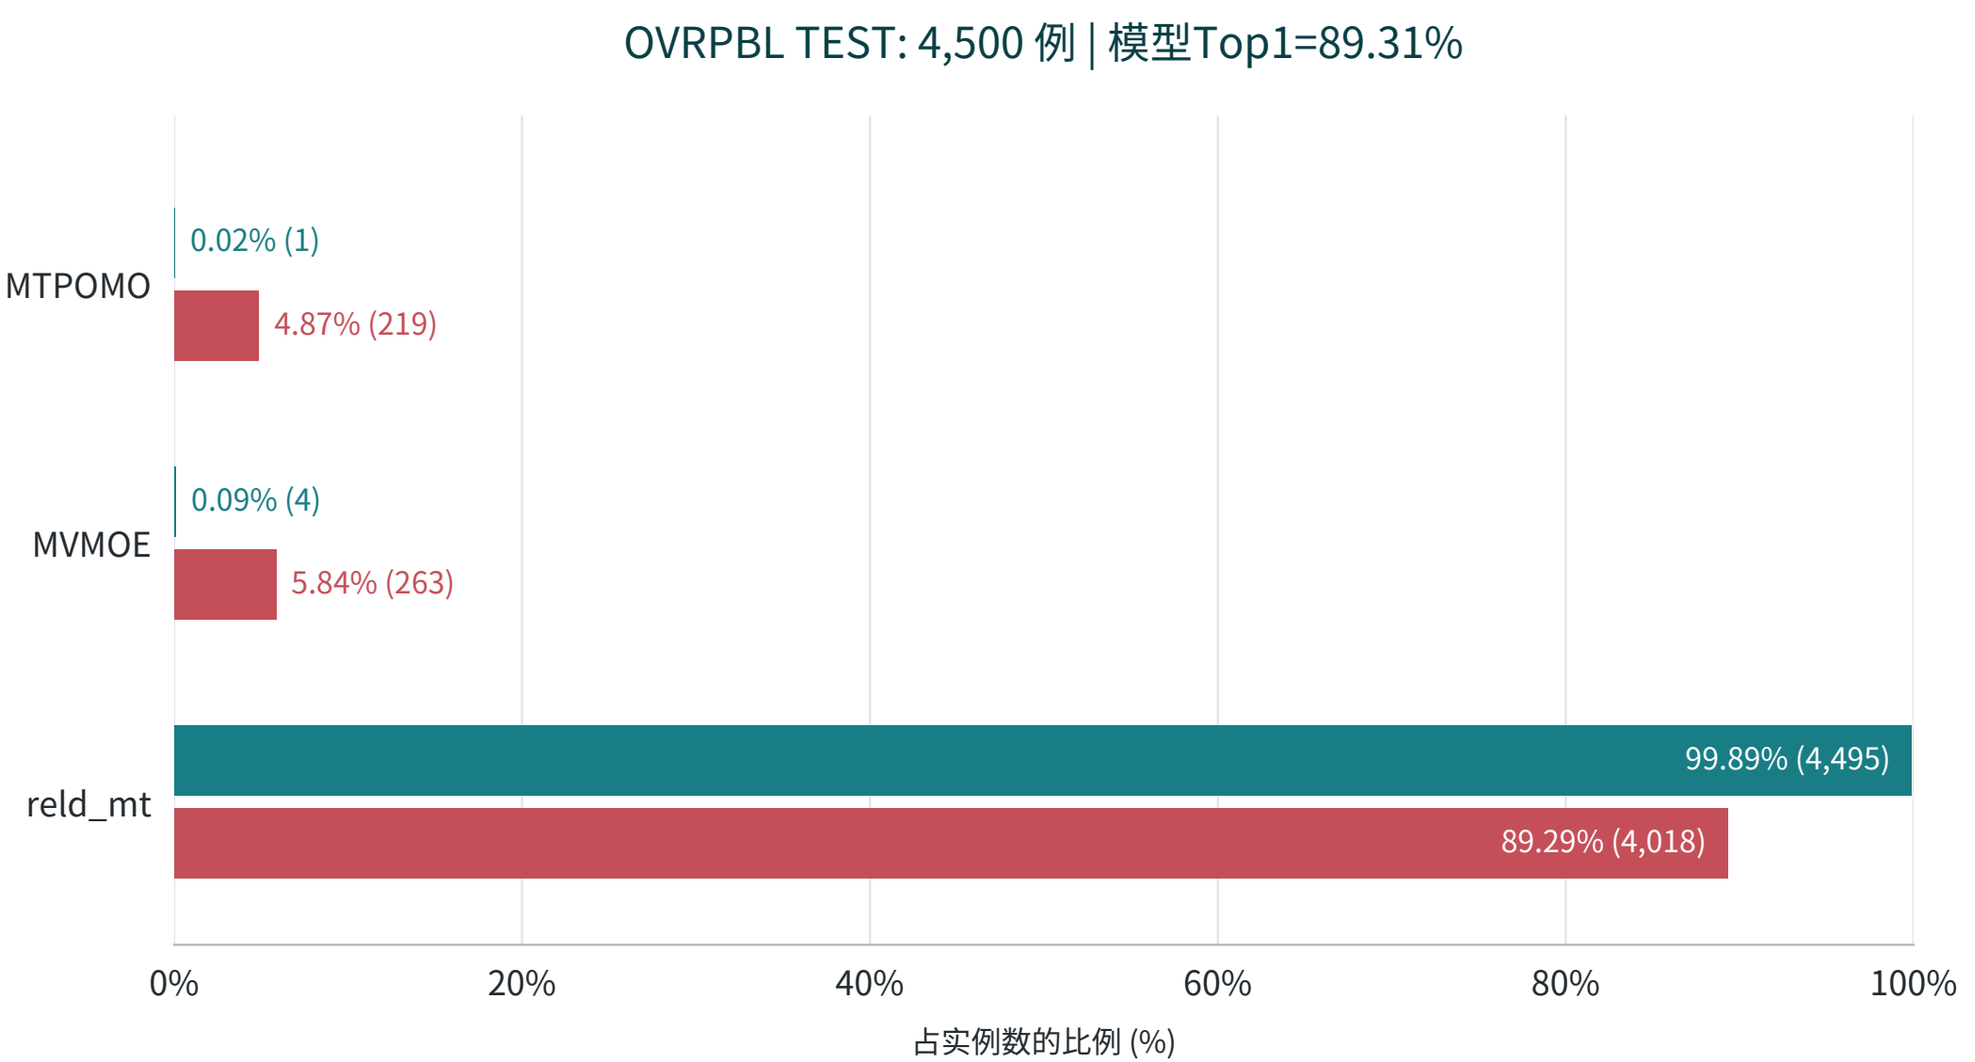

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPBTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

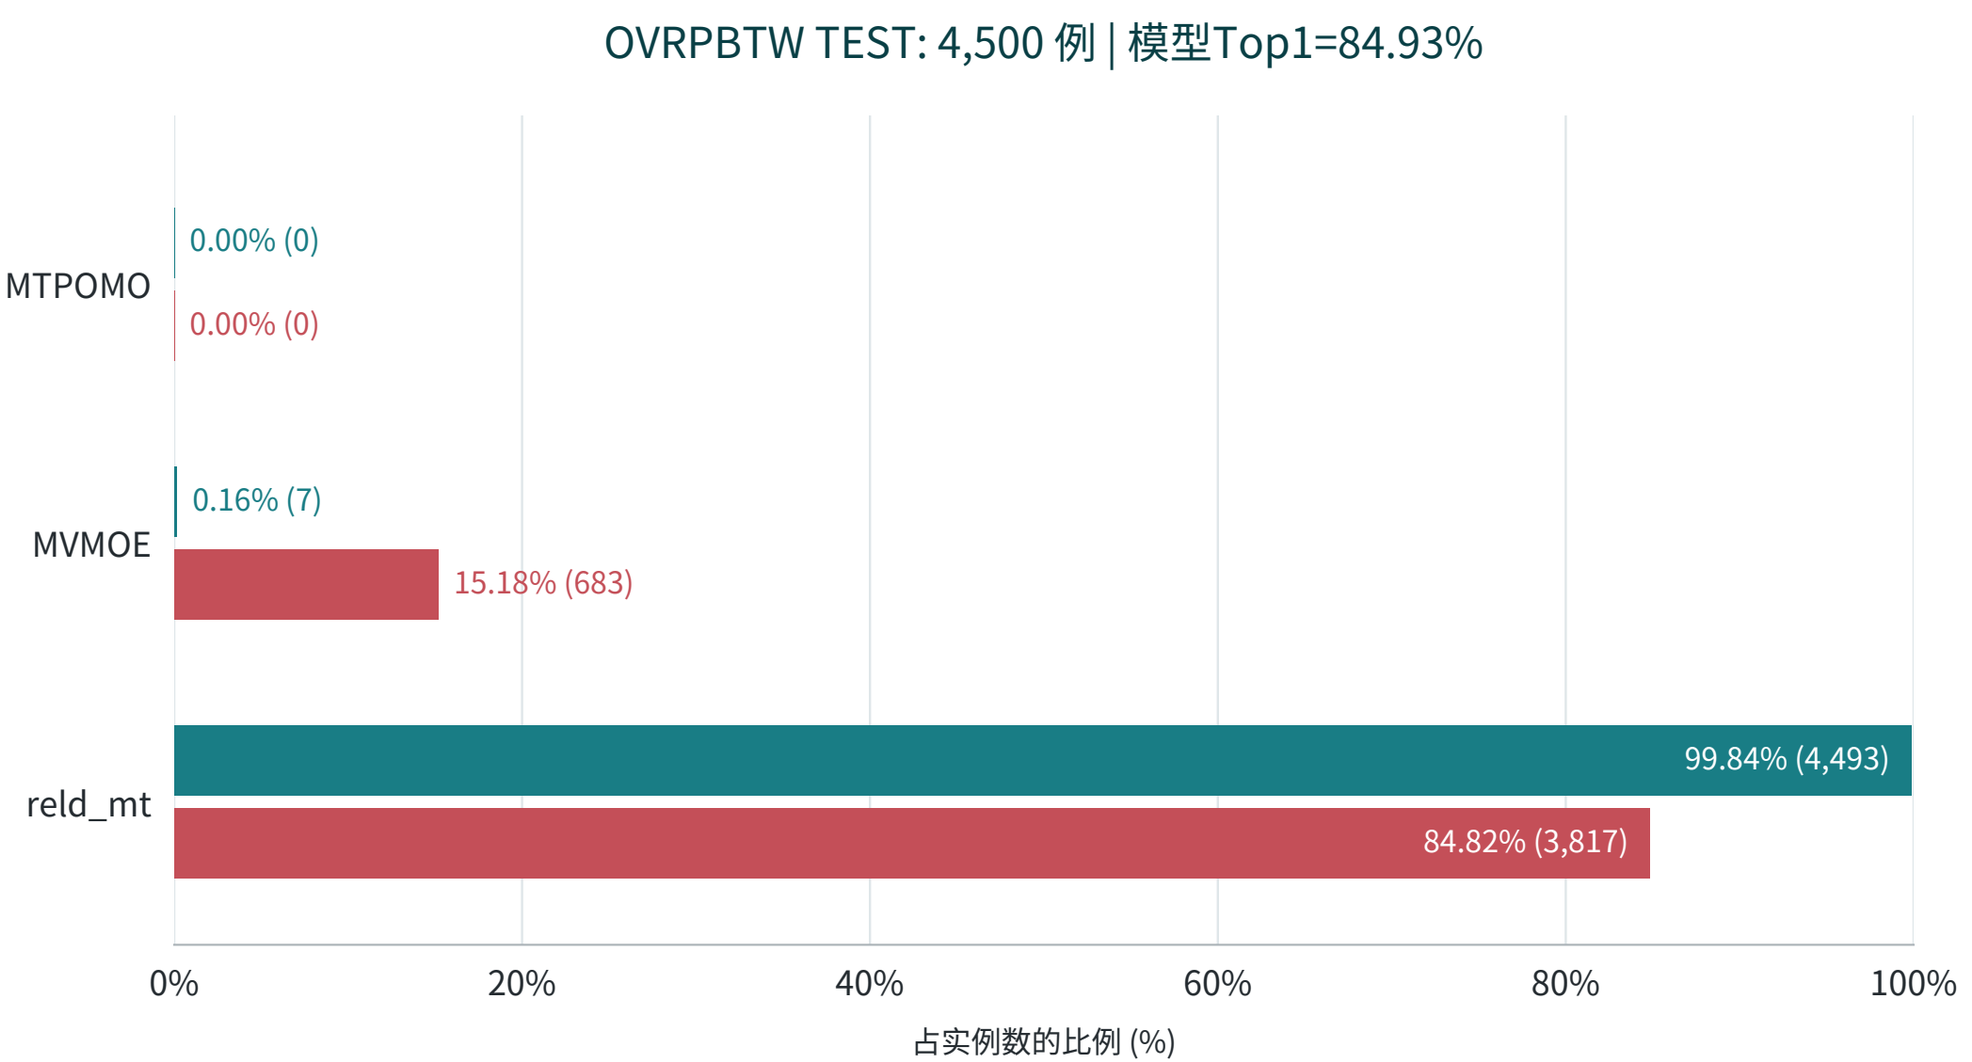

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

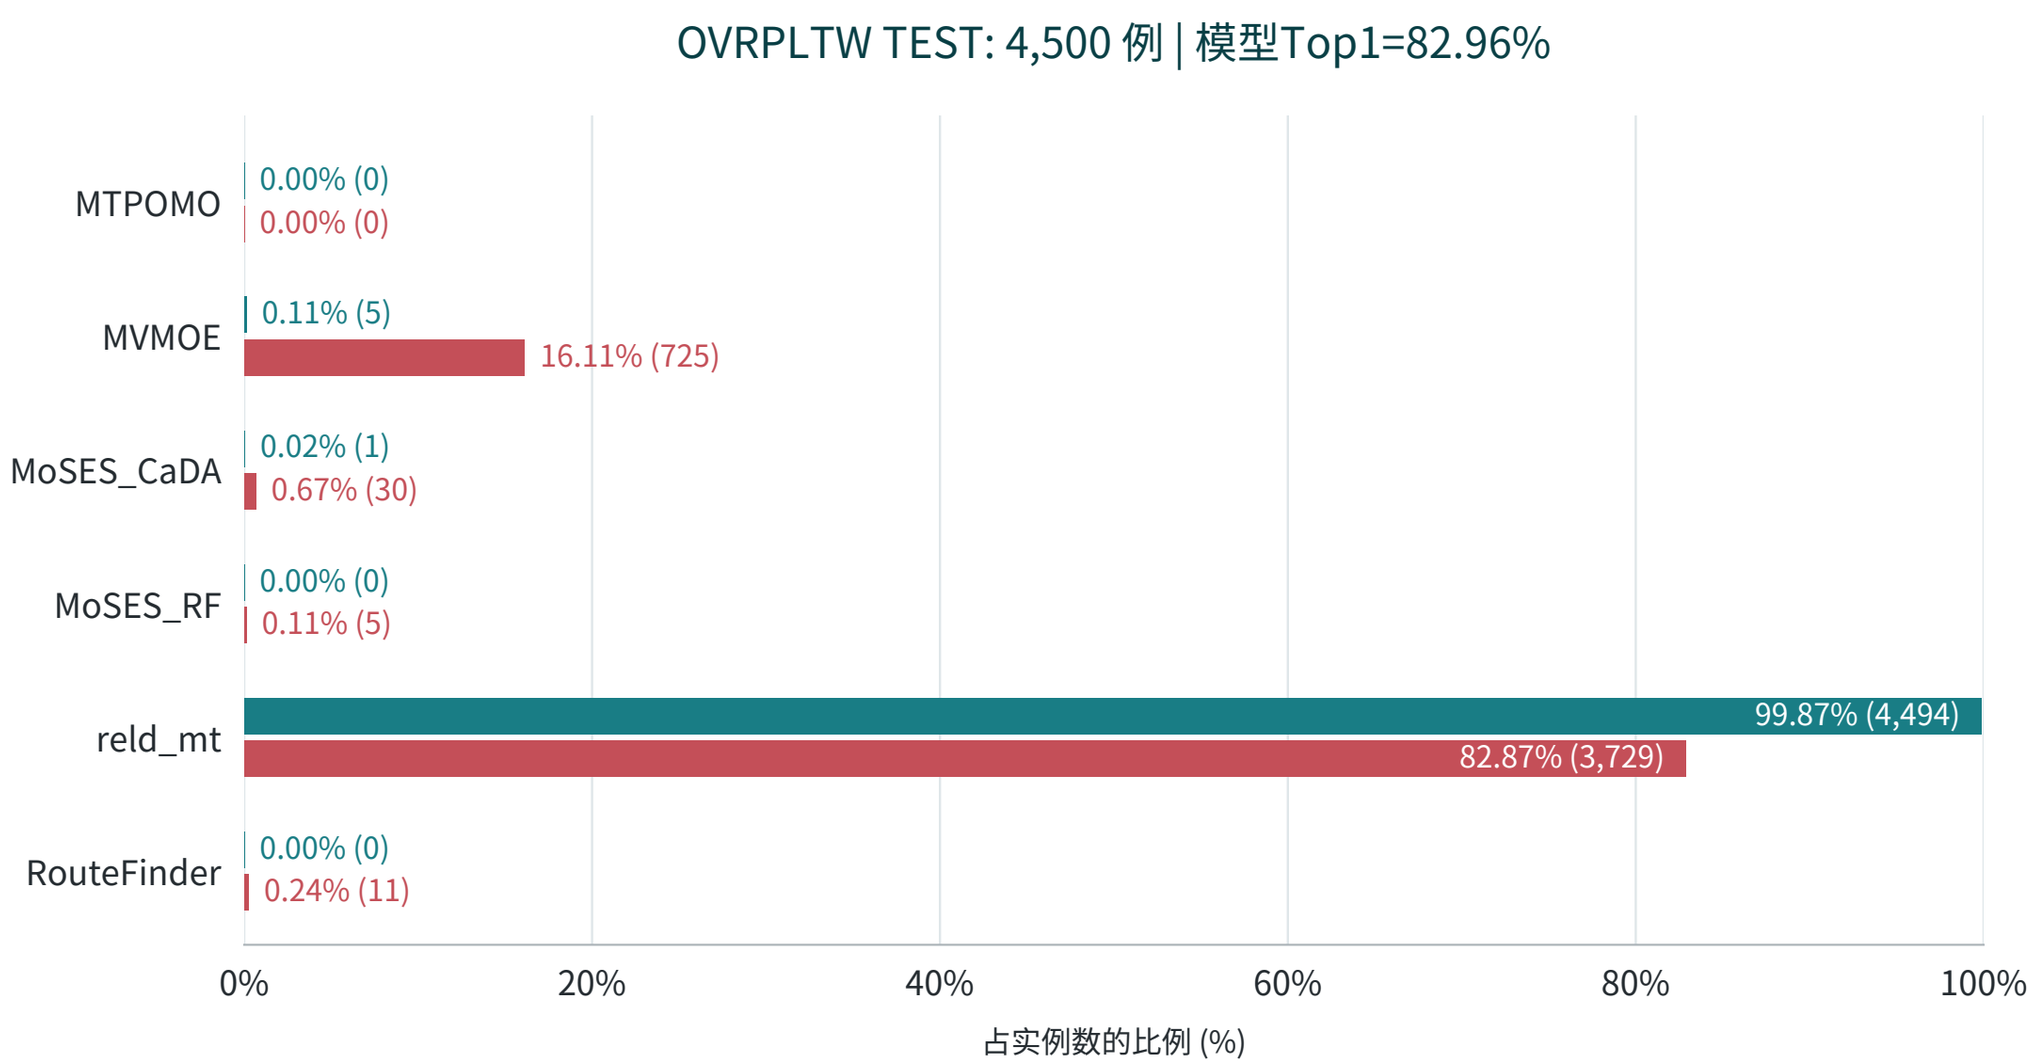

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | VRPBLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

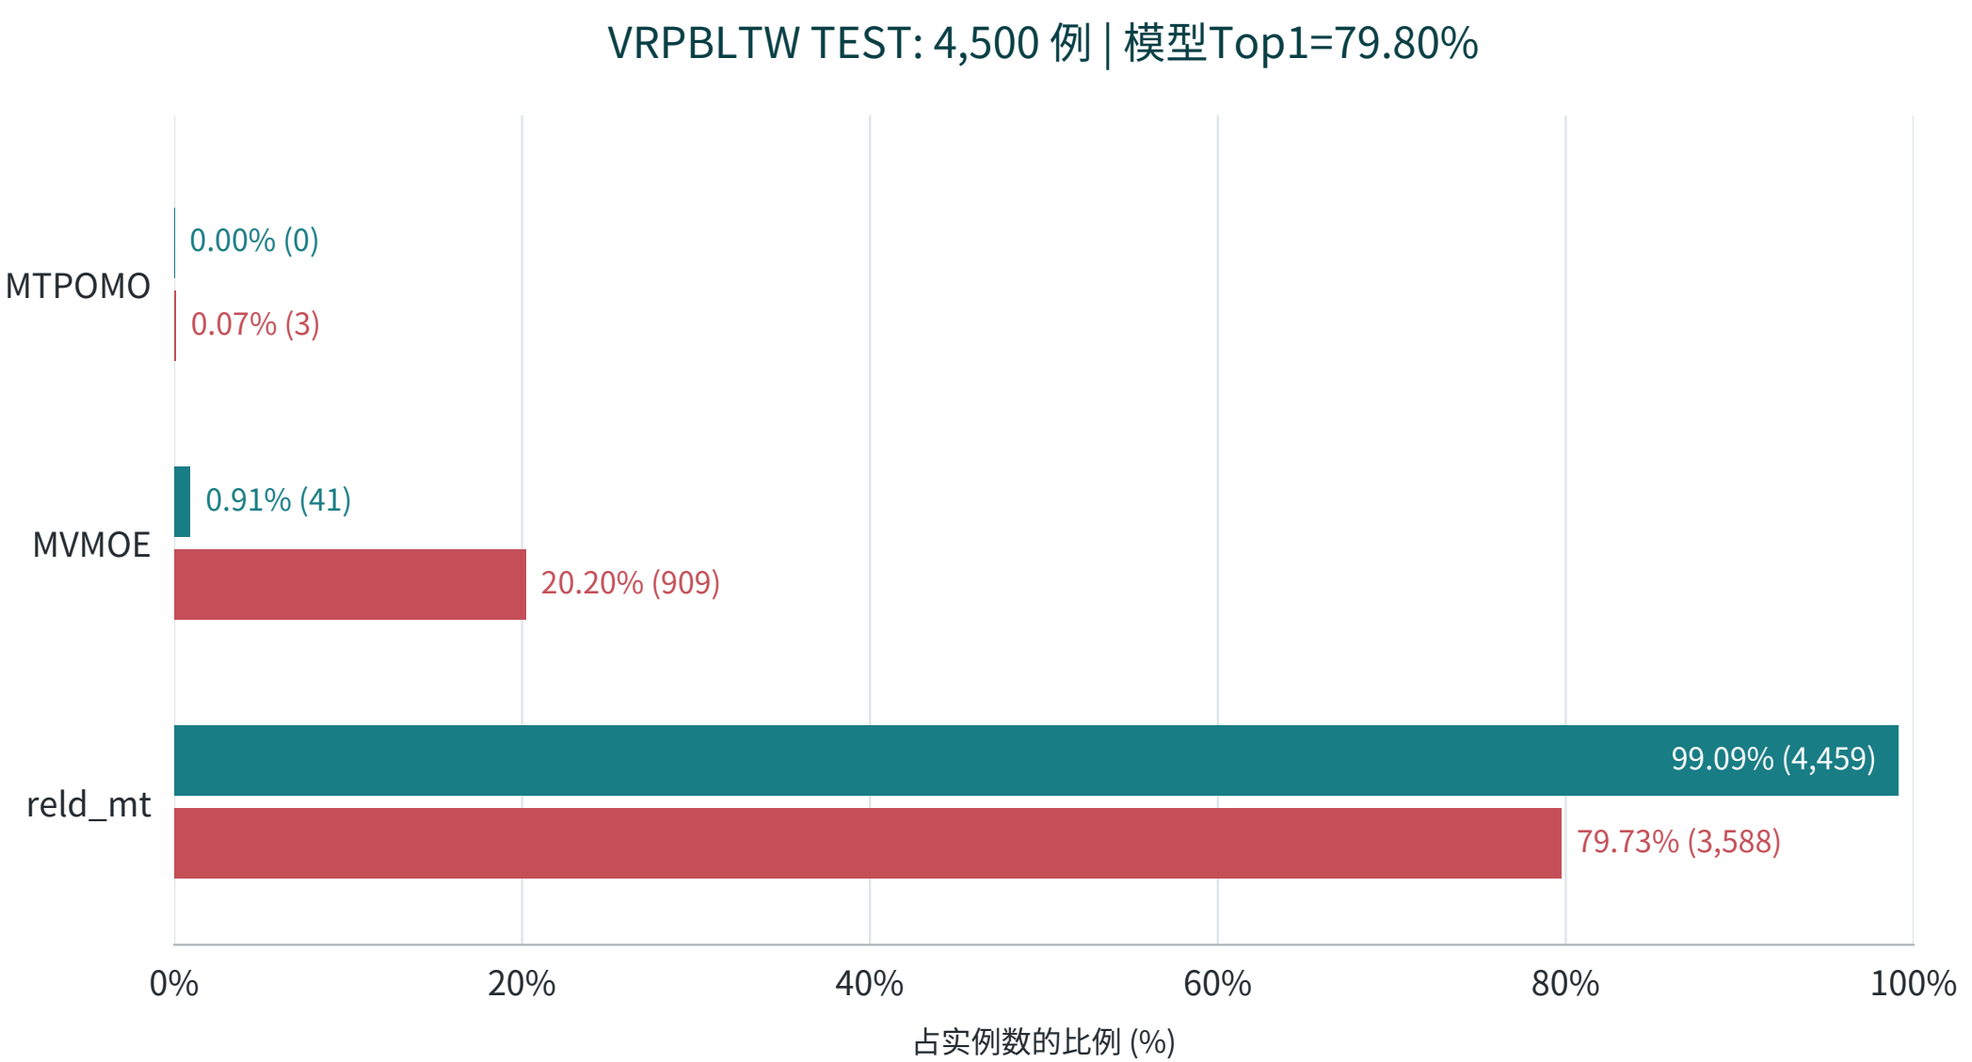

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.

R88/B_execution_anchor | OVRPBLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 1e23f0dce7677334

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

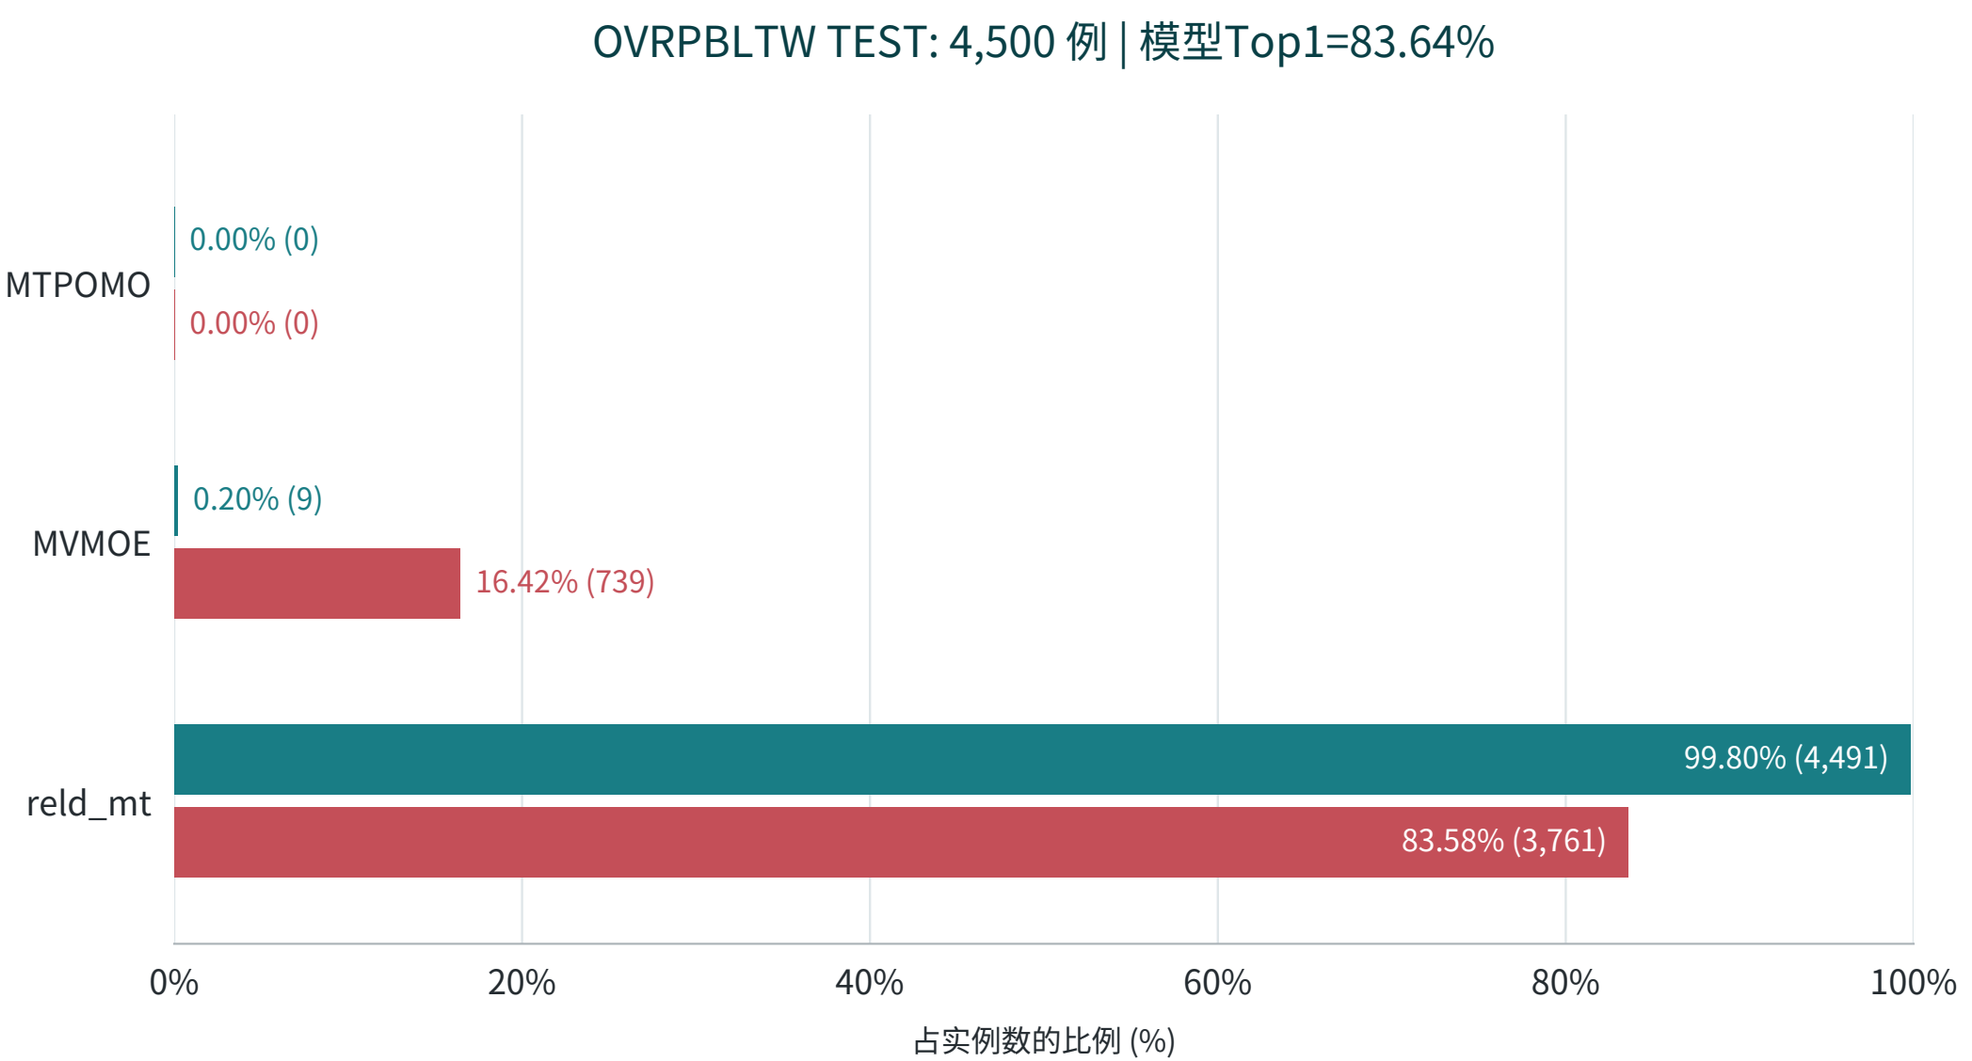

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R88/B_execution_anchor: stable global solver-ID score ties. Same R88 lock; LIB inference only; no training/reselection/Rxx mixing.