R89/A_adamw | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 26 | update 37440 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0506	66.2037	11.416832	11.427978	11.371692	-0.1925	+0.3951	0.4057
TEST ALL	71.2321	66.1802	11.373785	11.385299	11.329932	-0.1980	+0.3852	0.3942

Dataset	n	NSS Top1 (%)	R89 Top1 (%)	NSS cost	R89 cost
TSP TEST	4500	45.888889	46.622222	7.970400719	7.970363688
CVRP TEST	4500	45.977778	47.133333	18.004802368	18.013450705
TSPLIB	49	20.408163	22.448980	8.217907074	8.204903266
CVRPLIB	100	70.000000	63.000000	67.101111717	67.249246912

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original native CE

R89/A_adamw | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0506	66.2037	11.416832	11.427978	11.371692	-0.1925	+0.3951	0.4057	per-problem TRAIN SBS
TSP	46.5111	33.1111	8.024903	8.045354	7.990533	-0.2542	+0.4301	0.4187	T2T
CVRP	46.8222	18.7111	18.161086	18.269377	18.064087	-0.5927	+0.5370	0.7218	RELD_CVRP
ATSP	76.2889	47.4889	1.638800	1.676905	1.632471	-2.2724	+0.3877	0.3840	UNICO_MatPOENet
OVRP	41.0889	35.7556	7.461102	7.469579	7.415777	-0.1135	+0.6112	0.6237	MoSES_RF
VRPB	81.1556	80.8444	9.354186	9.354876	9.318750	-0.0074	+0.3803	0.3868	reld_mt
VRPL	38.2667	33.0889	12.431157	12.437959	12.383444	-0.0547	+0.3853	0.3919	MoSES_RF
VRPTW	79.9333	79.9556	18.819265	18.819431	18.766139	-0.0009	+0.2831	0.3001	reld_mt
OVRPTW	83.8222	83.7778	10.143315	10.143730	10.116859	-0.0041	+0.2615	0.2584	reld_mt
OVRPB	88.4889	88.5111	6.357252	6.357254	6.341078	-0.0000	+0.2551	0.2649	reld_mt
OVRPL	41.2000	35.9111	7.438122	7.445709	7.390416	-0.1019	+0.6455	0.6606	MoSES_RF
VRPBL	78.9556	78.5111	9.369355	9.371523	9.328366	-0.0231	+0.4394	0.4433	reld_mt
VRPBTW	78.5111	78.4222	19.946382	19.950430	19.851084	-0.0203	+0.4801	0.4607	reld_mt
VRPLTW	78.8222	78.7556	18.764558	18.765871	18.707843	-0.0070	+0.3032	0.3191	reld_mt
OVRPBL	89.2889	89.2000	6.369432	6.370093	6.352824	-0.0104	+0.2614	0.2719	reld_mt
OVRPBTW	83.5111	83.4444	10.661954	10.661098	10.623245	+0.0080	+0.3644	0.3417	reld_mt
OVRPLTW	83.5778	83.4889	10.157240	10.157423	10.129818	-0.0018	+0.2707	0.2730	reld_mt
VRPBLTW	79.4667	79.4000	19.794479	19.797044	19.706420	-0.0130	+0.4469	0.4344	reld_mt
OVRPBLTW	83.2000	83.2889	10.610393	10.609955	10.571302	+0.0041	+0.3698	0.3472	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R89/A_adamw | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2321	66.1802	11.373785	11.385299	11.329932	-0.1980	+0.3852	0.3942	per-problem TRAIN SBS
TSP	46.6222	34.5333	7.970364	7.989621	7.937593	-0.2410	+0.4128	0.4051	T2T
CVRP	47.1333	17.9333	18.013451	18.124983	17.918509	-0.6154	+0.5299	0.7024	RELD_CVRP
ATSP	76.2000	47.2444	1.635582	1.674207	1.629441	-2.3071	+0.3769	0.3759	UNICO_MatPOENet
OVRP	40.5556	33.6444	7.446112	7.455750	7.400487	-0.1293	+0.6165	0.6279	MoSES_RF
VRPB	80.7333	80.4000	9.348845	9.351810	9.315298	-0.0317	+0.3601	0.3636	reld_mt
VRPL	37.2889	32.2667	12.350307	12.356138	12.300958	-0.0472	+0.4012	0.4093	MoSES_RF
VRPTW	81.1778	80.8444	18.688531	18.690545	18.637408	-0.0108	+0.2743	0.2854	reld_mt
OVRPTW	84.0000	83.9333	10.092656	10.093063	10.068135	-0.0040	+0.2436	0.2345	reld_mt
OVRPB	88.1333	88.1333	6.370820	6.370826	6.352225	-0.0001	+0.2927	0.2995	reld_mt
OVRPL	42.0667	34.6000	7.463962	7.472542	7.418033	-0.1148	+0.6192	0.6278	MoSES_RF
VRPBL	79.5333	79.4222	9.394895	9.396379	9.355967	-0.0158	+0.4161	0.4202	reld_mt
VRPBTW	78.7778	78.7556	19.664490	19.665725	19.577666	-0.0063	+0.4435	0.4382	reld_mt
VRPLTW	79.3778	79.2444	18.801534	18.803136	18.745143	-0.0085	+0.3008	0.3180	reld_mt
OVRPBL	89.2889	89.2889	6.375379	6.375741	6.359310	-0.0057	+0.2527	0.2634	reld_mt
OVRPBTW	84.9556	84.8222	10.658782	10.659591	10.624748	-0.0076	+0.3203	0.2928	reld_mt
OVRPLTW	82.9556	82.8667	10.085636	10.086112	10.059001	-0.0047	+0.2648	0.2651	reld_mt
VRPBLTW	79.7333	79.7333	19.705009	19.707068	19.613284	-0.0104	+0.4677	0.4499	reld_mt
OVRPBLTW	83.6444	83.5778	10.661782	10.662149	10.625574	-0.0034	+0.3408	0.3174	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R89/A_adamw | LIB and locked provenance

Current R89 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	22.4490	10.2041	8.204903	8.240435	8.142167	-0.4312	+0.7705	0.7573
CVRPLIB	63.0000	45.0000	67.249247	67.245364	66.945093	+0.0058	+0.4543	0.5554

SHA256: f7b995ea7d5d6c31c014657e6087fb84b64cdb0611c727f37f95d8d67b41cafe

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode, fixed physical-node0 TSP slot3 role, original R77 score MLP/pair differences/maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R89/A_adamw | TSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

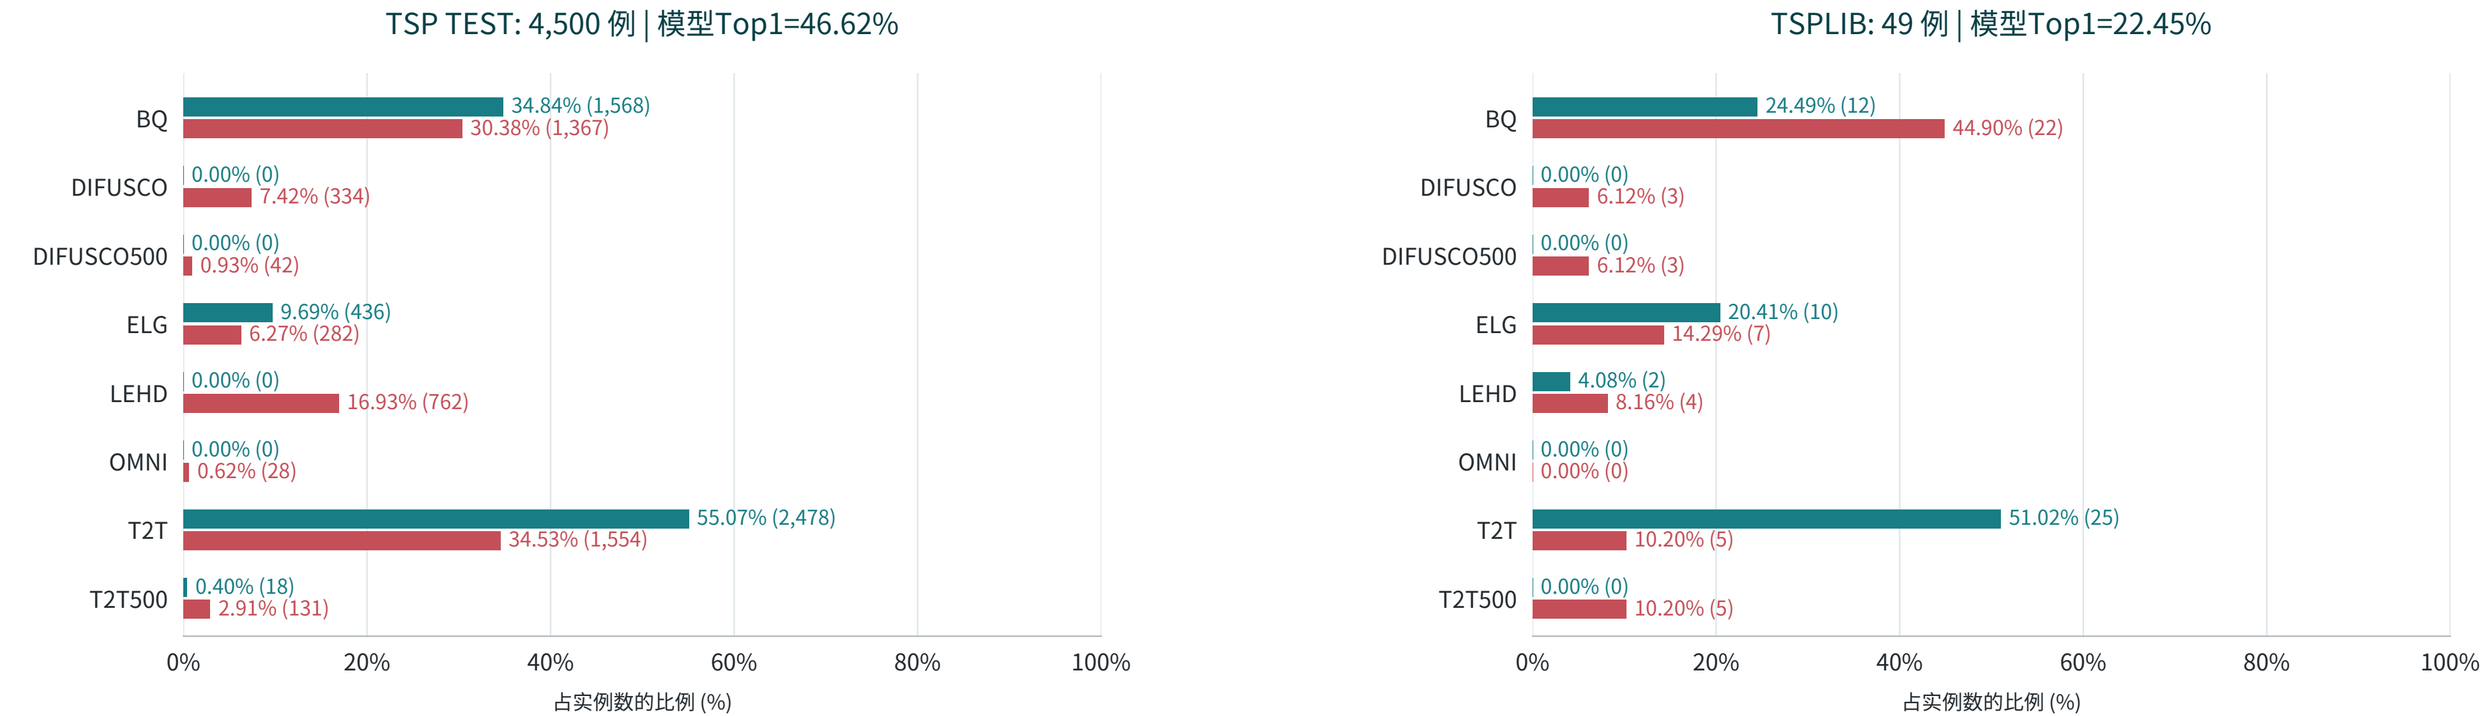

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.


R89/A_adamw | CVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

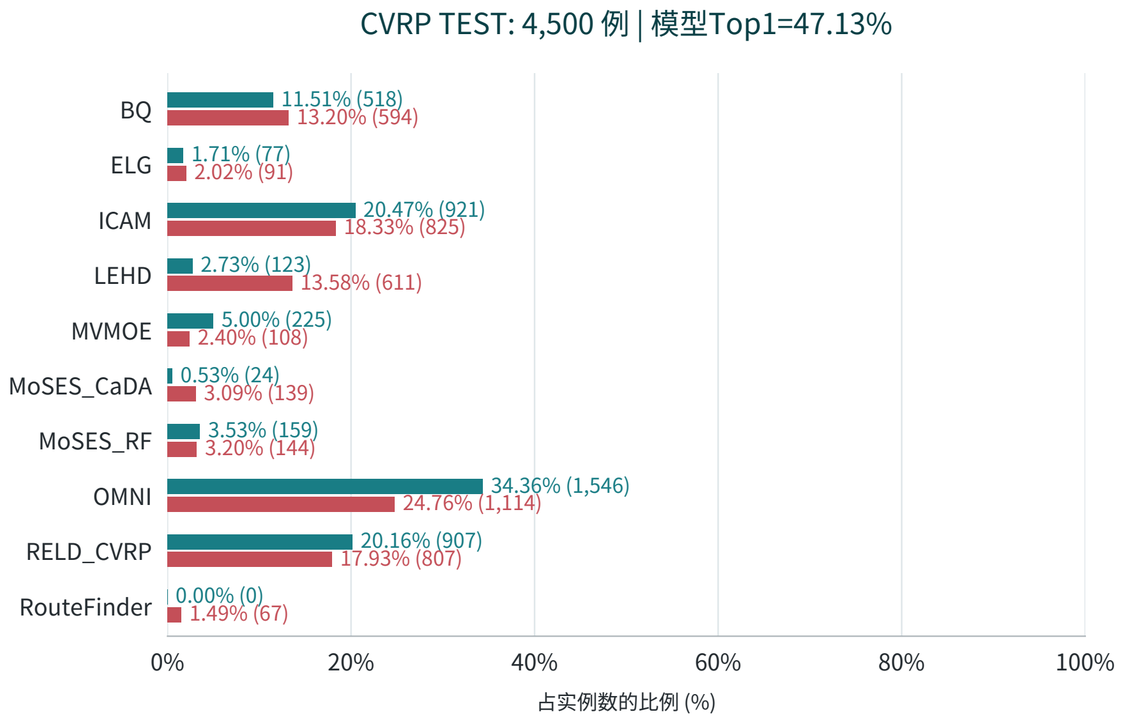

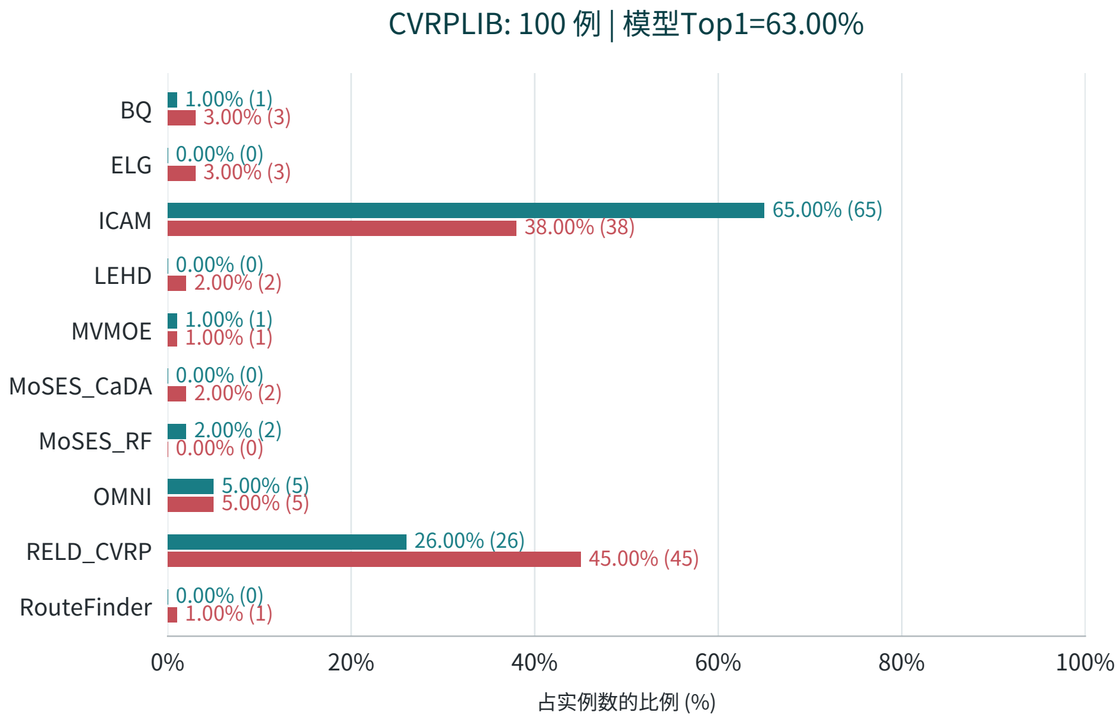

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | ATSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

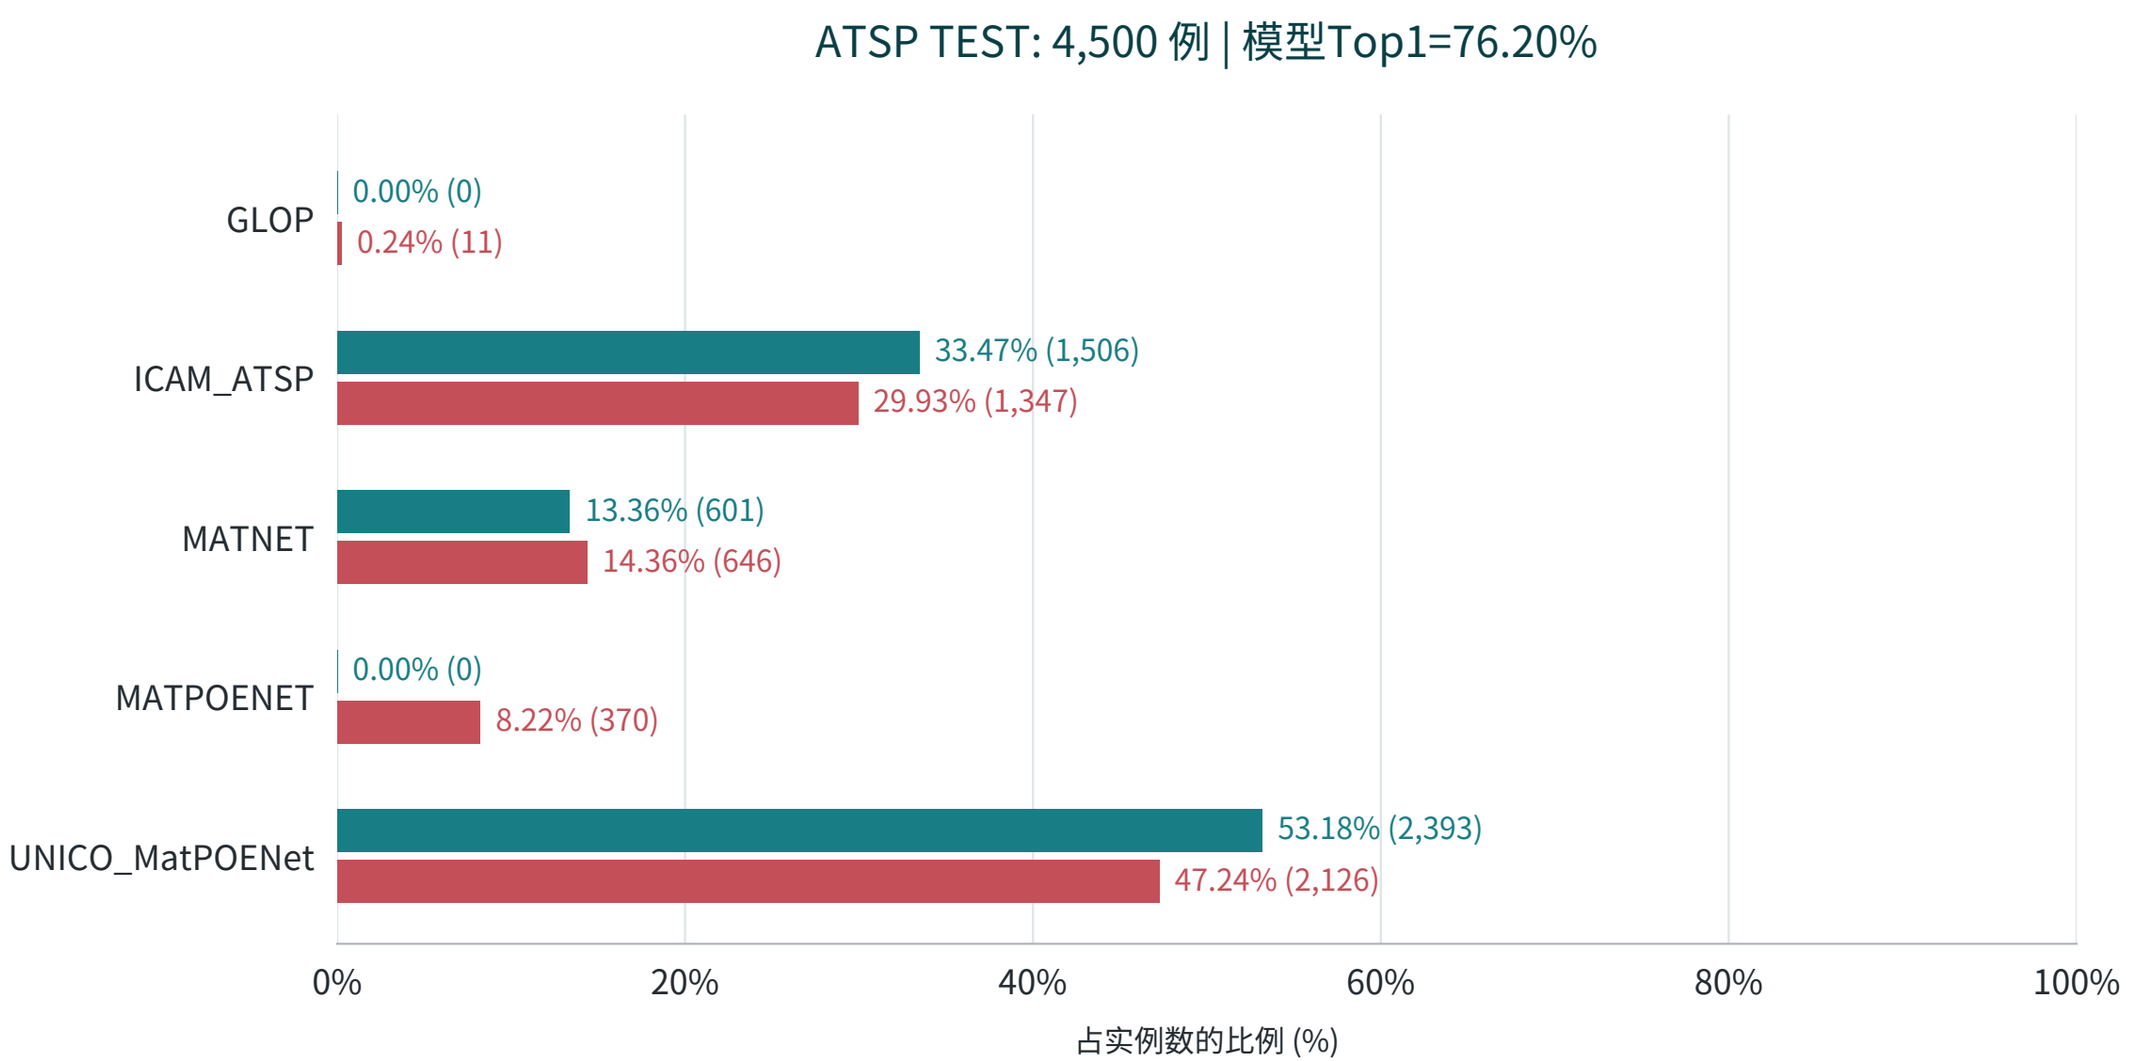

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

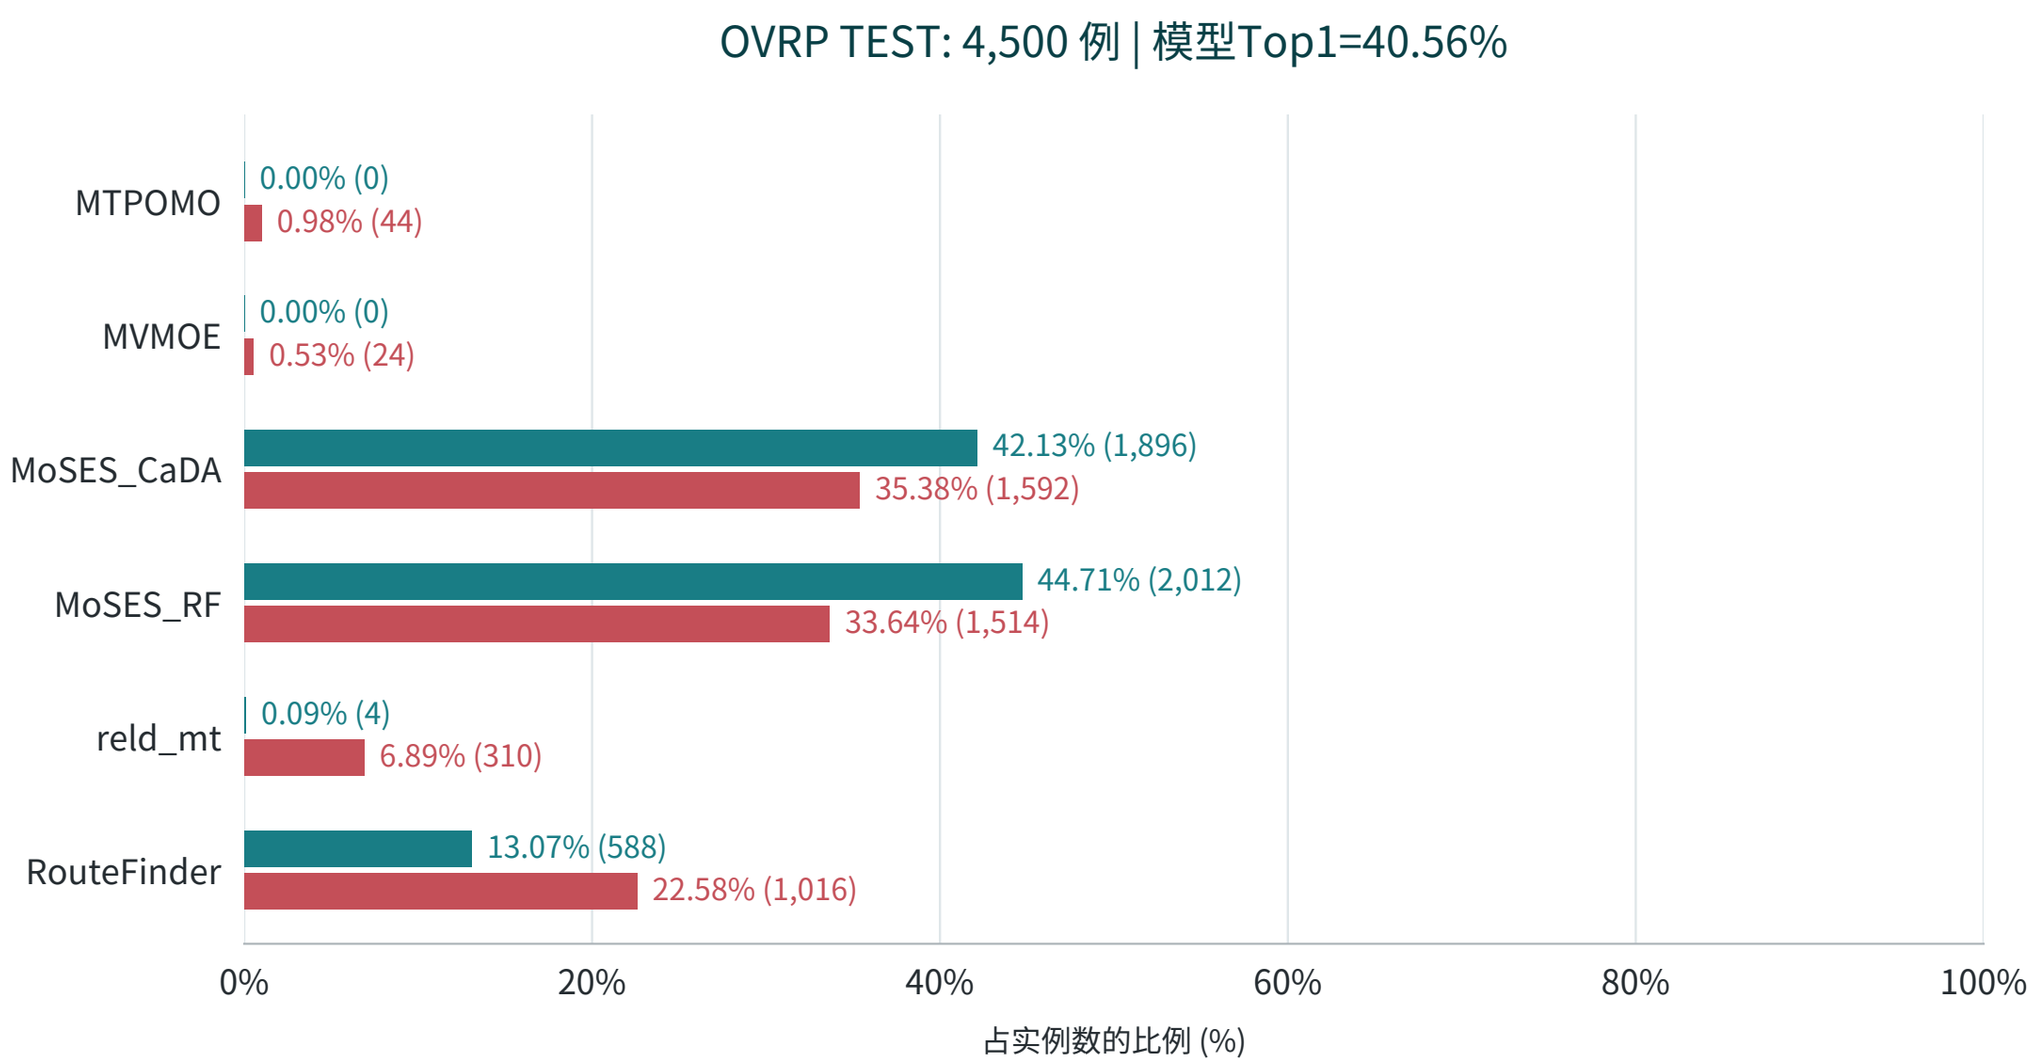

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

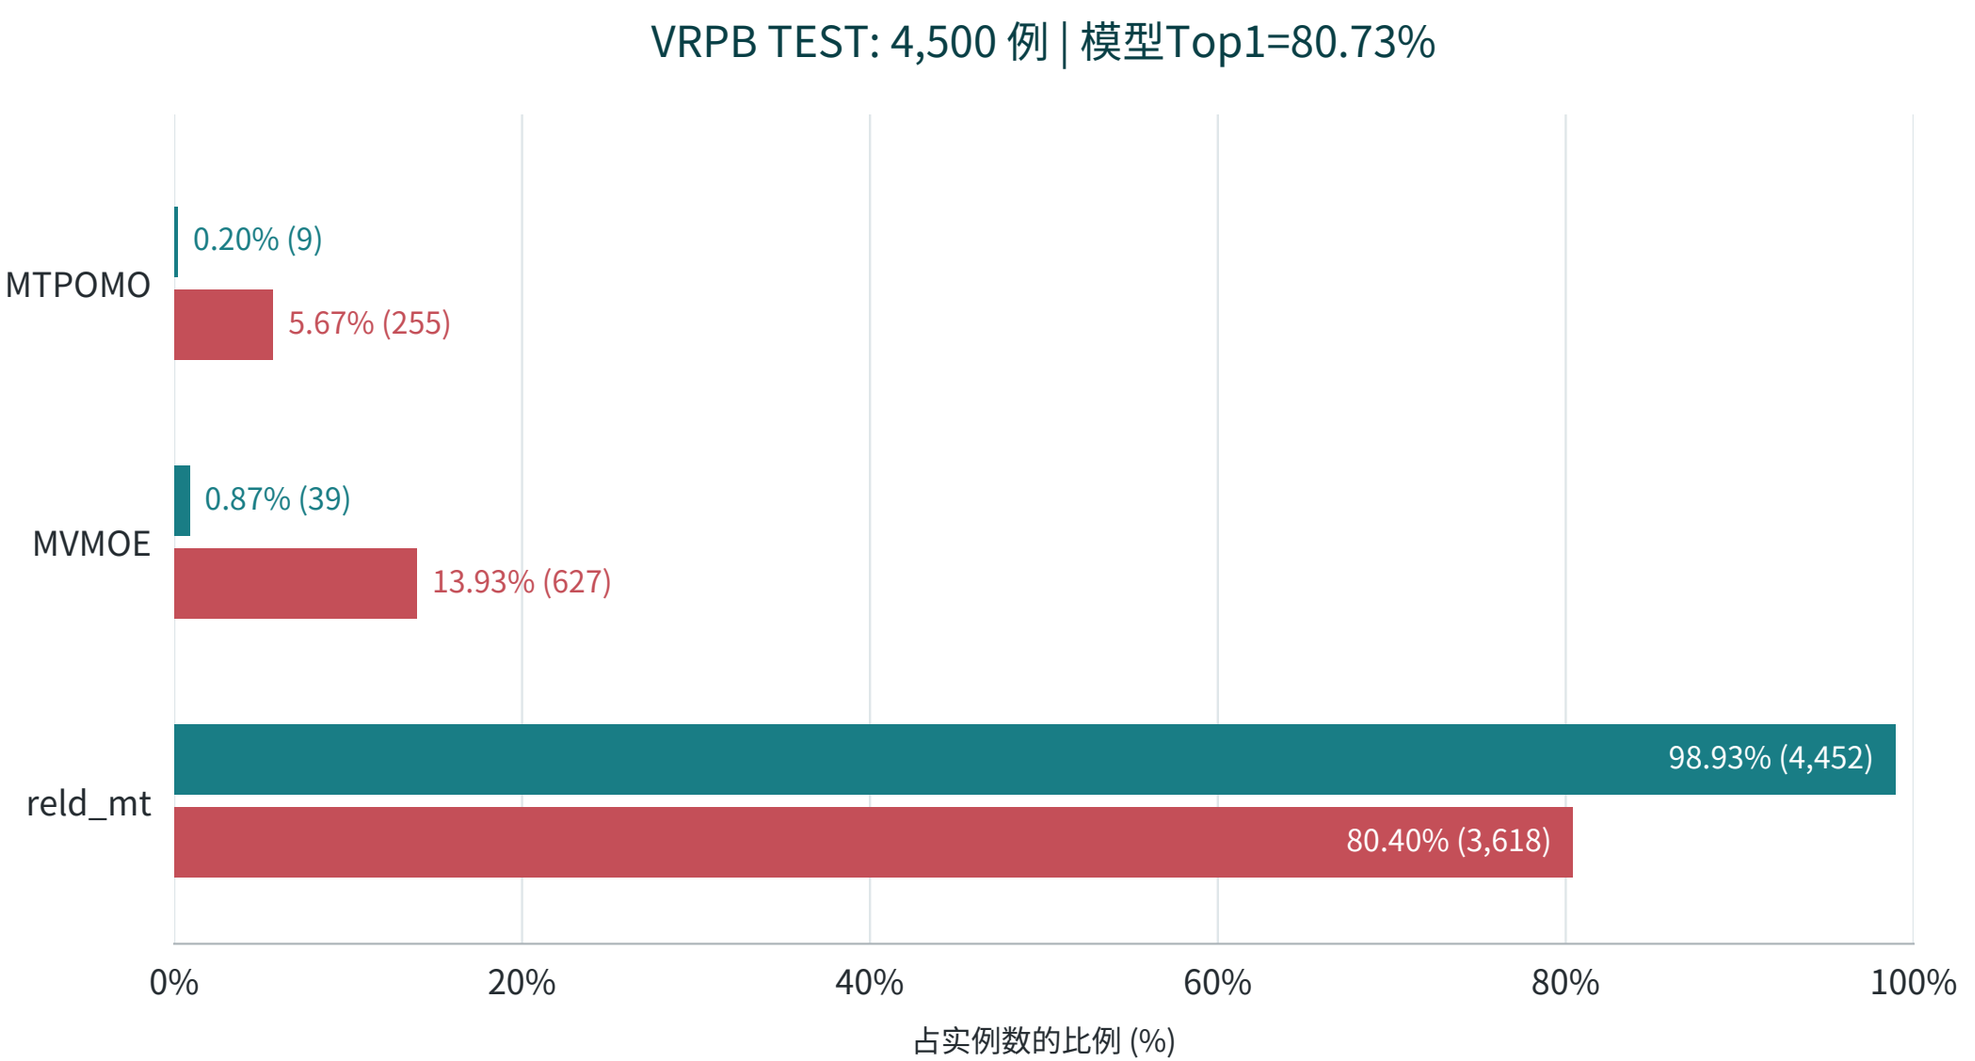

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

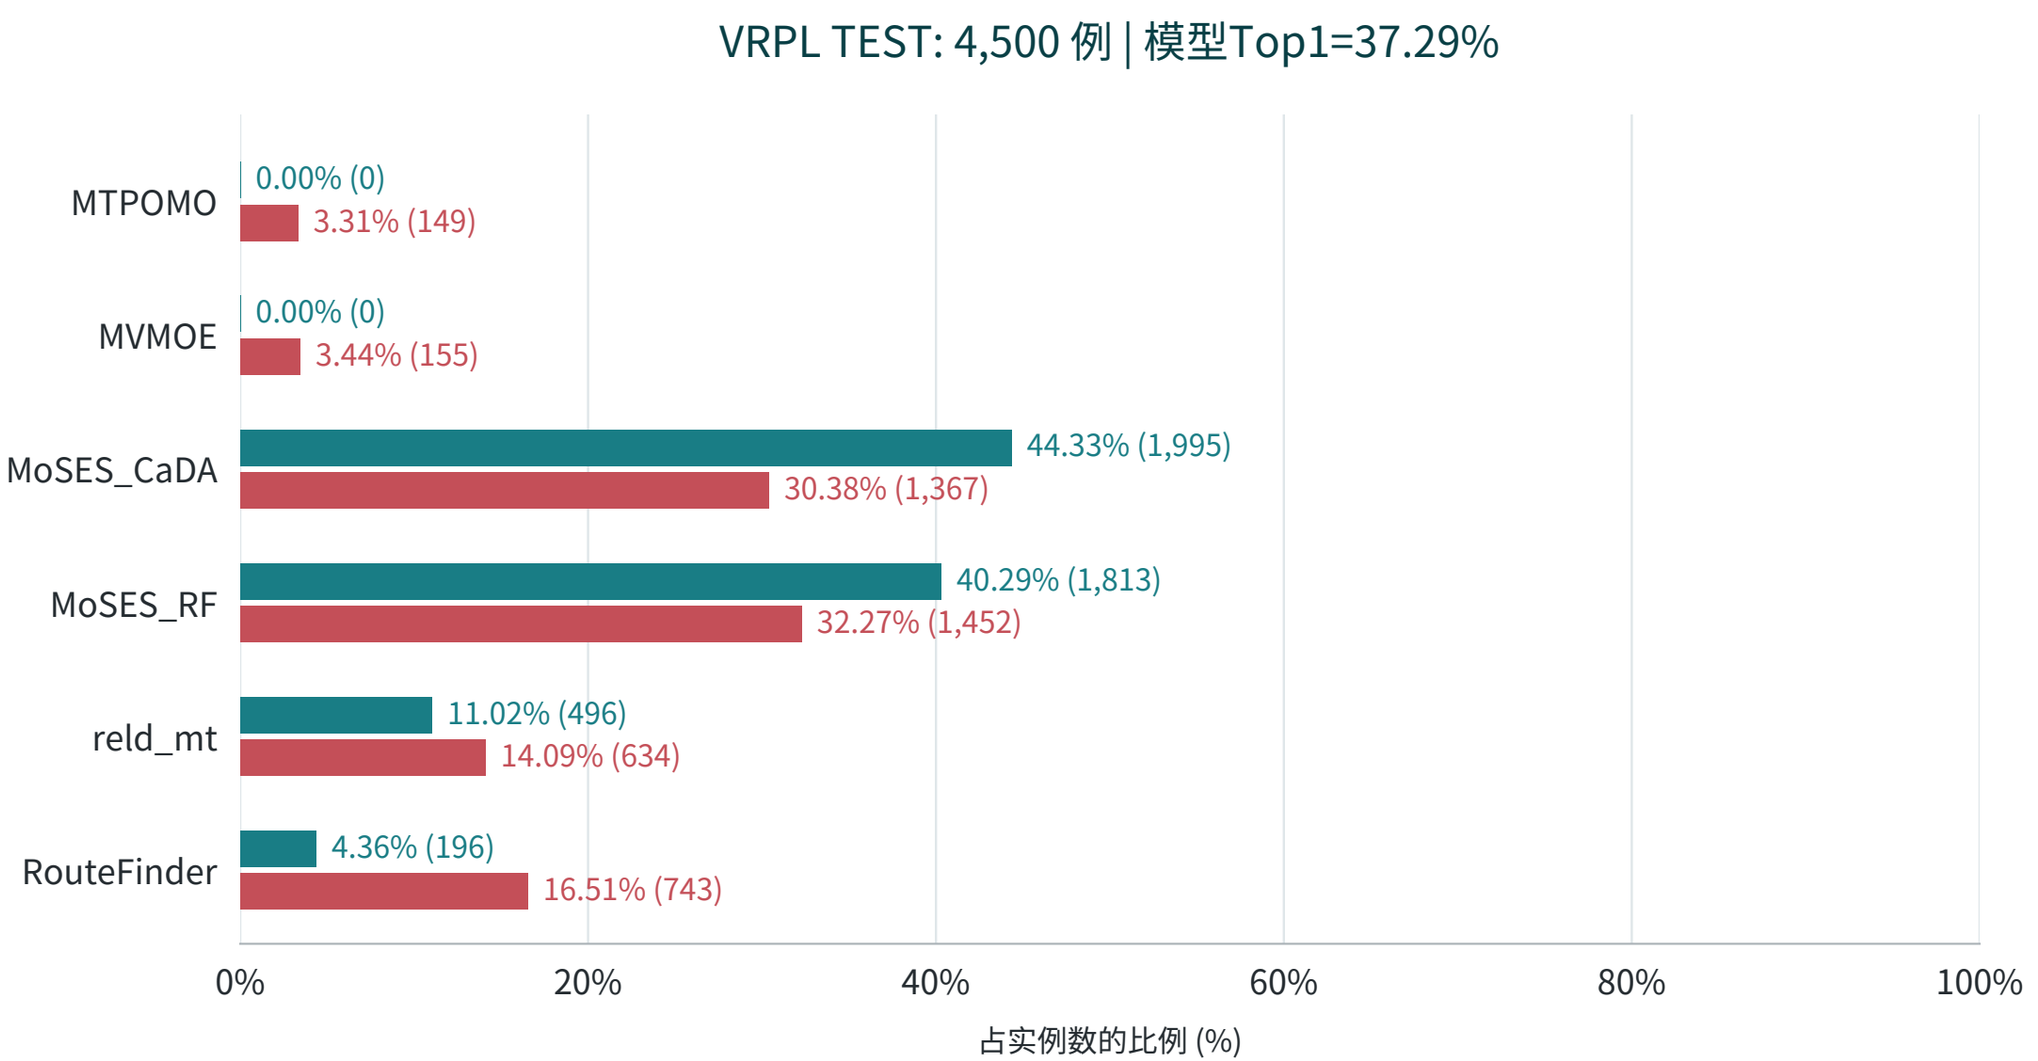

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

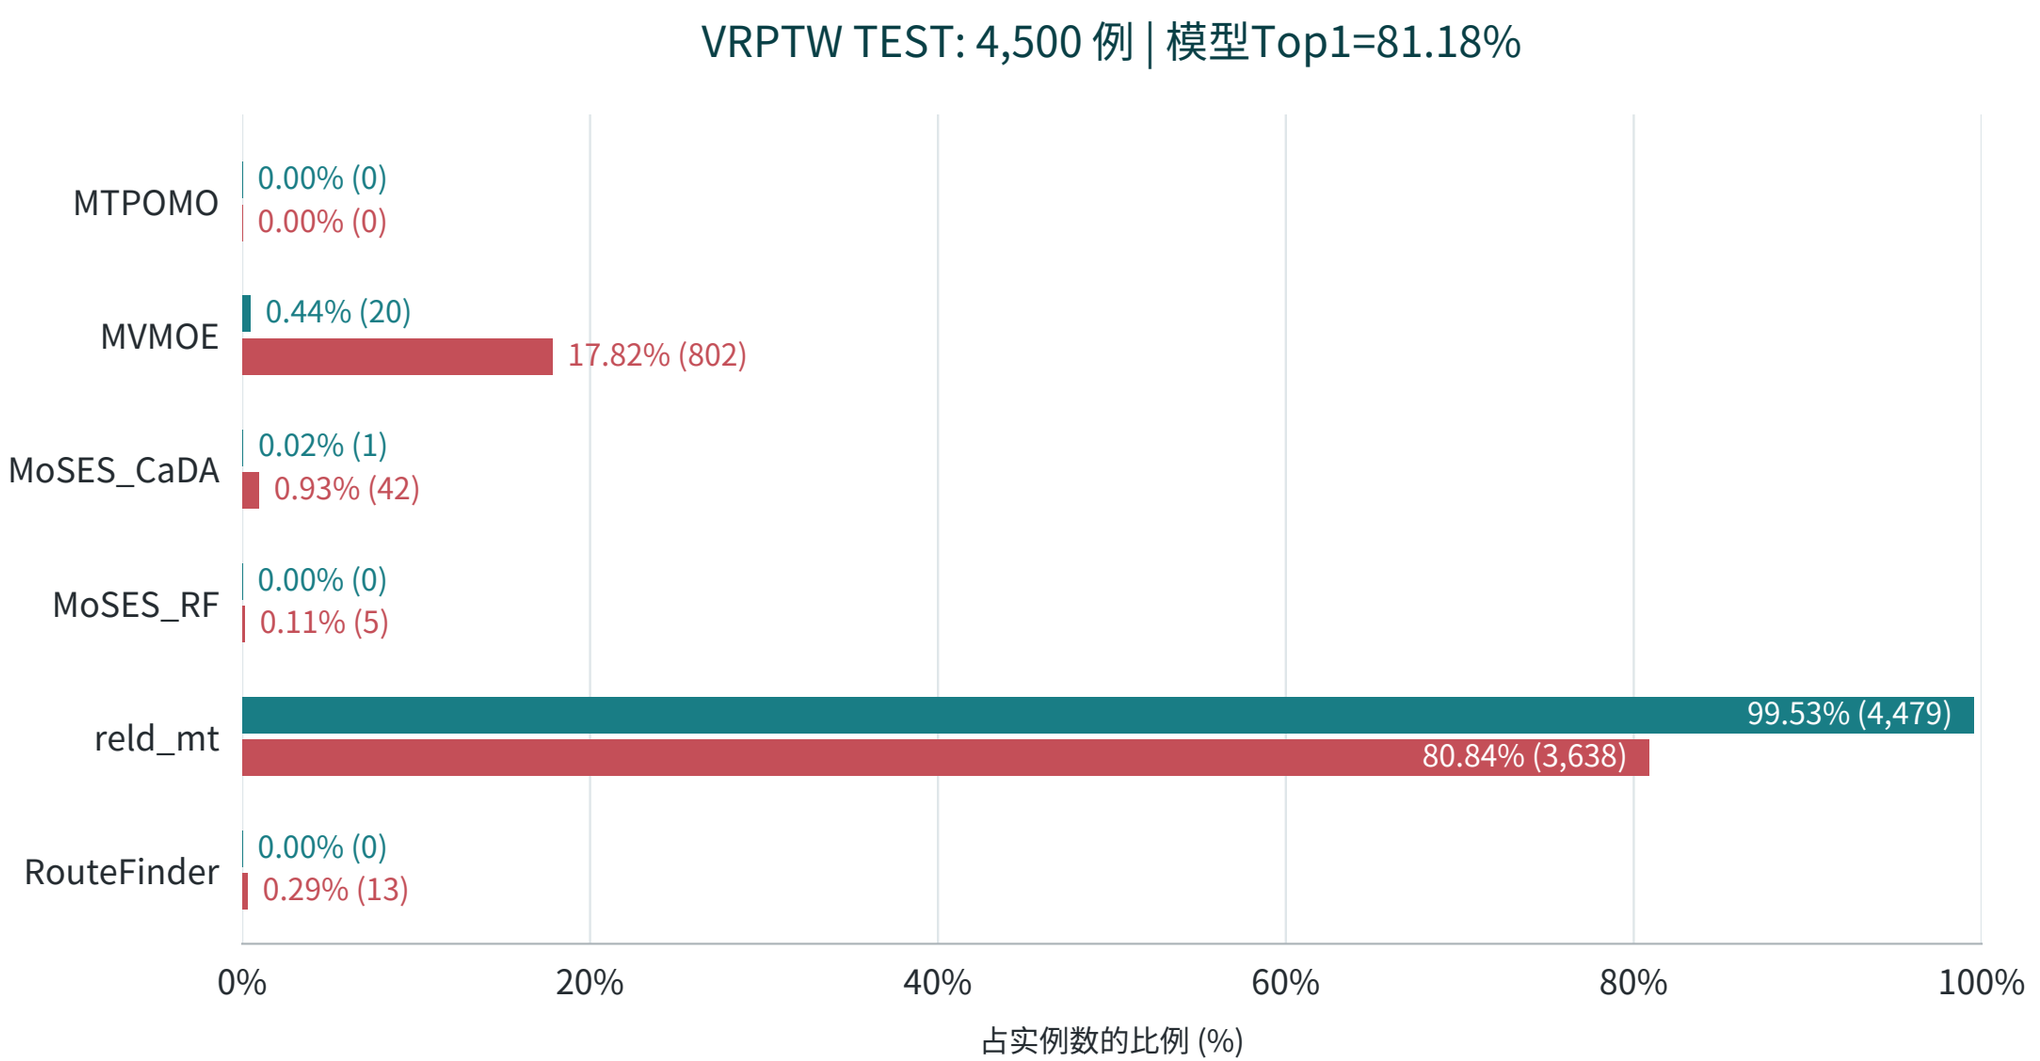

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

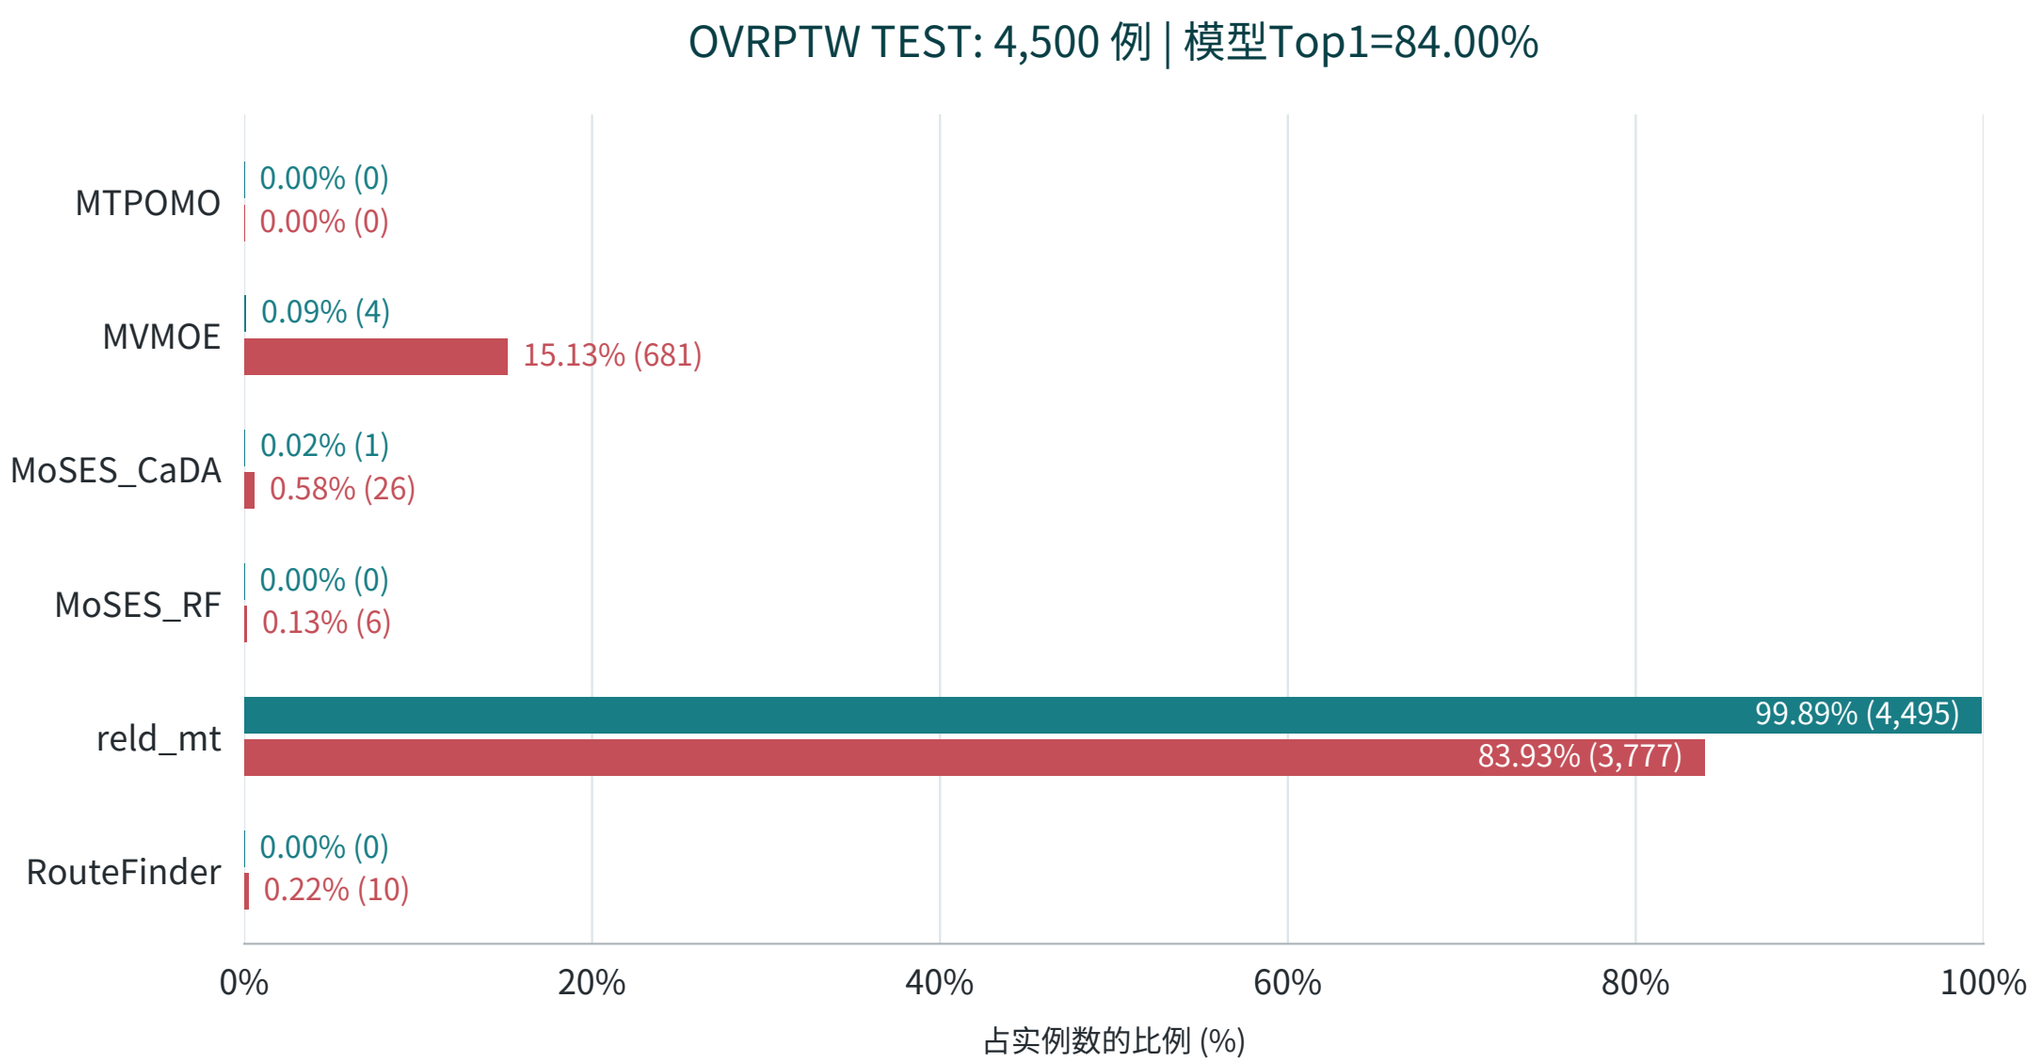

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

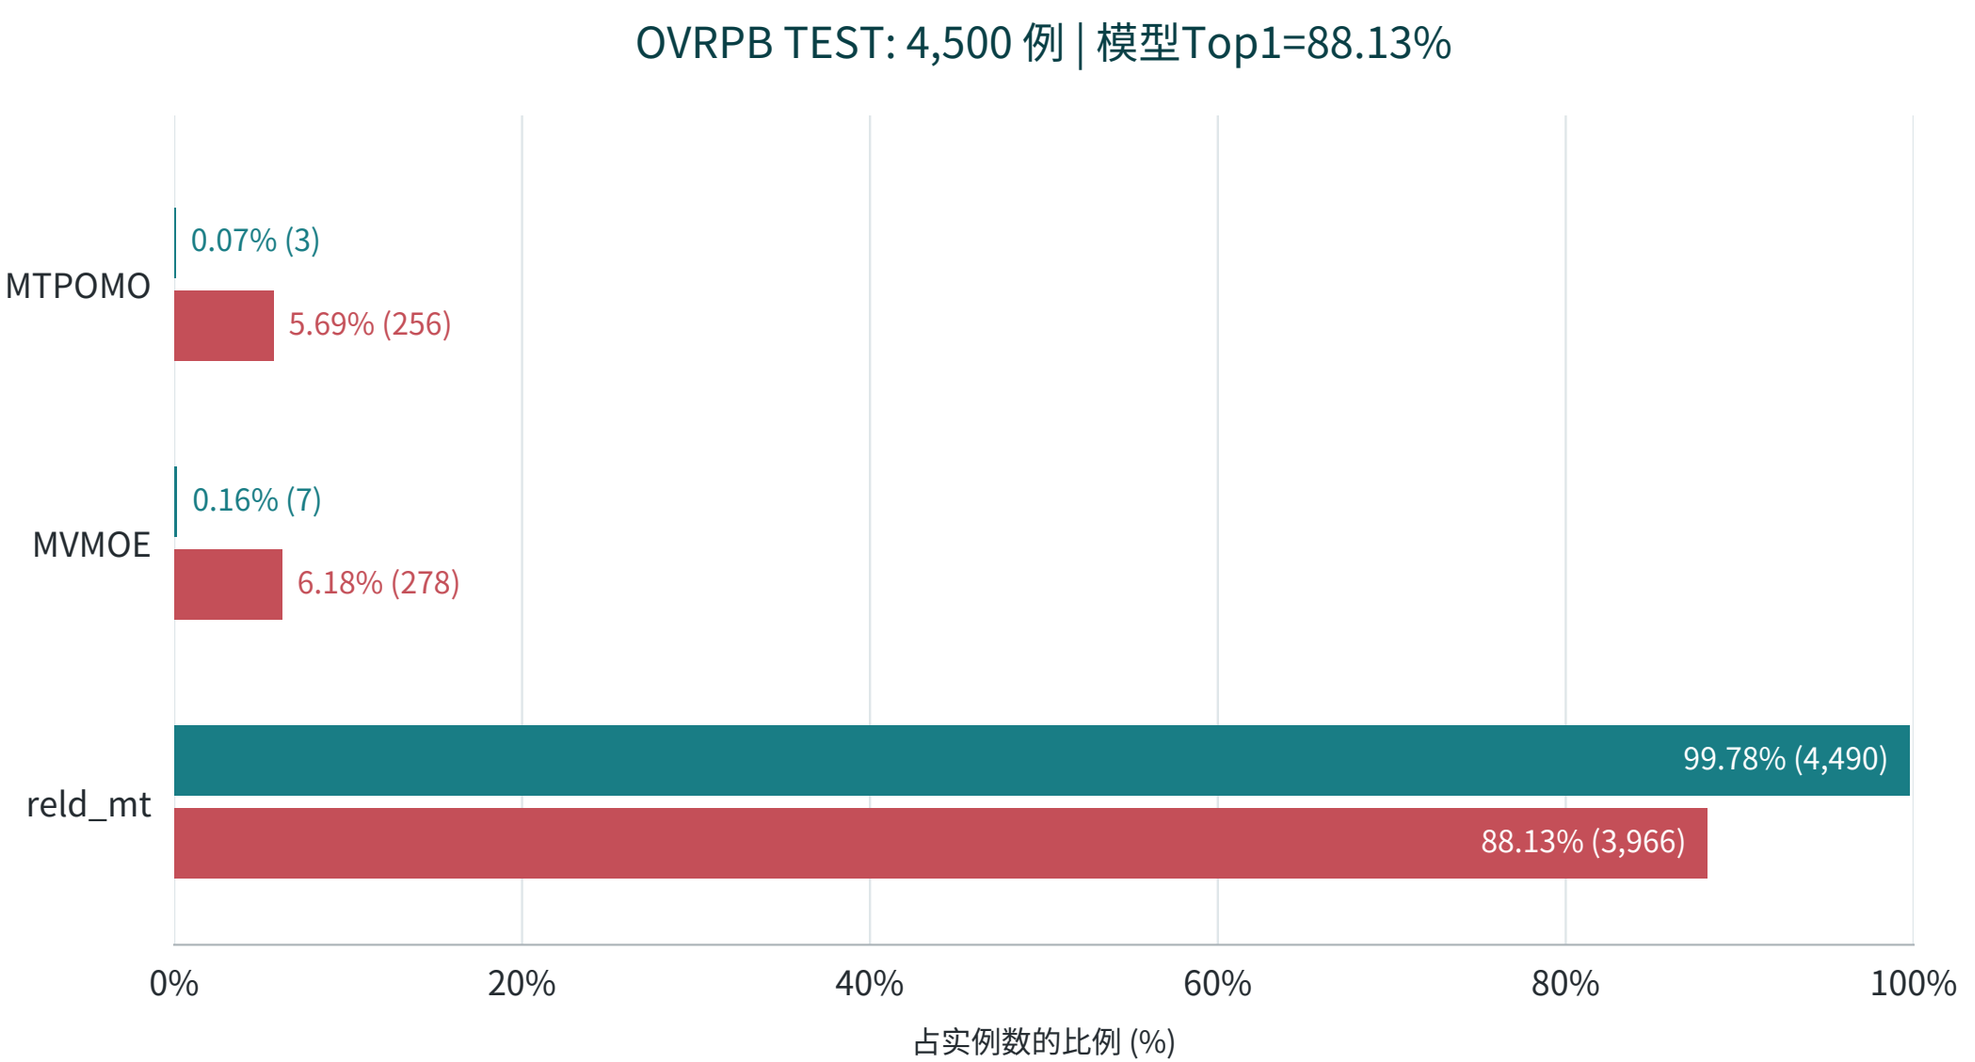

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

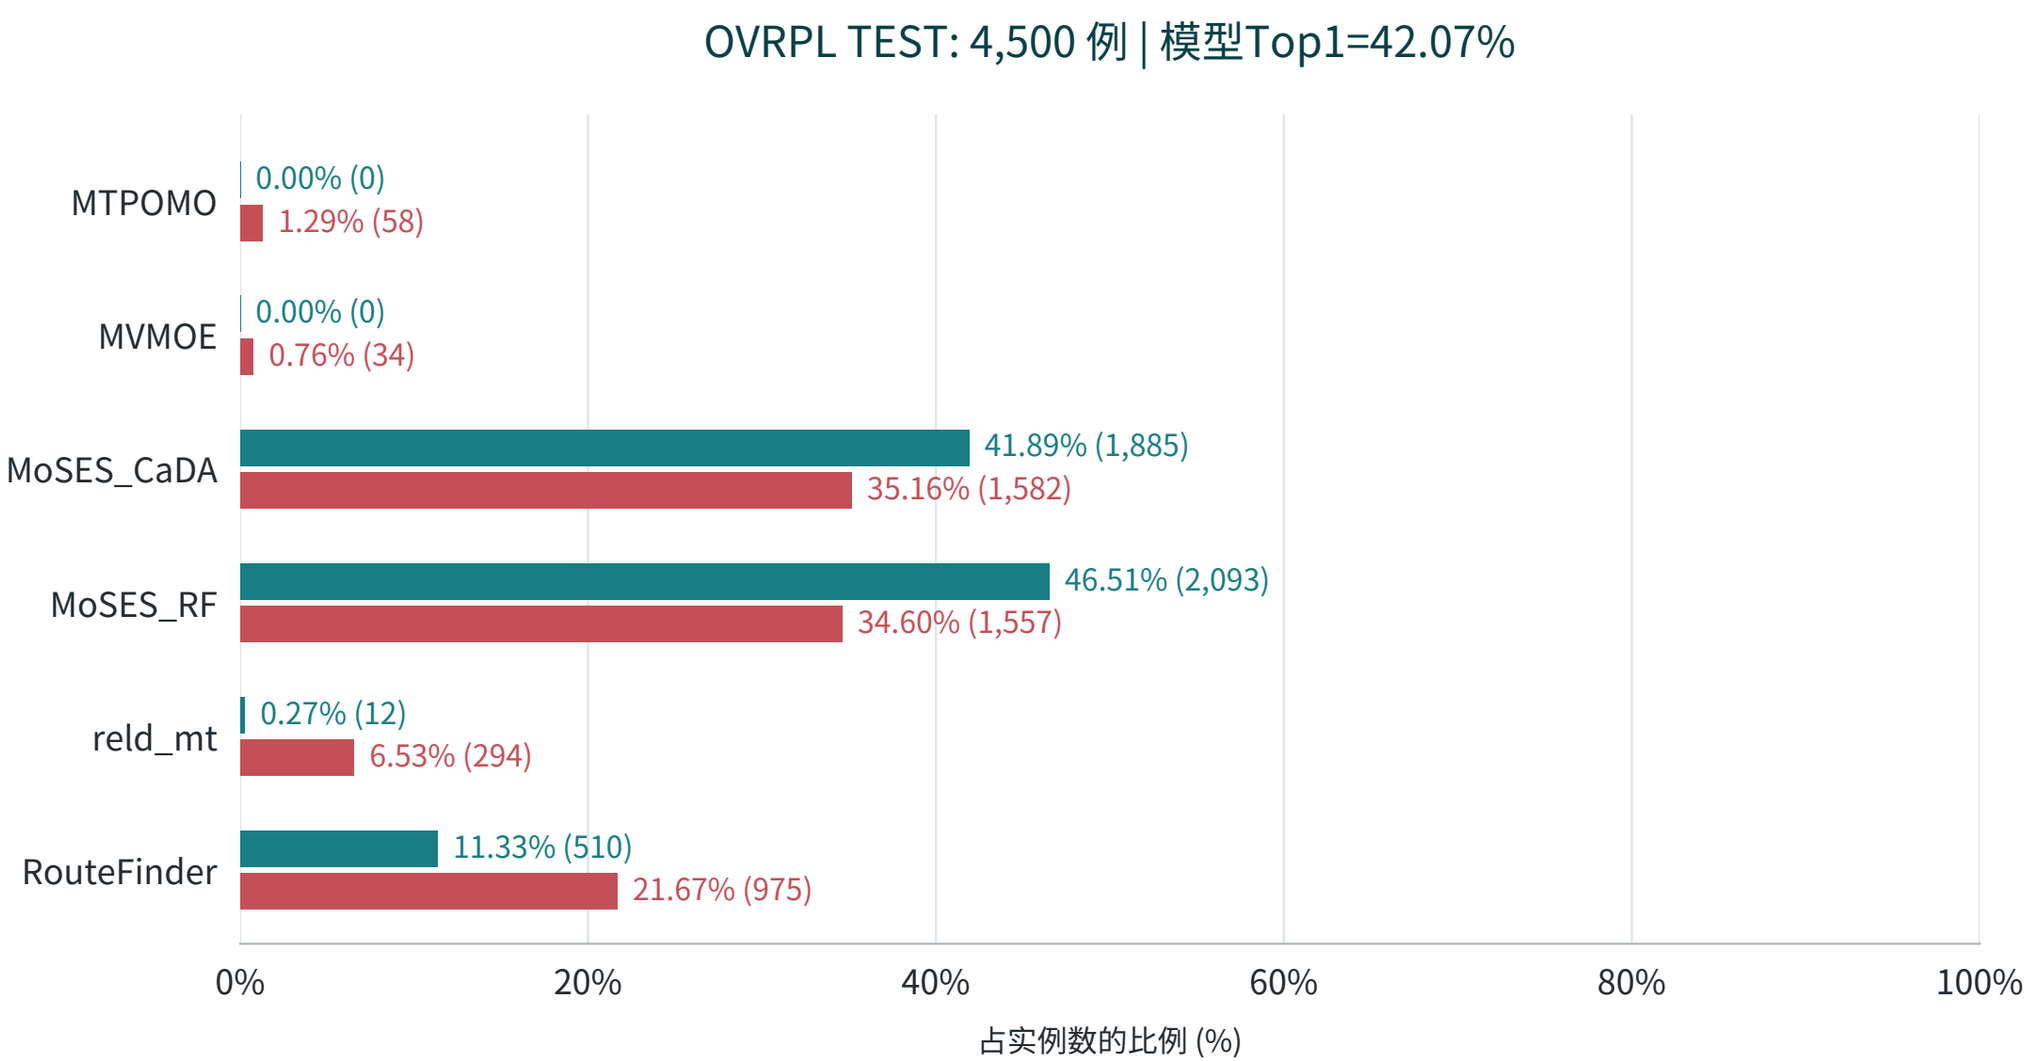

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

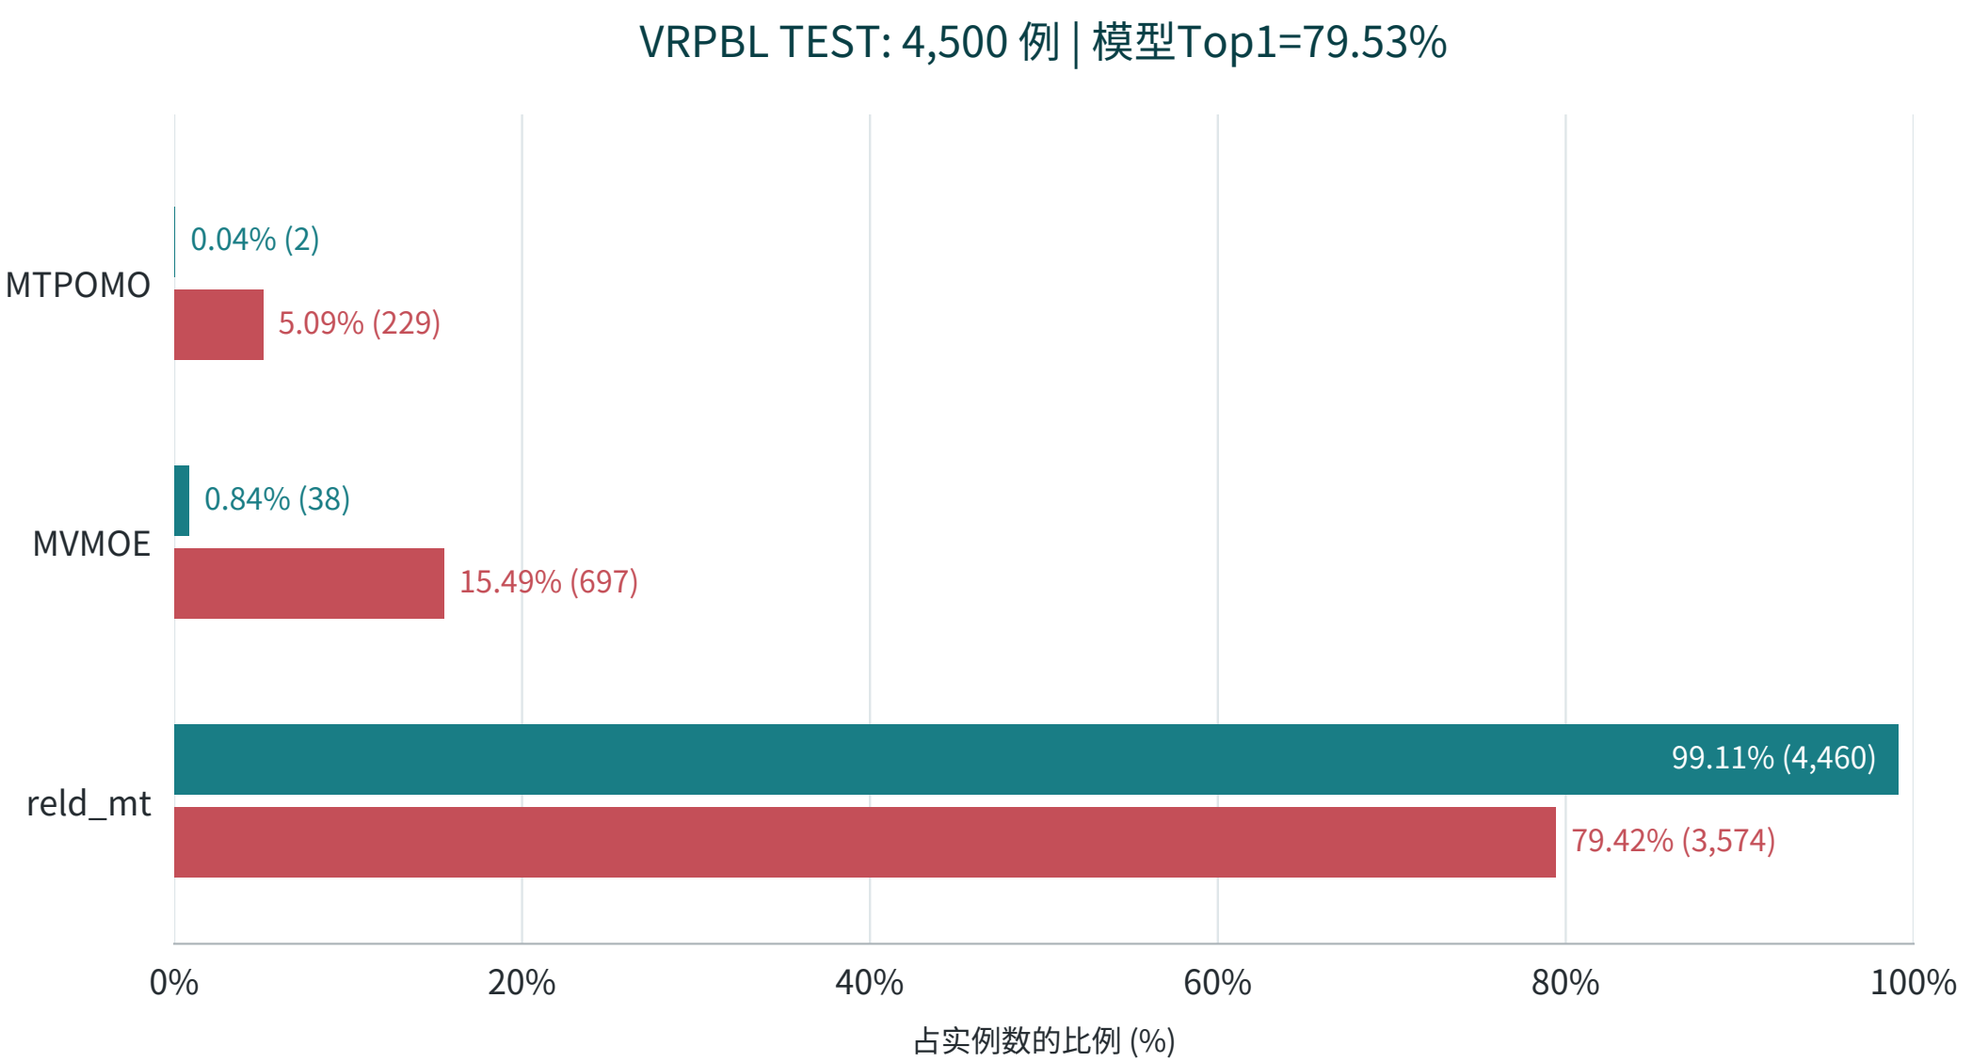

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

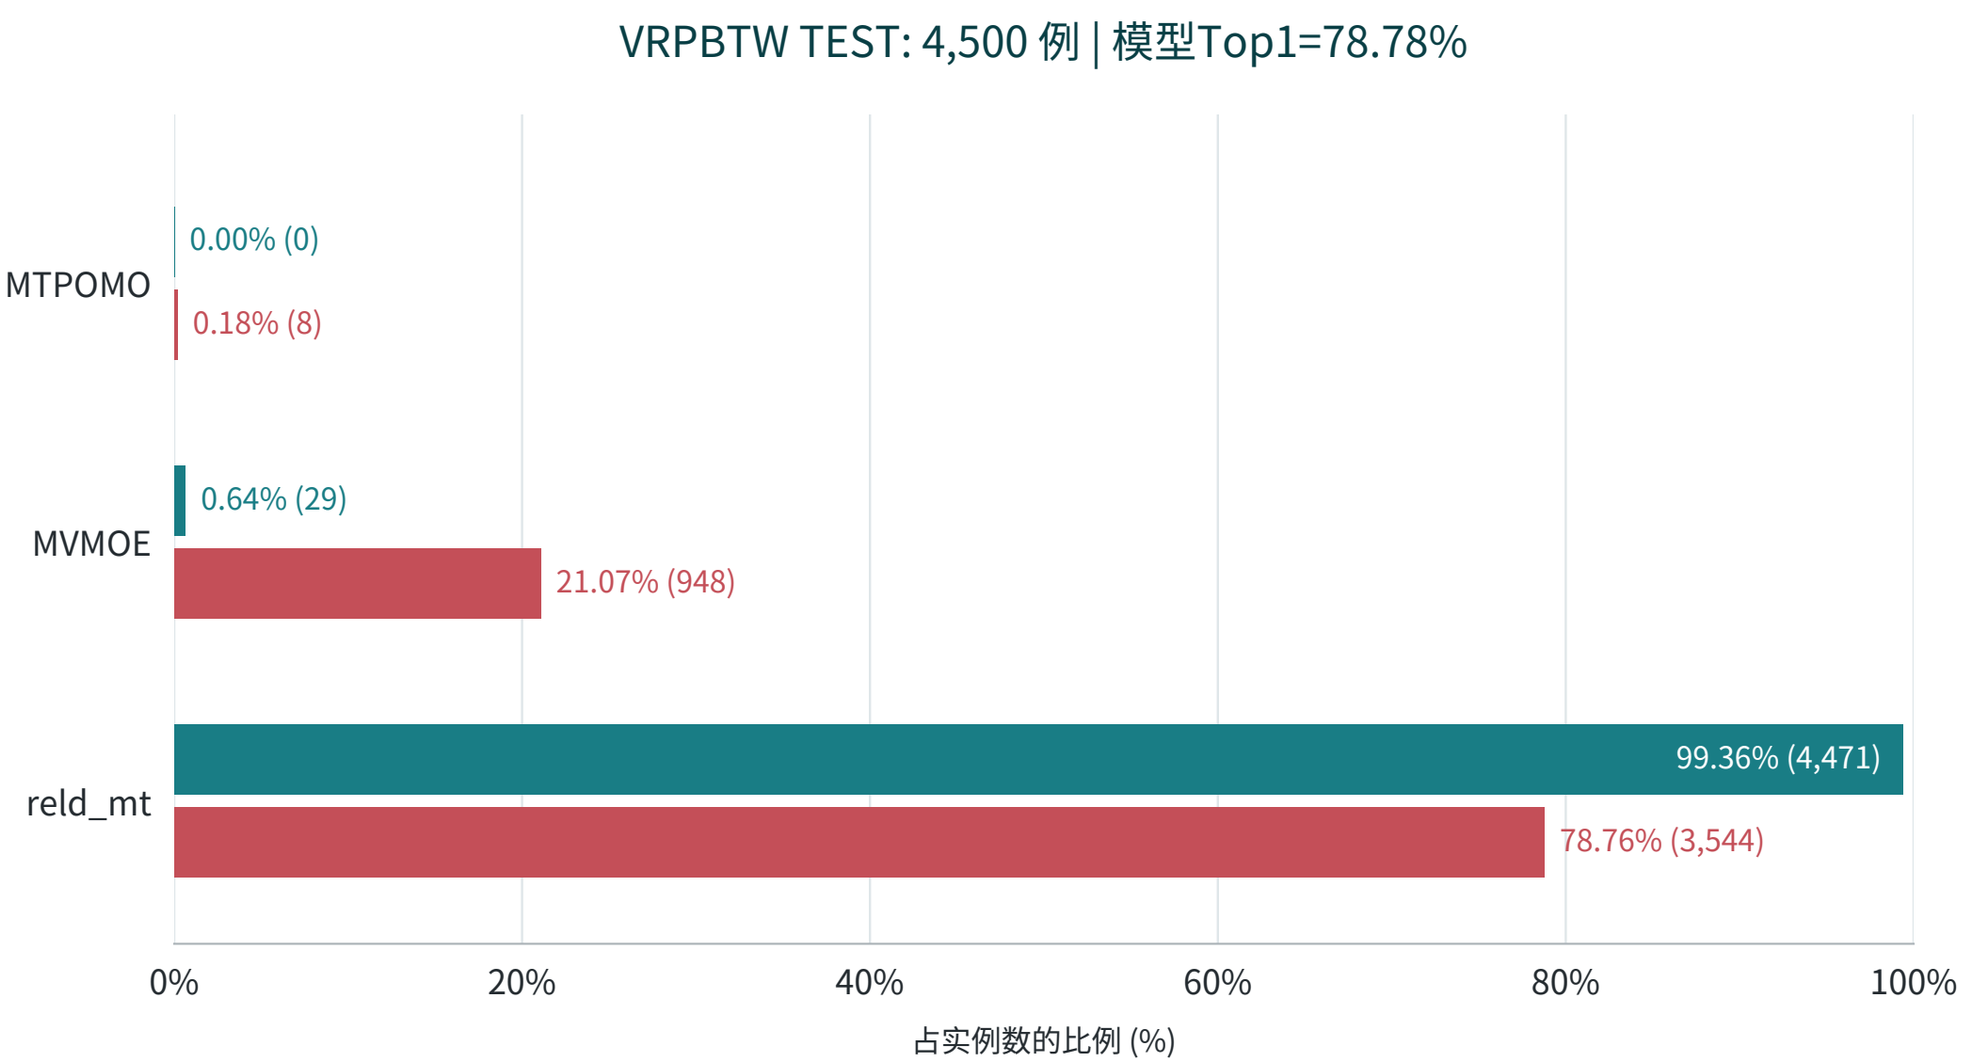

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

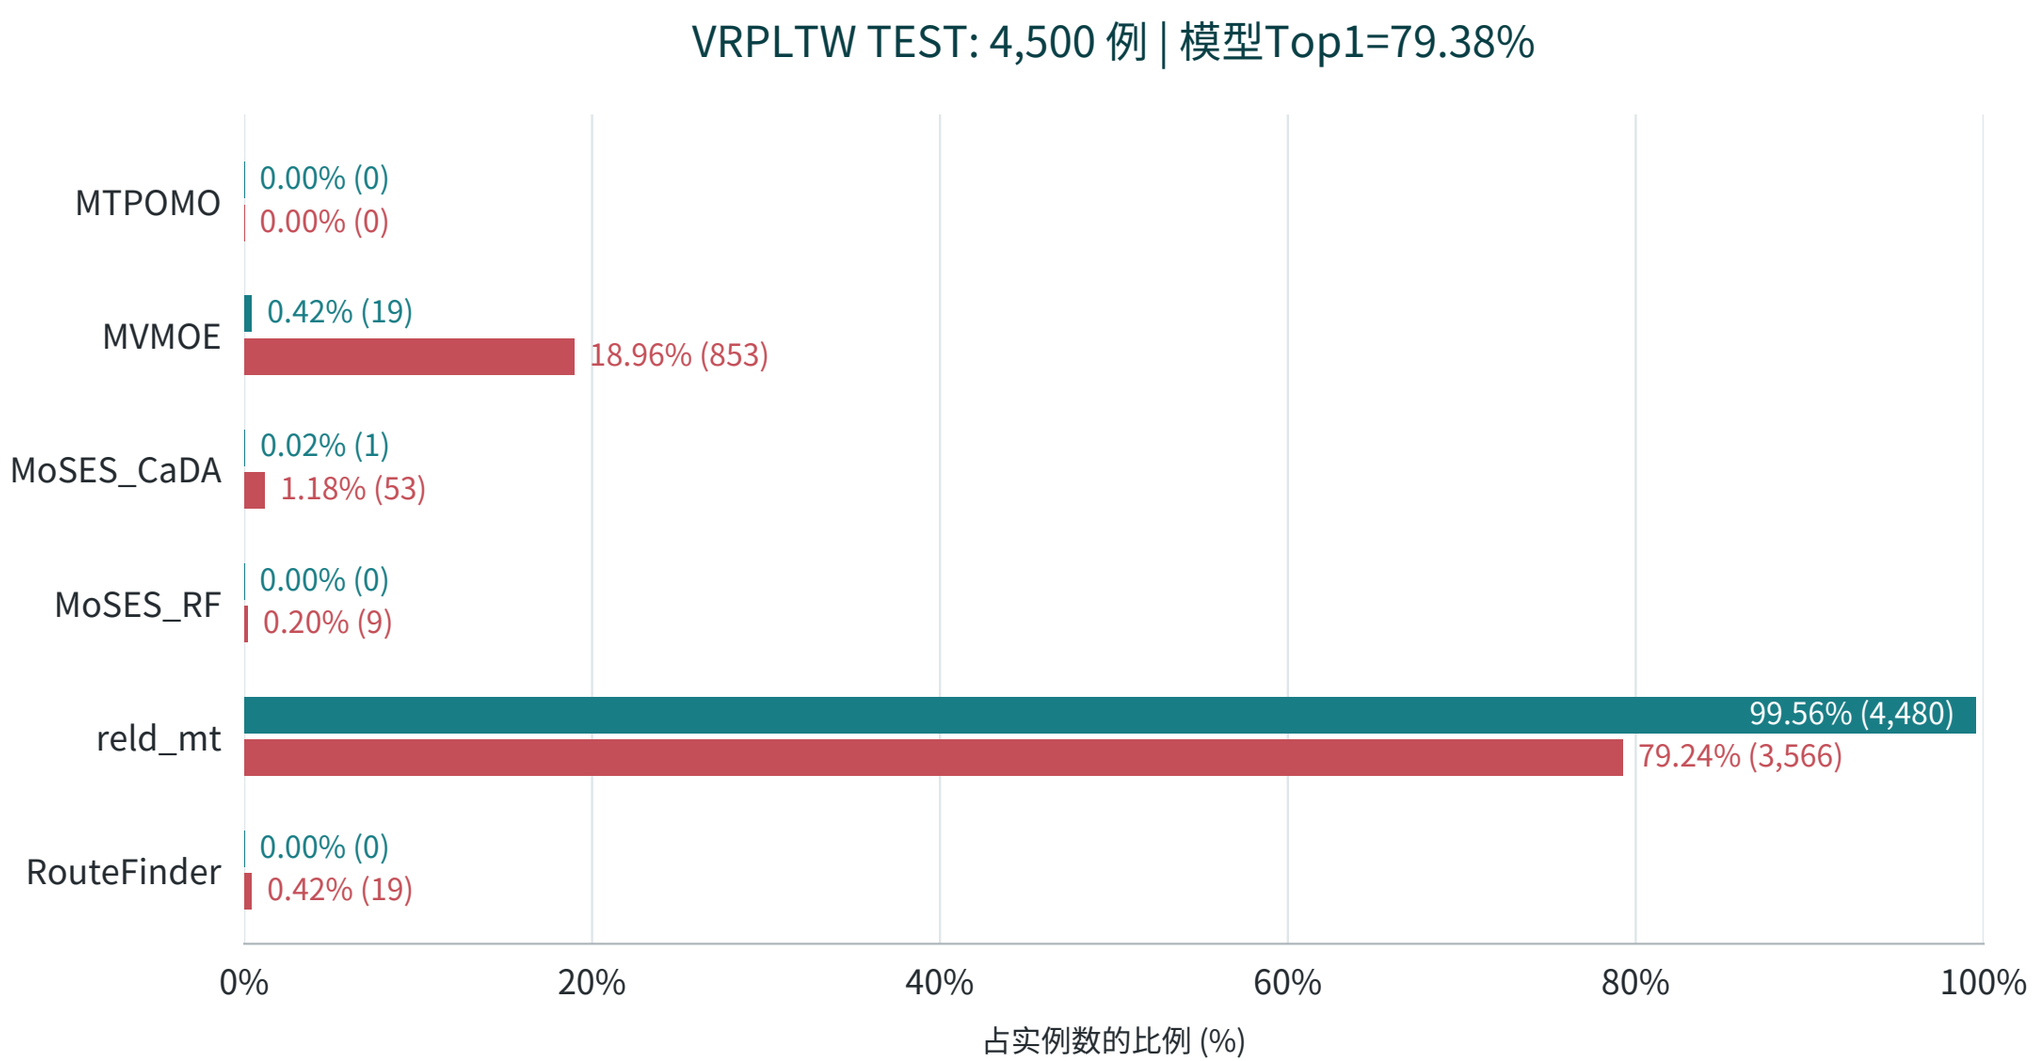

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

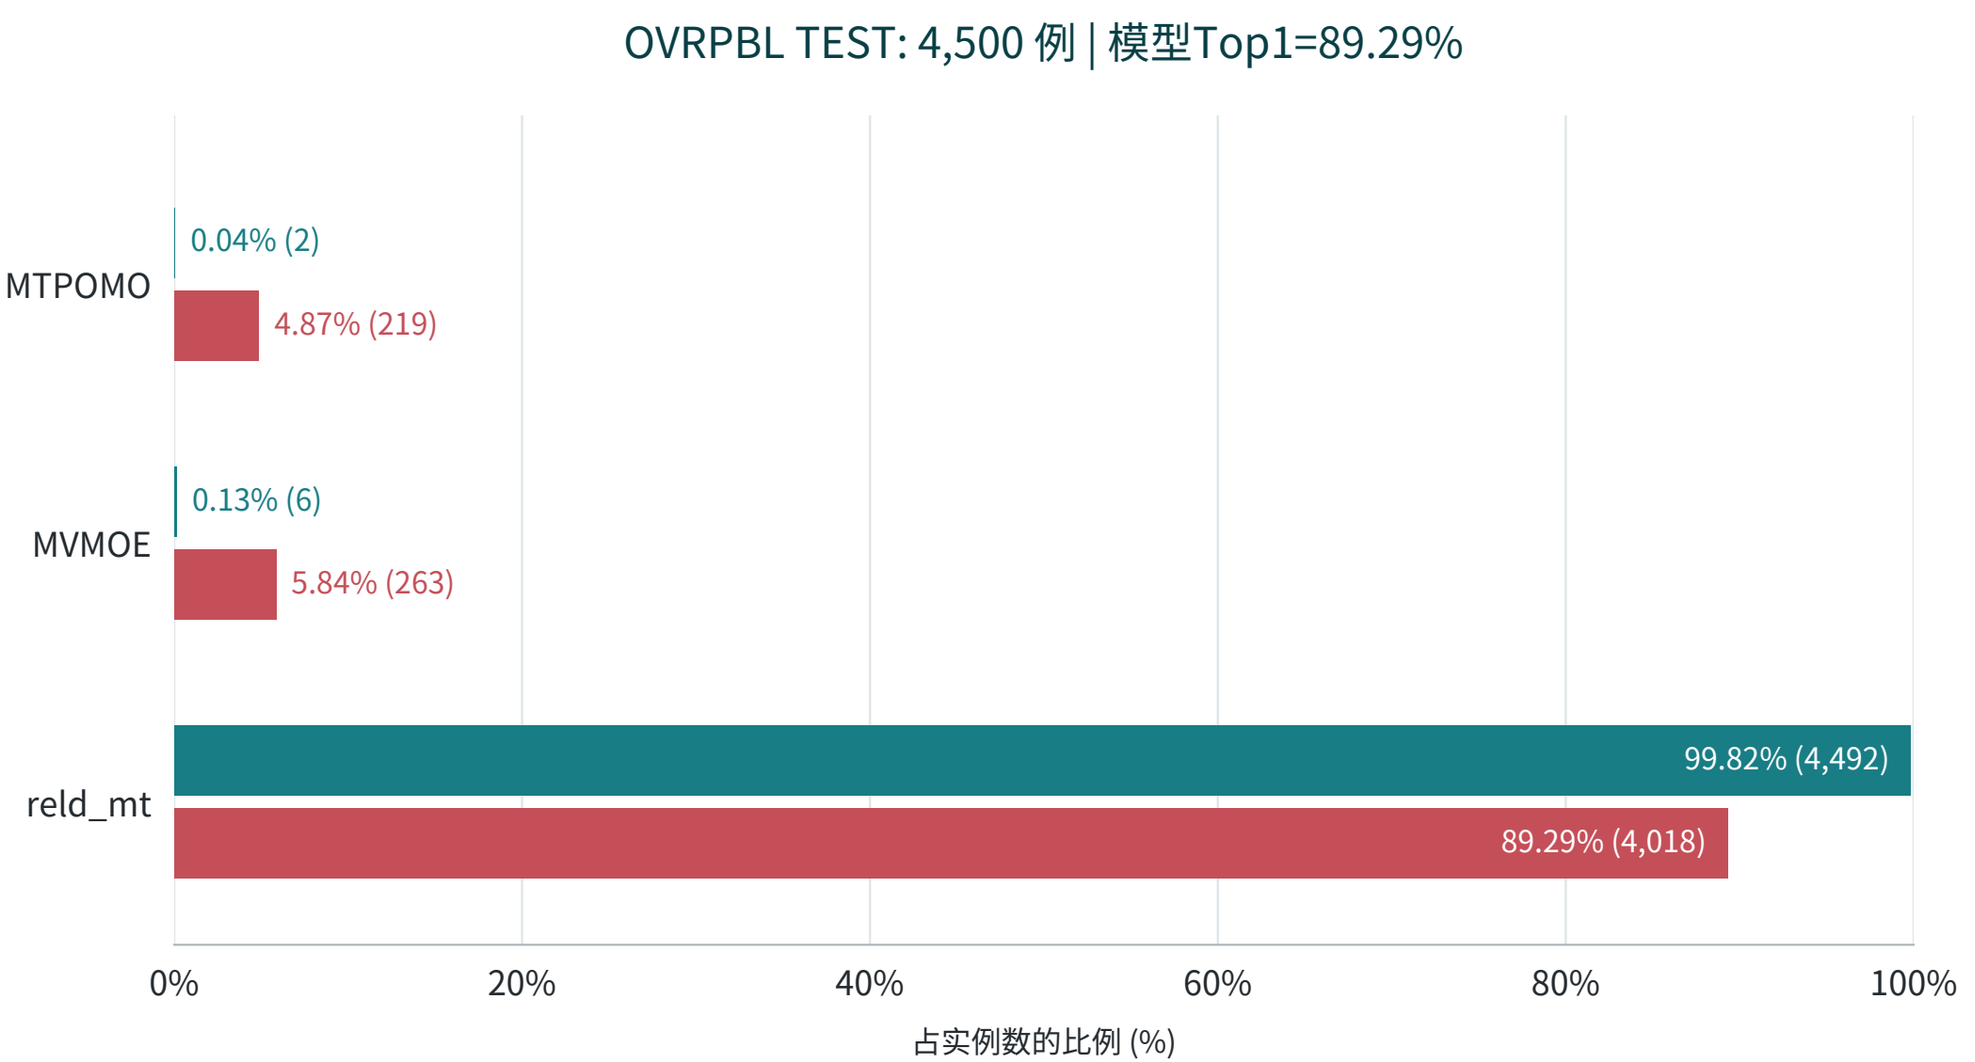

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

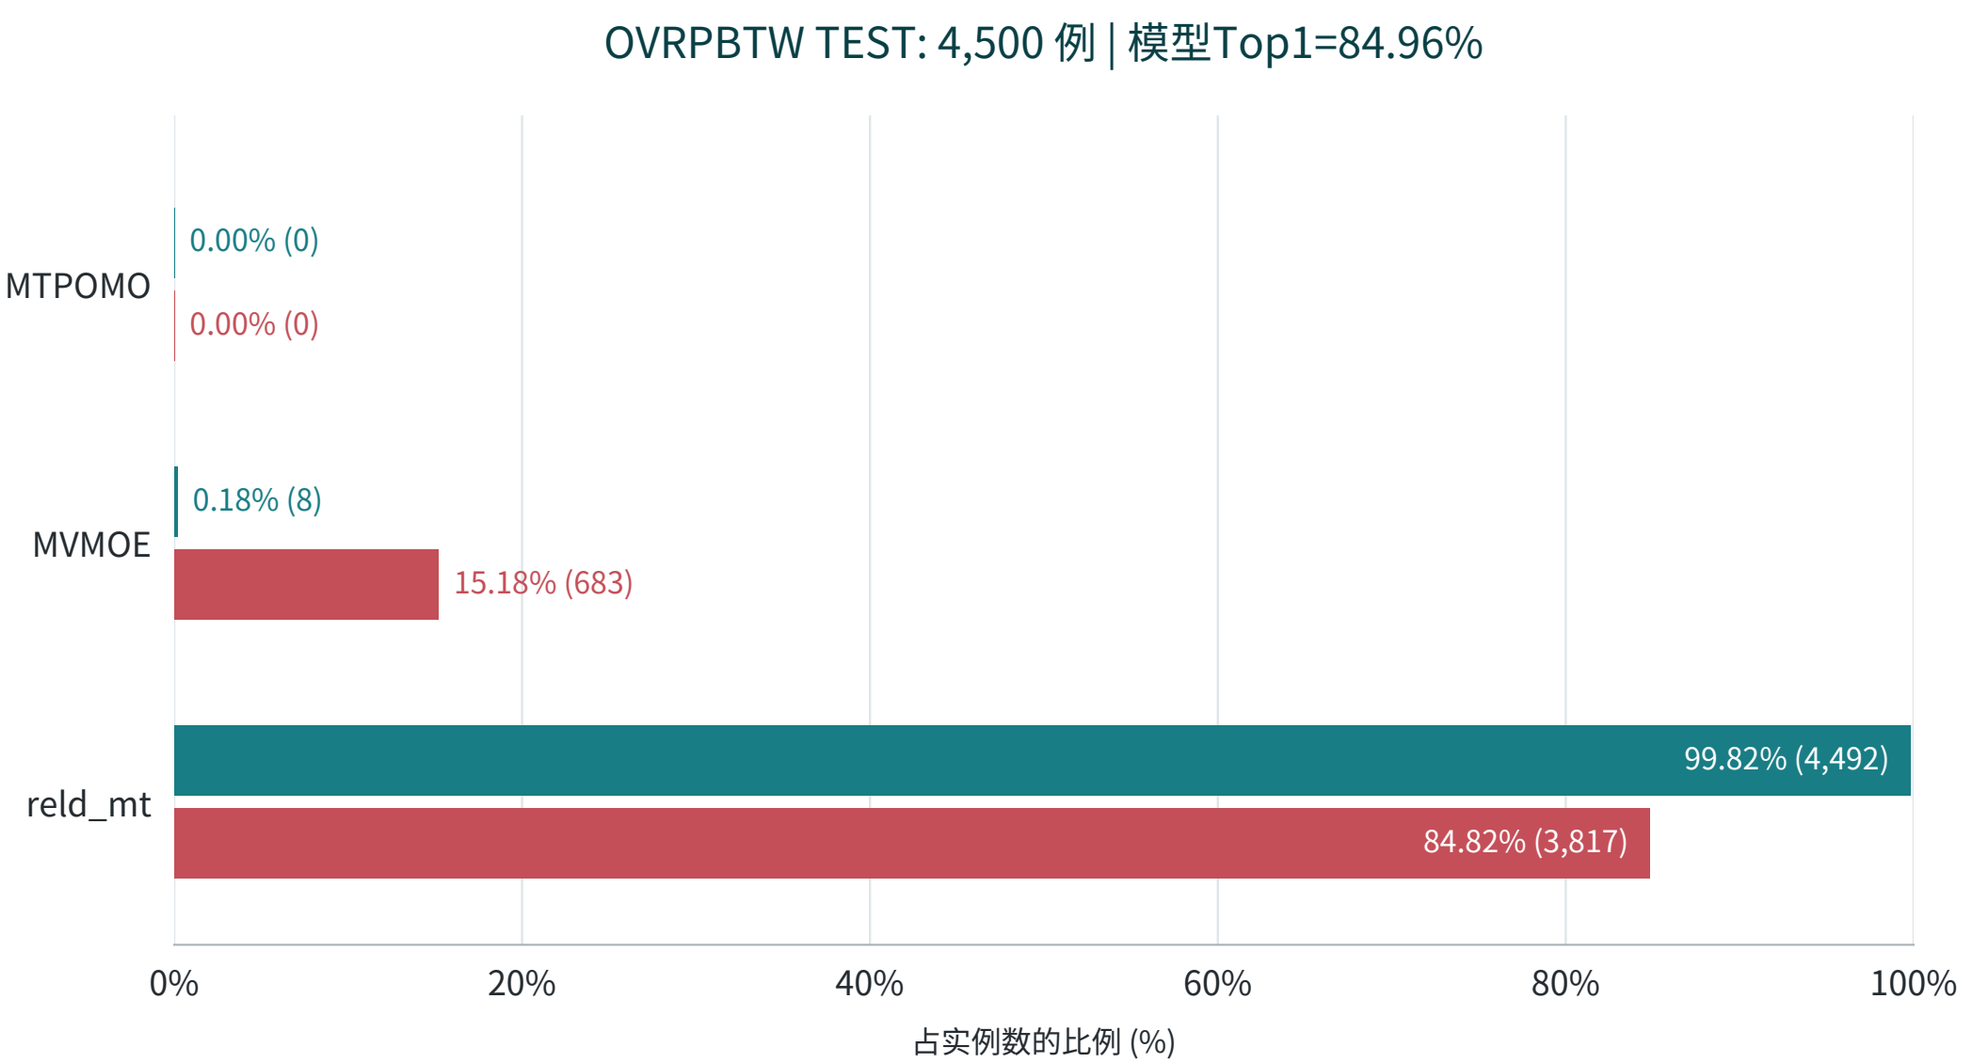

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

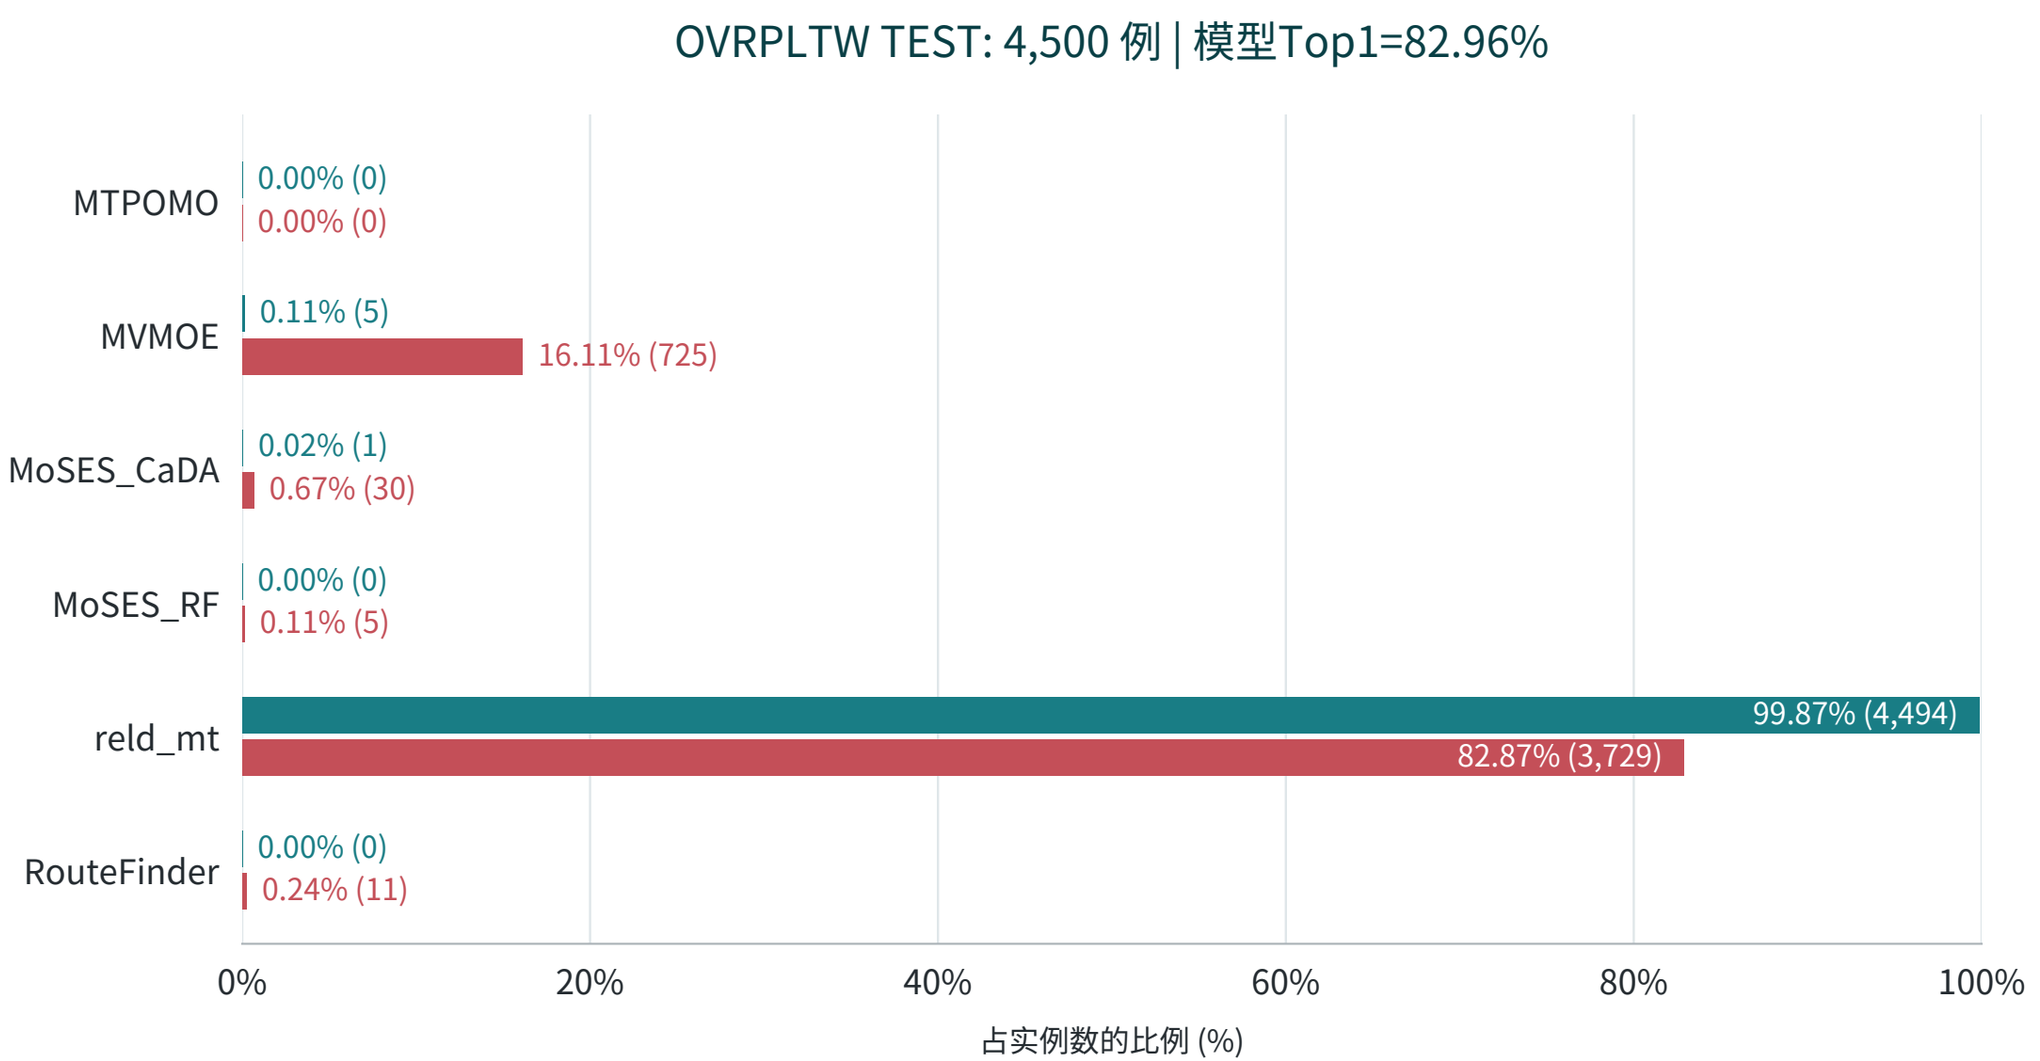

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

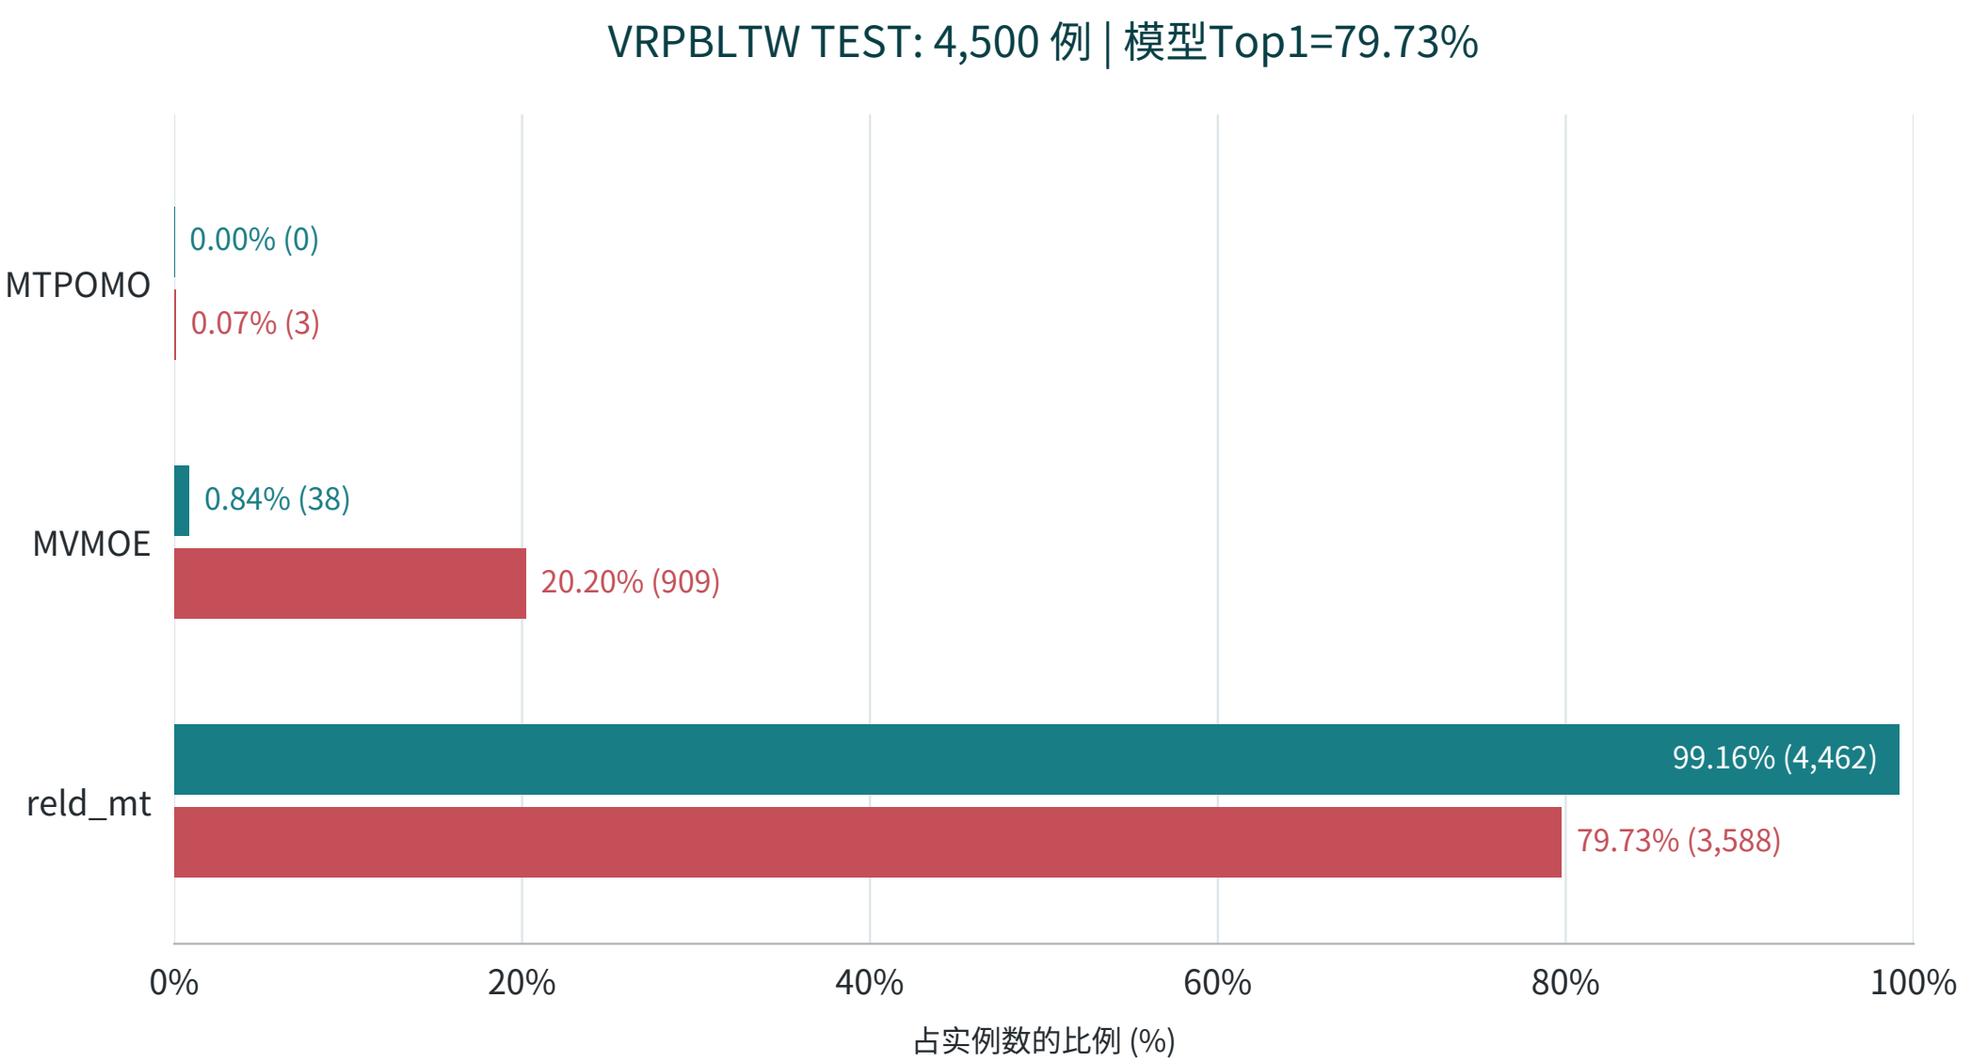

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.

R89/A_adamw | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 f7b995ea7d5d6c31

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

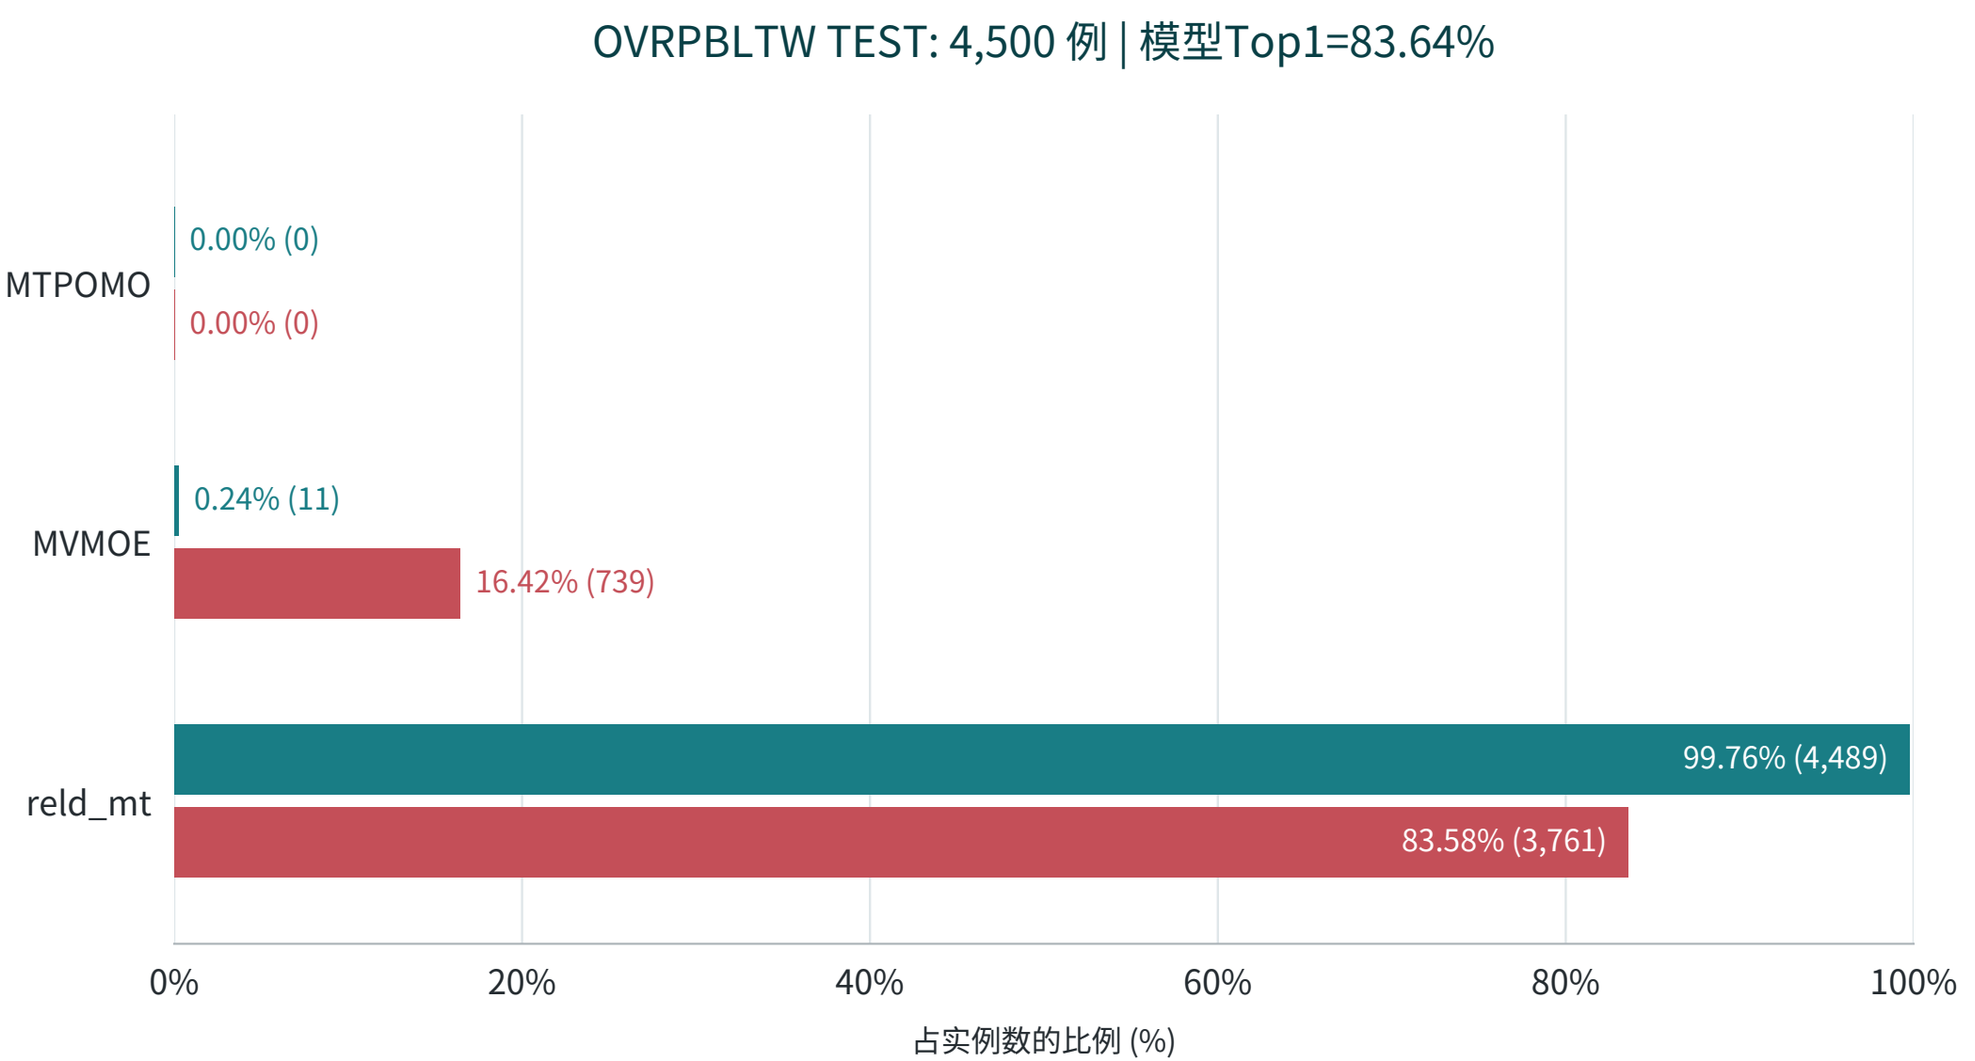

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R89/A_adamw: stable global solver-ID score ties. Same R89 lock; LIB inference only; no training/reselection/Rxx mixing.