R107/A_edge_factorized | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 26 | update 37440 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0568	66.2037	11.416879	11.427978	11.371692	-0.1921	+0.3955	0.4067
TEST ALL	71.2605	66.1802	11.373877	11.385299	11.329932	-0.1975	+0.3857	0.3947

Dataset	n	NSS Top1 (%)	R107 Top1 (%)	NSS cost	R107 cost
TSP TEST	4500	45.888889	46.688889	7.970400719	7.970814980
CVRP TEST	4500	45.977778	47.622222	18.004802368	18.012358991
TSPLIB	49	20.408163	22.448980	8.217907074	8.208846062
CVRPLIB	100	70.000000	61.000000	67.101111717	67.253256073

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original R77 native CE

R107/A_edge_factorized | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0568	66.2037	11.416879	11.427978	11.371692	-0.1921	+0.3955	0.4067	per-problem TRAIN SBS
TSP	46.6222	33.1111	8.024920	8.045354	7.990533	-0.2540	+0.4304	0.4187	T2T
CVRP	46.5333	18.7111	18.161444	18.269377	18.064087	-0.5908	+0.5390	0.7245	RELD_CVRP
ATSP	76.4000	47.4889	1.638699	1.676905	1.632471	-2.2783	+0.3816	0.3789	UNICO_MatPOENet
OVRP	41.0667	35.7556	7.461341	7.469579	7.415777	-0.1103	+0.6144	0.6277	MoSES_RF
VRPB	81.0222	80.8444	9.354065	9.354876	9.318750	-0.0087	+0.3790	0.3875	reld_mt
VRPL	38.3333	33.0889	12.431140	12.437959	12.383444	-0.0548	+0.3852	0.3918	MoSES_RF
VRPTW	79.9333	79.9556	18.819064	18.819431	18.766139	-0.0020	+0.2820	0.2992	reld_mt
OVRPTW	83.8222	83.7778	10.143288	10.143730	10.116859	-0.0044	+0.2612	0.2583	reld_mt
OVRPB	88.4444	88.5111	6.357882	6.357254	6.341078	+0.0099	+0.2650	0.2779	reld_mt
OVRPL	41.4222	35.9111	7.437983	7.445709	7.390416	-0.1038	+0.6436	0.6581	MoSES_RF
VRPBL	79.0222	78.5111	9.368971	9.371523	9.328366	-0.0272	+0.4353	0.4395	reld_mt
VRPBTW	78.6222	78.4222	19.946742	19.950430	19.851084	-0.0185	+0.4819	0.4619	reld_mt
VRPLTW	78.8444	78.7556	18.764398	18.765871	18.707843	-0.0079	+0.3023	0.3186	reld_mt
OVRPBL	89.2889	89.2000	6.369584	6.370093	6.352824	-0.0080	+0.2638	0.2753	reld_mt
OVRPBTW	83.4222	83.4444	10.662406	10.661098	10.623245	+0.0123	+0.3686	0.3473	reld_mt
OVRPLTW	83.4889	83.4889	10.157217	10.157423	10.129818	-0.0020	+0.2705	0.2725	reld_mt
VRPBLTW	79.5111	79.4000	19.794257	19.797044	19.706420	-0.0141	+0.4457	0.4347	reld_mt
OVRPBLTW	83.2222	83.2889	10.610426	10.609955	10.571302	+0.0044	+0.3701	0.3481	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R107/A_edge_factorized | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2605	66.1802	11.373877	11.385299	11.329932	-0.1975	+0.3857	0.3947	per-problem TRAIN SBS
TSP	46.6889	34.5333	7.970815	7.989621	7.937593	-0.2354	+0.4185	0.4100	T2T
CVRP	47.6222	17.9333	18.012359	18.124983	17.918509	-0.6214	+0.5238	0.6962	RELD_CVRP
ATSP	76.1111	47.2444	1.635588	1.674207	1.629441	-2.3067	+0.3772	0.3762	UNICO_MatPOENet
OVRP	40.0000	33.6444	7.446165	7.455750	7.400487	-0.1286	+0.6172	0.6290	MoSES_RF
VRPB	80.6000	80.4000	9.349829	9.351810	9.315298	-0.0212	+0.3707	0.3740	reld_mt
VRPL	37.7556	32.2667	12.349754	12.356138	12.300958	-0.0517	+0.3967	0.4051	MoSES_RF
VRPTW	81.1333	80.8444	18.689070	18.690545	18.637408	-0.0079	+0.2772	0.2887	reld_mt
OVRPTW	83.9778	83.9333	10.092716	10.093063	10.068135	-0.0034	+0.2441	0.2355	reld_mt
OVRPB	88.1778	88.1333	6.370464	6.370826	6.352225	-0.0057	+0.2871	0.2934	reld_mt
OVRPL	42.1556	34.6000	7.463746	7.472542	7.418033	-0.1177	+0.6162	0.6239	MoSES_RF
VRPBL	79.6667	79.4222	9.394909	9.396379	9.355967	-0.0156	+0.4162	0.4201	reld_mt
VRPBTW	78.7333	78.7556	19.667196	19.665725	19.577666	+0.0075	+0.4573	0.4533	reld_mt
VRPLTW	79.3333	79.2444	18.801826	18.803136	18.745143	-0.0070	+0.3024	0.3193	reld_mt
OVRPBL	89.3556	89.2889	6.375281	6.375741	6.359310	-0.0072	+0.2511	0.2615	reld_mt
OVRPBTW	84.9778	84.8222	10.658767	10.659591	10.624748	-0.0077	+0.3202	0.2926	reld_mt
OVRPLTW	82.9556	82.8667	10.085636	10.086112	10.059001	-0.0047	+0.2648	0.2651	reld_mt
VRPBLTW	79.7778	79.7333	19.704064	19.707068	19.613284	-0.0152	+0.4628	0.4449	reld_mt
OVRPBLTW	83.6667	83.5778	10.661594	10.662149	10.625574	-0.0052	+0.3390	0.3152	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R107/A_edge_factorized | LIB and locked provenance

Current R107 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	22.4490	10.2041	8.208846	8.240435	8.142167	-0.3833	+0.8189	0.8281
CVRPLIB	61.0000	45.0000	67.253256	67.245364	66.945093	+0.0117	+0.4603	0.5647

SHA256: 074788d55df5074e8cf42e8f77a7fc8d19601bbc7c269b6bd2df8279a7151150

Unique selection: strict minimum whole18 VAL macro_vs_sbs_pct; first exact tie; common full-TRAIN SBS

Inference: original score MLP utility differences and maximin; no calibration or solver quotas


Normalization: new81000 TRAIN only; no TEST/LIB refit.


R107/A_edge_factorized | TSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

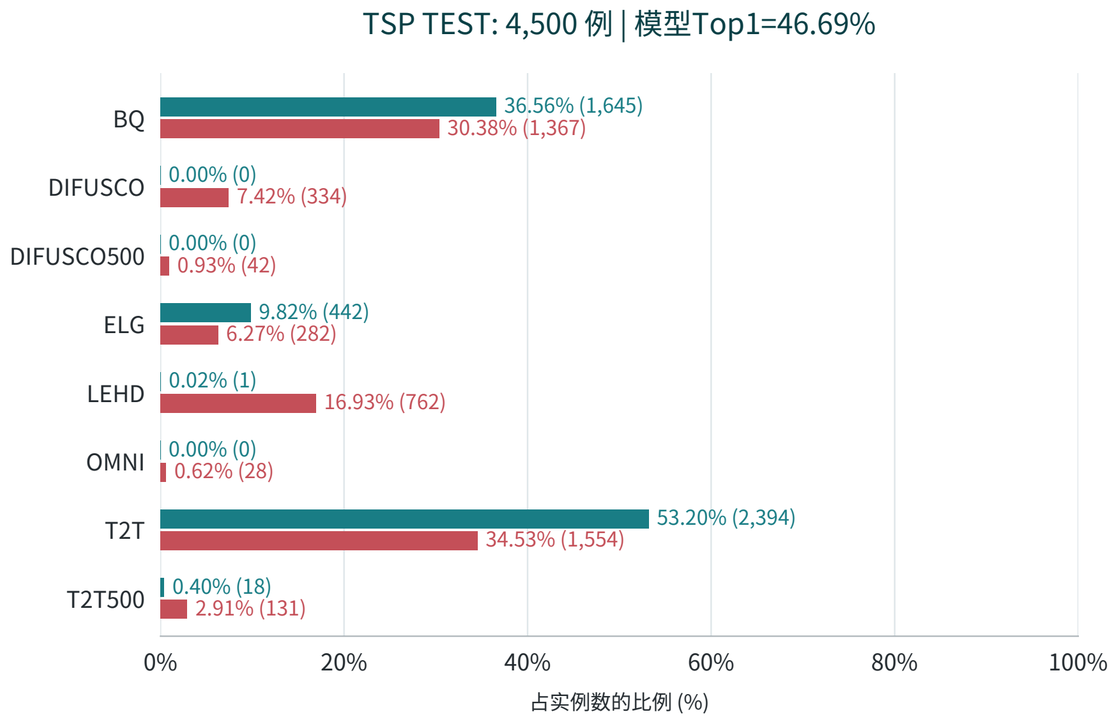

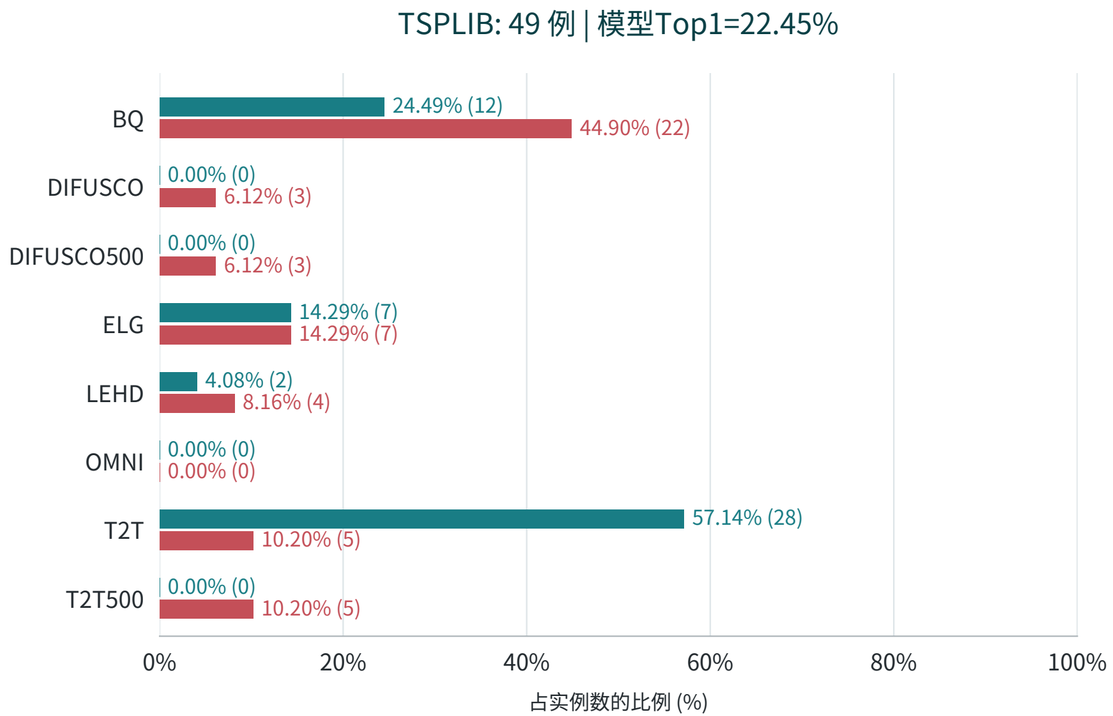

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.


R107/A_edge_factorized | CVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

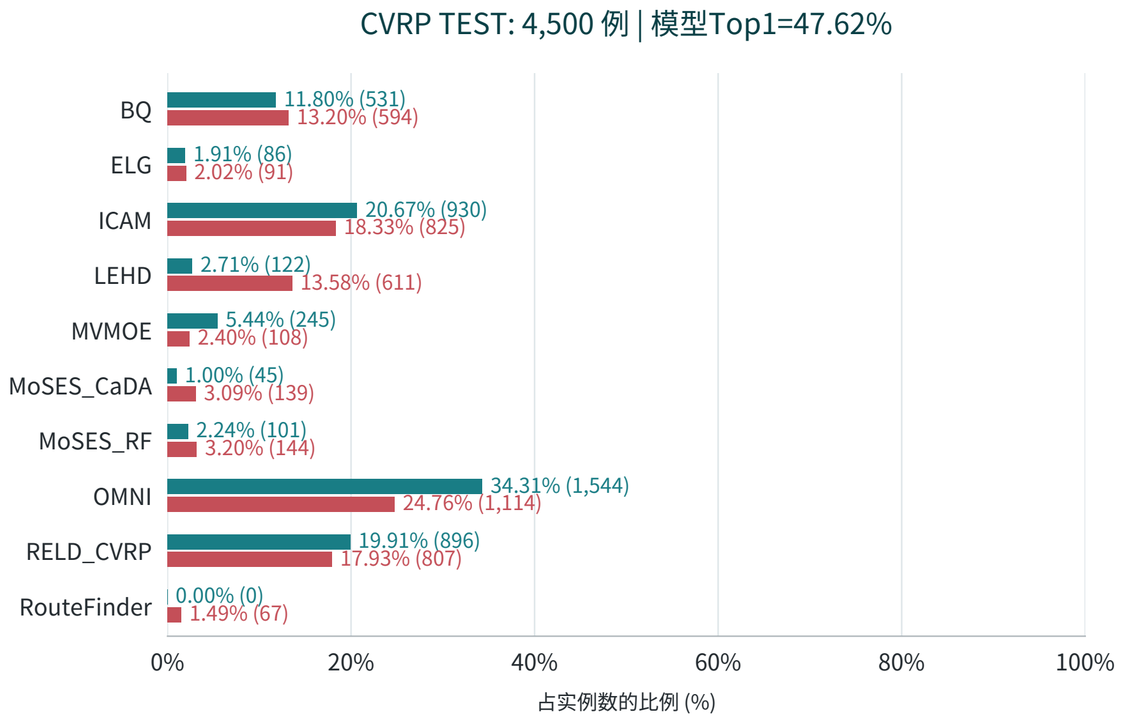

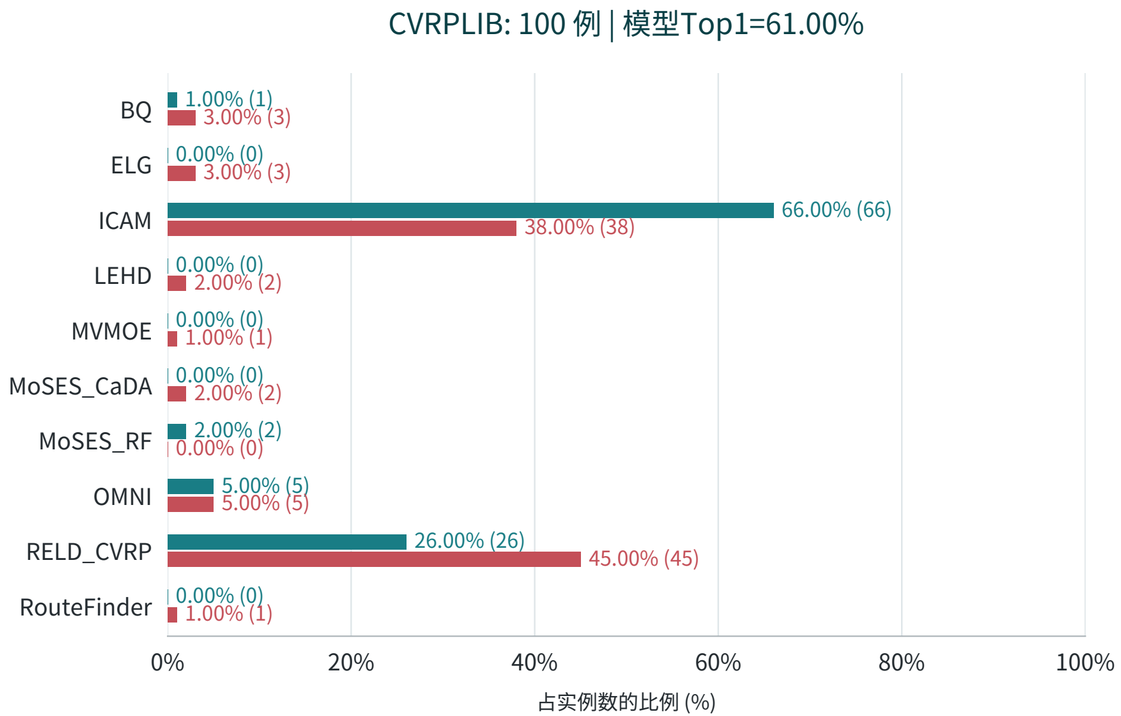

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | ATSP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

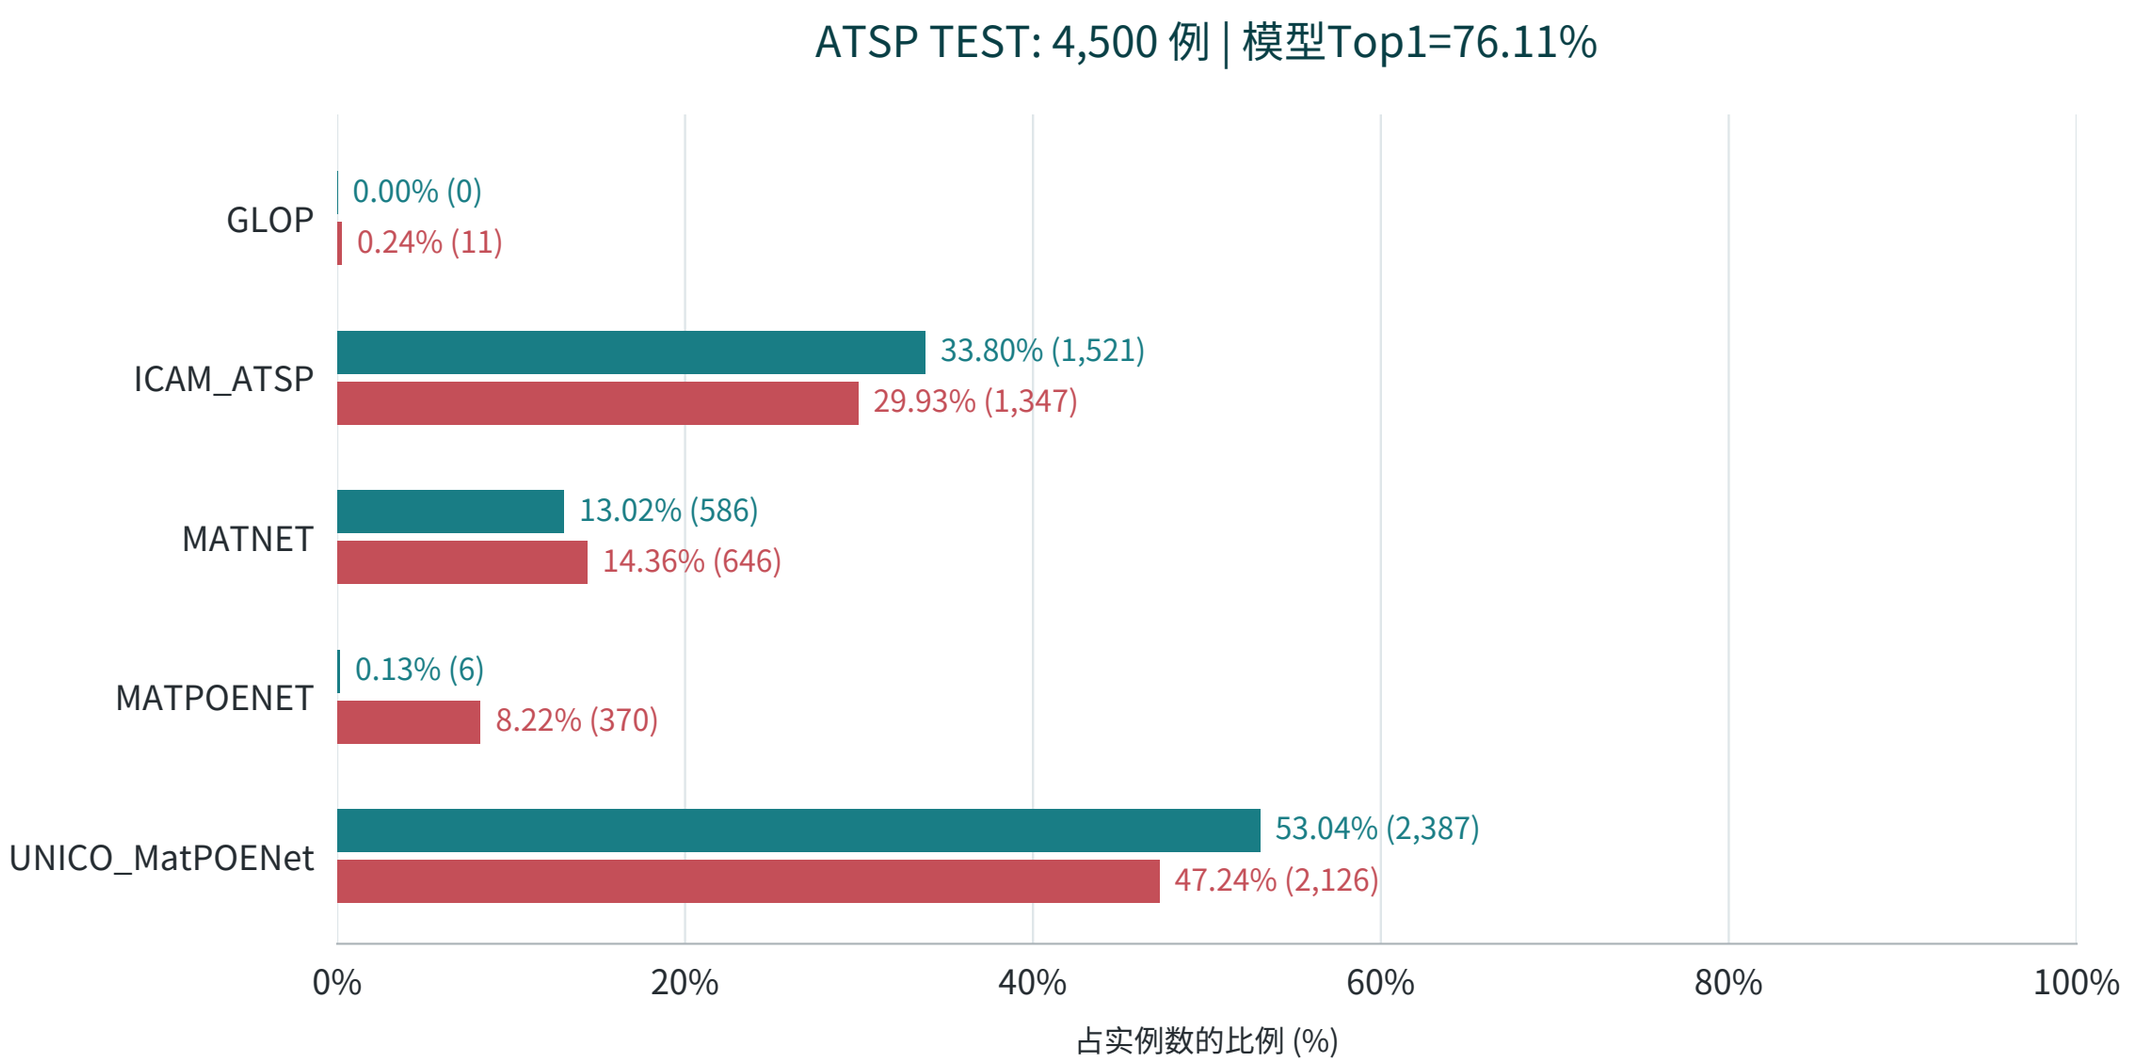

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRP | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

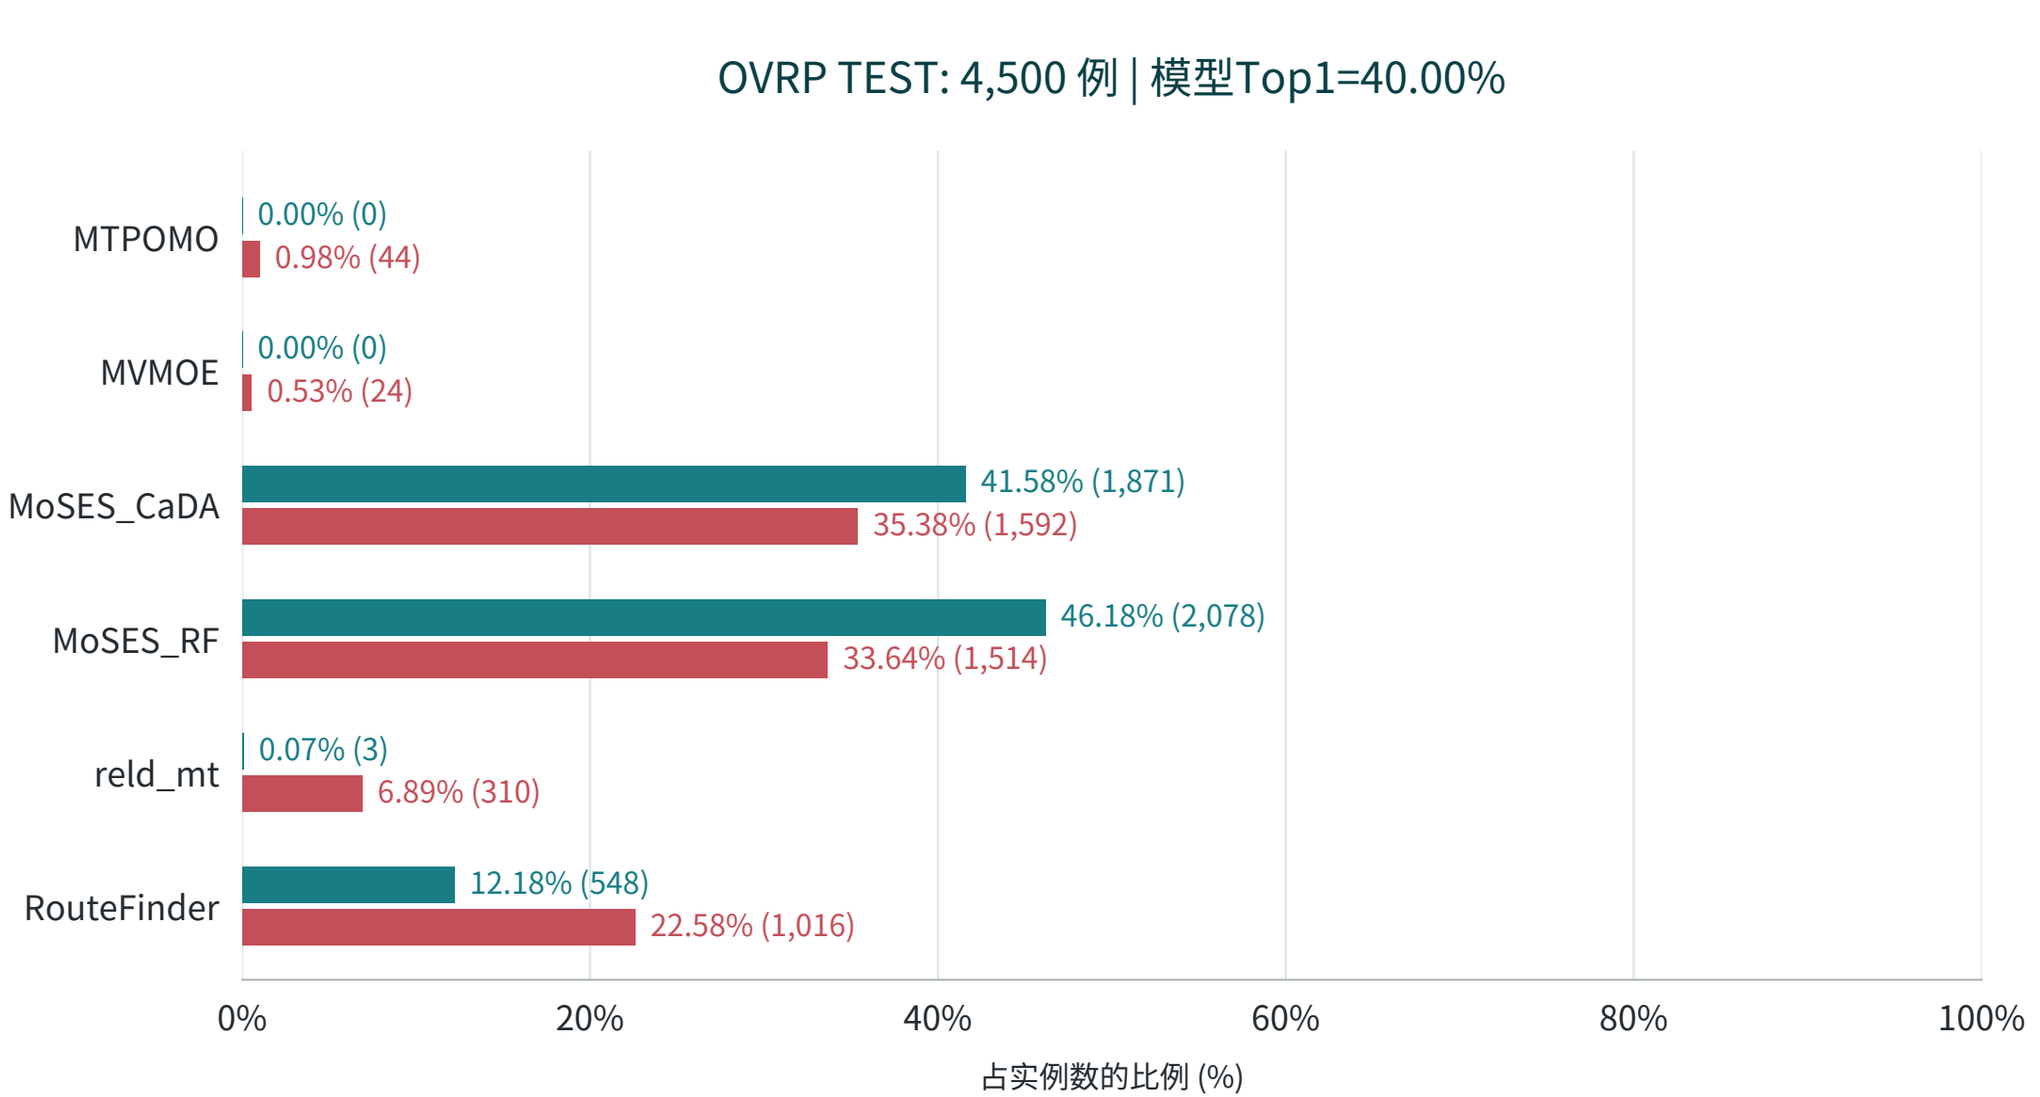

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

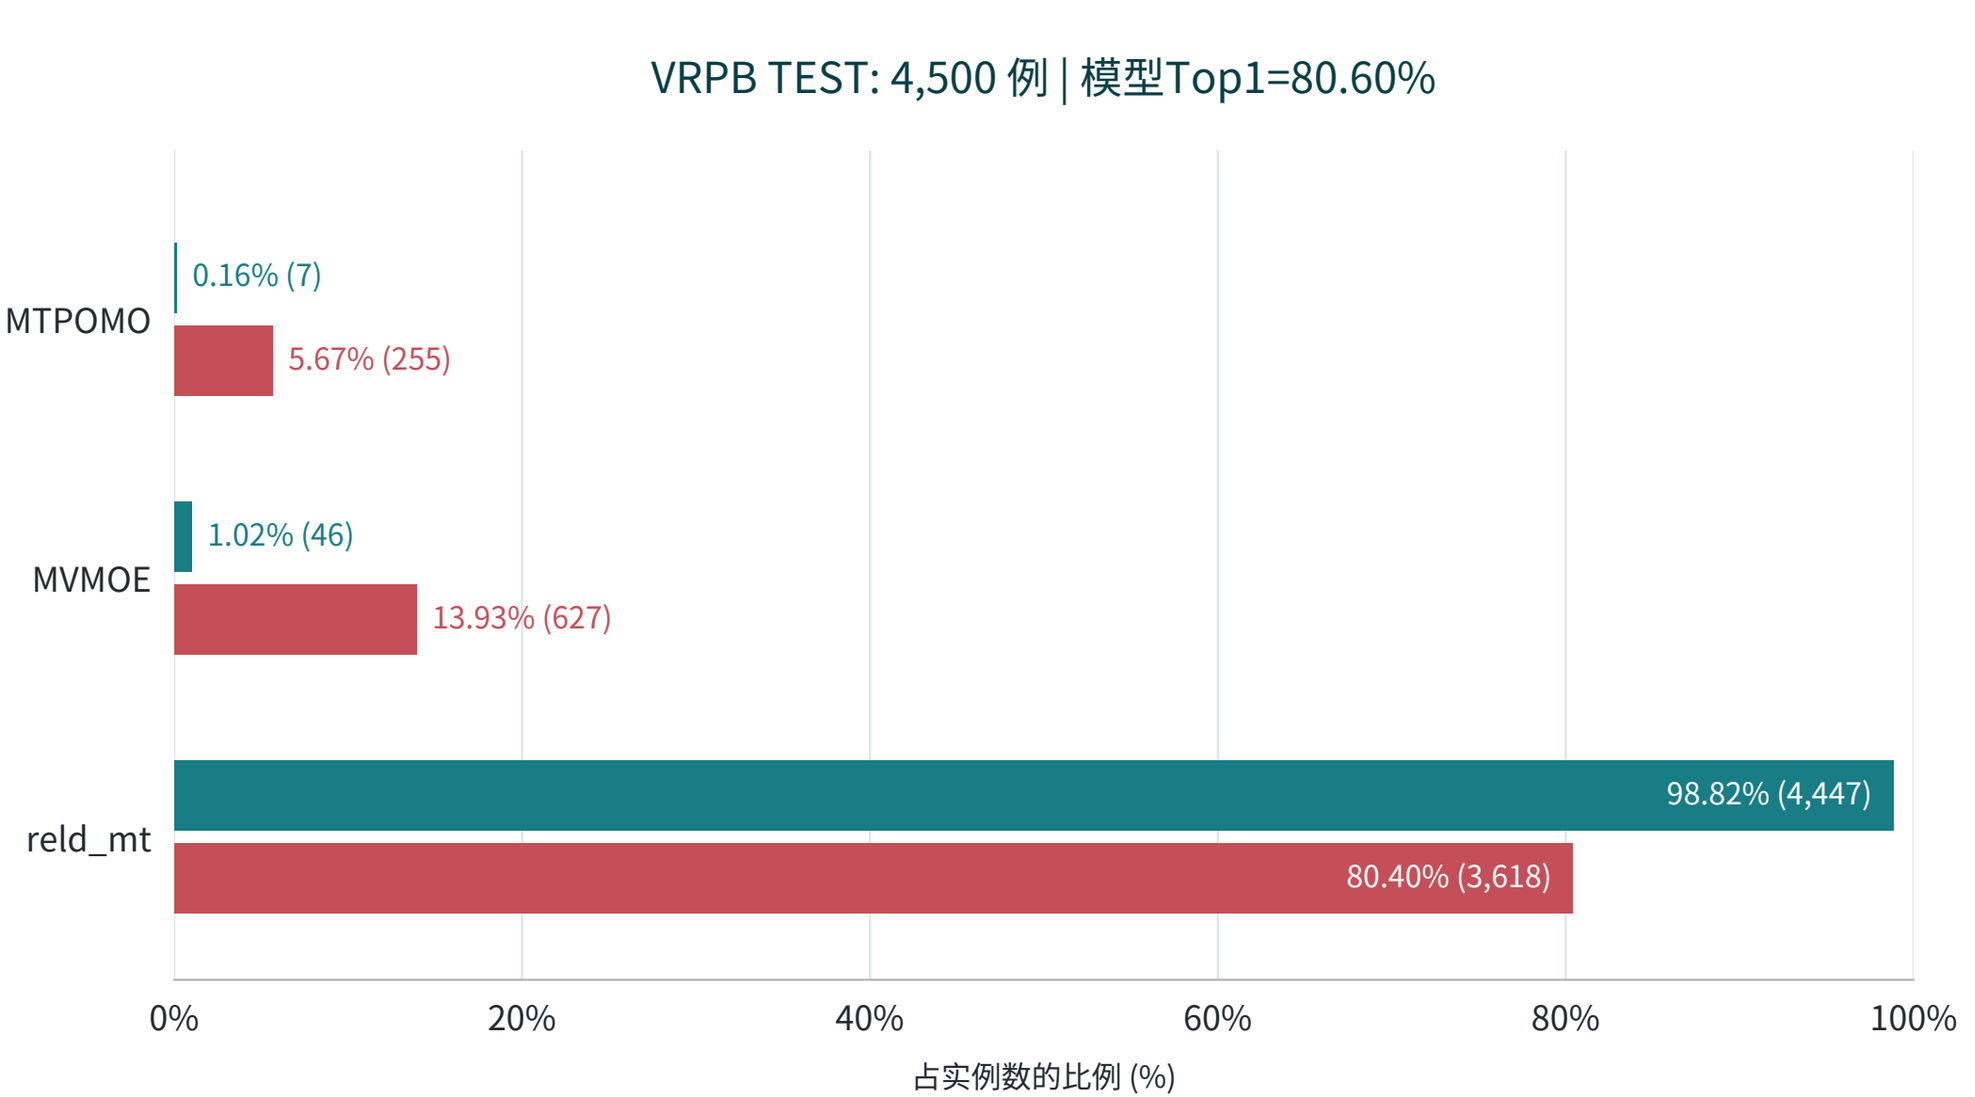

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

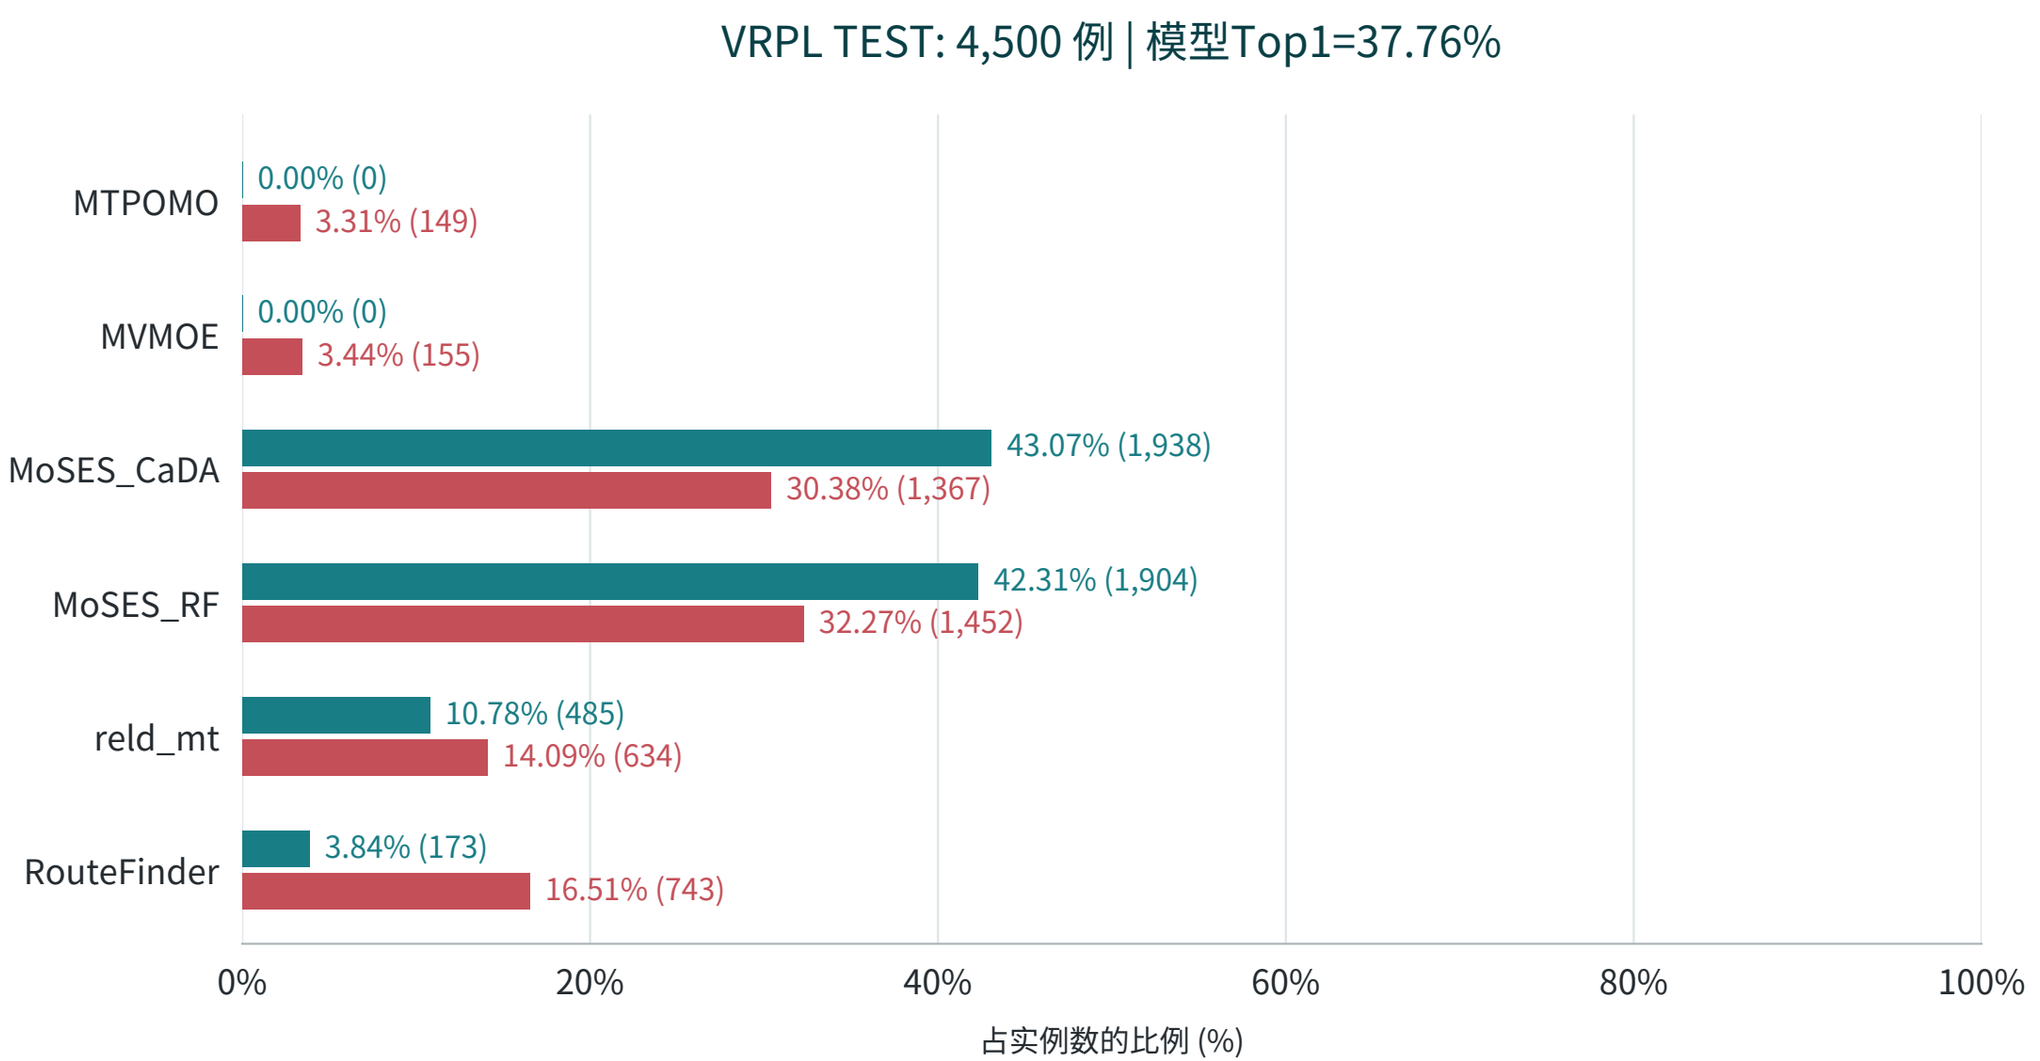

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

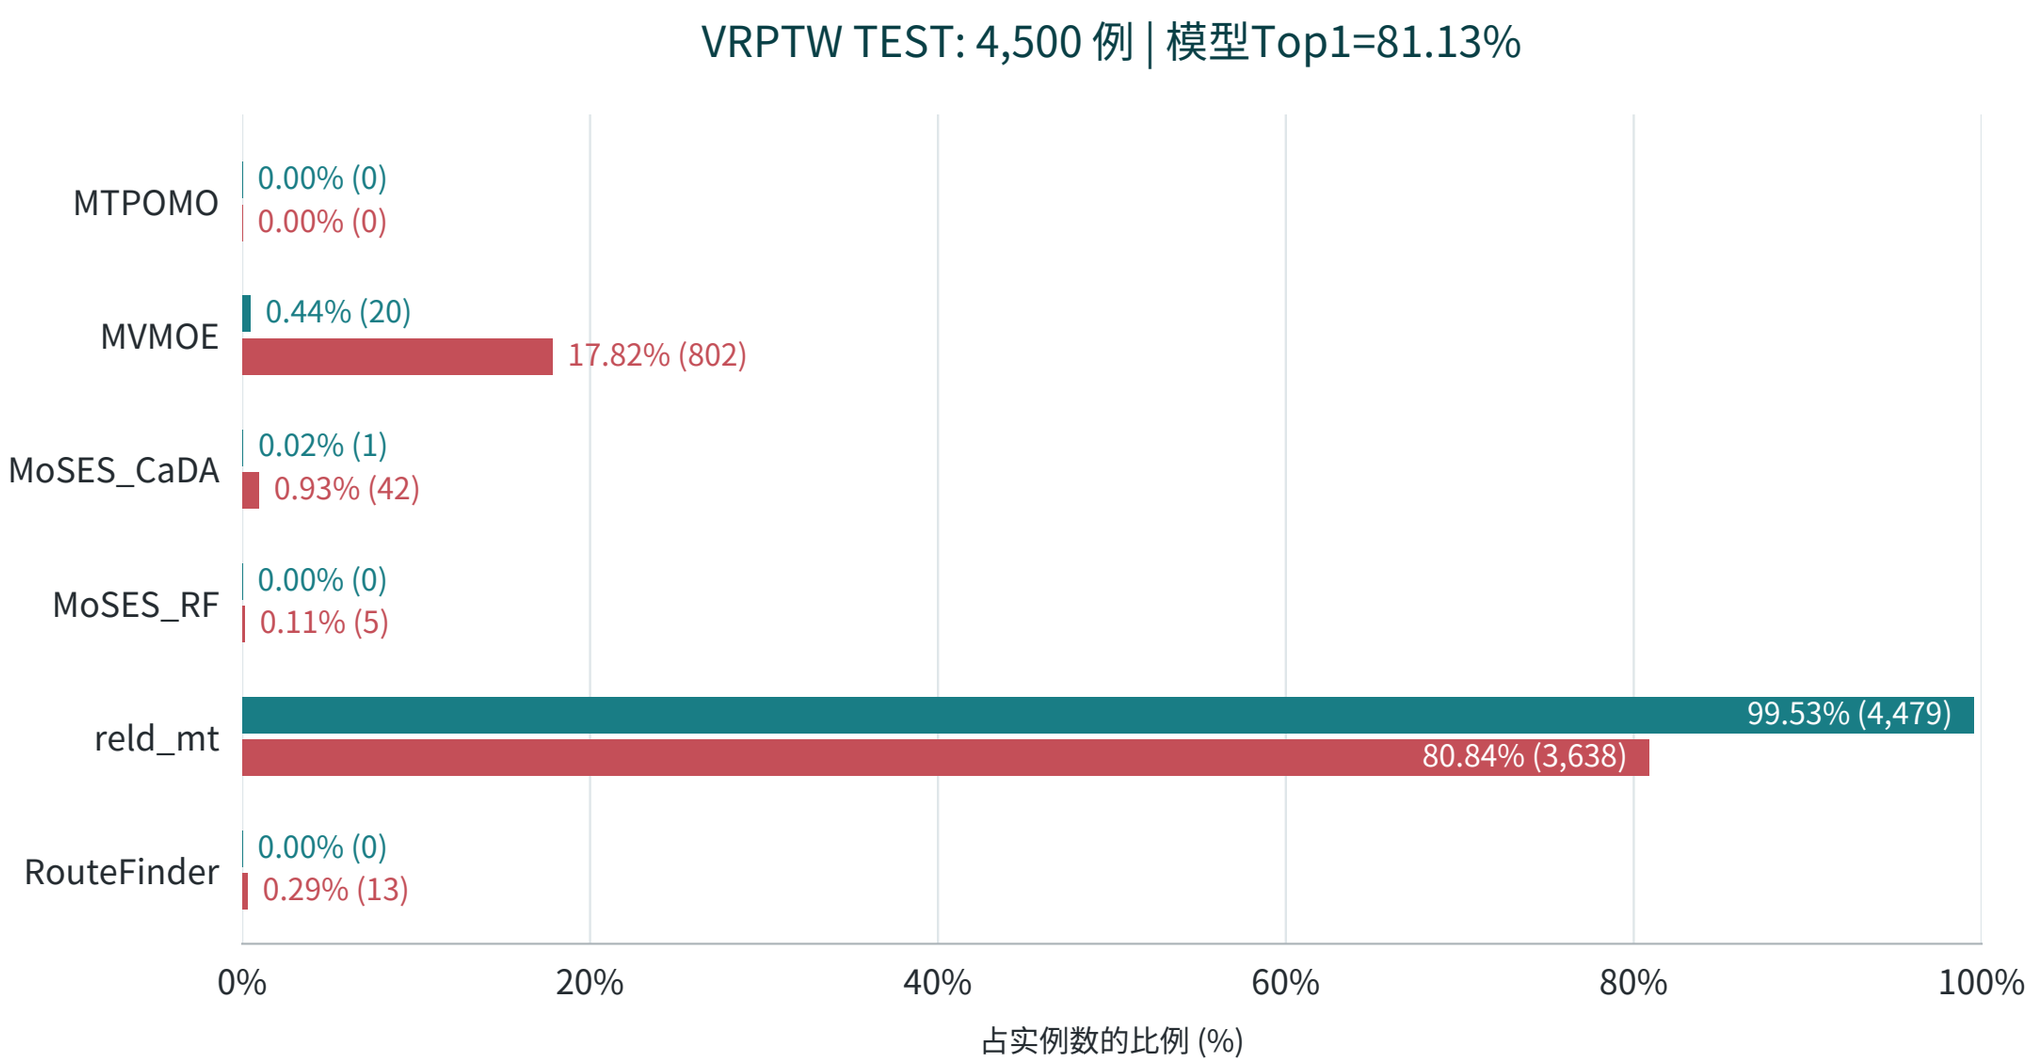

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

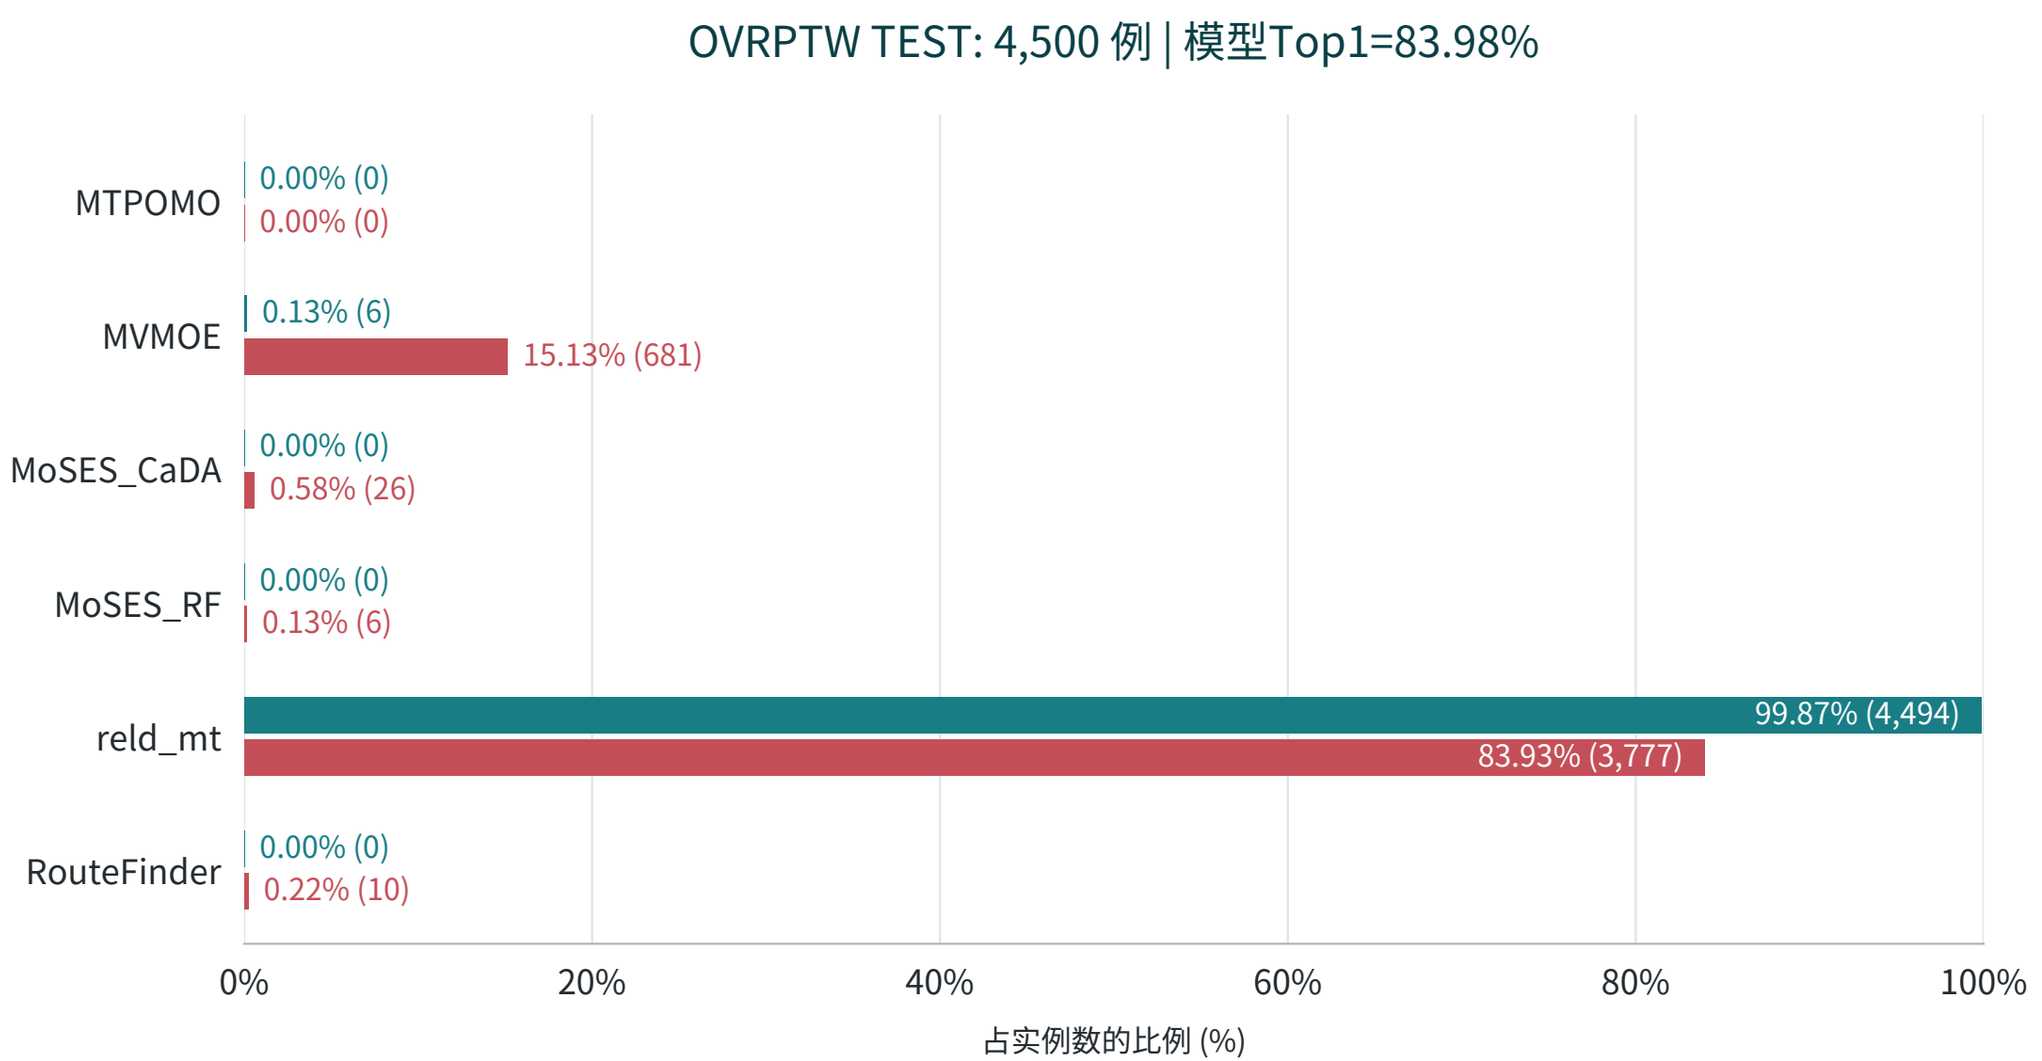

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPB | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

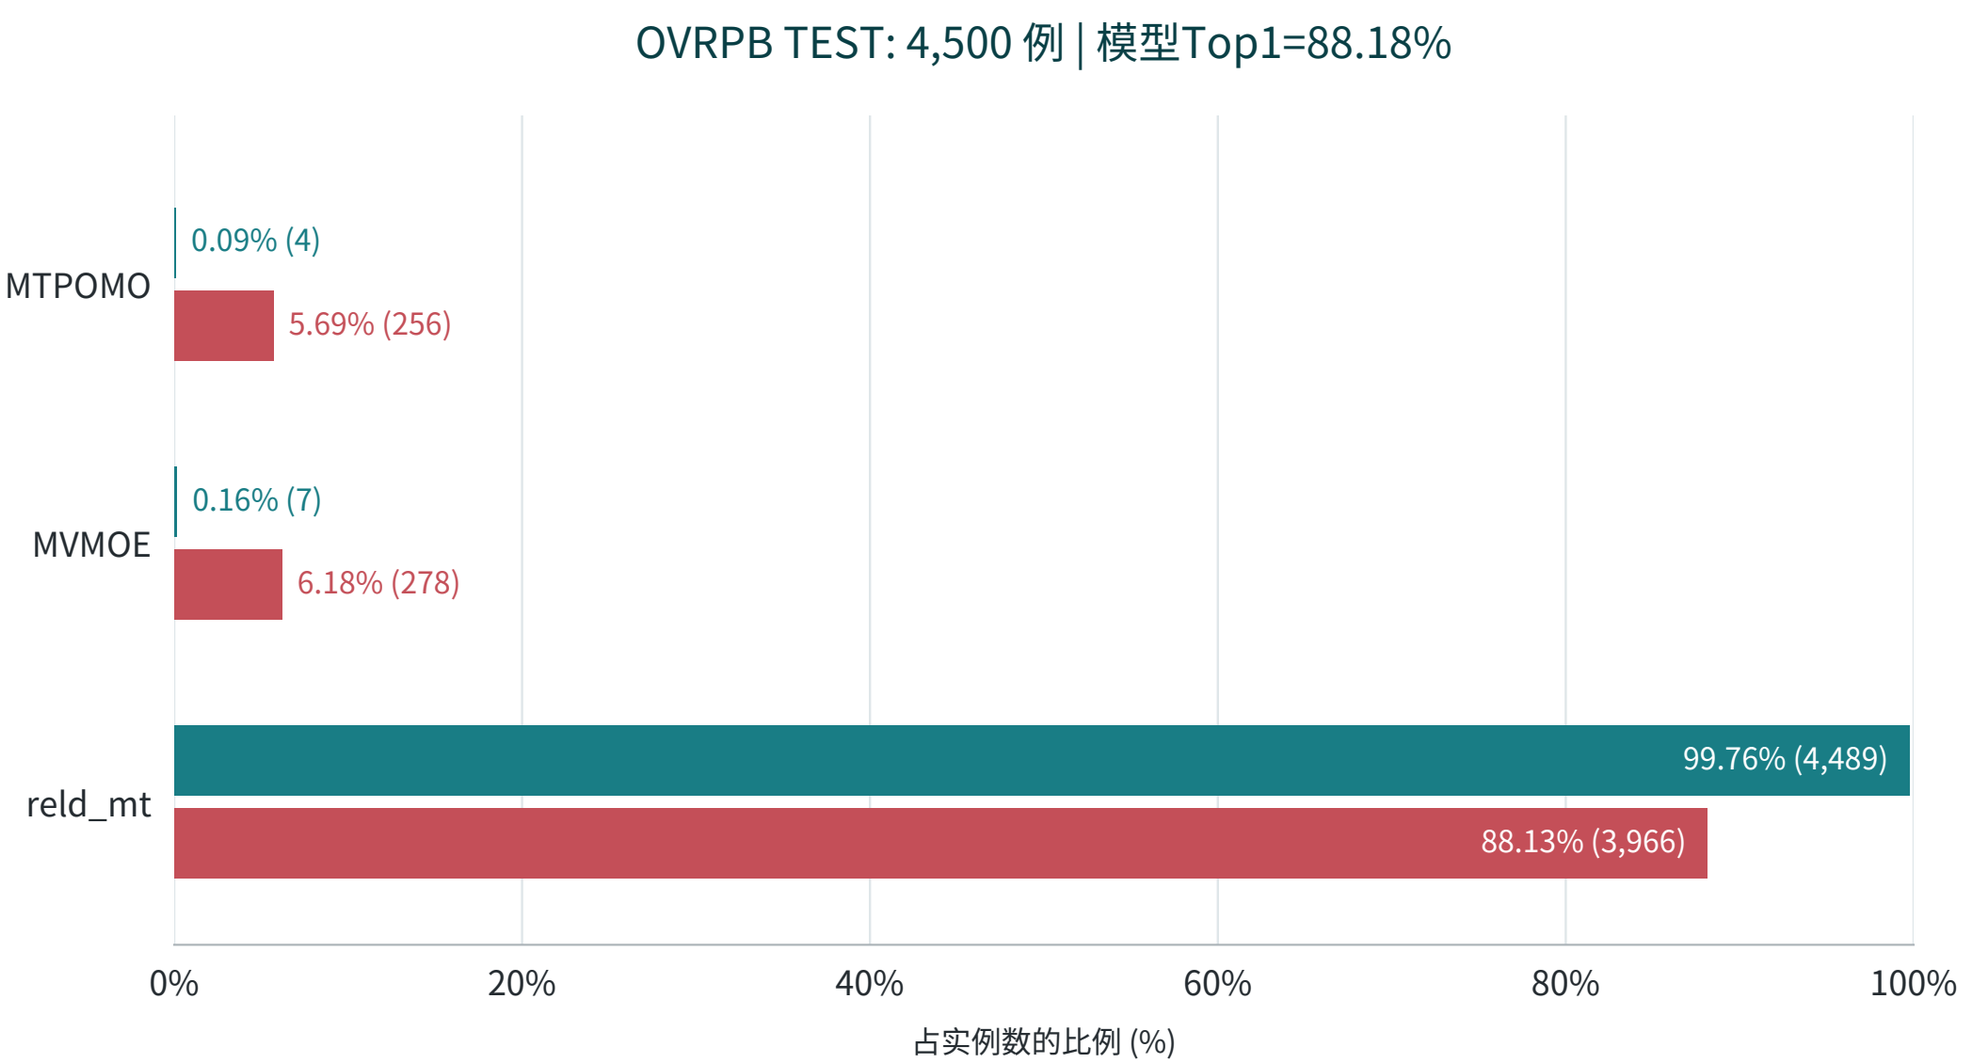

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

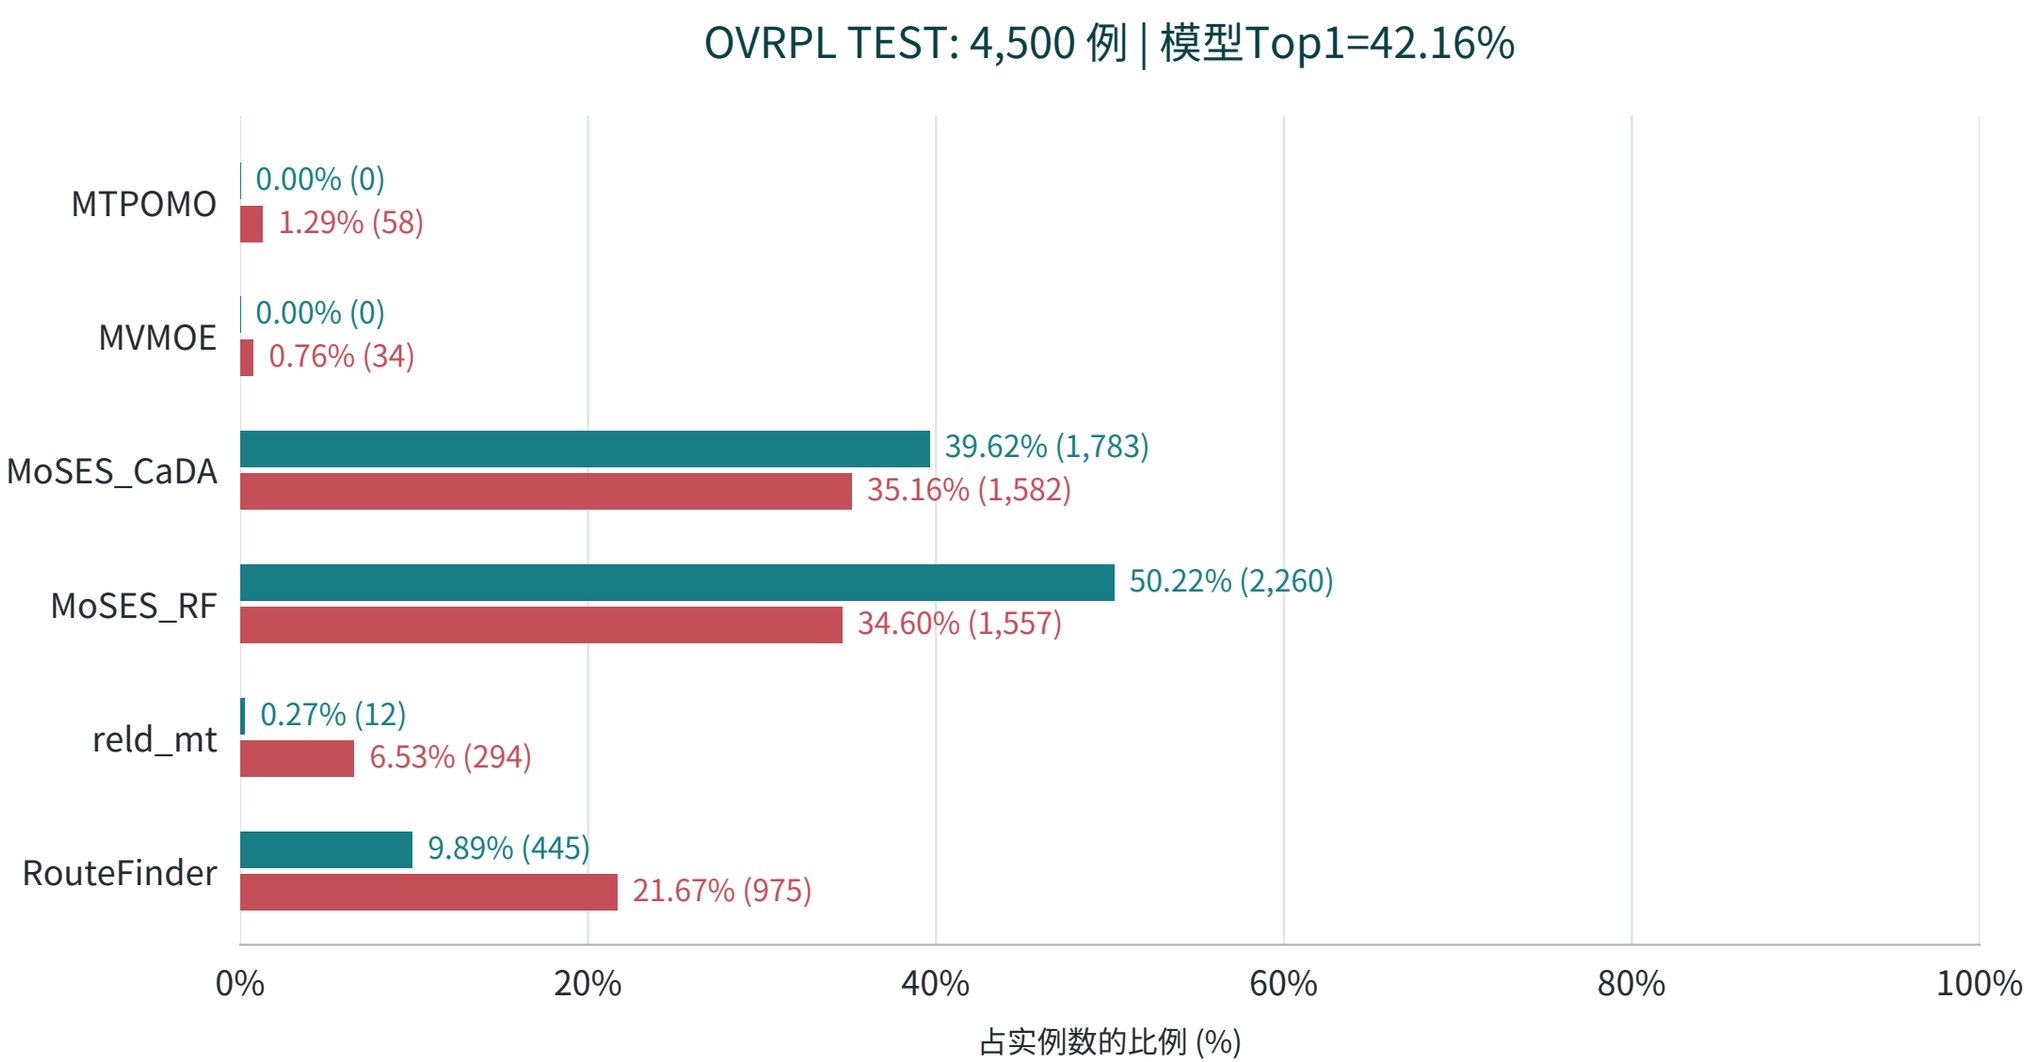

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

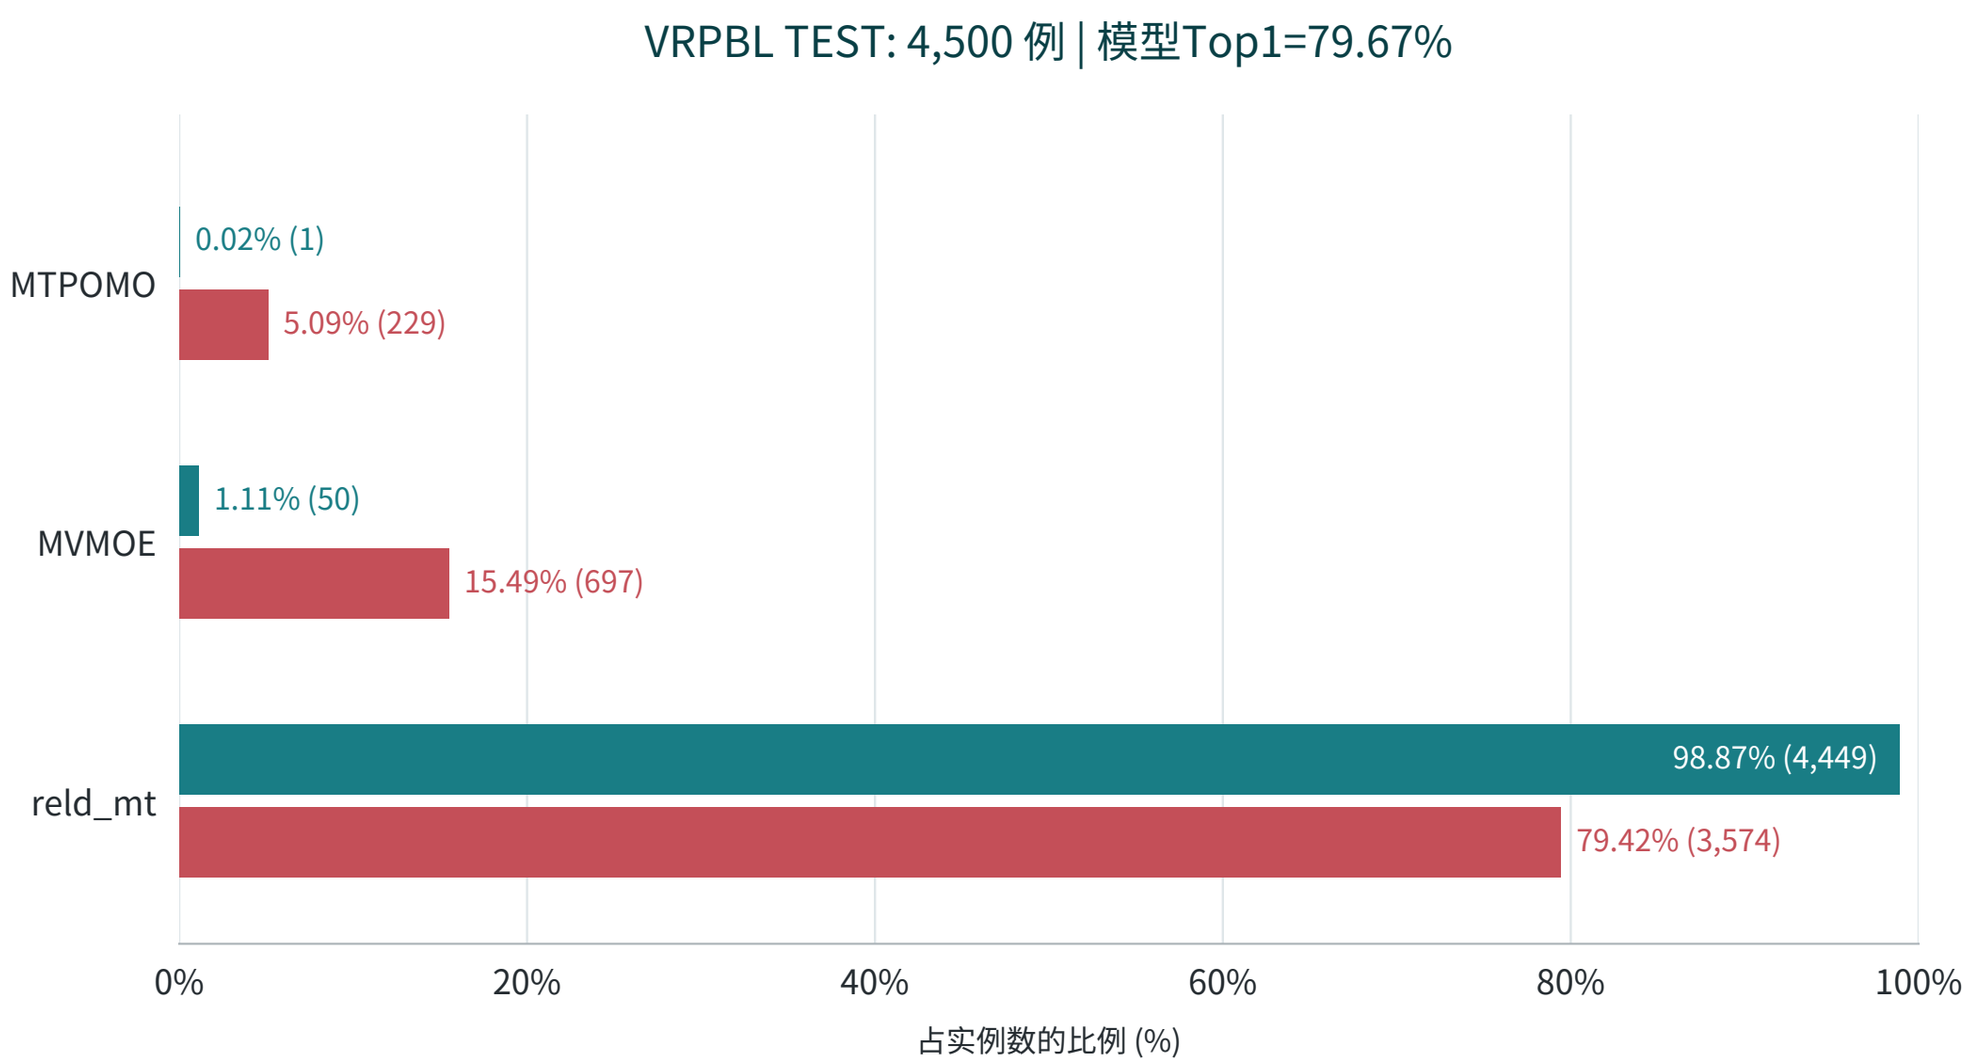

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

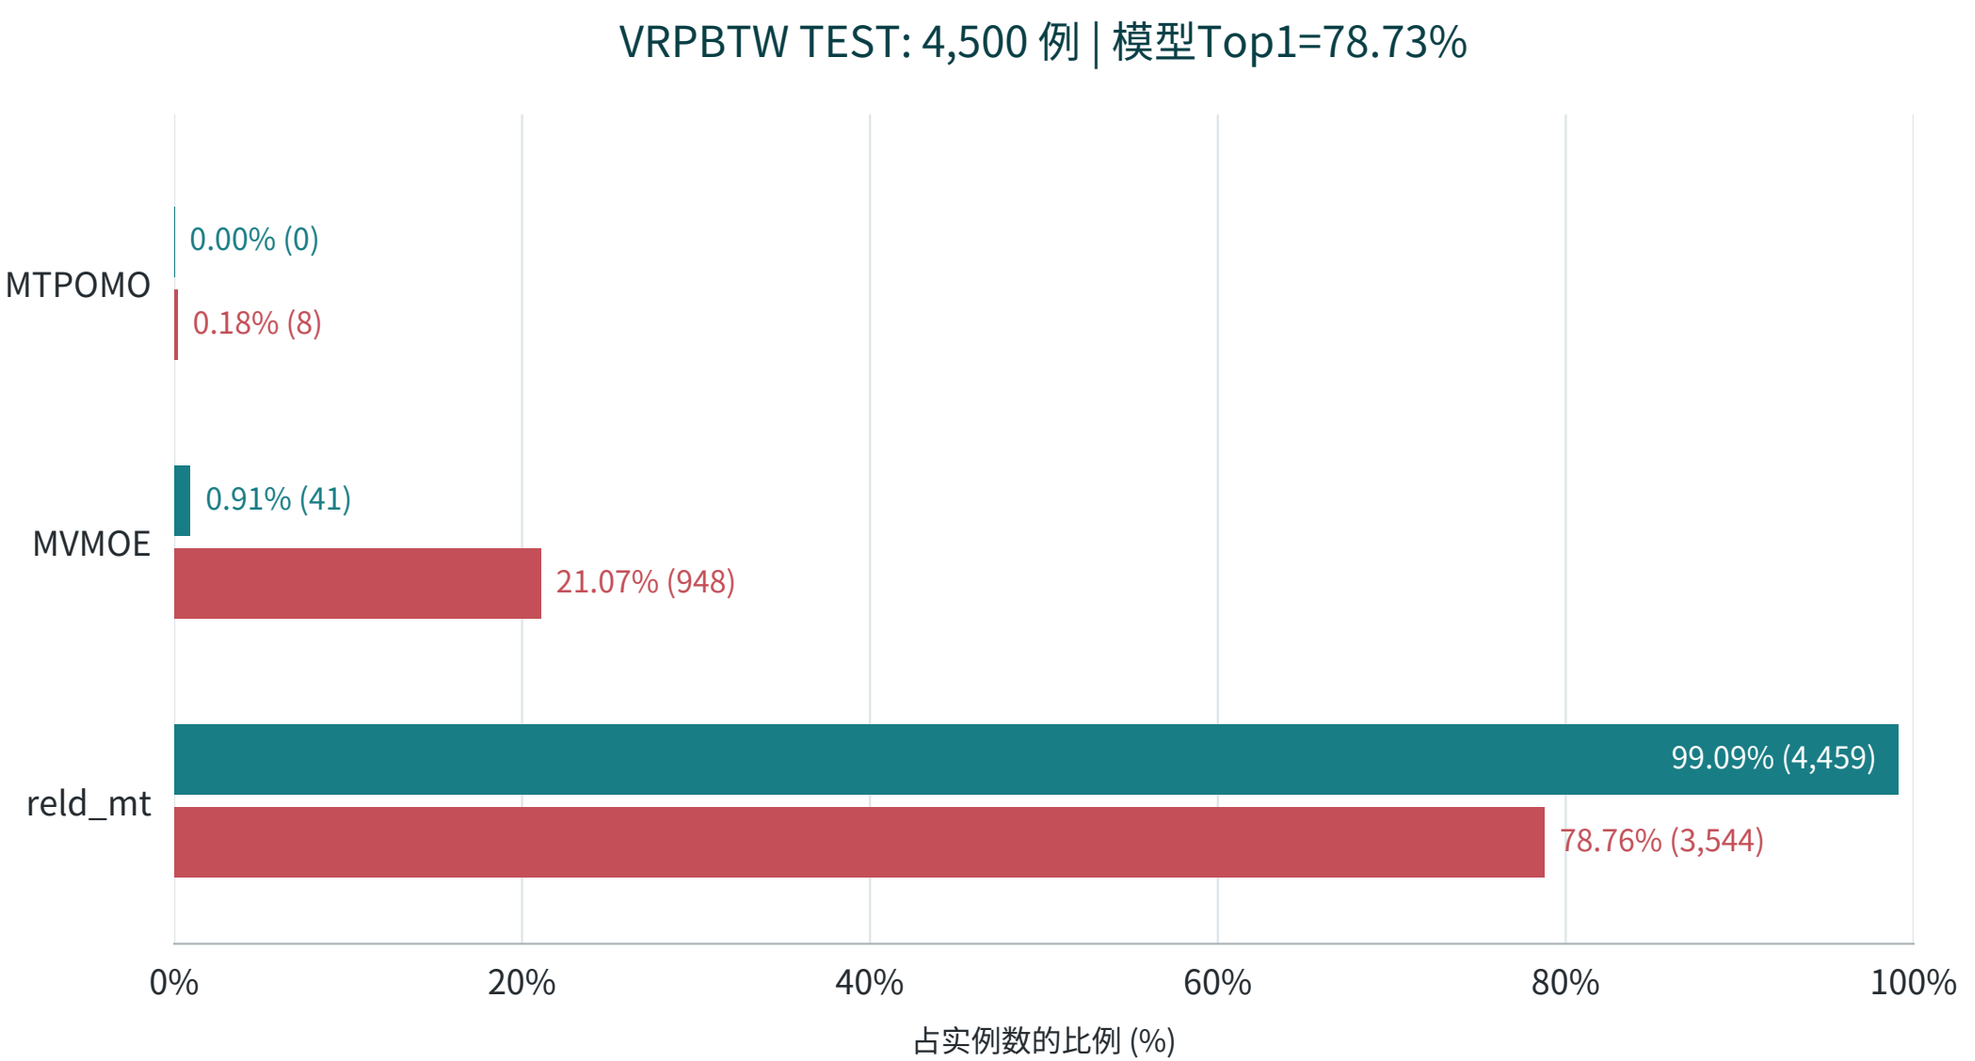

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

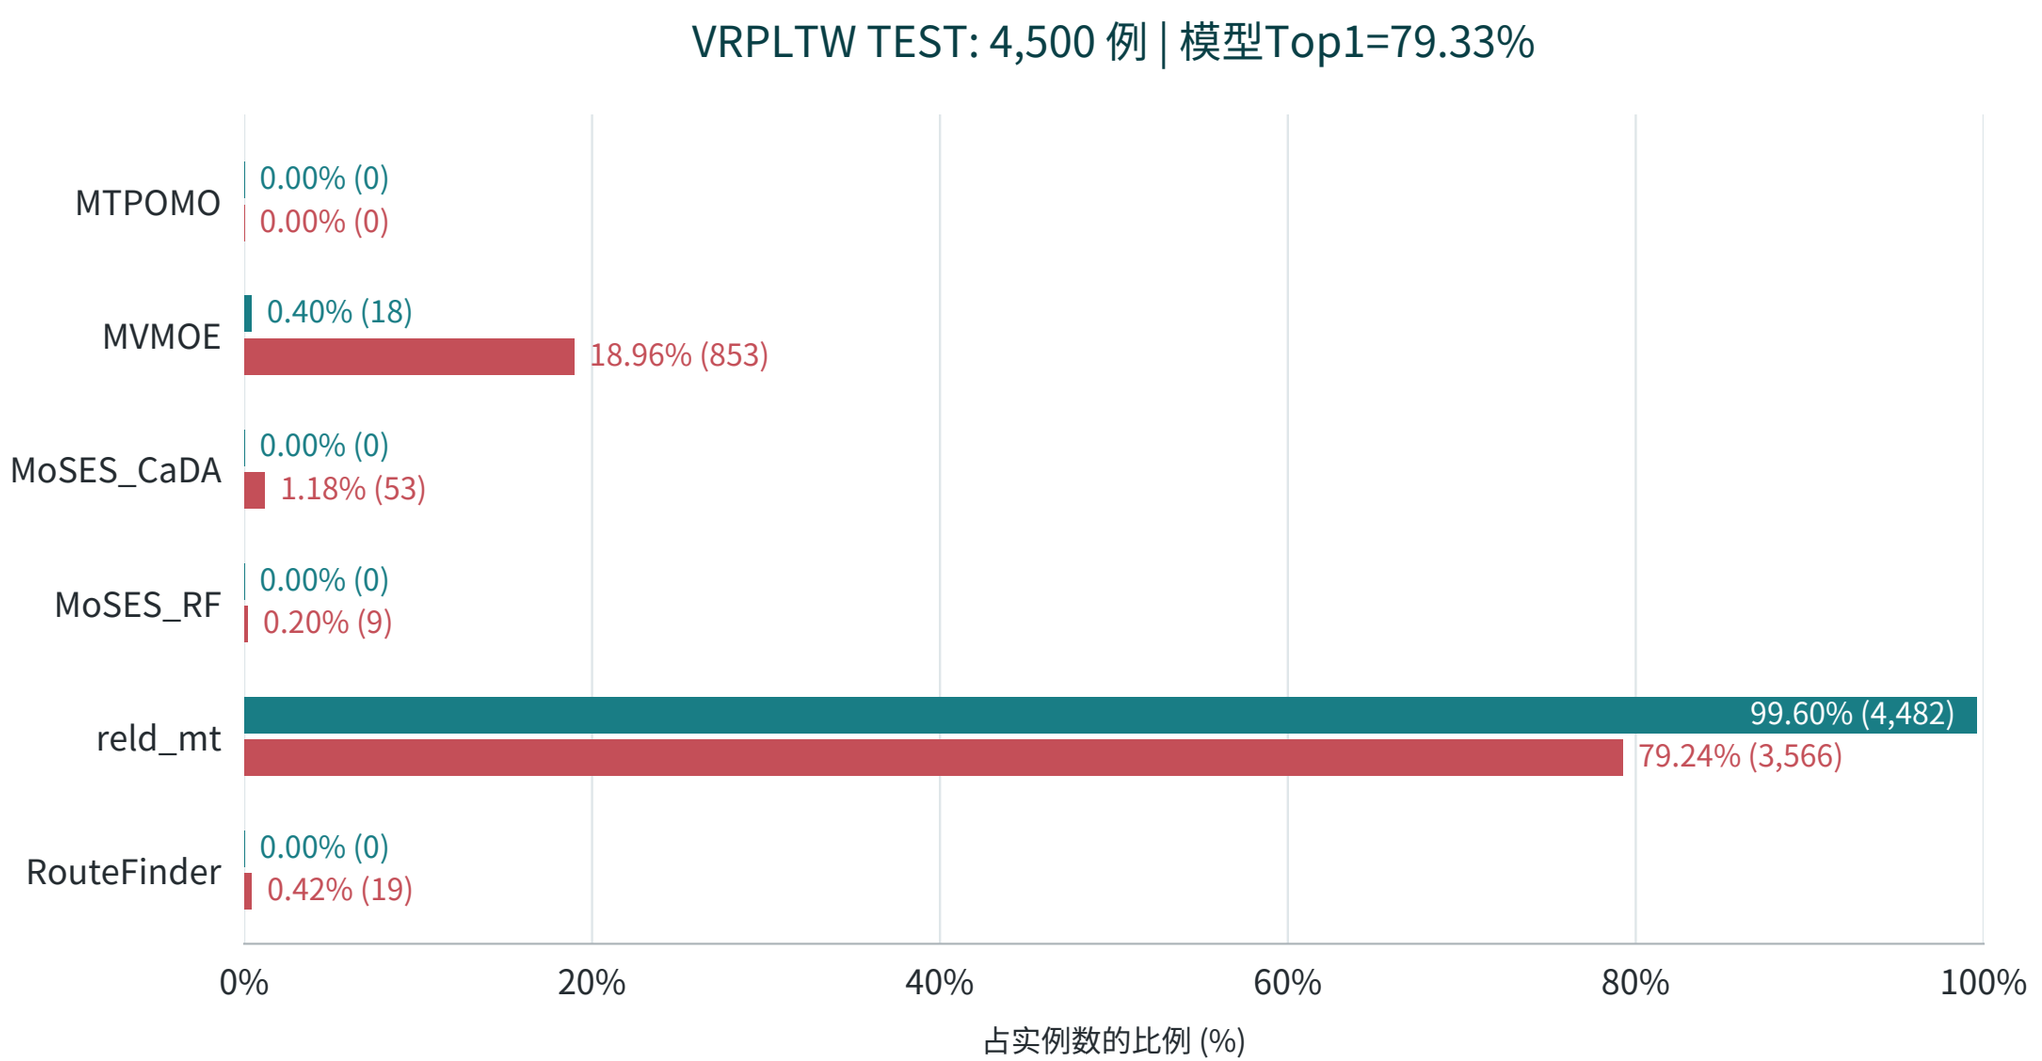

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPBL | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

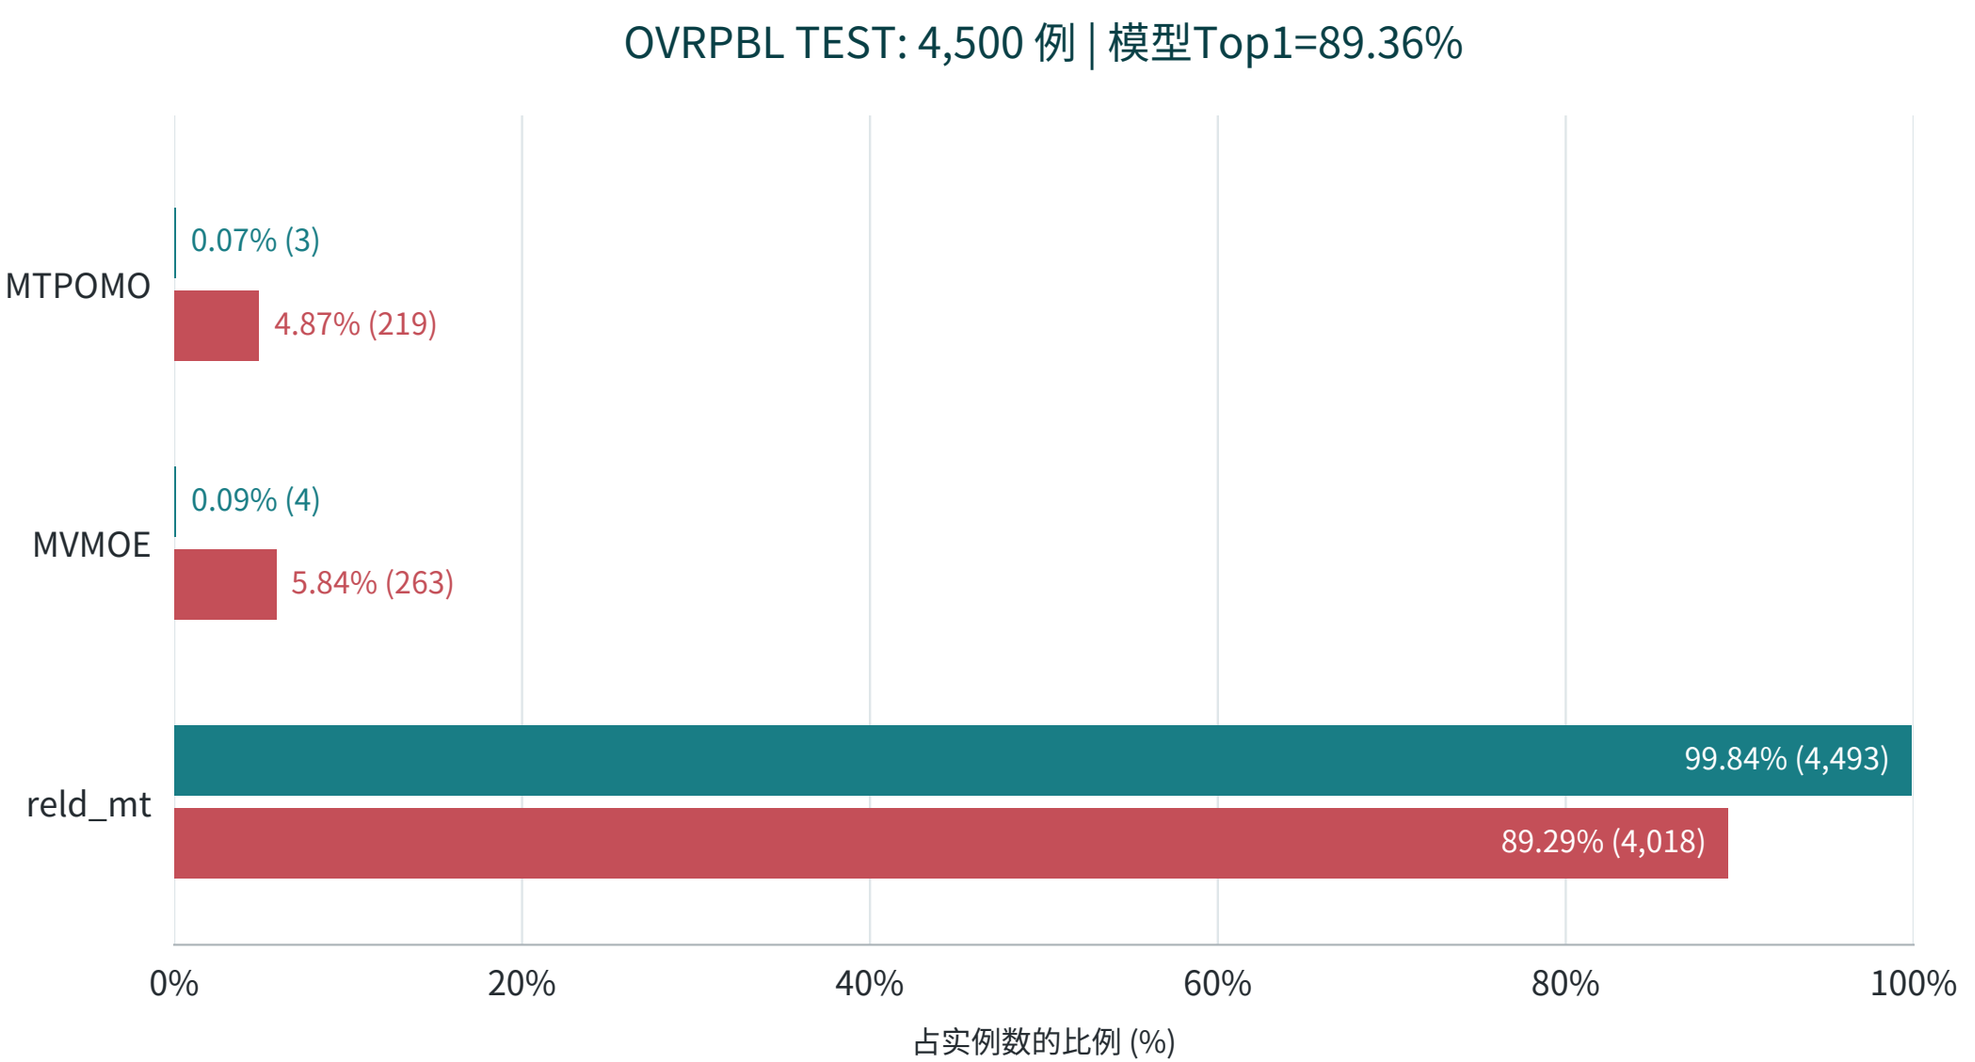

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPBTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

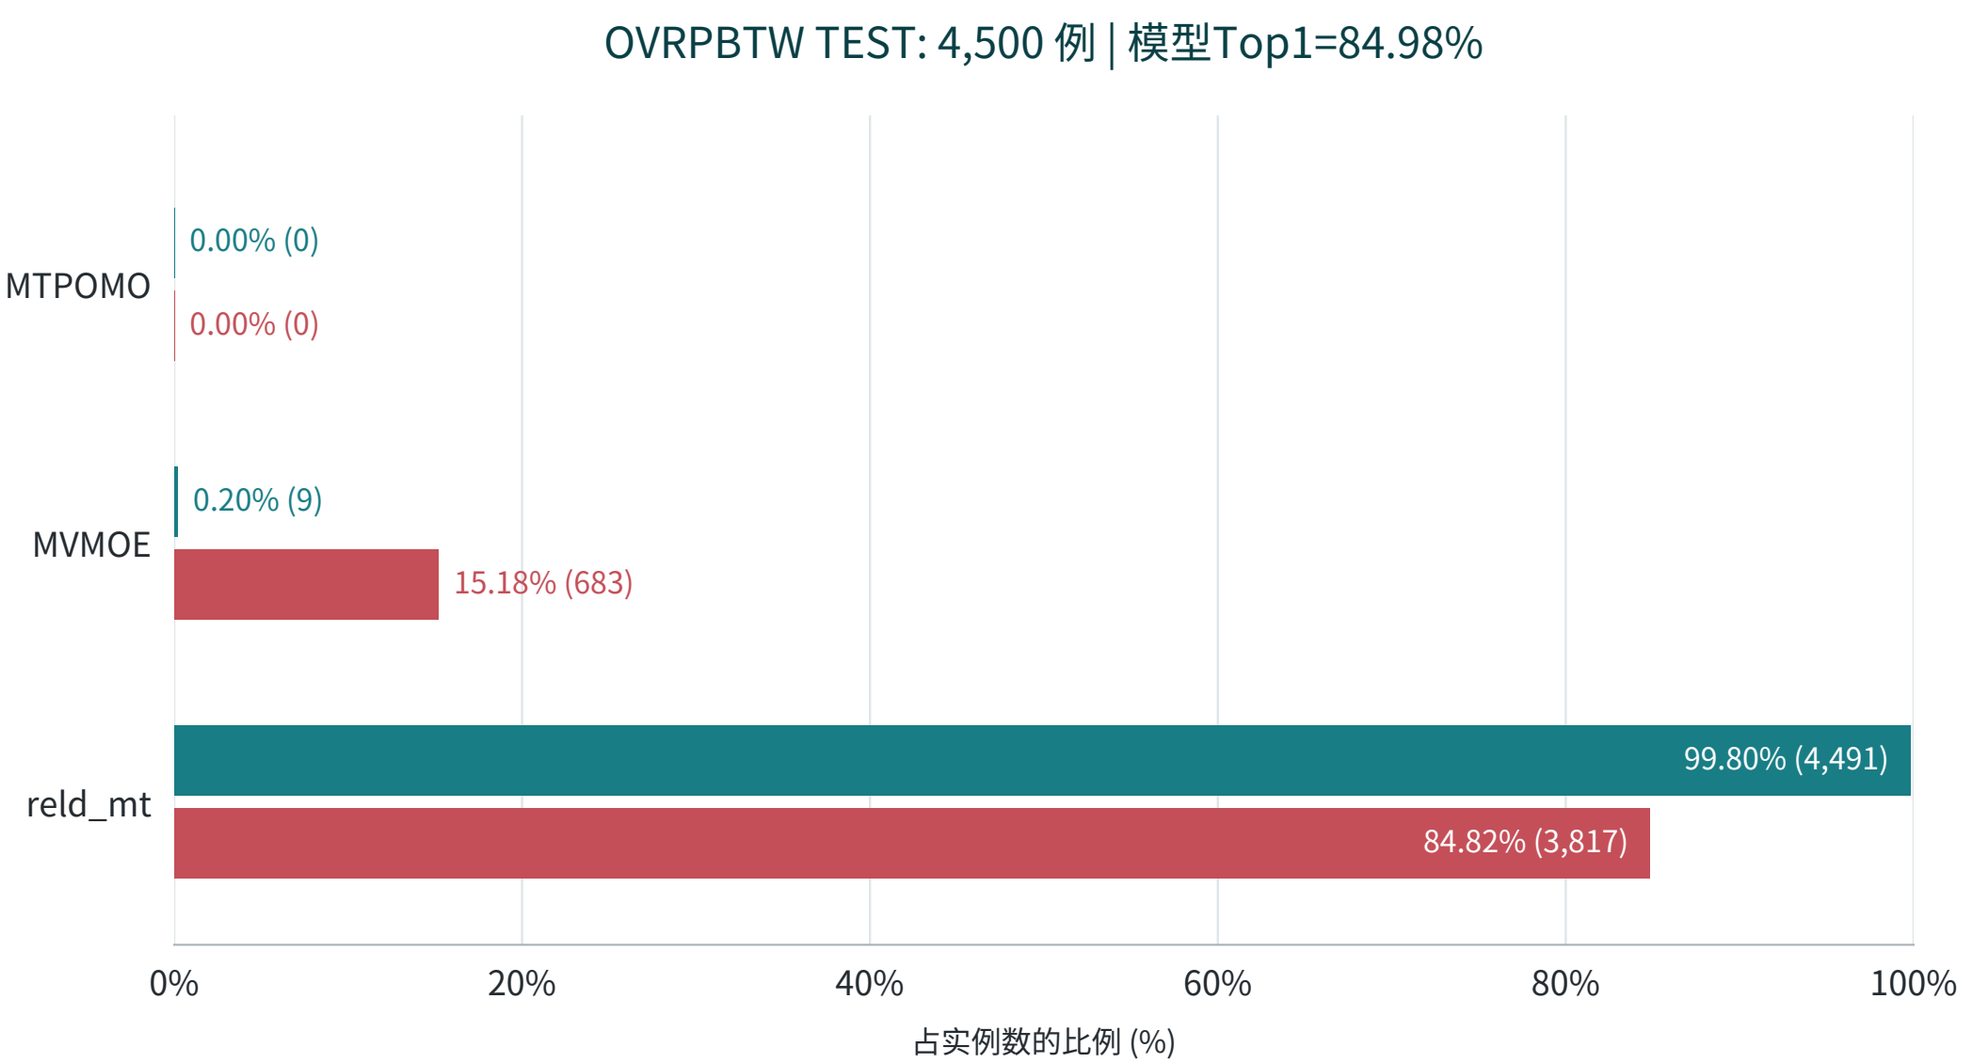

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

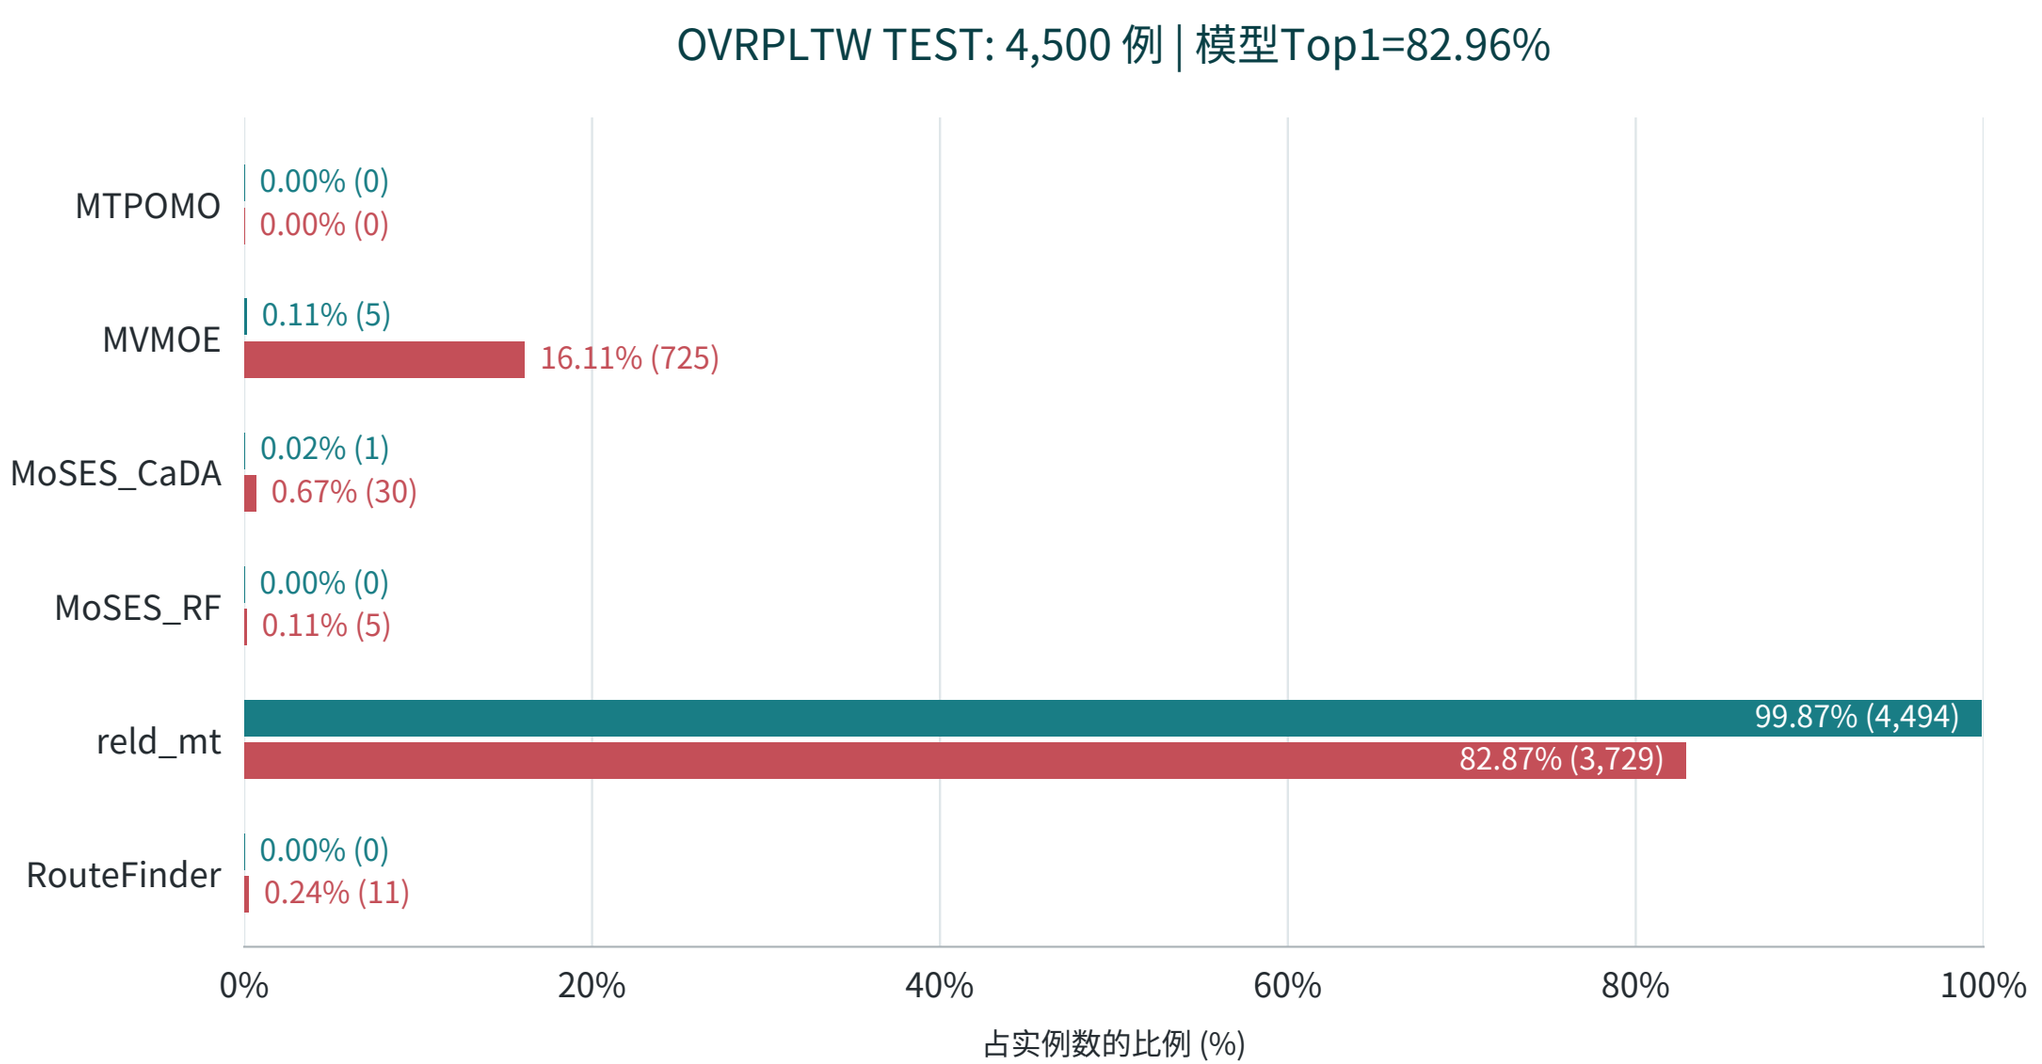

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | VRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

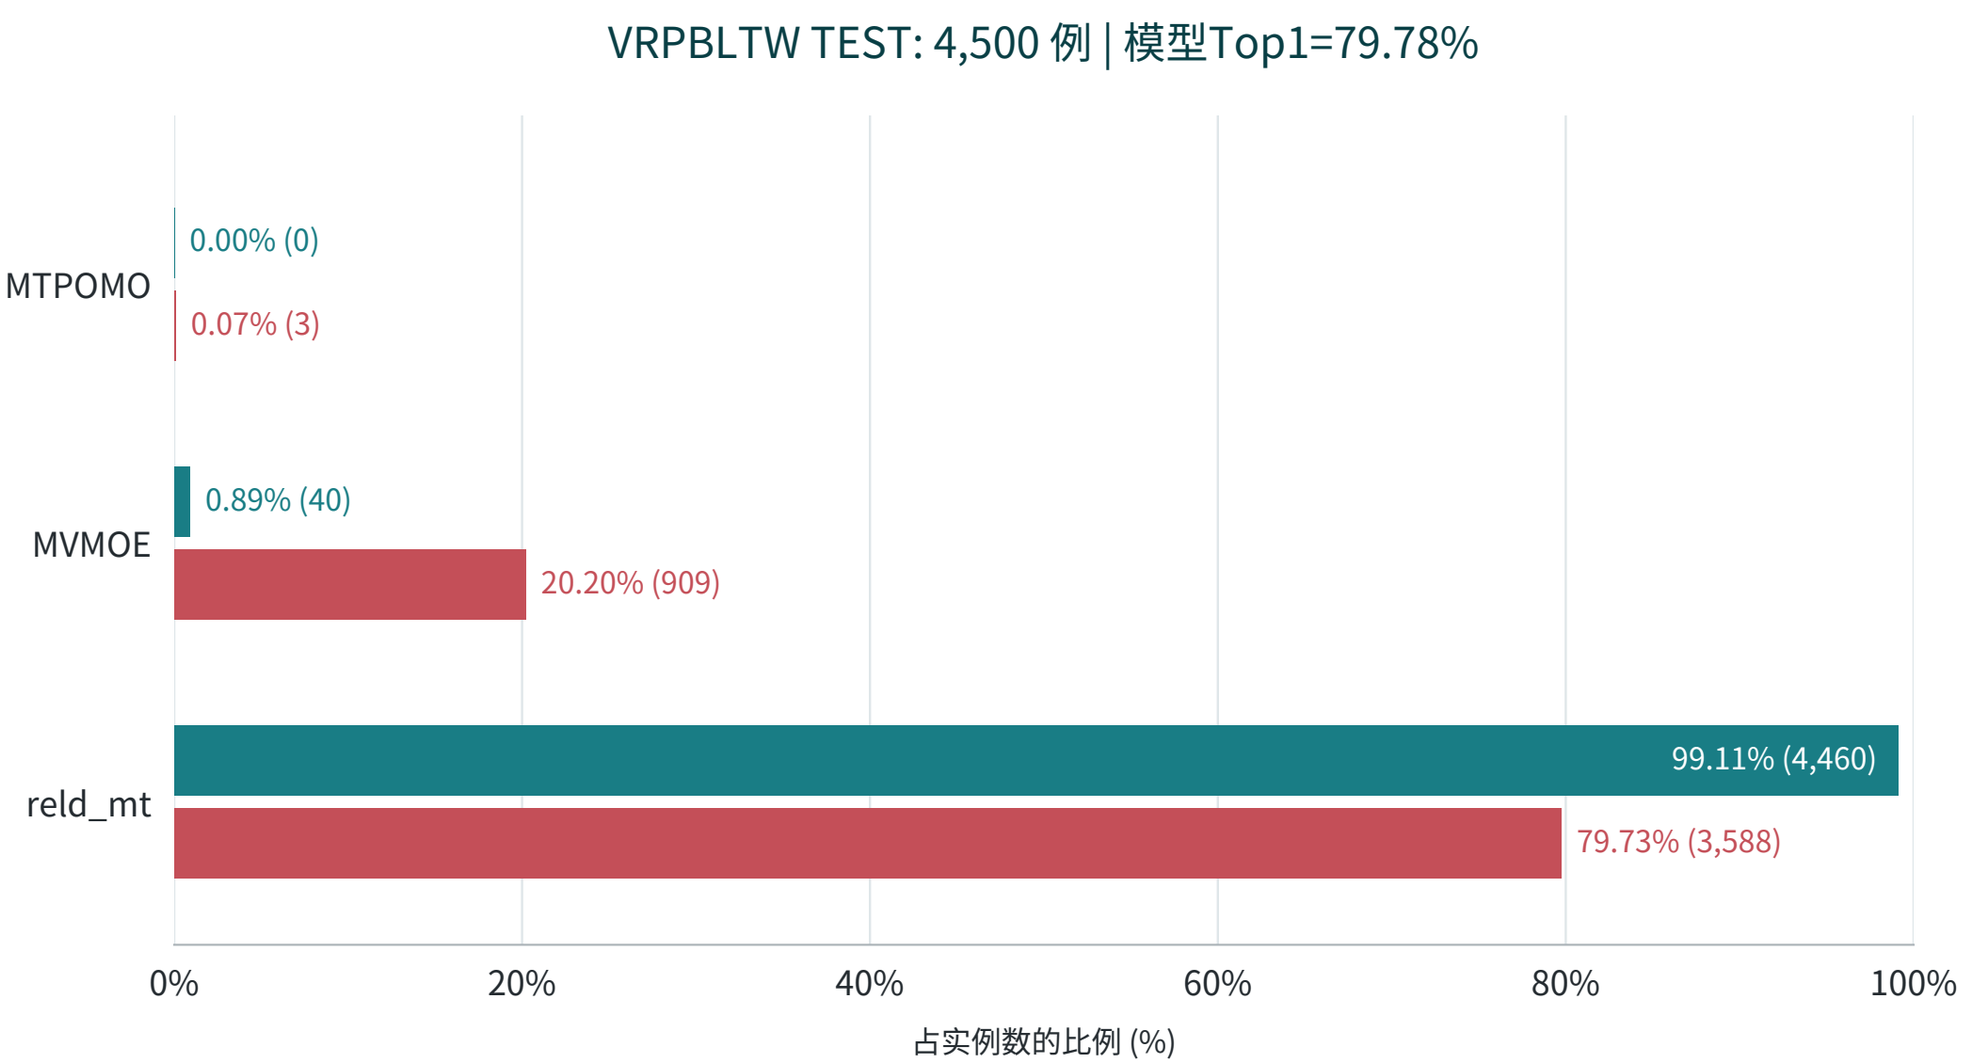

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/A_edge_factorized | OVRPBLTW | 方法分布

同一锁定模型: epoch 26 / update 37440 / SHA256 074788d55df5074e

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

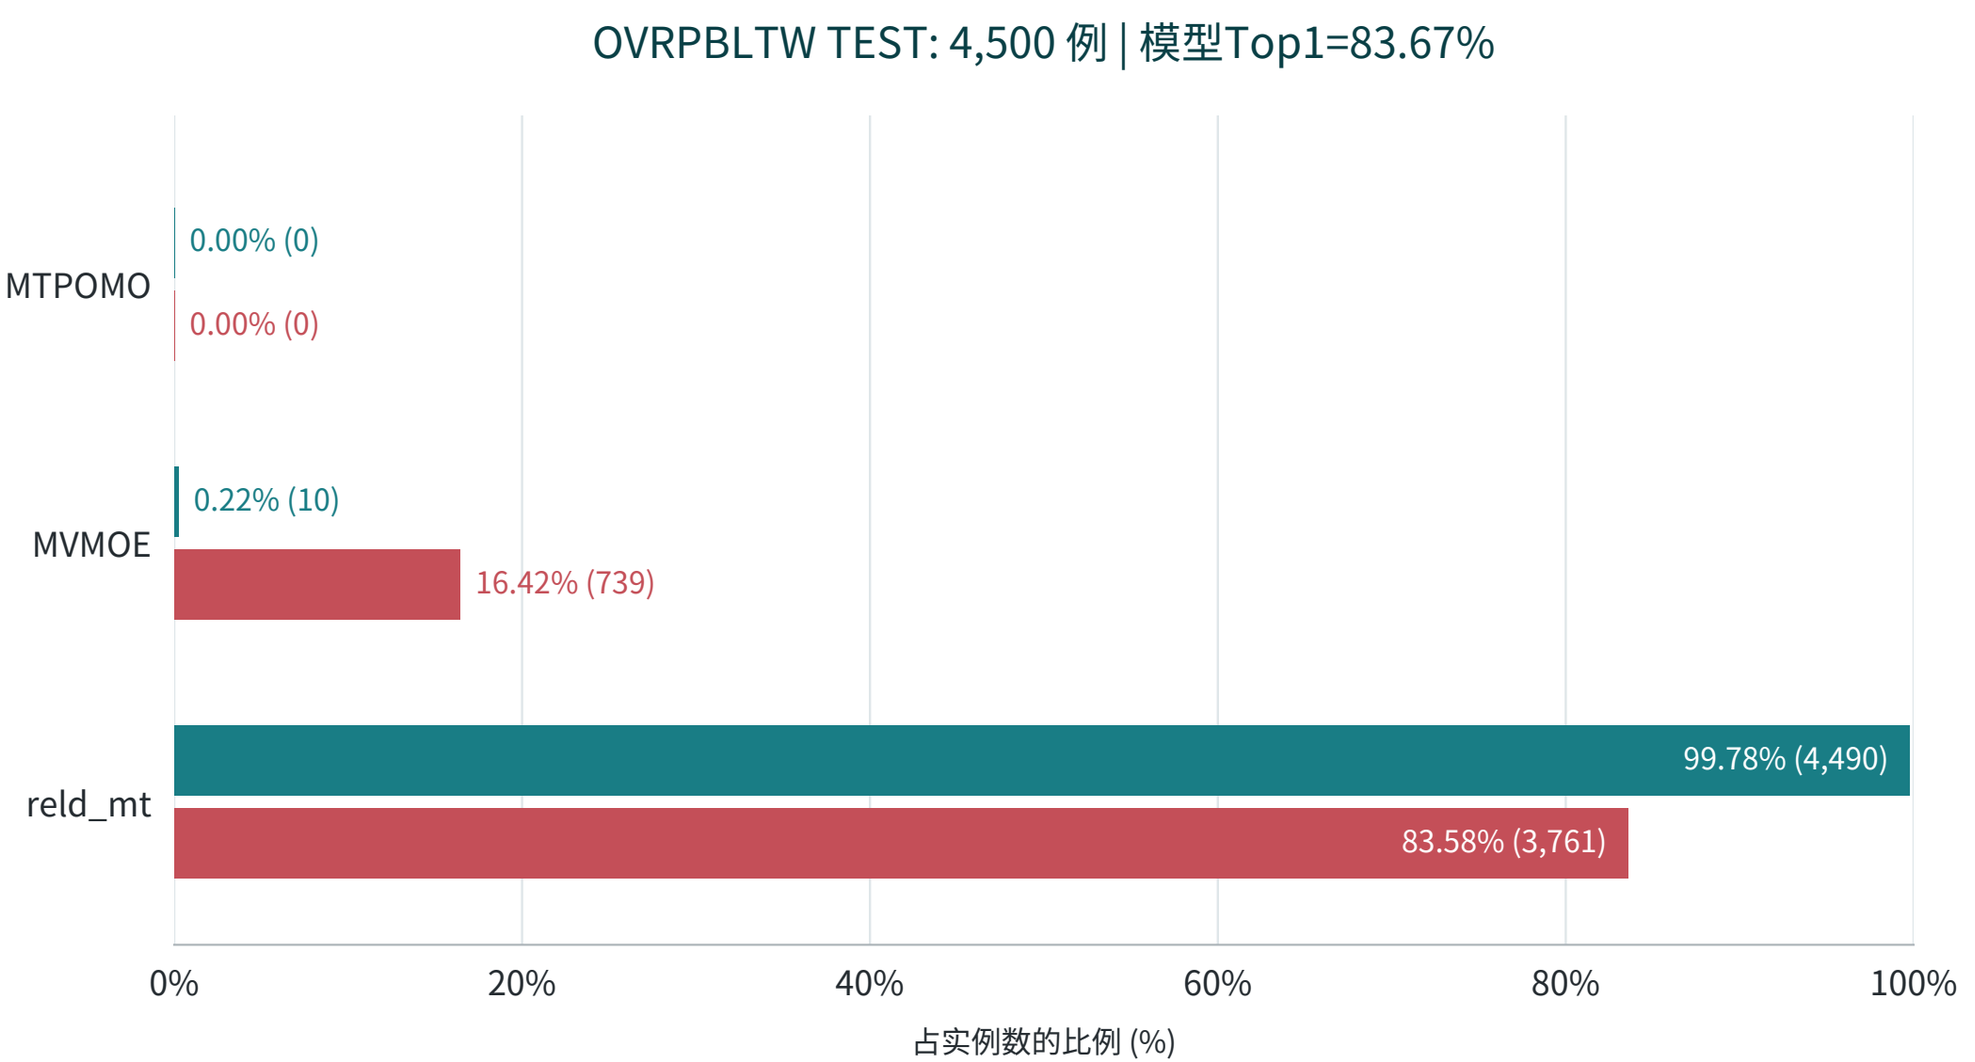

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R107/A_edge_factorized: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.