



R107/A_edge_factorized | Saved Training History

Successful-update axis. Training losses and full VAL traces are descriptive only; the checkpoint is already locked.

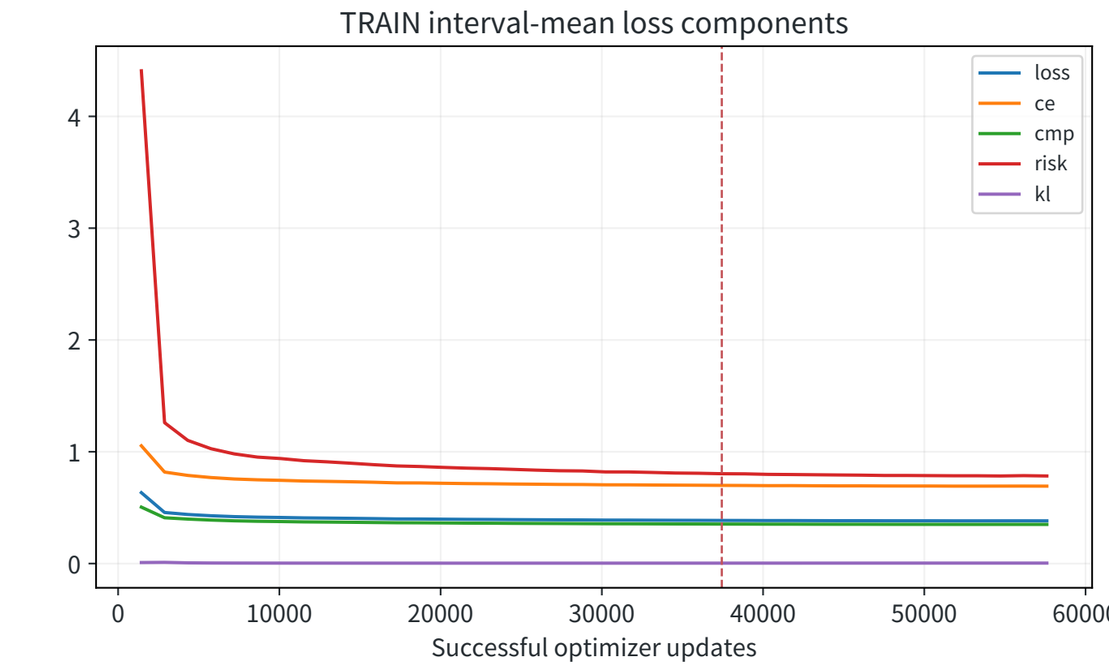

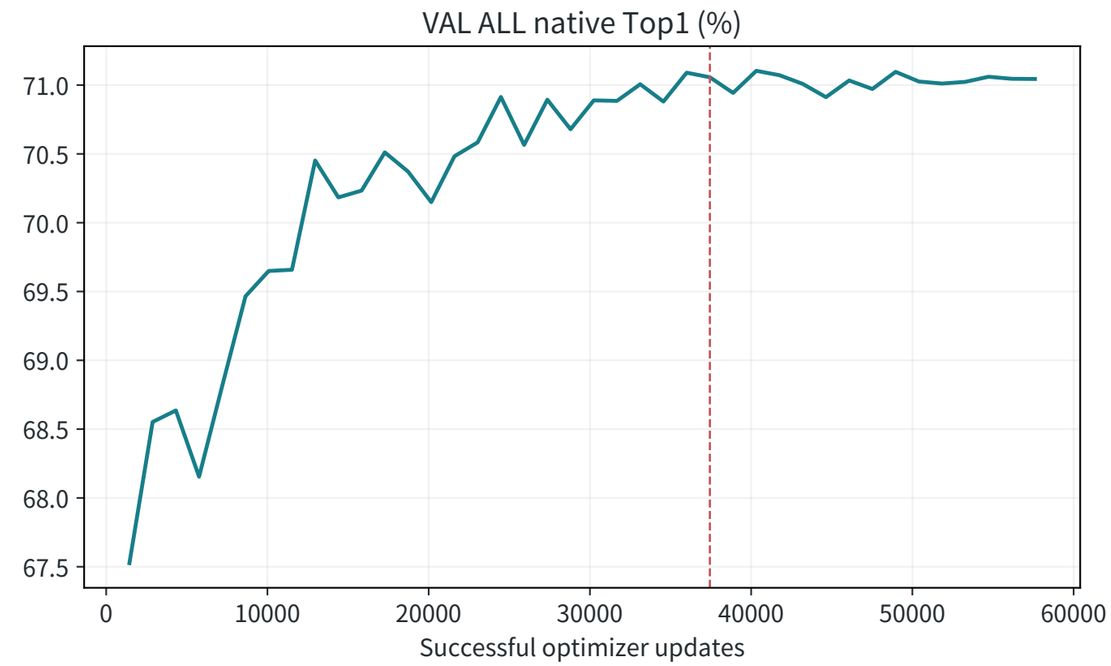


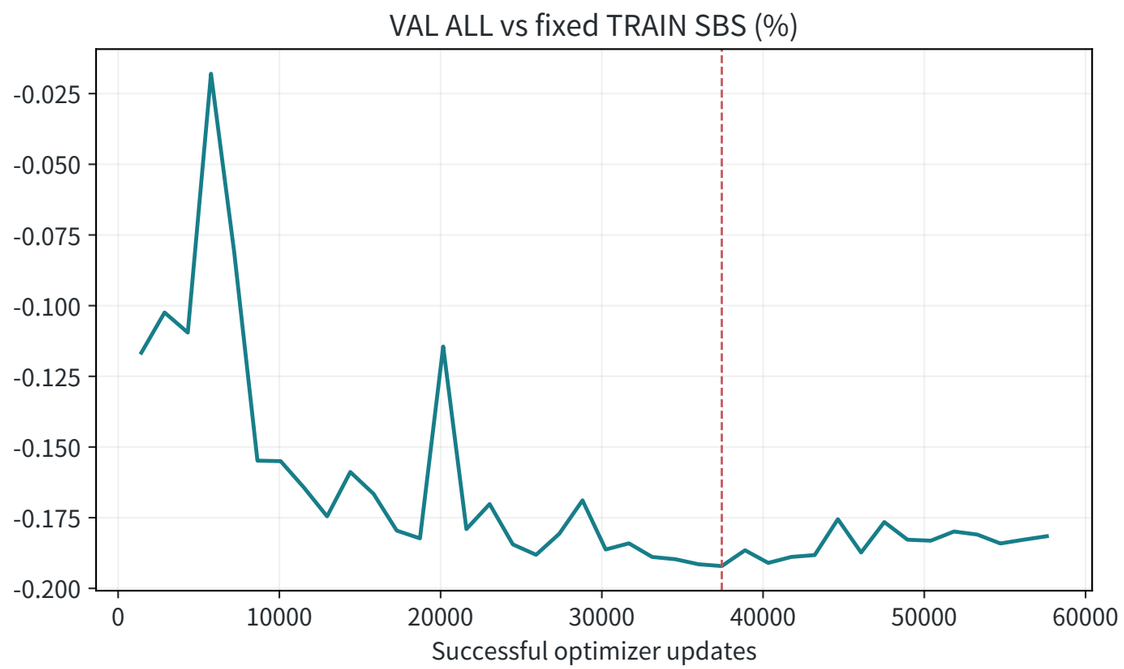


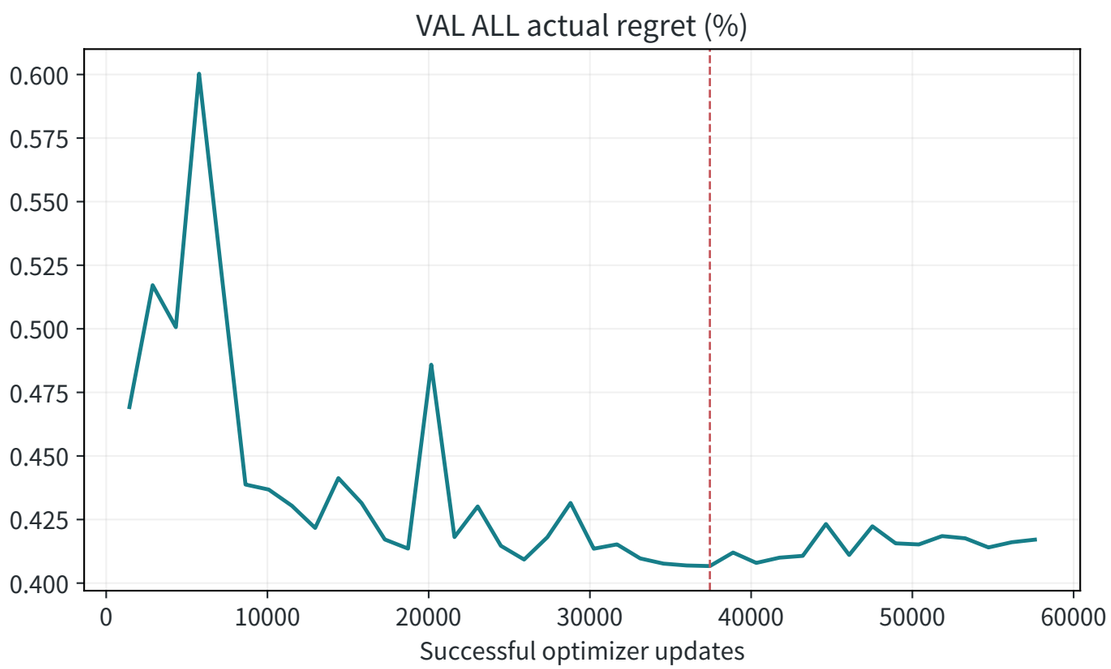



R107/A_edge_factorized | TSP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

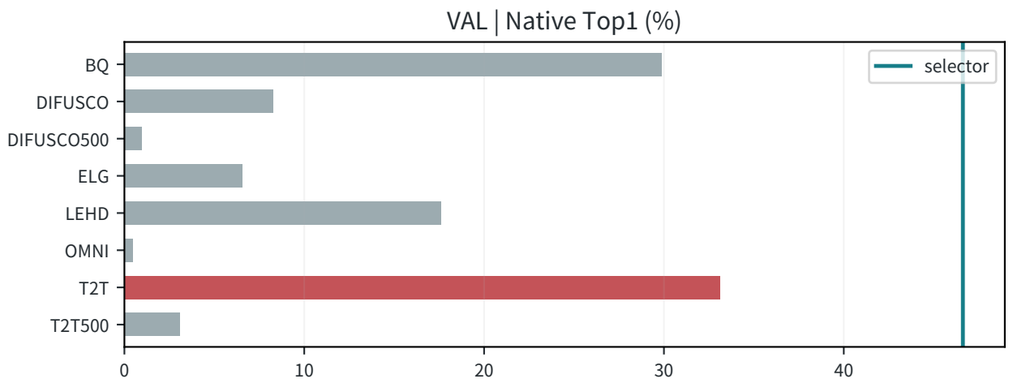


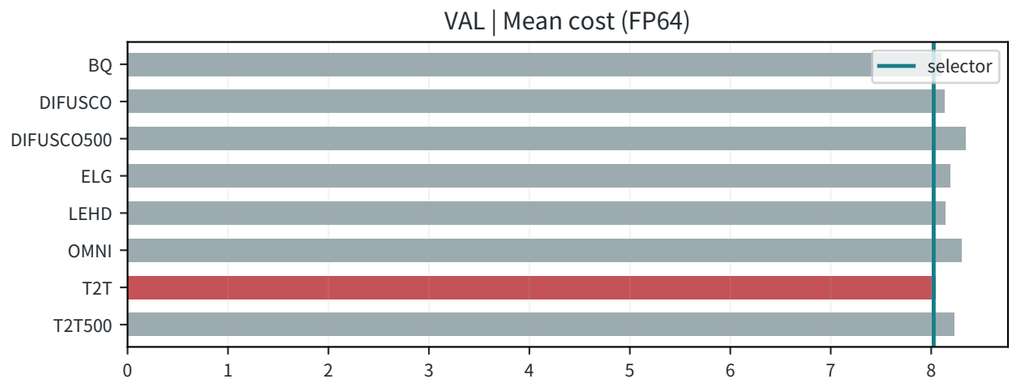

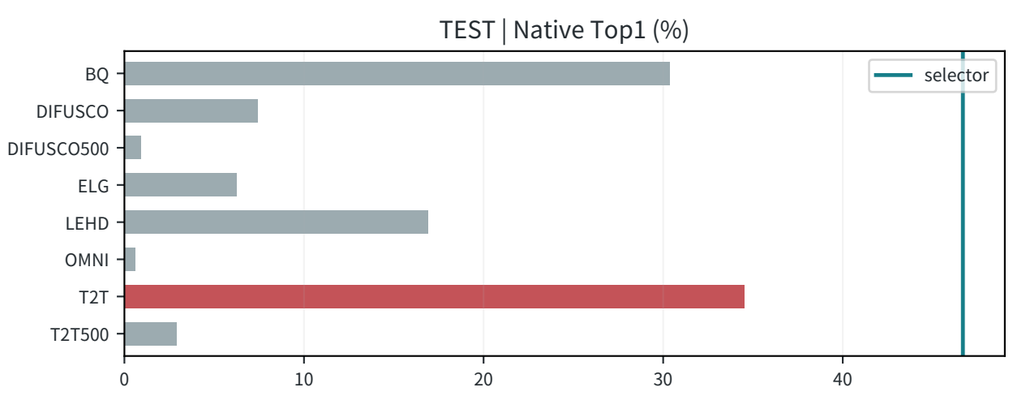

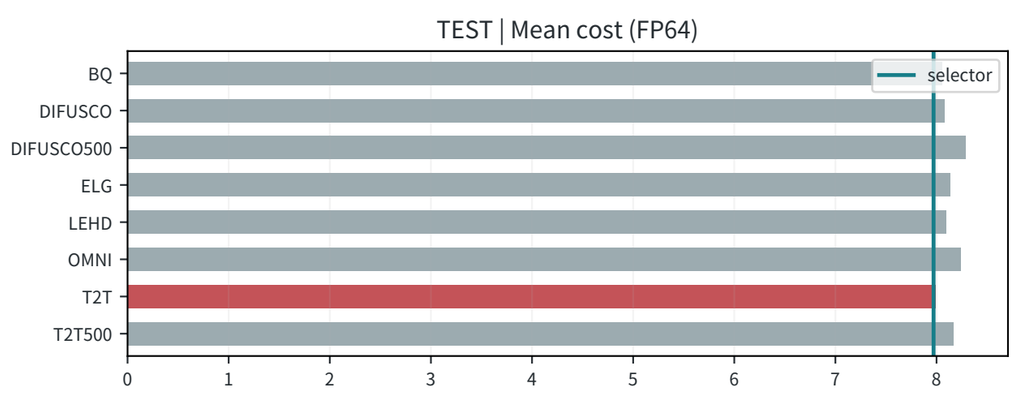


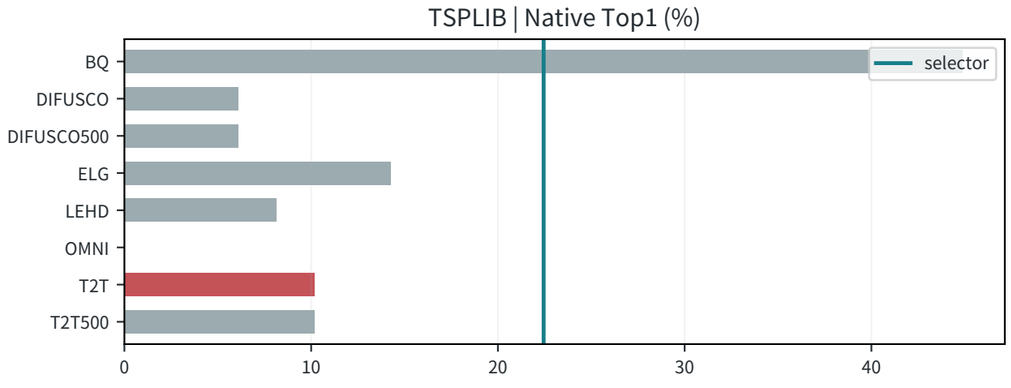


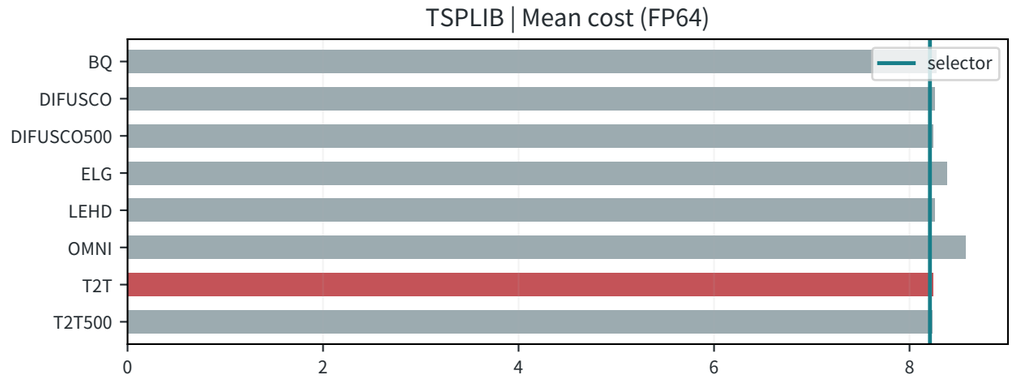



R107/A_edge_factorized | CVRP: Selector vs Single Methods


Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

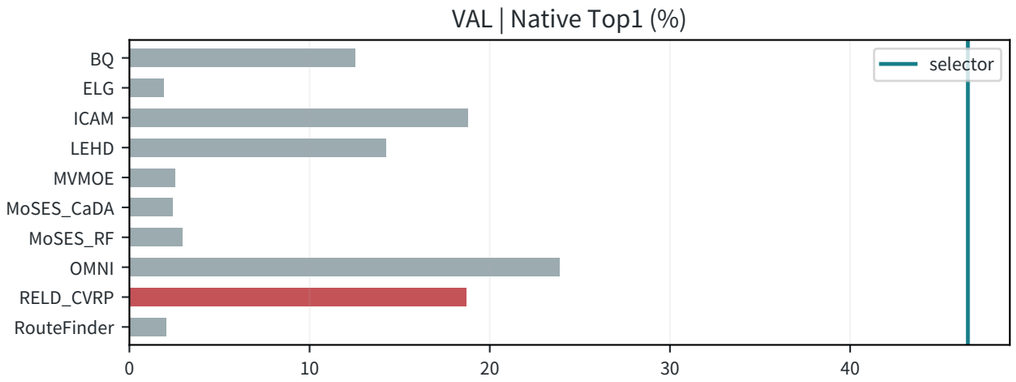


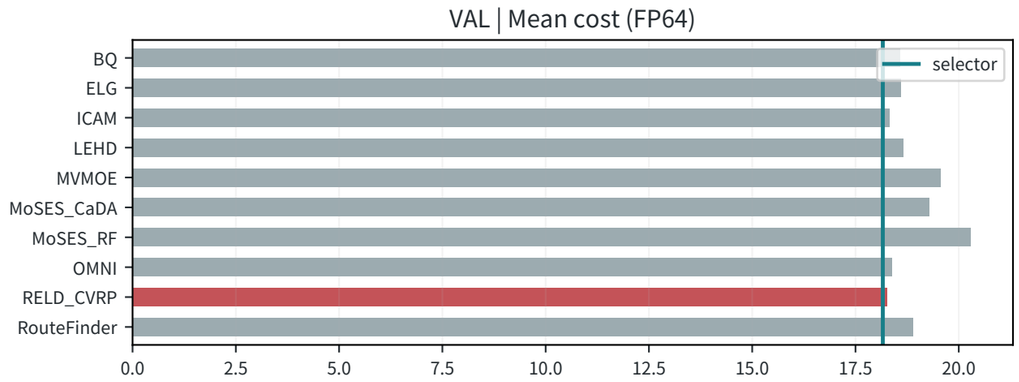

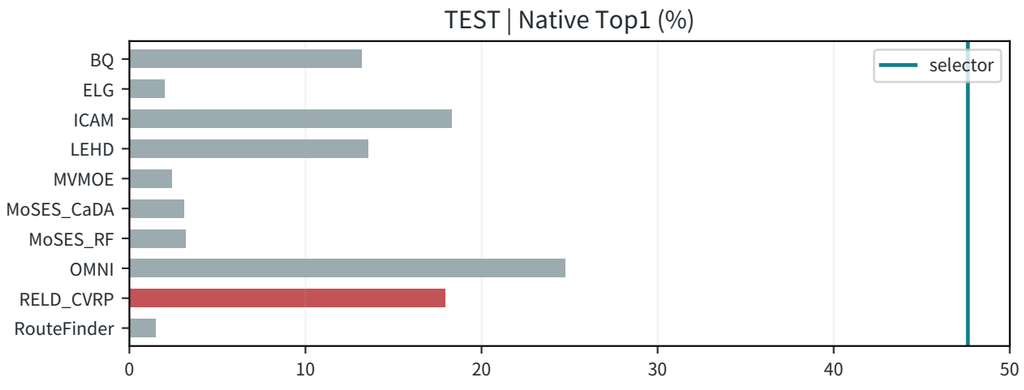

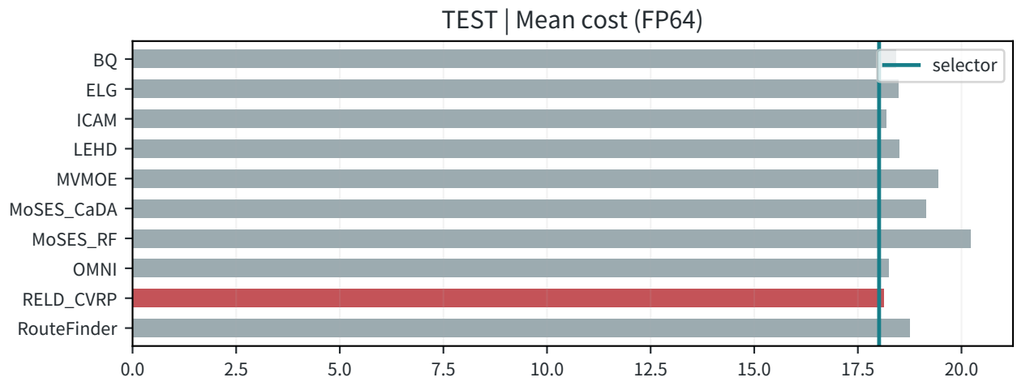


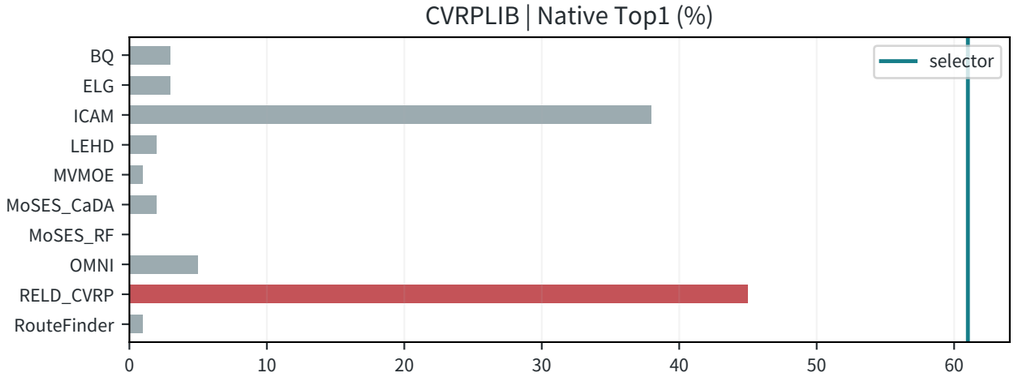


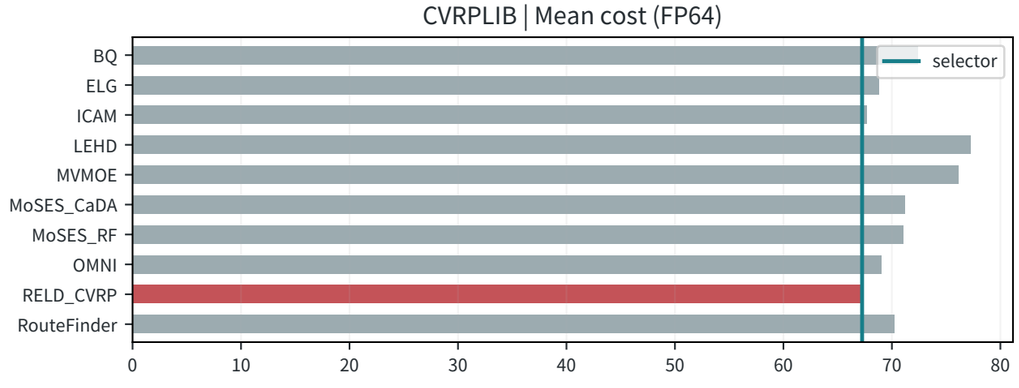



R107/A_edge_factorized | ATSP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

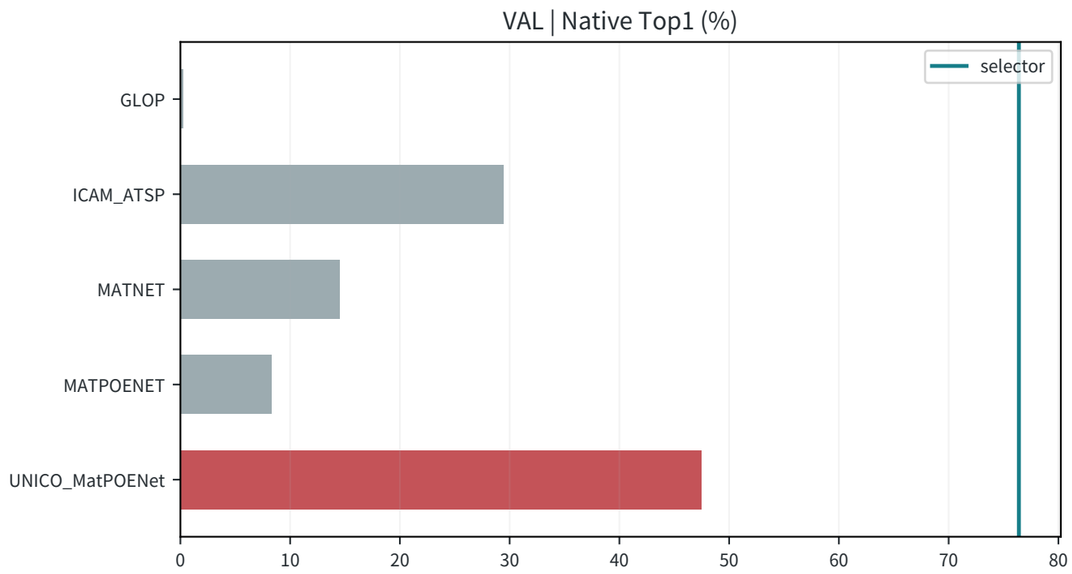

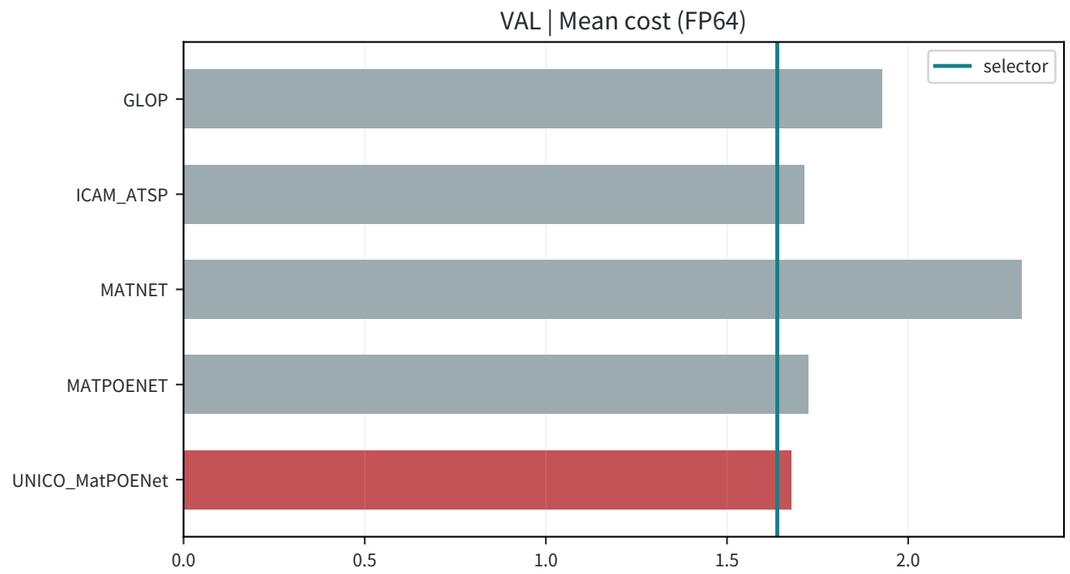


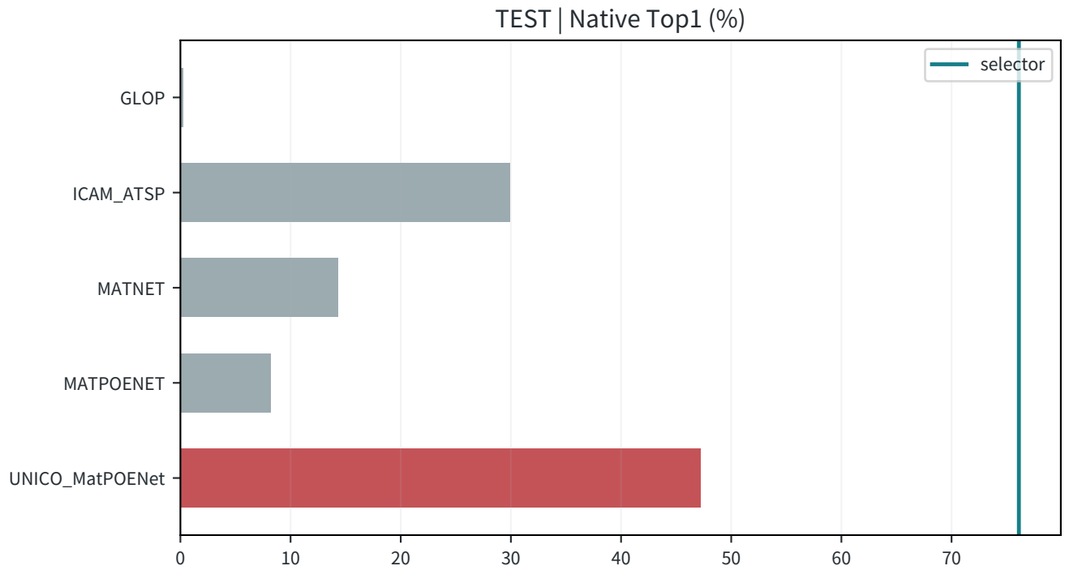


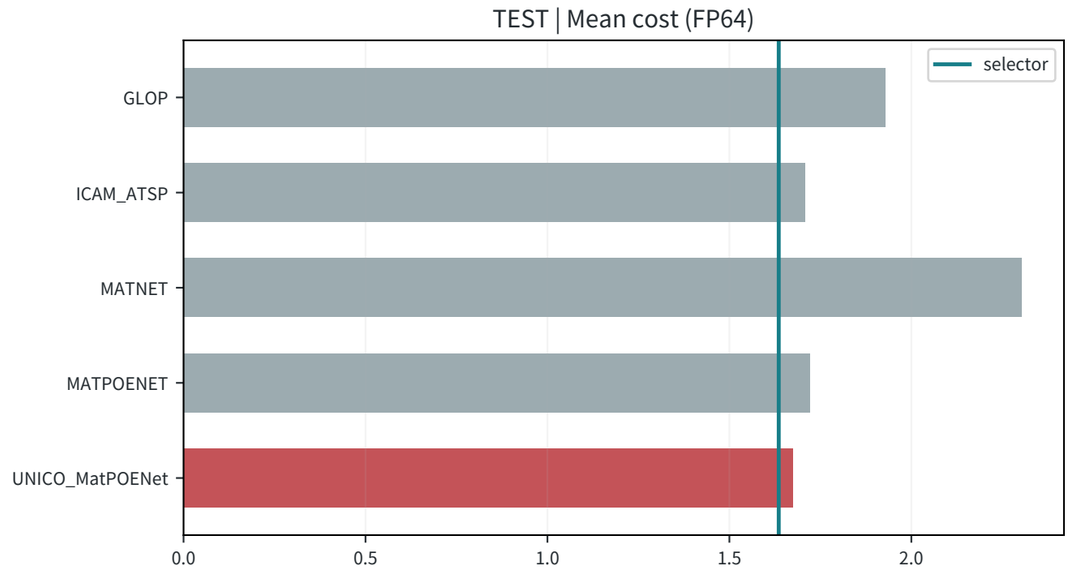


R107/A_edge_factorized | OVRP: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

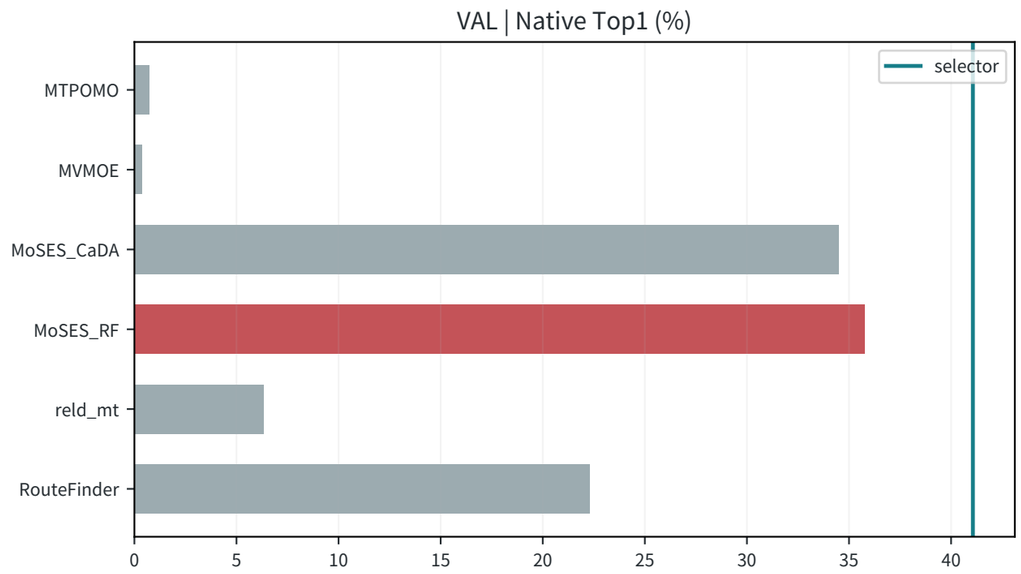

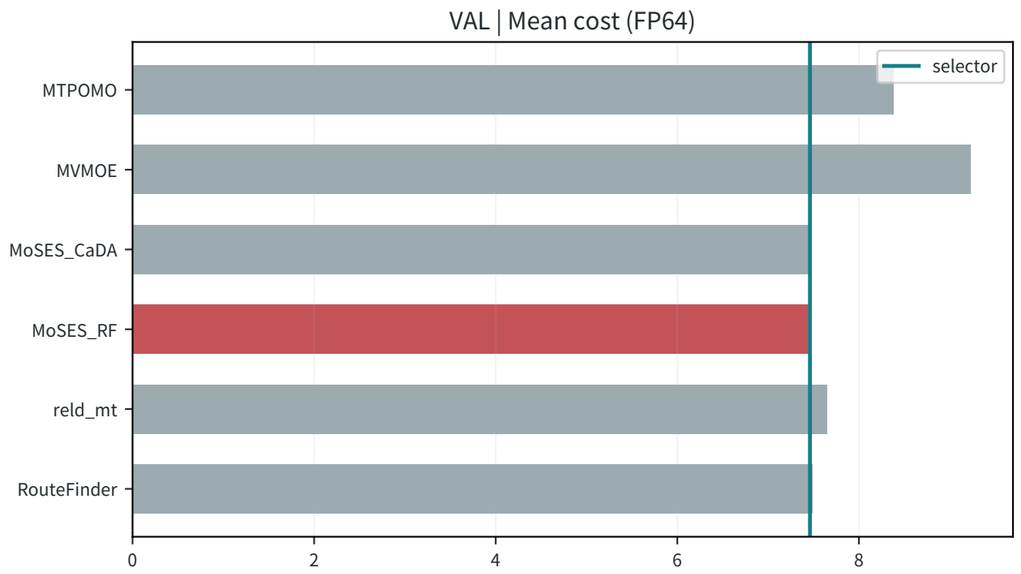


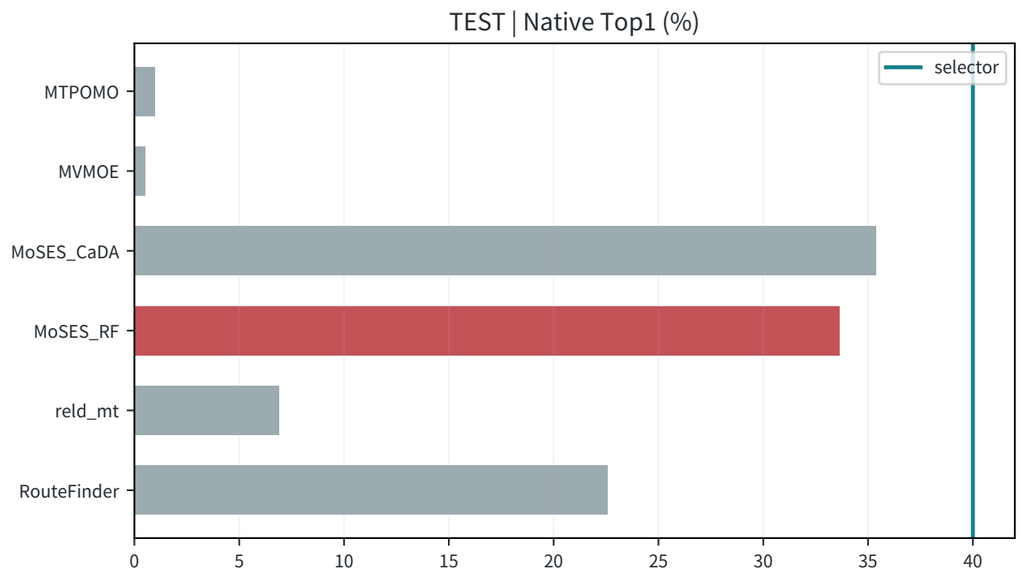






R107/A_edge_factorized | VRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

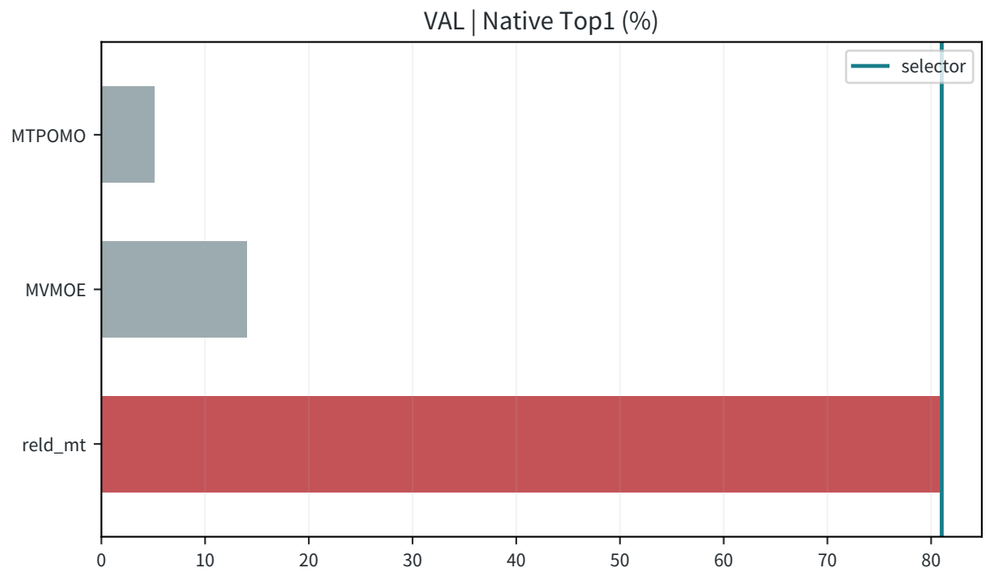

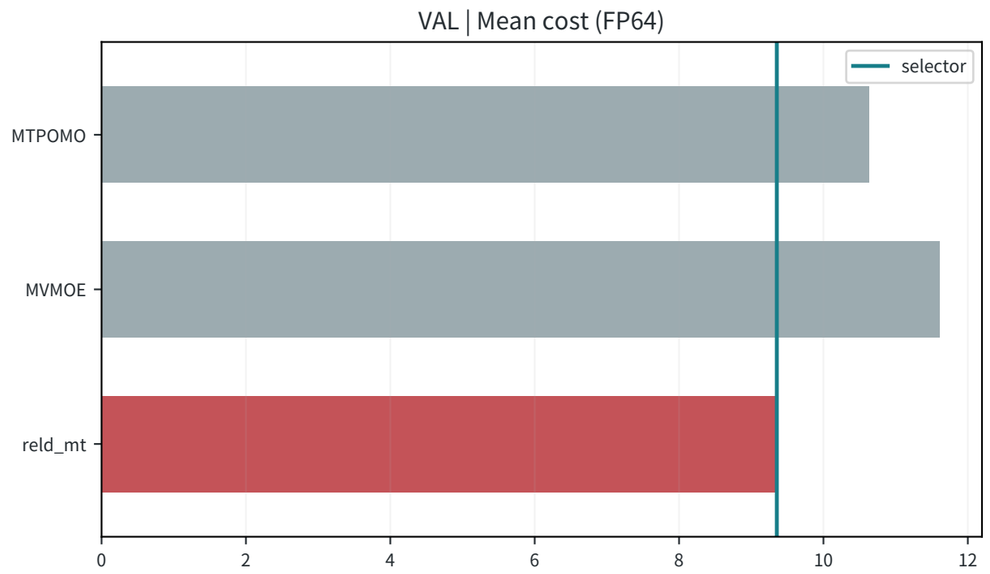


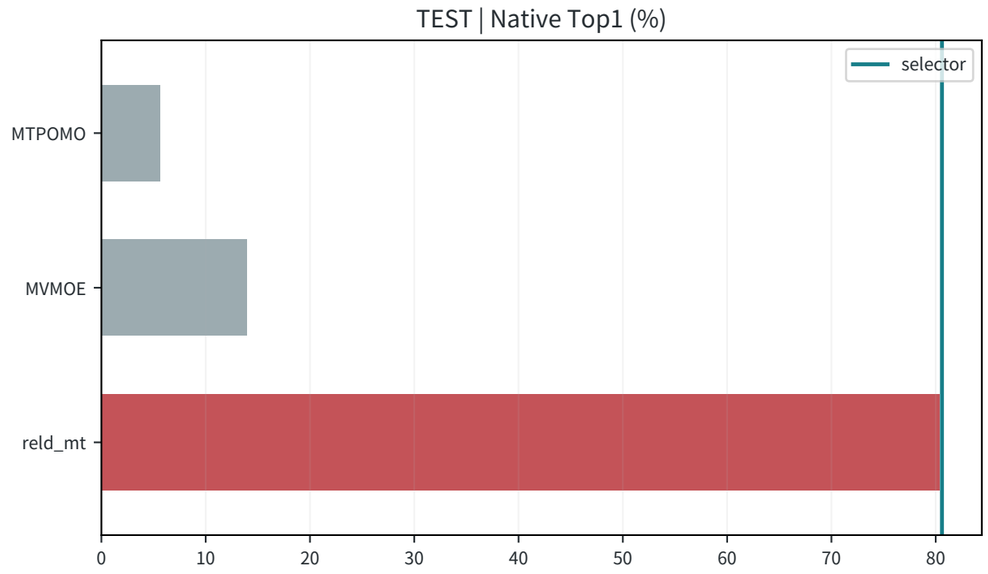


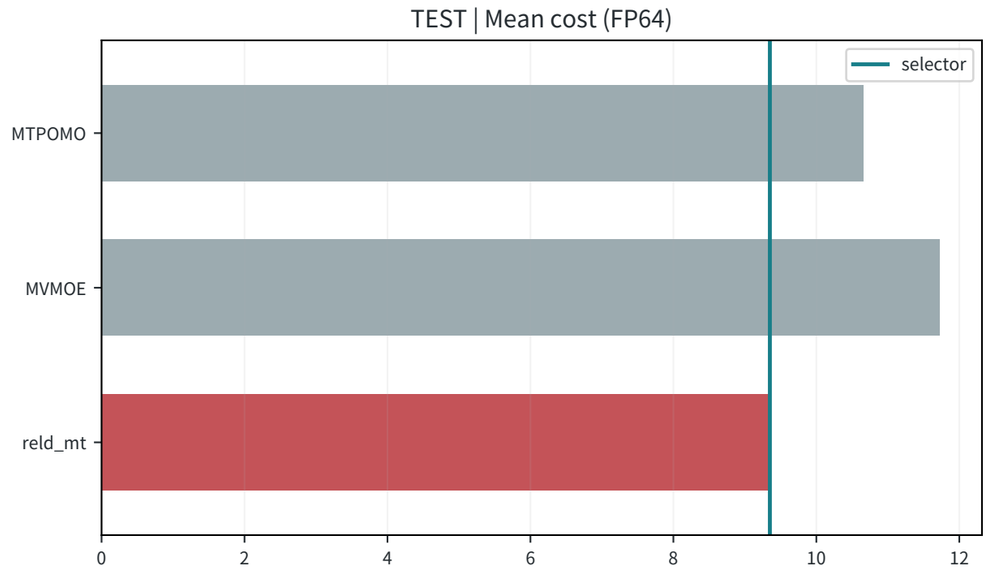



R107/A_edge_factorized | VRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

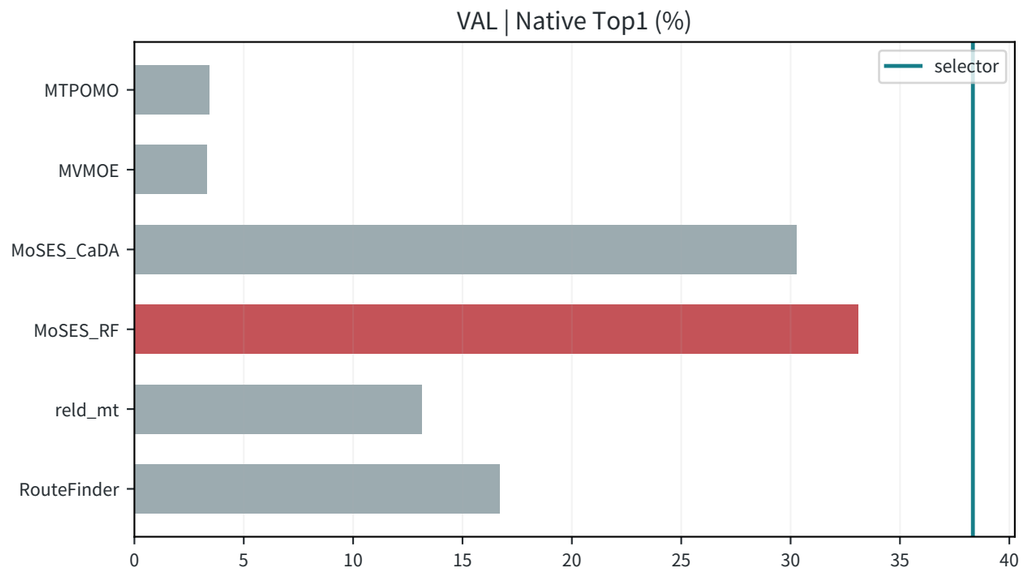

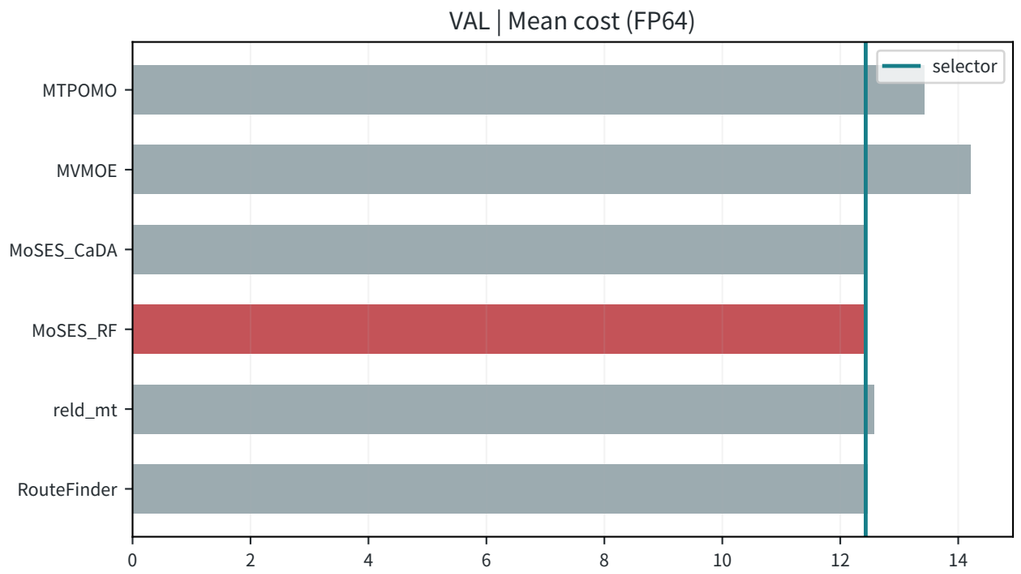


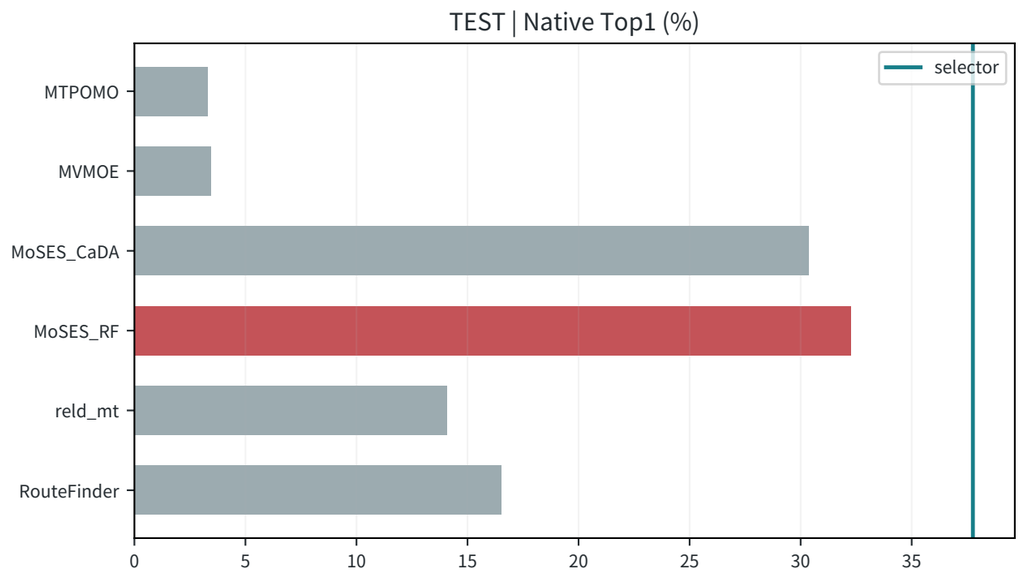


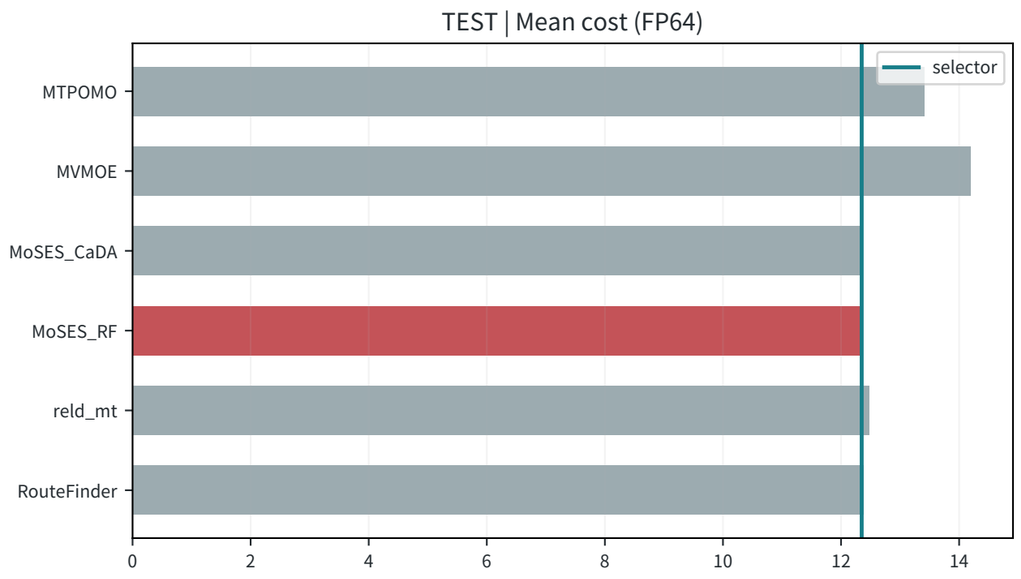



R107/A_edge_factorized | VRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

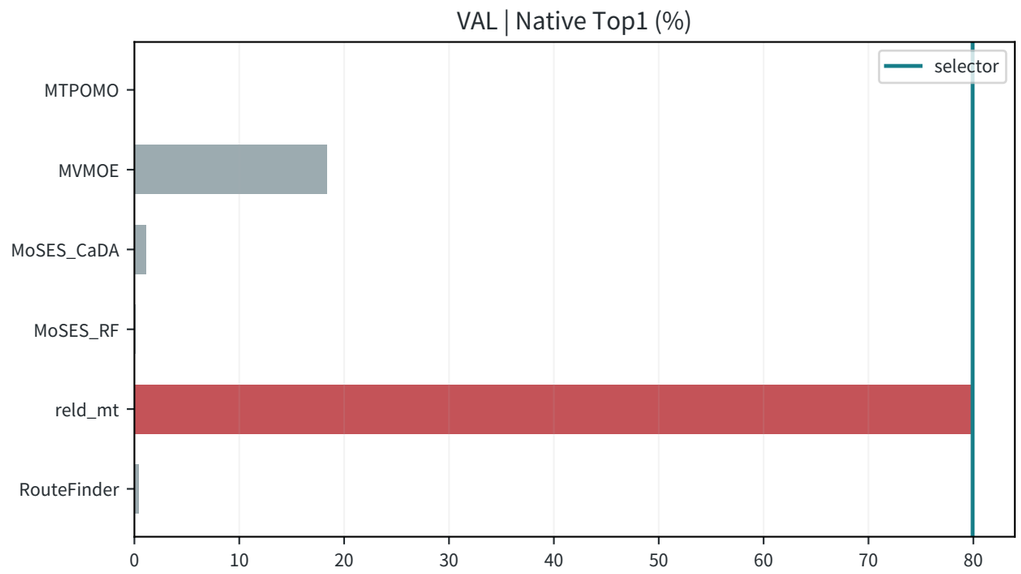

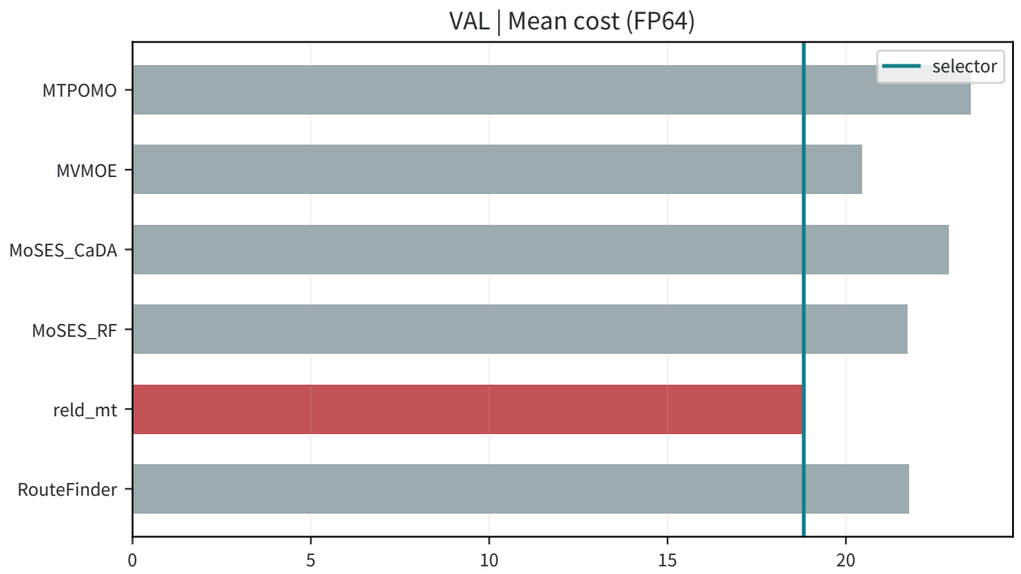


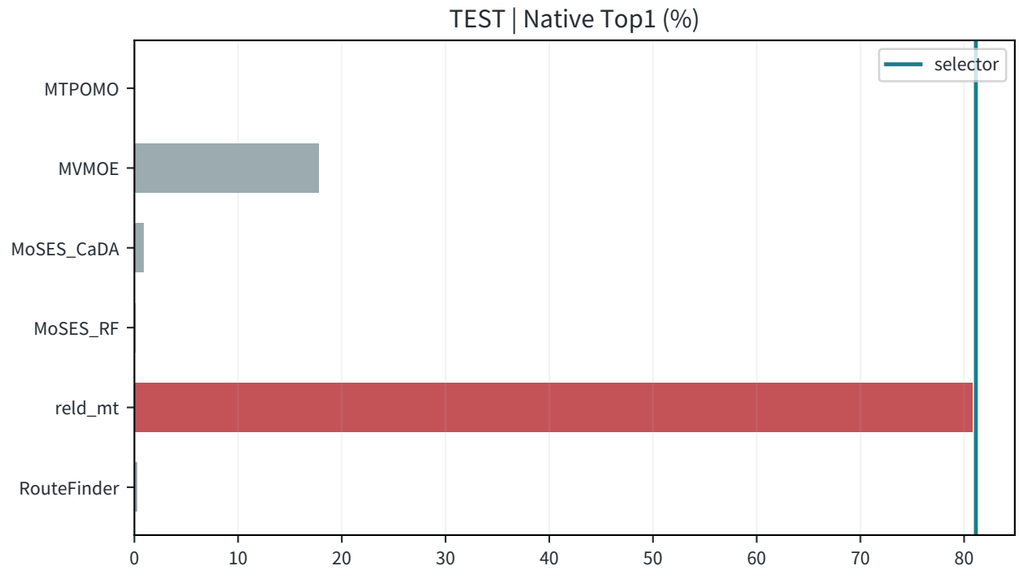


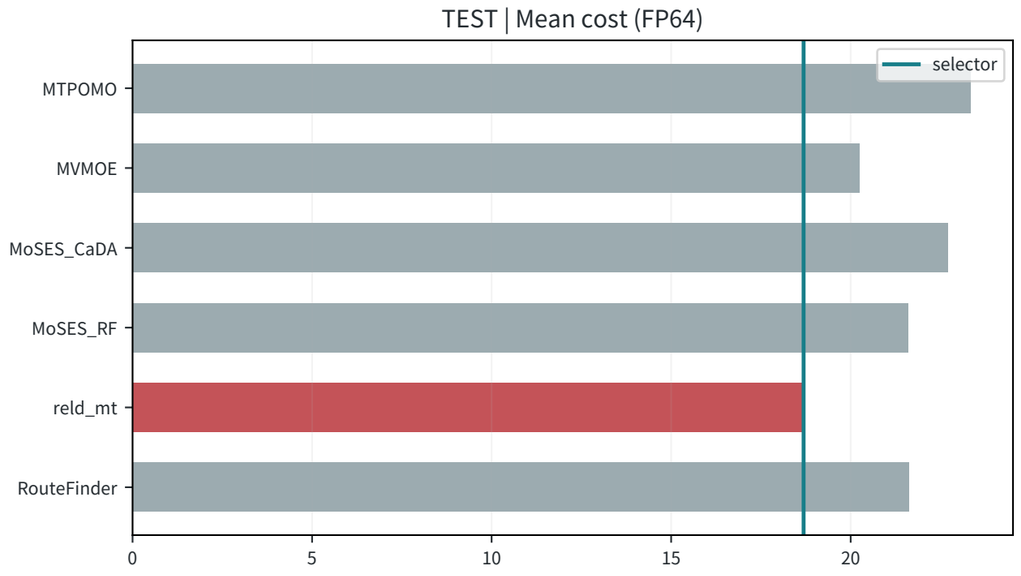



R107/A_edge_factorized | OVRPTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

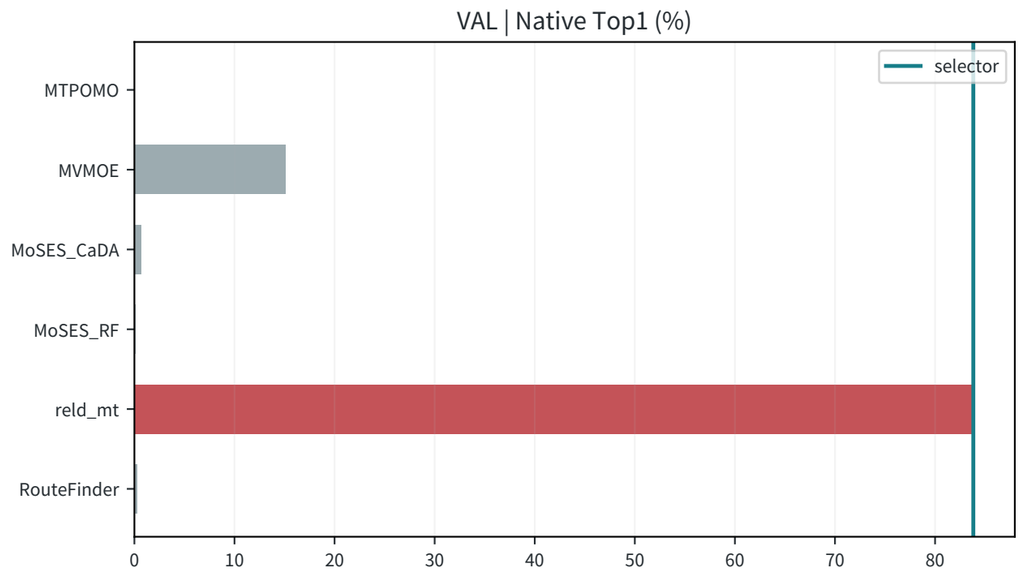

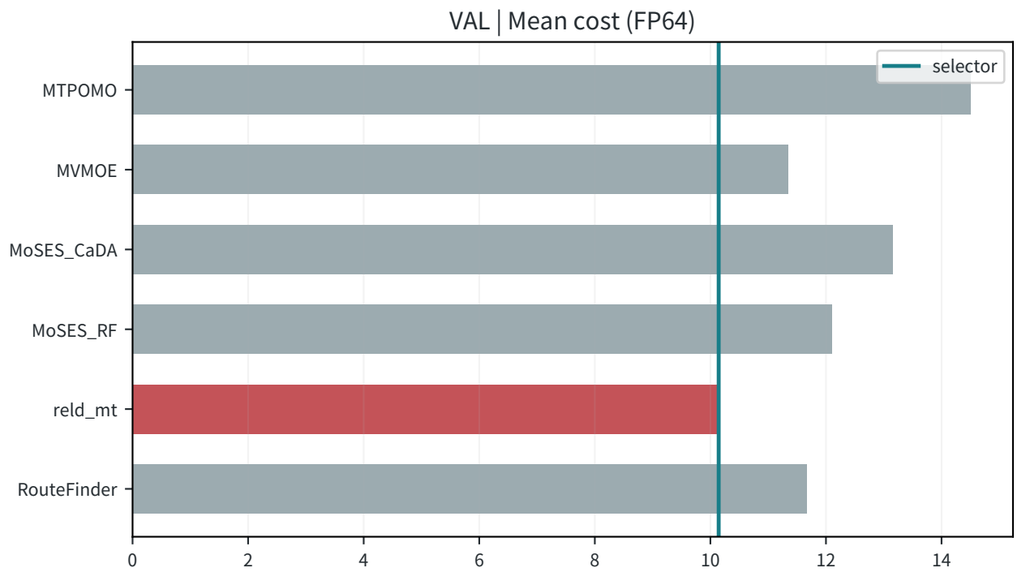


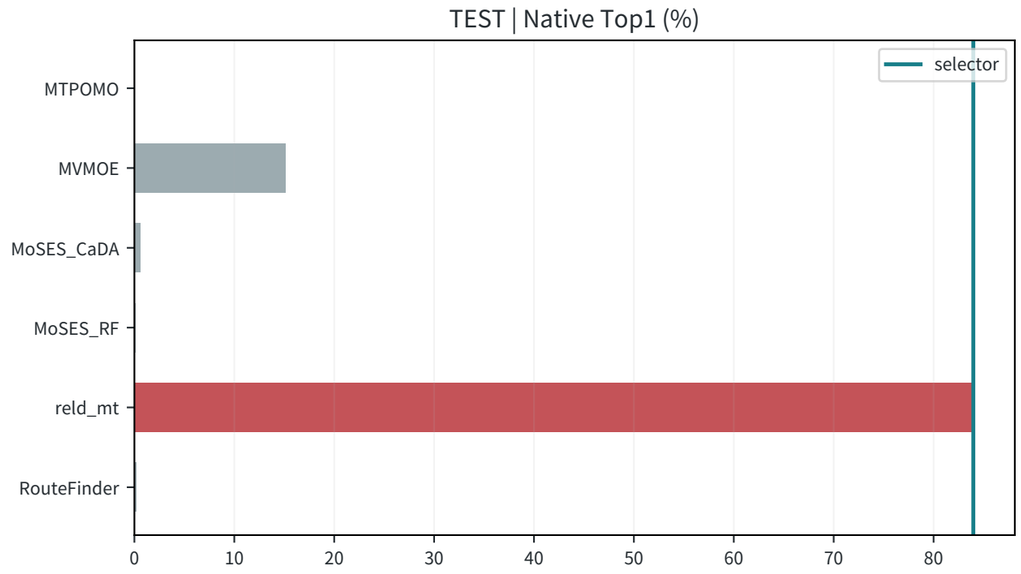


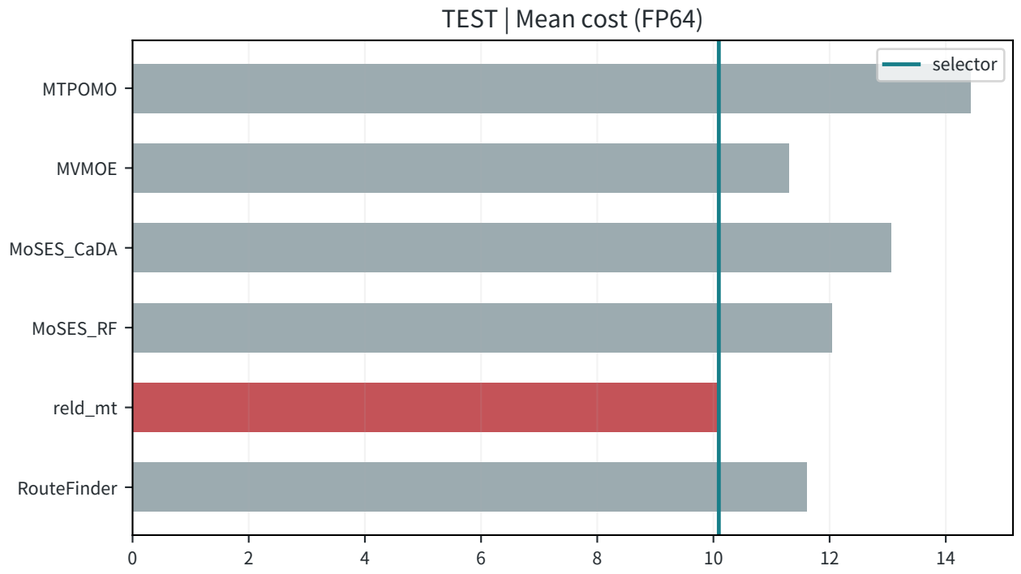



R107/A_edge_factorized | OVRPB: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

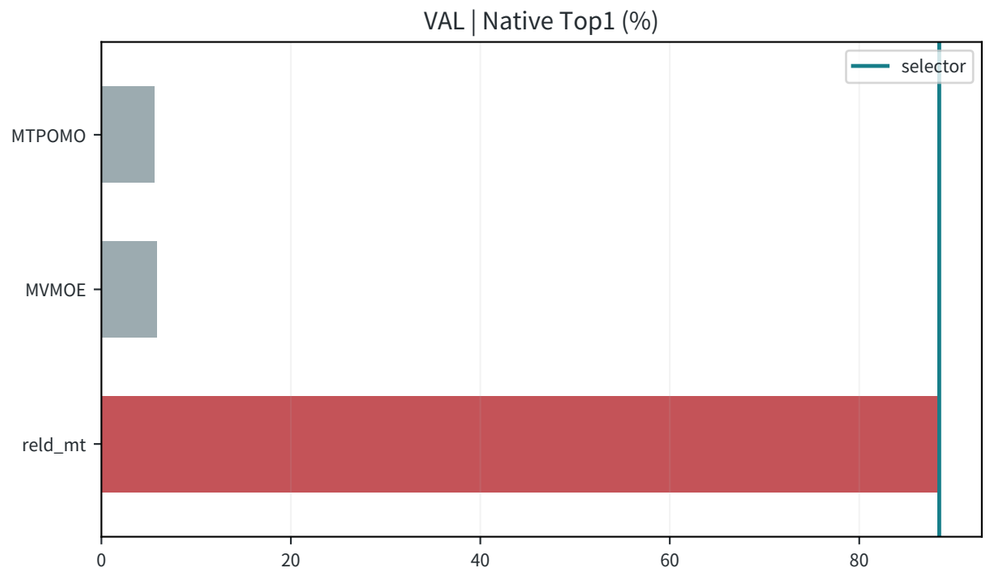

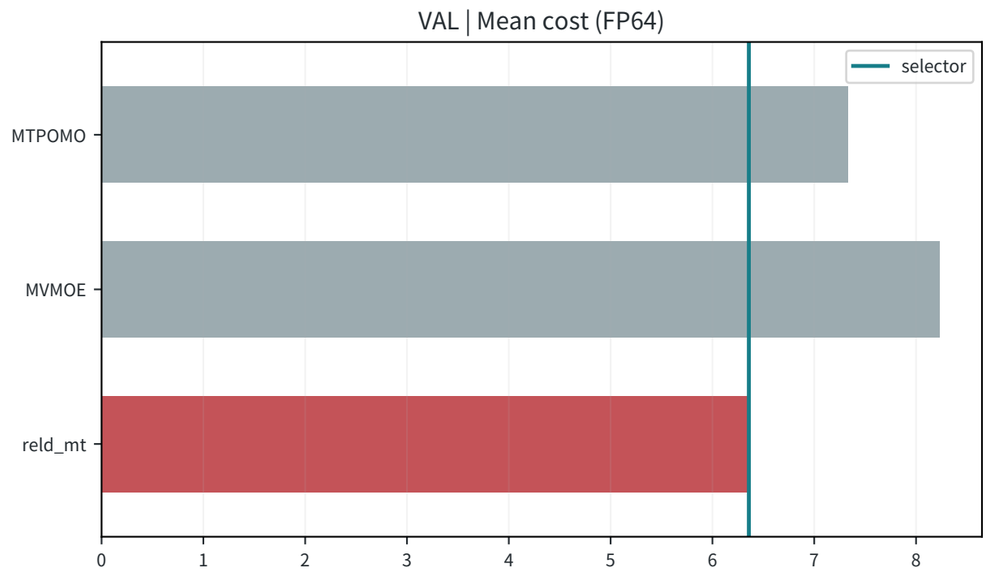


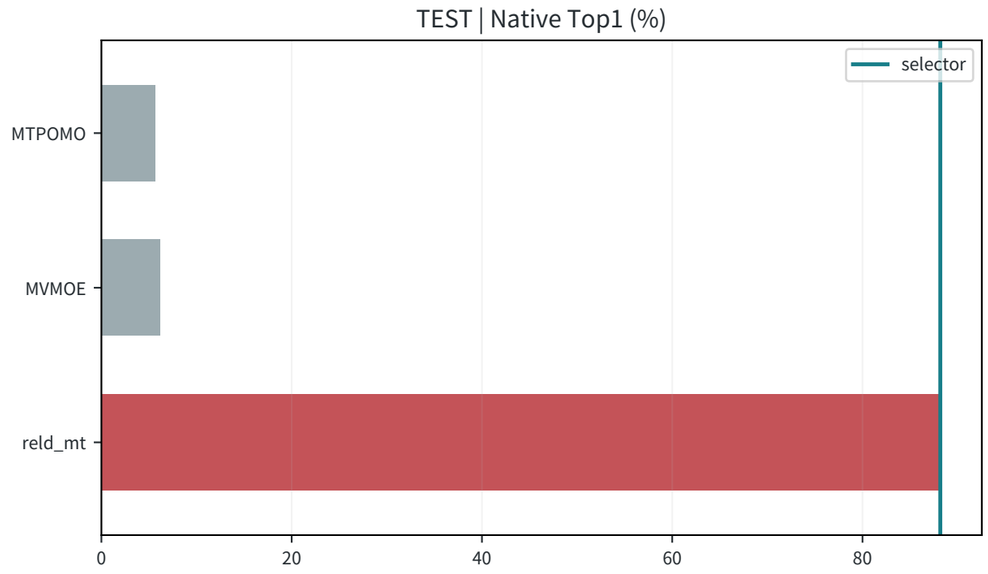


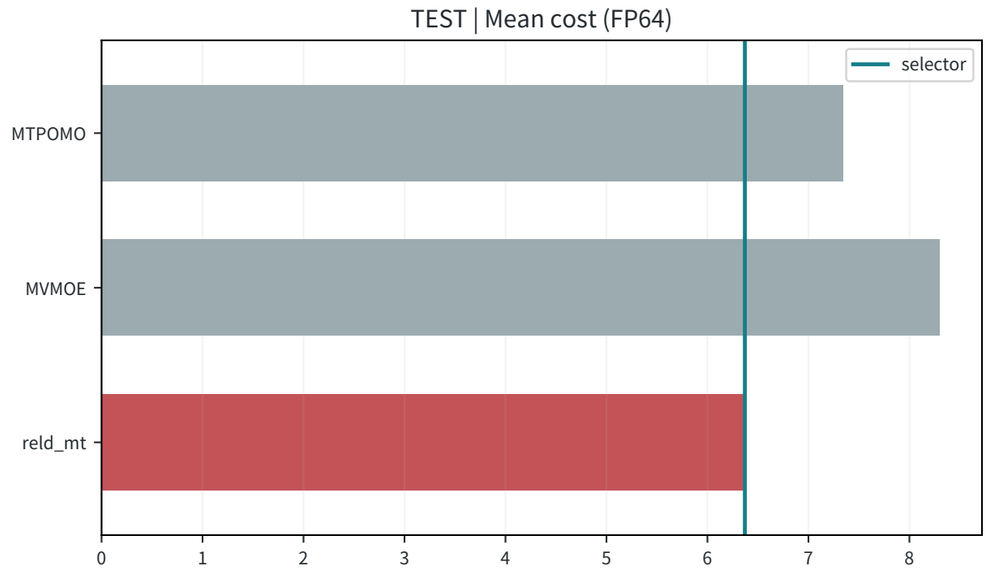


R107/A_edge_factorized | OVRPL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

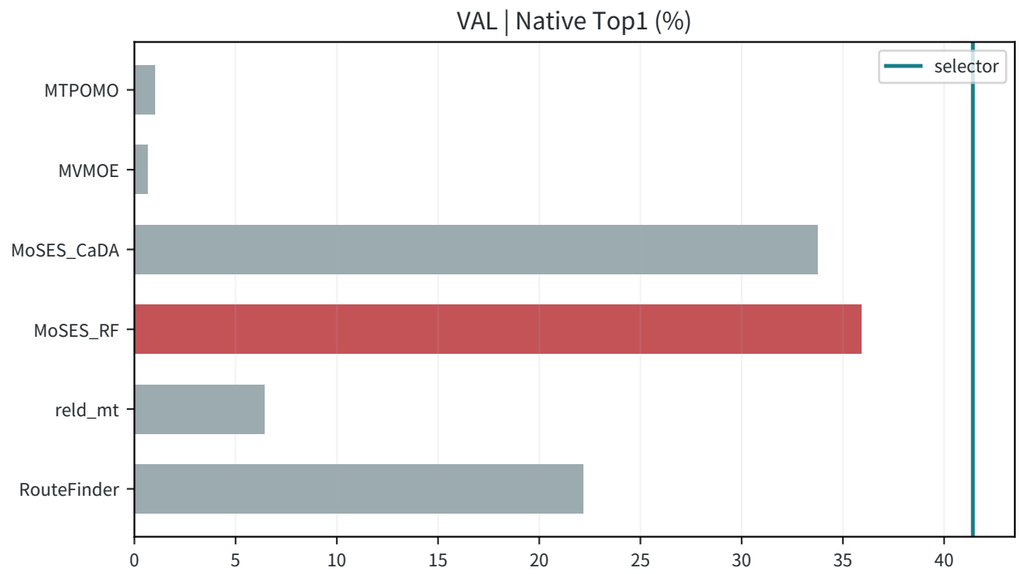

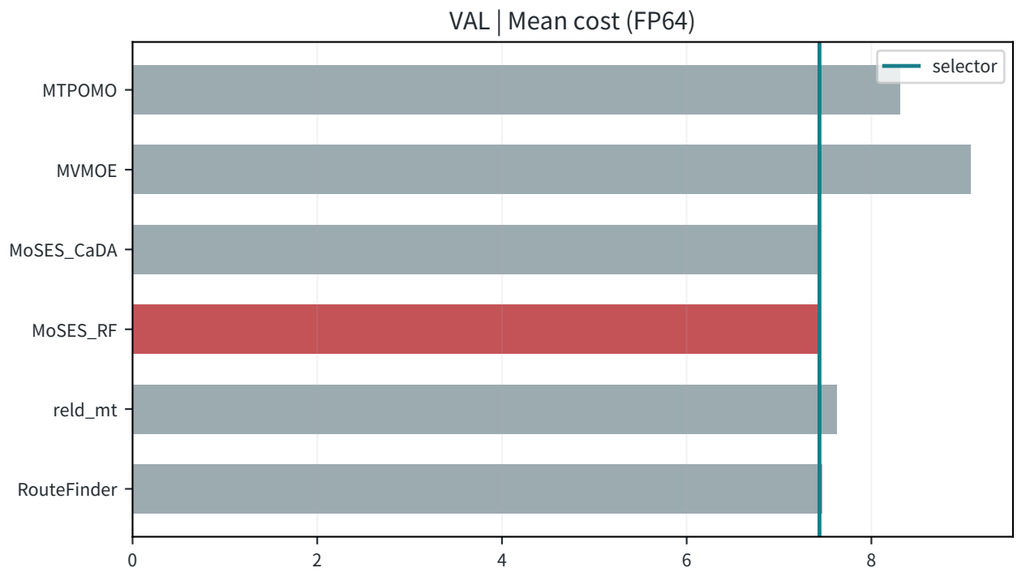


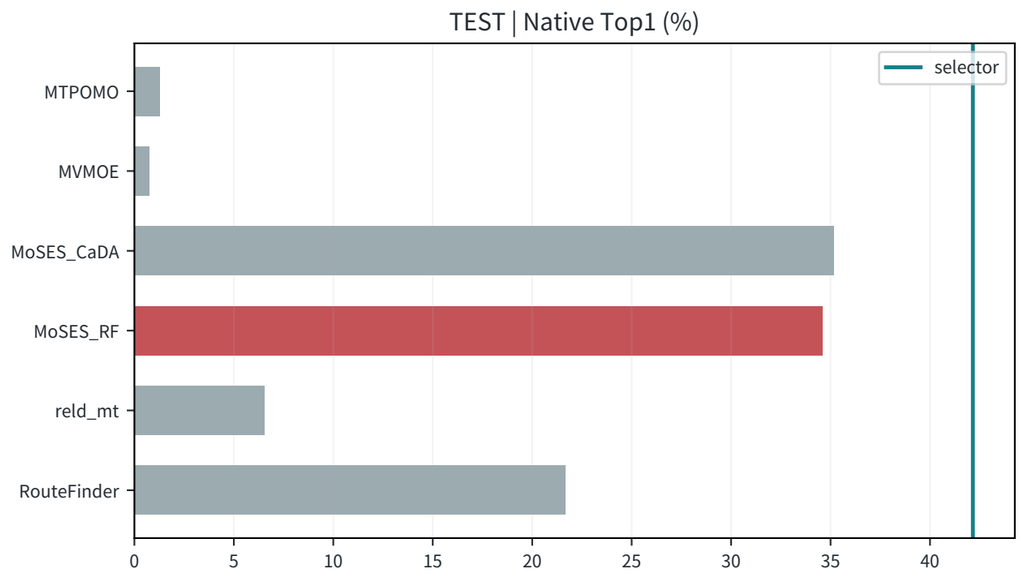






R107/A_edge_factorized | VRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

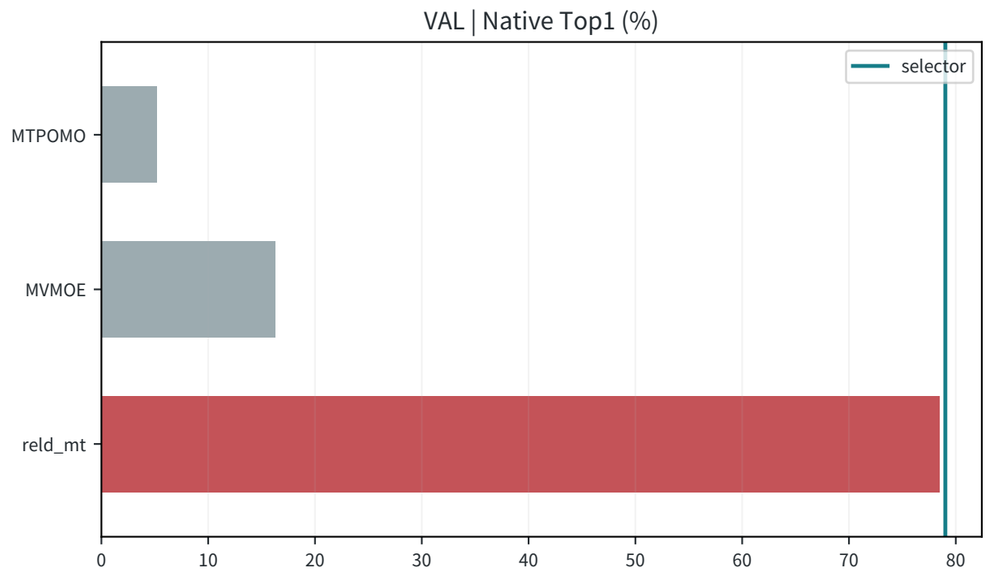

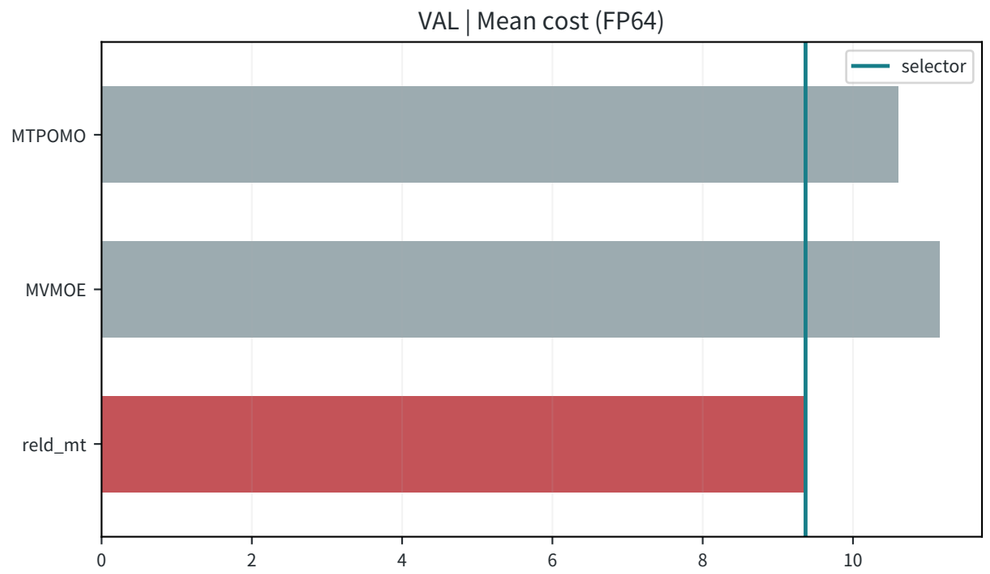


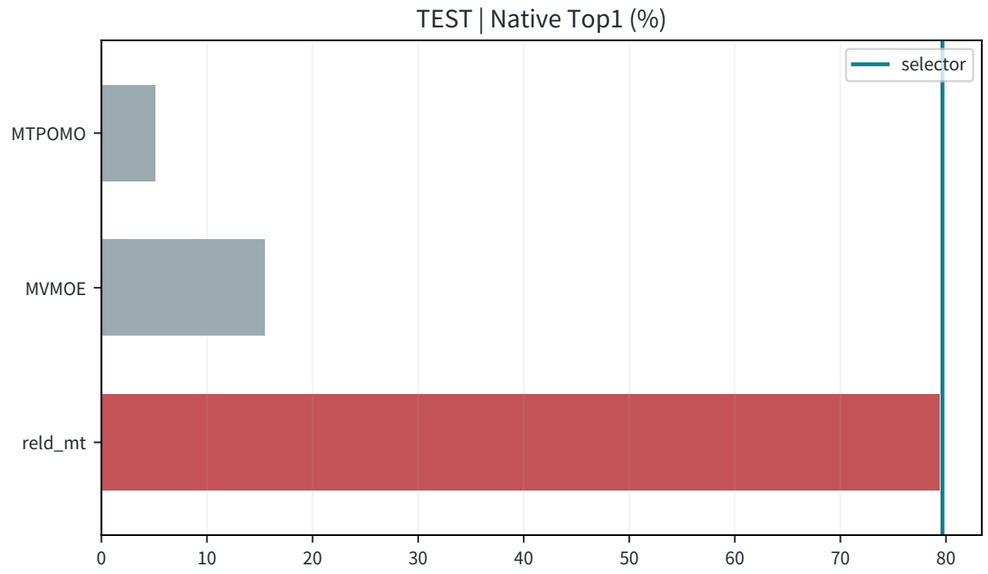


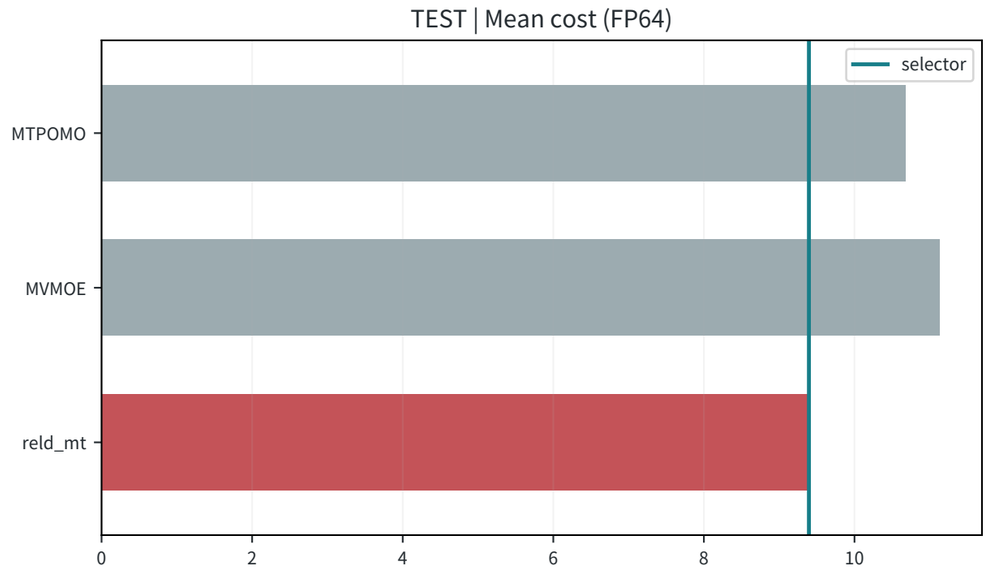



R107/A_edge_factorized | VRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

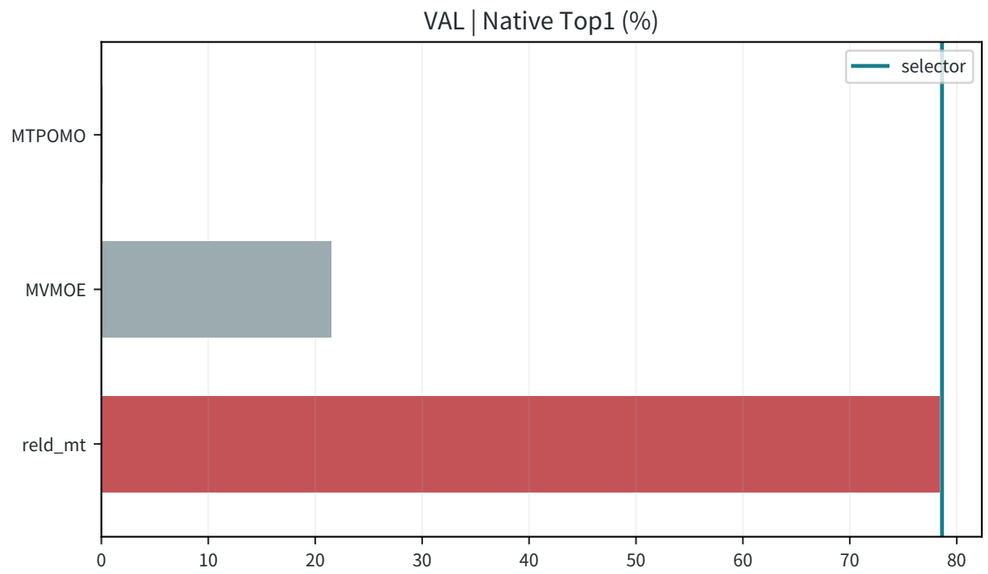

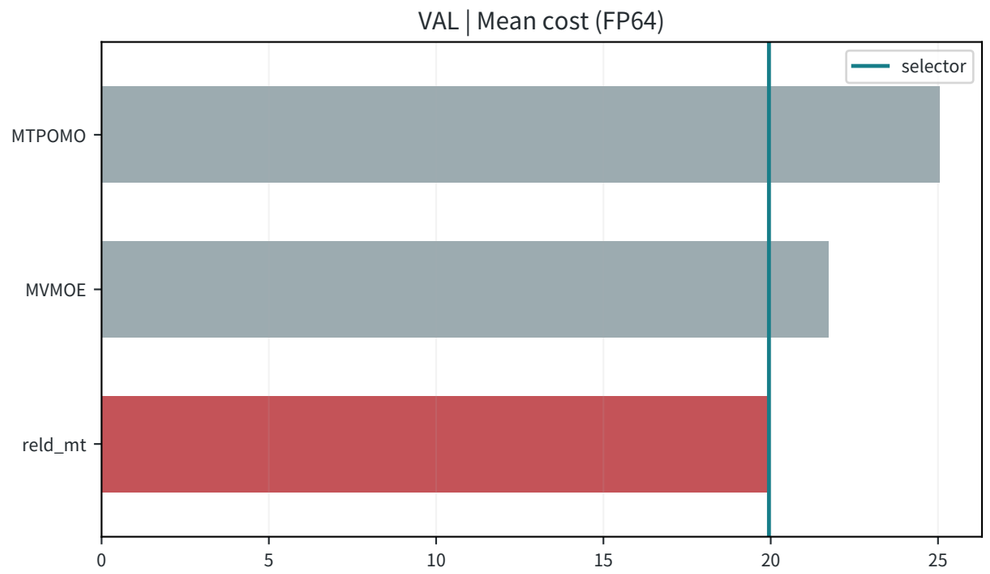


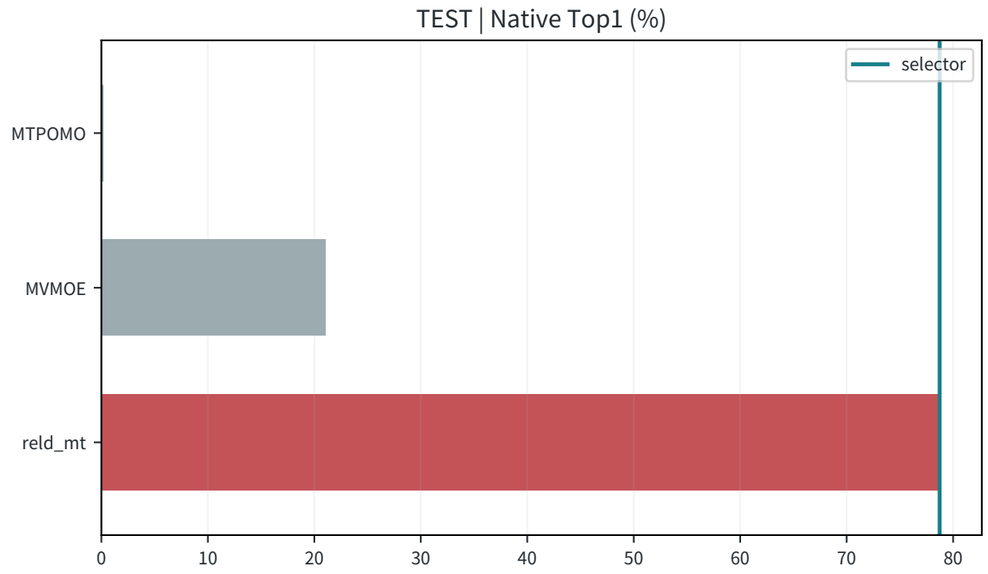


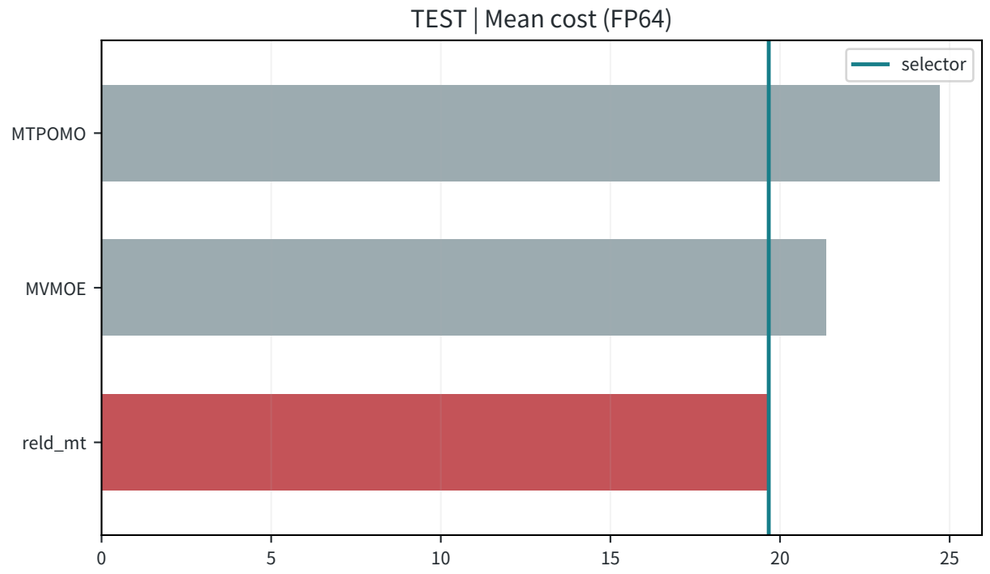



R107/A_edge_factorized | VRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

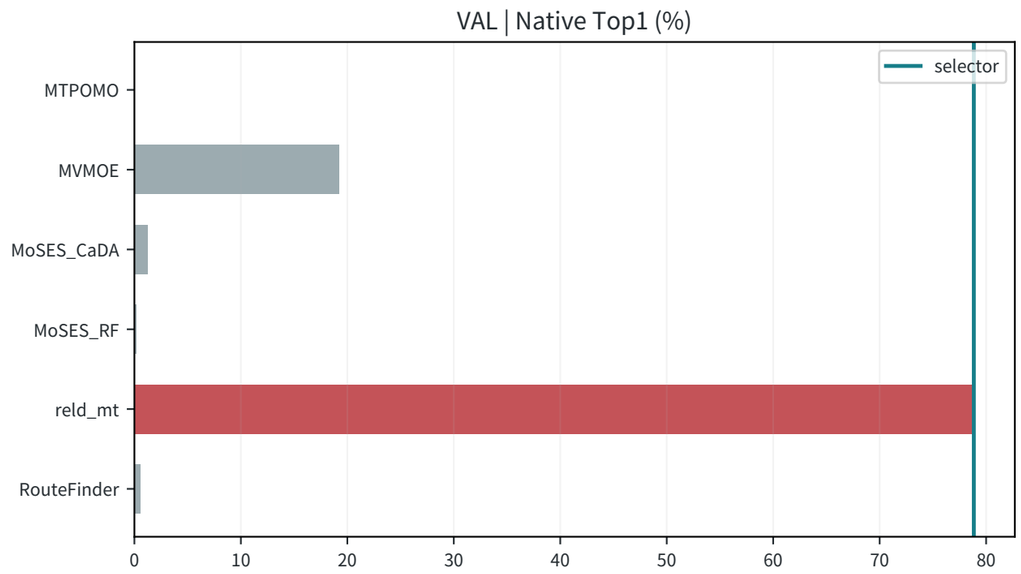

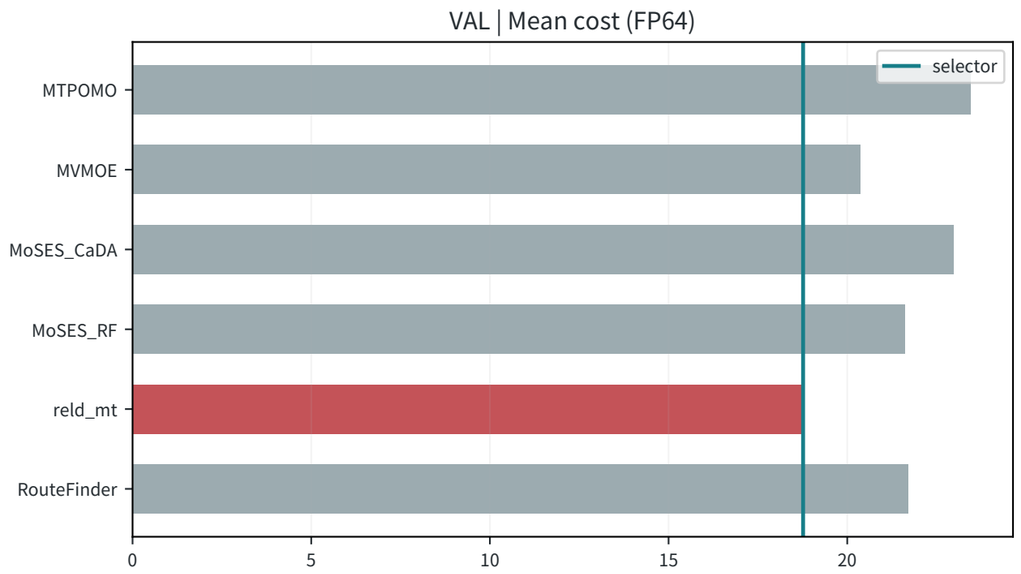


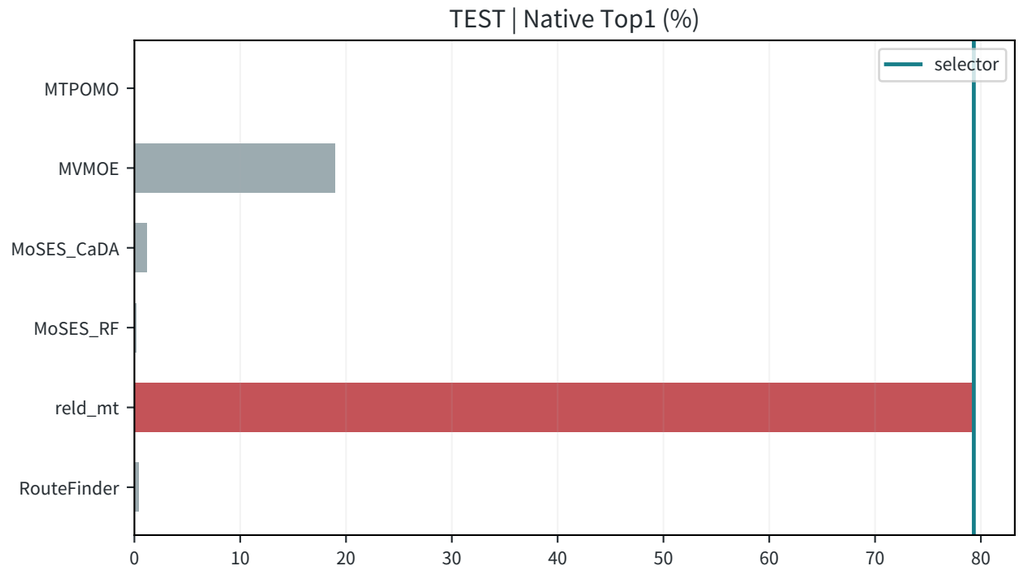


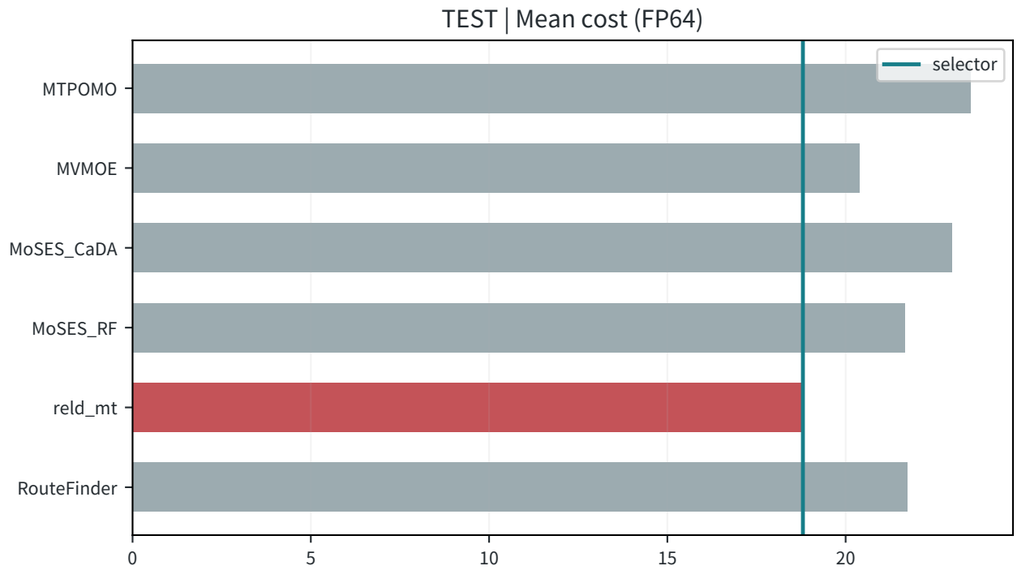



R107/A_edge_factorized | OVRPBL: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

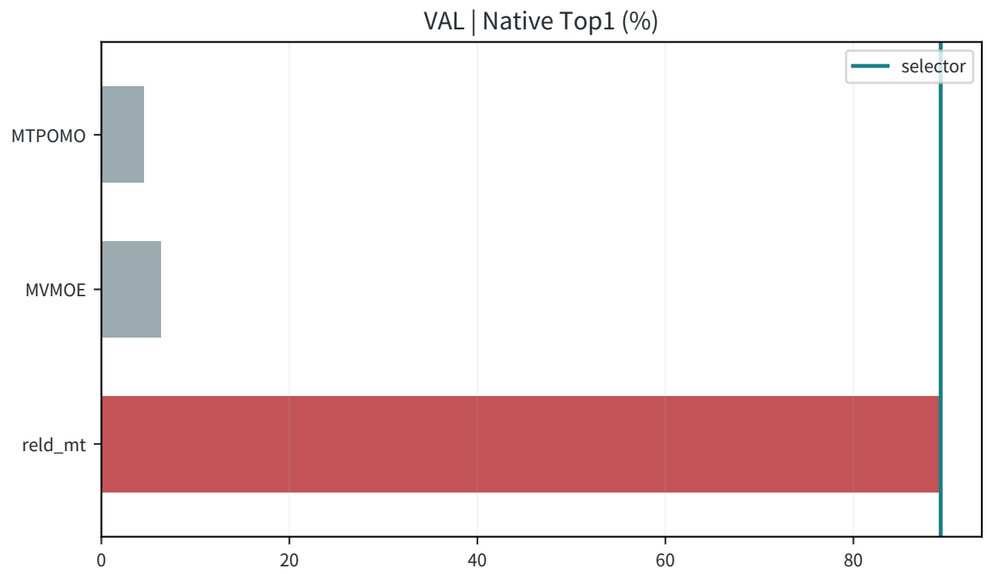

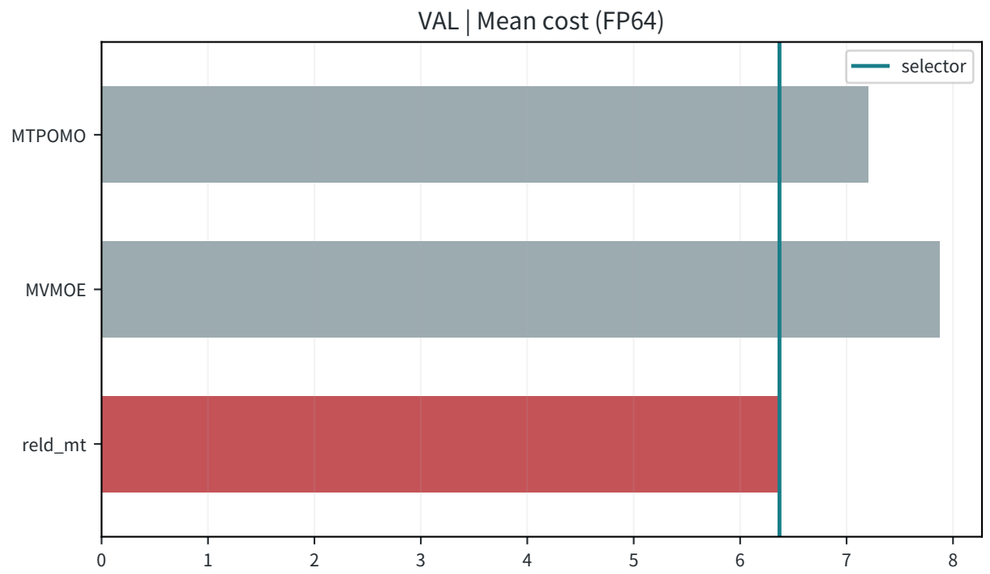


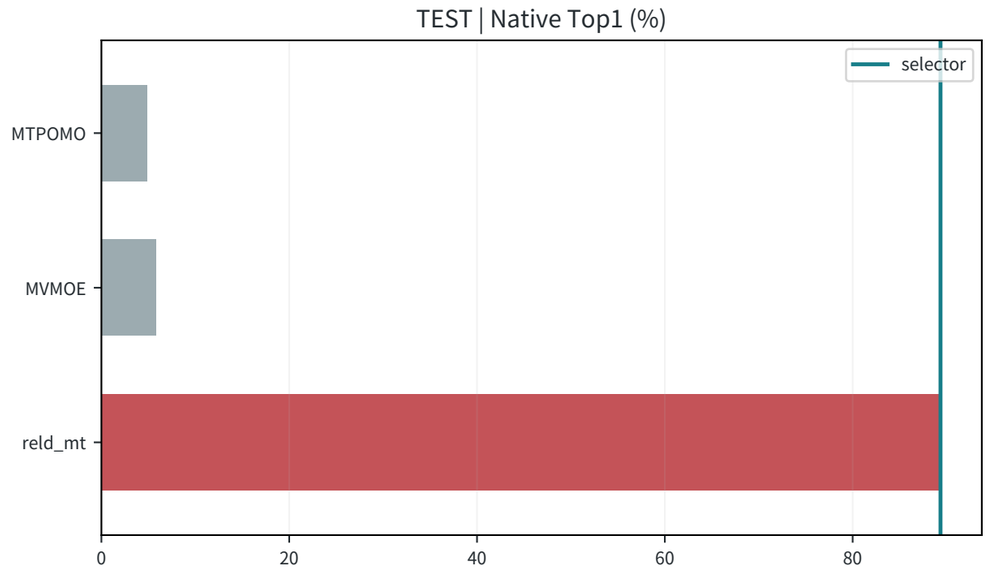


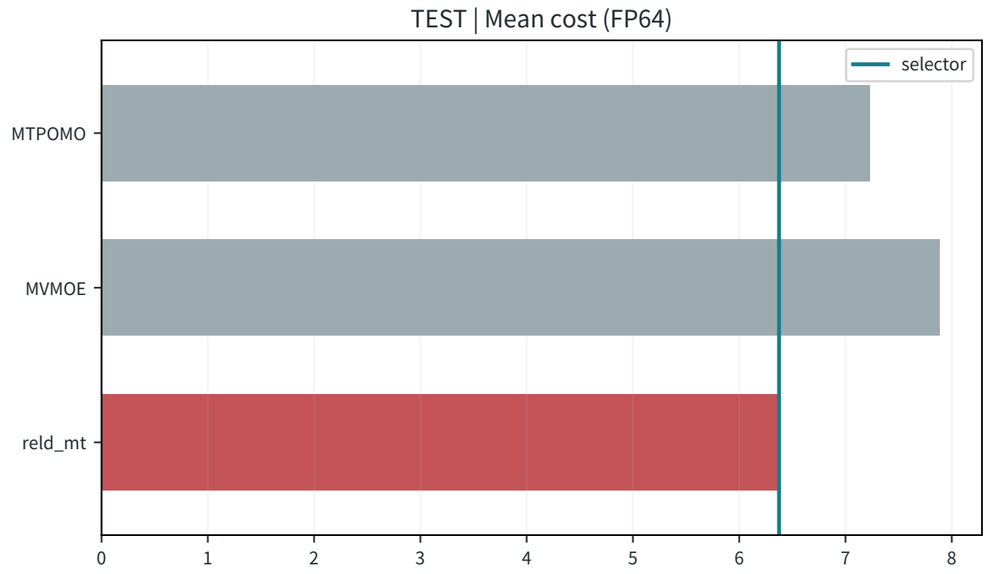



R107/A_edge_factorized | OVRPBTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

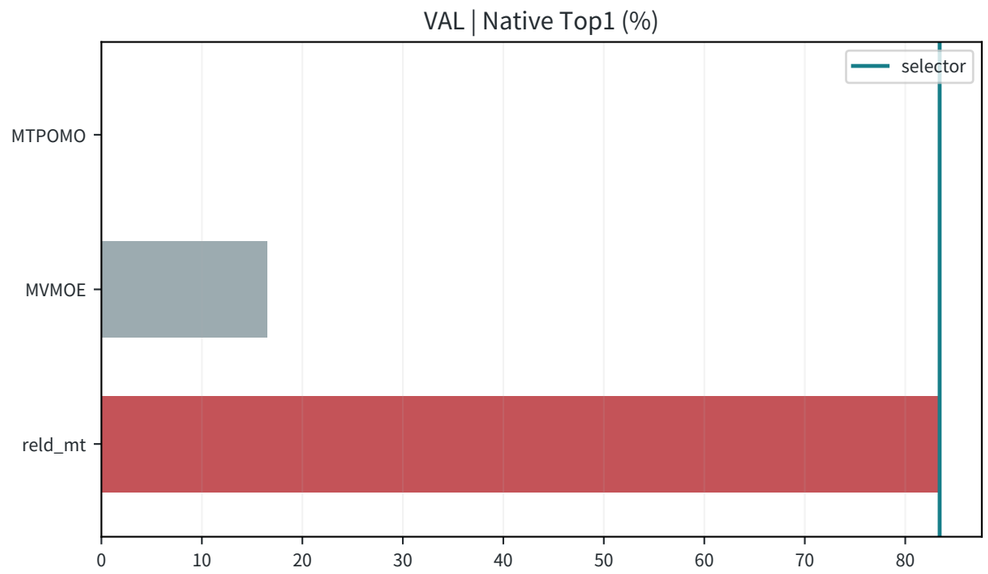

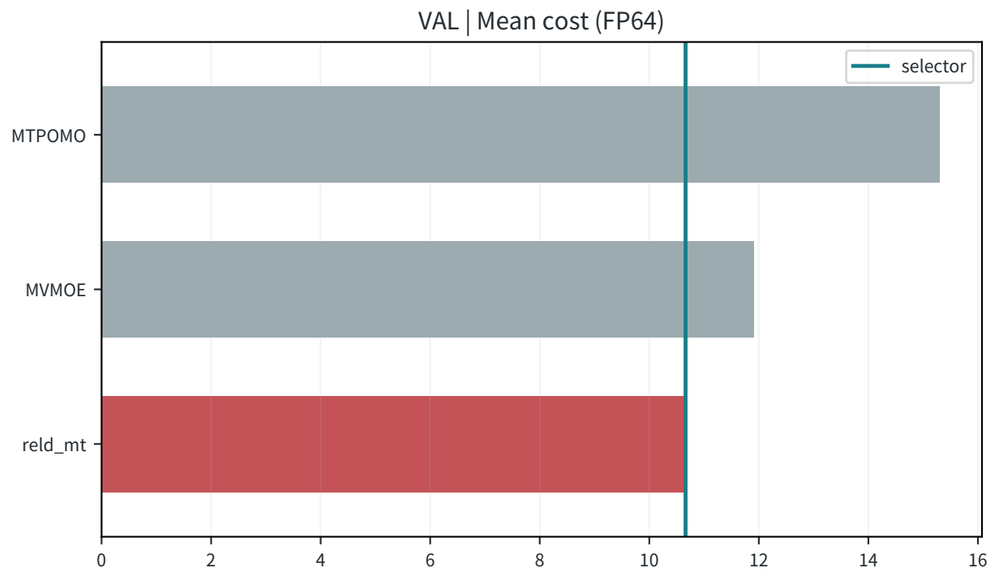


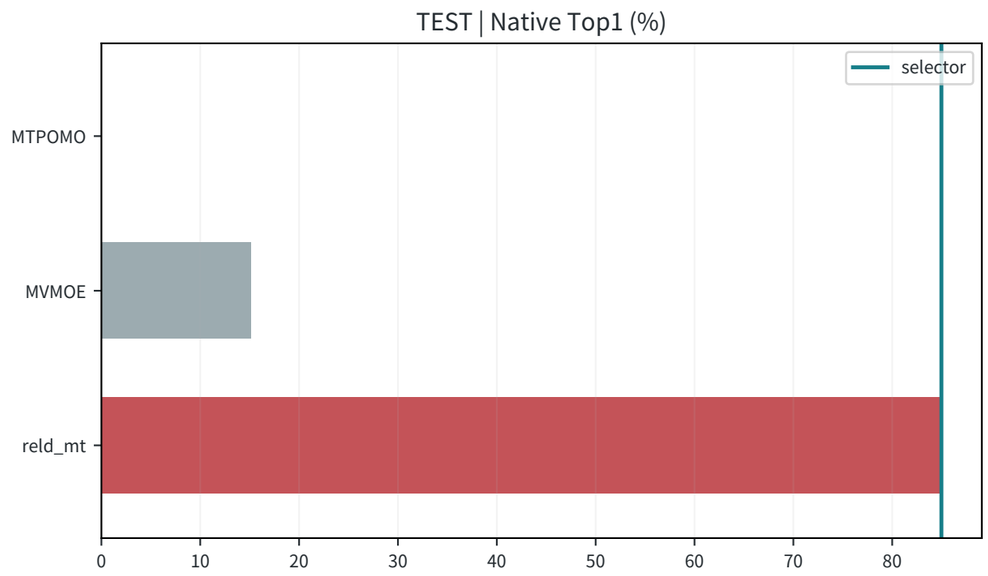


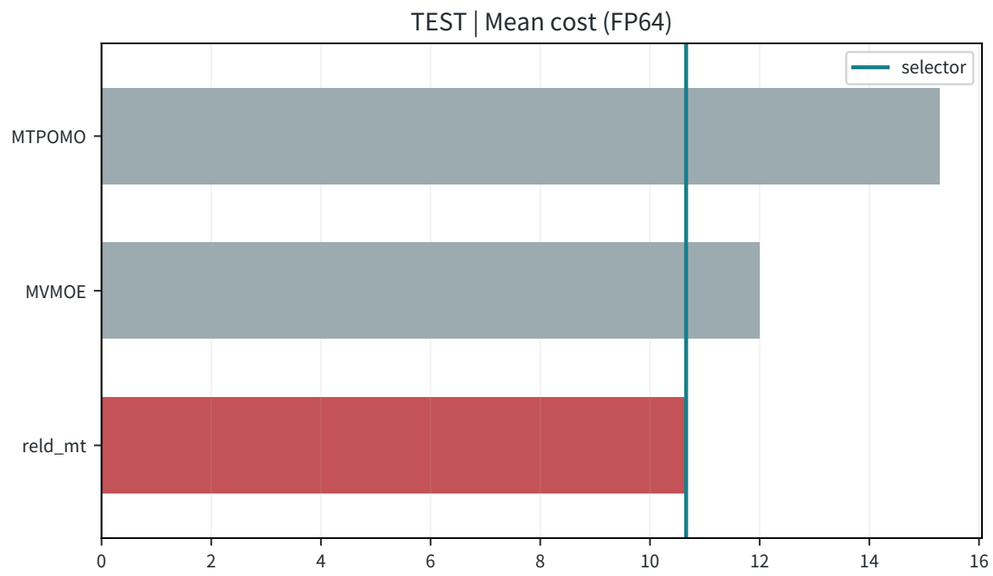



R107/A_edge_factorized | OVRPLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

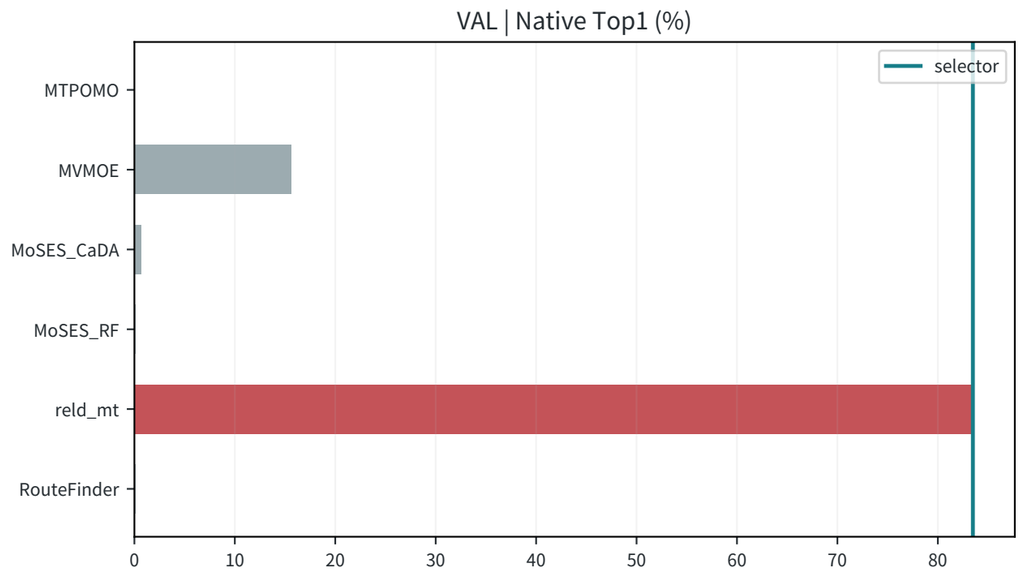

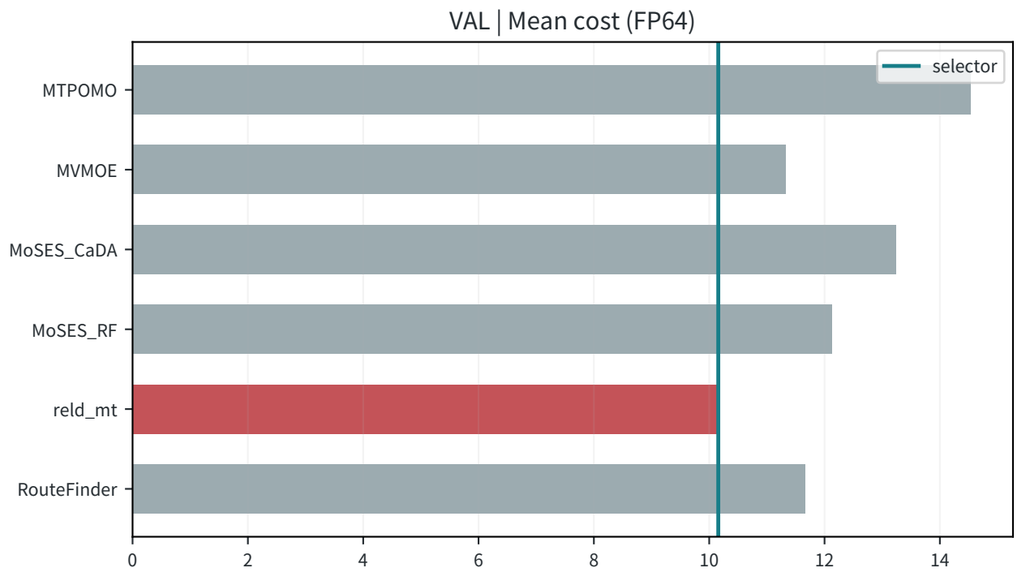


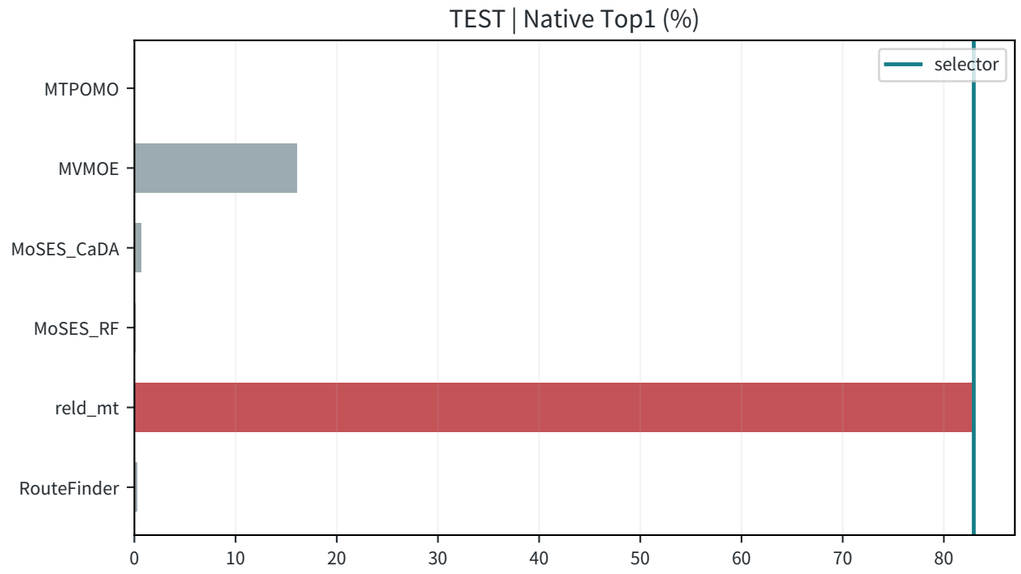


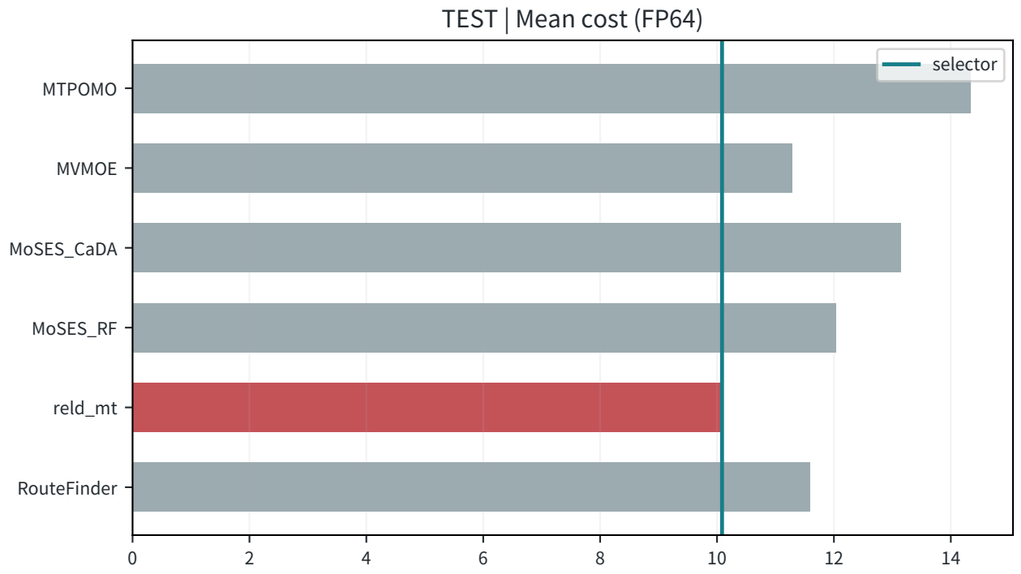



R107/A_edge_factorized | VRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

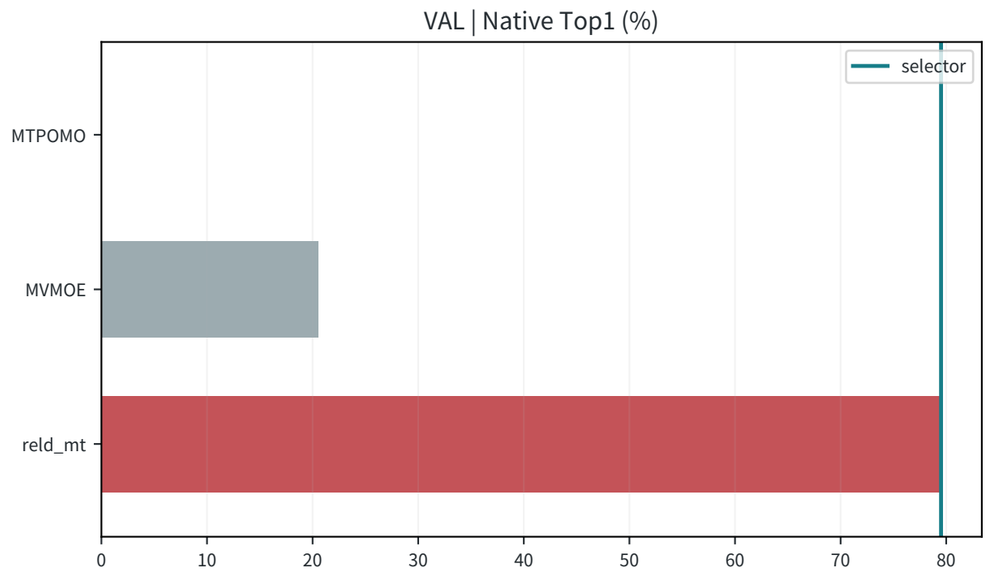

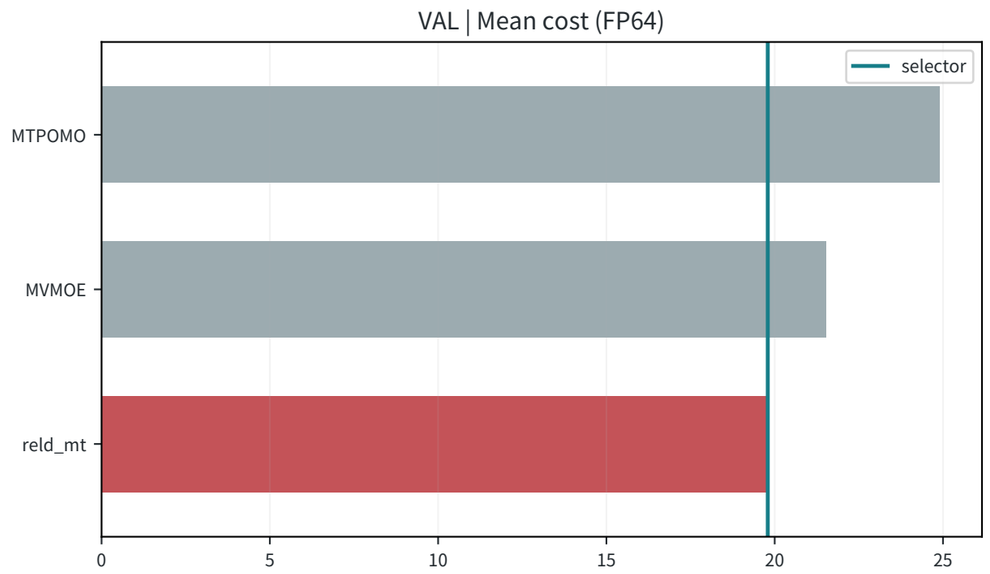

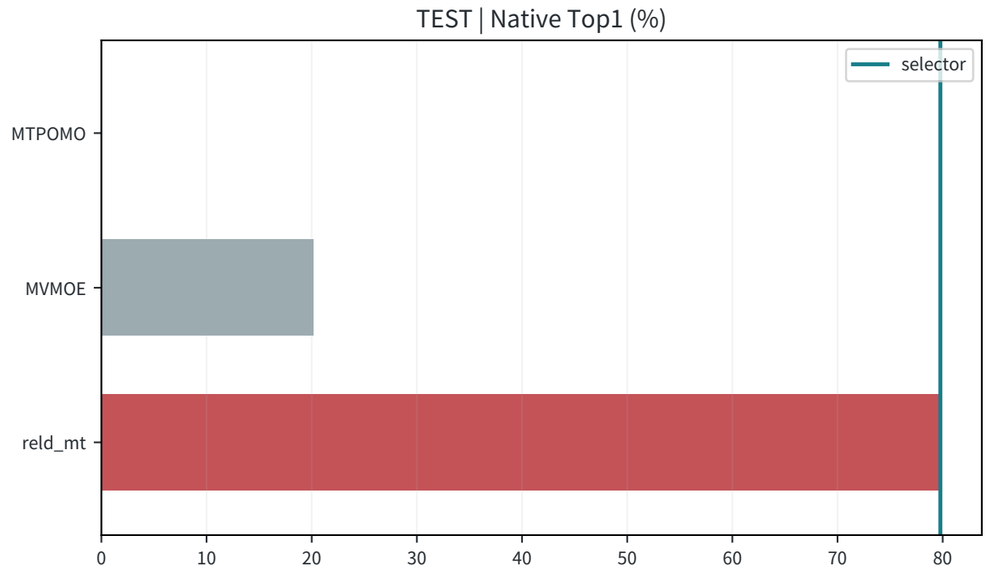

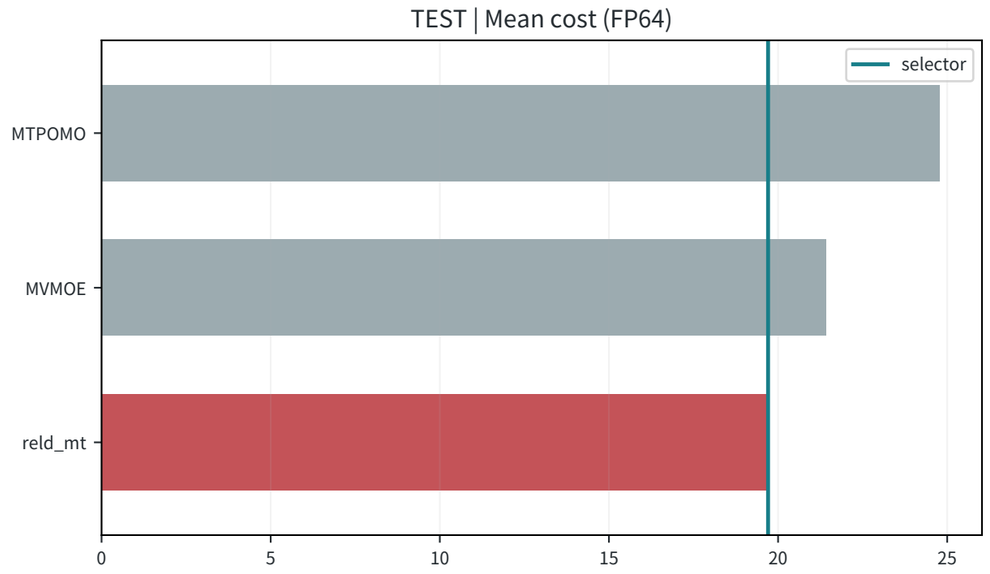

R107/A_edge_factorized | OVRPBLTW: Selector vs Single Methods

Native winner Top1 and FP64 mean cost; every selection is from the same locked model. Lower cost is better.

