R107/B_connected_paths | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 27 | update 38880 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0728	66.2037	11.416705	11.427978	11.371692	-0.1933	+0.3944	0.4054
TEST ALL	71.3074	66.1802	11.373846	11.385299	11.329932	-0.1972	+0.3860	0.3945

Dataset	n	NSS Top1 (%)	R107 Top1 (%)	NSS cost	R107 cost
TSP TEST	4500	45.888889	46.533333	7.970400719	7.970972702
CVRP TEST	4500	45.977778	47.777778	18.004802368	18.010114200
TSPLIB	49	20.408163	22.448980	8.217907074	8.208846062
CVRPLIB	100	70.000000	60.000000	67.101111717	67.250925875

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: original R77 native CE

R107/B_connected_paths | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0728	66.2037	11.416705	11.427978	11.371692	-0.1933	+0.3944	0.4054	per-problem TRAIN SBS
TSP	46.7556	33.1111	8.025192	8.045354	7.990533	-0.2506	+0.4338	0.4220	T2T
CVRP	46.4667	18.7111	18.160578	18.269377	18.064087	-0.5955	+0.5342	0.7116	RELD_CVRP
ATSP	76.8444	47.4889	1.638787	1.676905	1.632471	-2.2731	+0.3870	0.3849	UNICO_MatPOENet
OVRP	41.2000	35.7556	7.461533	7.469579	7.415777	-0.1077	+0.6170	0.6298	MoSES_RF
VRPB	81.0667	80.8444	9.353586	9.354876	9.318750	-0.0138	+0.3738	0.3809	reld_mt
VRPL	37.9556	33.0889	12.431377	12.437959	12.383444	-0.0529	+0.3871	0.3945	MoSES_RF
VRPTW	80.0000	79.9556	18.819250	18.819431	18.766139	-0.0010	+0.2830	0.3001	reld_mt
OVRPTW	83.9111	83.7778	10.142662	10.143730	10.116859	-0.0105	+0.2550	0.2514	reld_mt
OVRPB	88.4667	88.5111	6.357877	6.357254	6.341078	+0.0098	+0.2649	0.2778	reld_mt
OVRPL	41.2667	35.9111	7.436936	7.445709	7.390416	-0.1178	+0.6295	0.6448	MoSES_RF
VRPBL	78.9111	78.5111	9.368069	9.371523	9.328366	-0.0368	+0.4256	0.4289	reld_mt
VRPBTW	78.6222	78.4222	19.946743	19.950430	19.851084	-0.0185	+0.4819	0.4611	reld_mt
VRPLTW	78.7778	78.7556	18.764248	18.765871	18.707843	-0.0086	+0.3015	0.3183	reld_mt
OVRPBL	89.3556	89.2000	6.370312	6.370093	6.352824	+0.0034	+0.2753	0.2903	reld_mt
OVRPBTW	83.5111	83.4444	10.662107	10.661098	10.623245	+0.0095	+0.3658	0.3441	reld_mt
OVRPLTW	83.4889	83.4889	10.157364	10.157423	10.129818	-0.0006	+0.2719	0.2755	reld_mt
VRPBLTW	79.4444	79.4000	19.793853	19.797044	19.706420	-0.0161	+0.4437	0.4341	reld_mt
OVRPBLTW	83.2667	83.2889	10.610208	10.609955	10.571302	+0.0024	+0.3680	0.3461	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R107/B_connected_paths | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.3074	66.1802	11.373846	11.385299	11.329932	-0.1972	+0.3860	0.3945	per-problem TRAIN SBS
TSP	46.5333	34.5333	7.970973	7.989621	7.937593	-0.2334	+0.4205	0.4131	T2T
CVRP	47.7778	17.9333	18.010114	18.124983	17.918509	-0.6338	+0.5112	0.6720	RELD_CVRP
ATSP	76.4667	47.2444	1.635749	1.674207	1.629441	-2.2971	+0.3871	0.3878	UNICO_MatPOENet
OVRP	40.4889	33.6444	7.445553	7.455750	7.400487	-0.1368	+0.6090	0.6207	MoSES_RF
VRPB	80.6667	80.4000	9.349844	9.351810	9.315298	-0.0210	+0.3709	0.3734	reld_mt
VRPL	37.6222	32.2667	12.349543	12.356138	12.300958	-0.0534	+0.3950	0.4030	MoSES_RF
VRPTW	81.1778	80.8444	18.688564	18.690545	18.637408	-0.0106	+0.2745	0.2855	reld_mt
OVRPTW	83.9556	83.9333	10.092788	10.093063	10.068135	-0.0027	+0.2449	0.2365	reld_mt
OVRPB	88.1556	88.1333	6.370499	6.370826	6.352225	-0.0051	+0.2877	0.2942	reld_mt
OVRPL	42.3111	34.6000	7.463108	7.472542	7.418033	-0.1262	+0.6076	0.6157	MoSES_RF
VRPBL	79.6000	79.4222	9.395371	9.396379	9.355967	-0.0107	+0.4212	0.4245	reld_mt
VRPBTW	78.8222	78.7556	19.666611	19.665725	19.577666	+0.0045	+0.4543	0.4507	reld_mt
VRPLTW	79.3556	79.2444	18.803704	18.803136	18.745143	+0.0030	+0.3124	0.3293	reld_mt
OVRPBL	89.3333	89.2889	6.375489	6.375741	6.359310	-0.0040	+0.2544	0.2650	reld_mt
OVRPBTW	84.9556	84.8222	10.659395	10.659591	10.624748	-0.0018	+0.3261	0.2987	reld_mt
OVRPLTW	82.9778	82.8667	10.085631	10.086112	10.059001	-0.0048	+0.2647	0.2650	reld_mt
VRPBLTW	79.7111	79.7333	19.704299	19.707068	19.613284	-0.0141	+0.4640	0.4463	reld_mt
OVRPBLTW	83.6222	83.5778	10.661988	10.662149	10.625574	-0.0015	+0.3427	0.3194	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R107/B_connected_paths | LIB and locked provenance

Current R107 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	22.4490	10.2041	8.208846	8.240435	8.142167	-0.3833	+0.8189	0.8281
CVRPLIB	60.0000	45.0000	67.250926	67.245364	66.945093	+0.0083	+0.4568	0.5397

SHA256: 81c17fe9b2d355e9f2f4b7ad2160f01ab377a5a6a6072c6bd35fcf6497a4bc03

Unique selection: strict minimum whole18 VAL macro_vs_sbs_pct; first exact tie; common full-TRAIN SBS

Inference: original score MLP utility differences and maximin; no calibration or solver quotas


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R107/B_connected_paths | TSP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

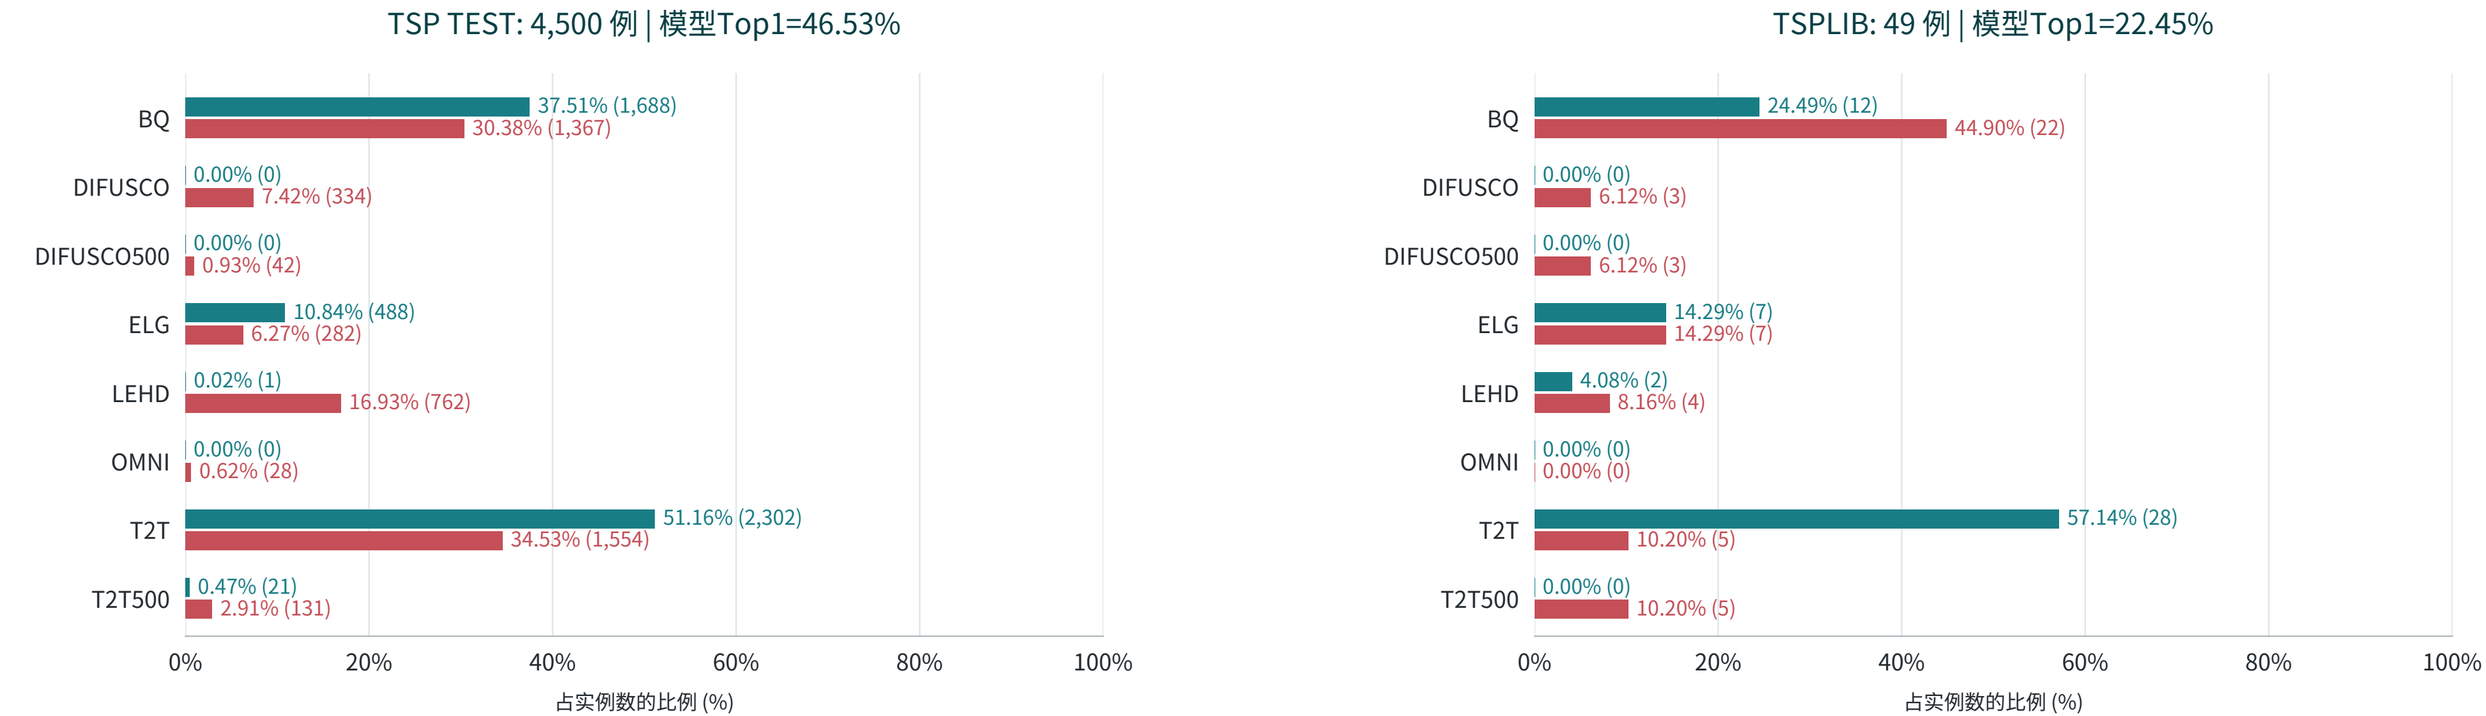

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | CVRP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

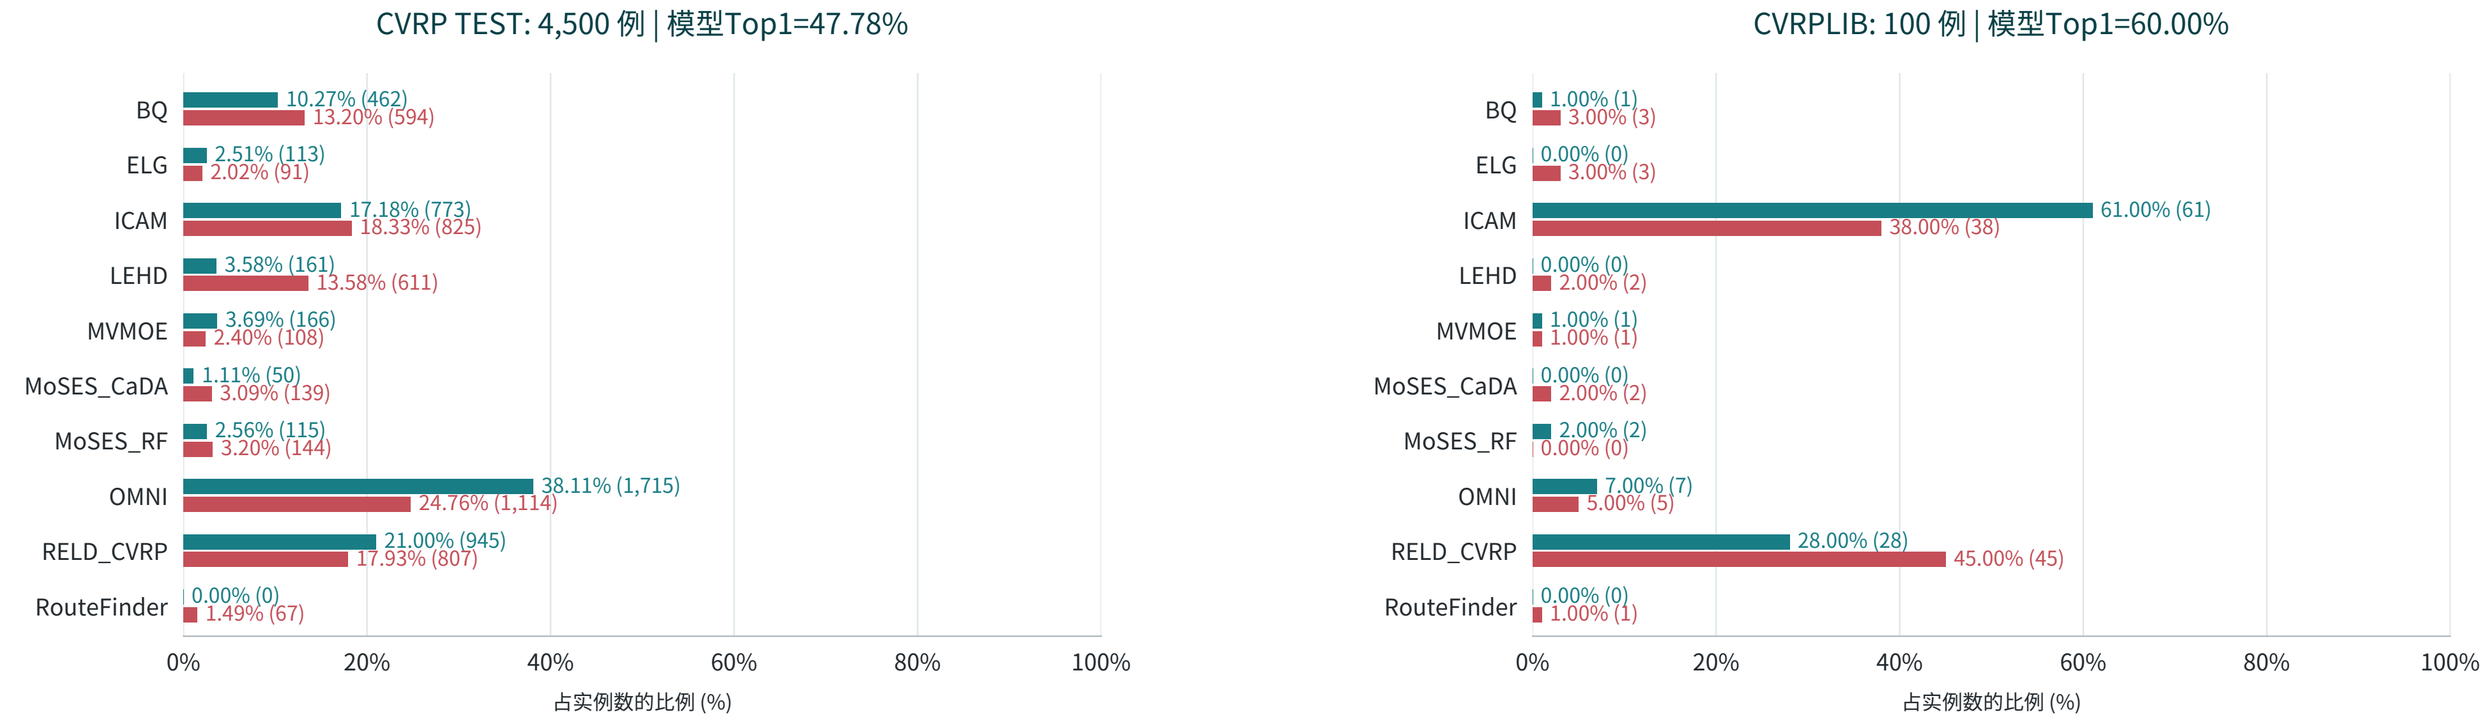

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | ATSP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

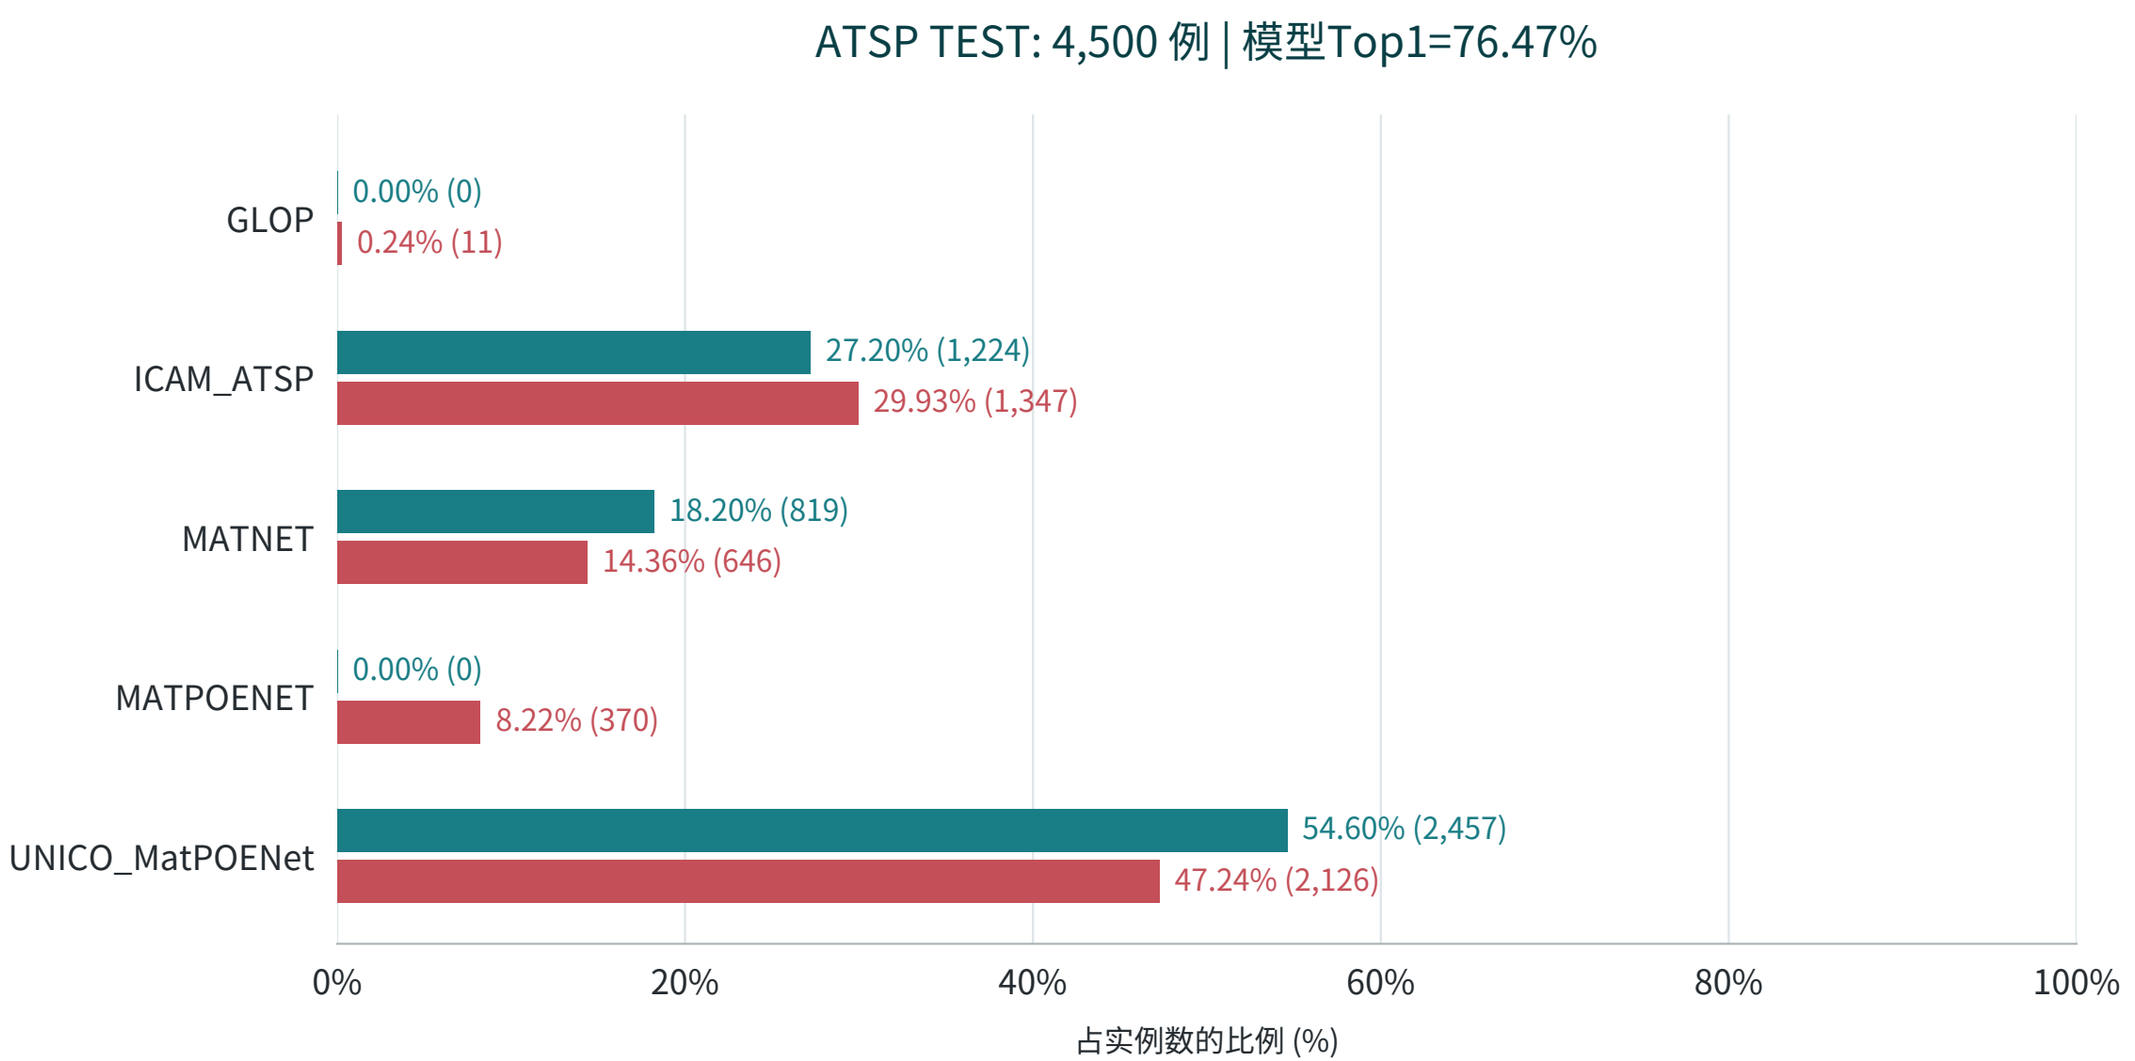

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRP | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

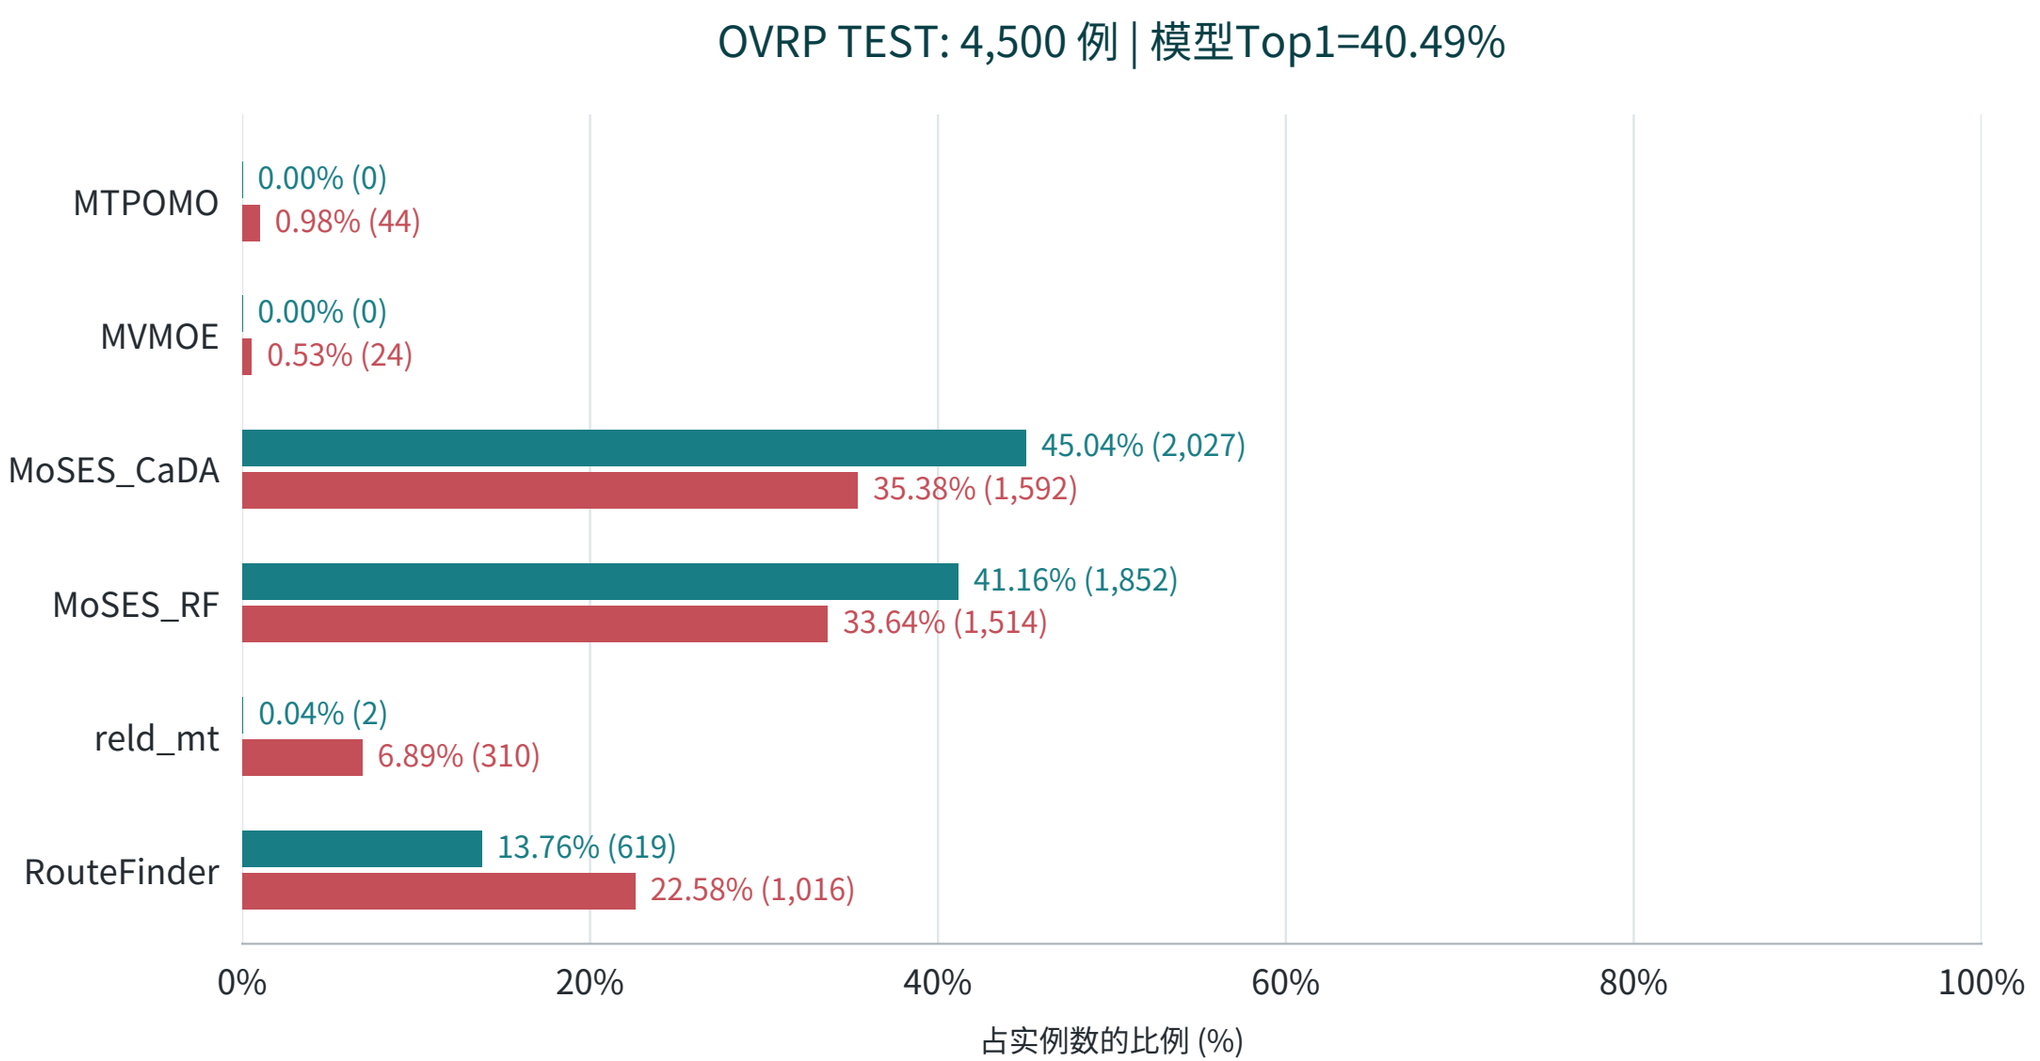

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPB | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

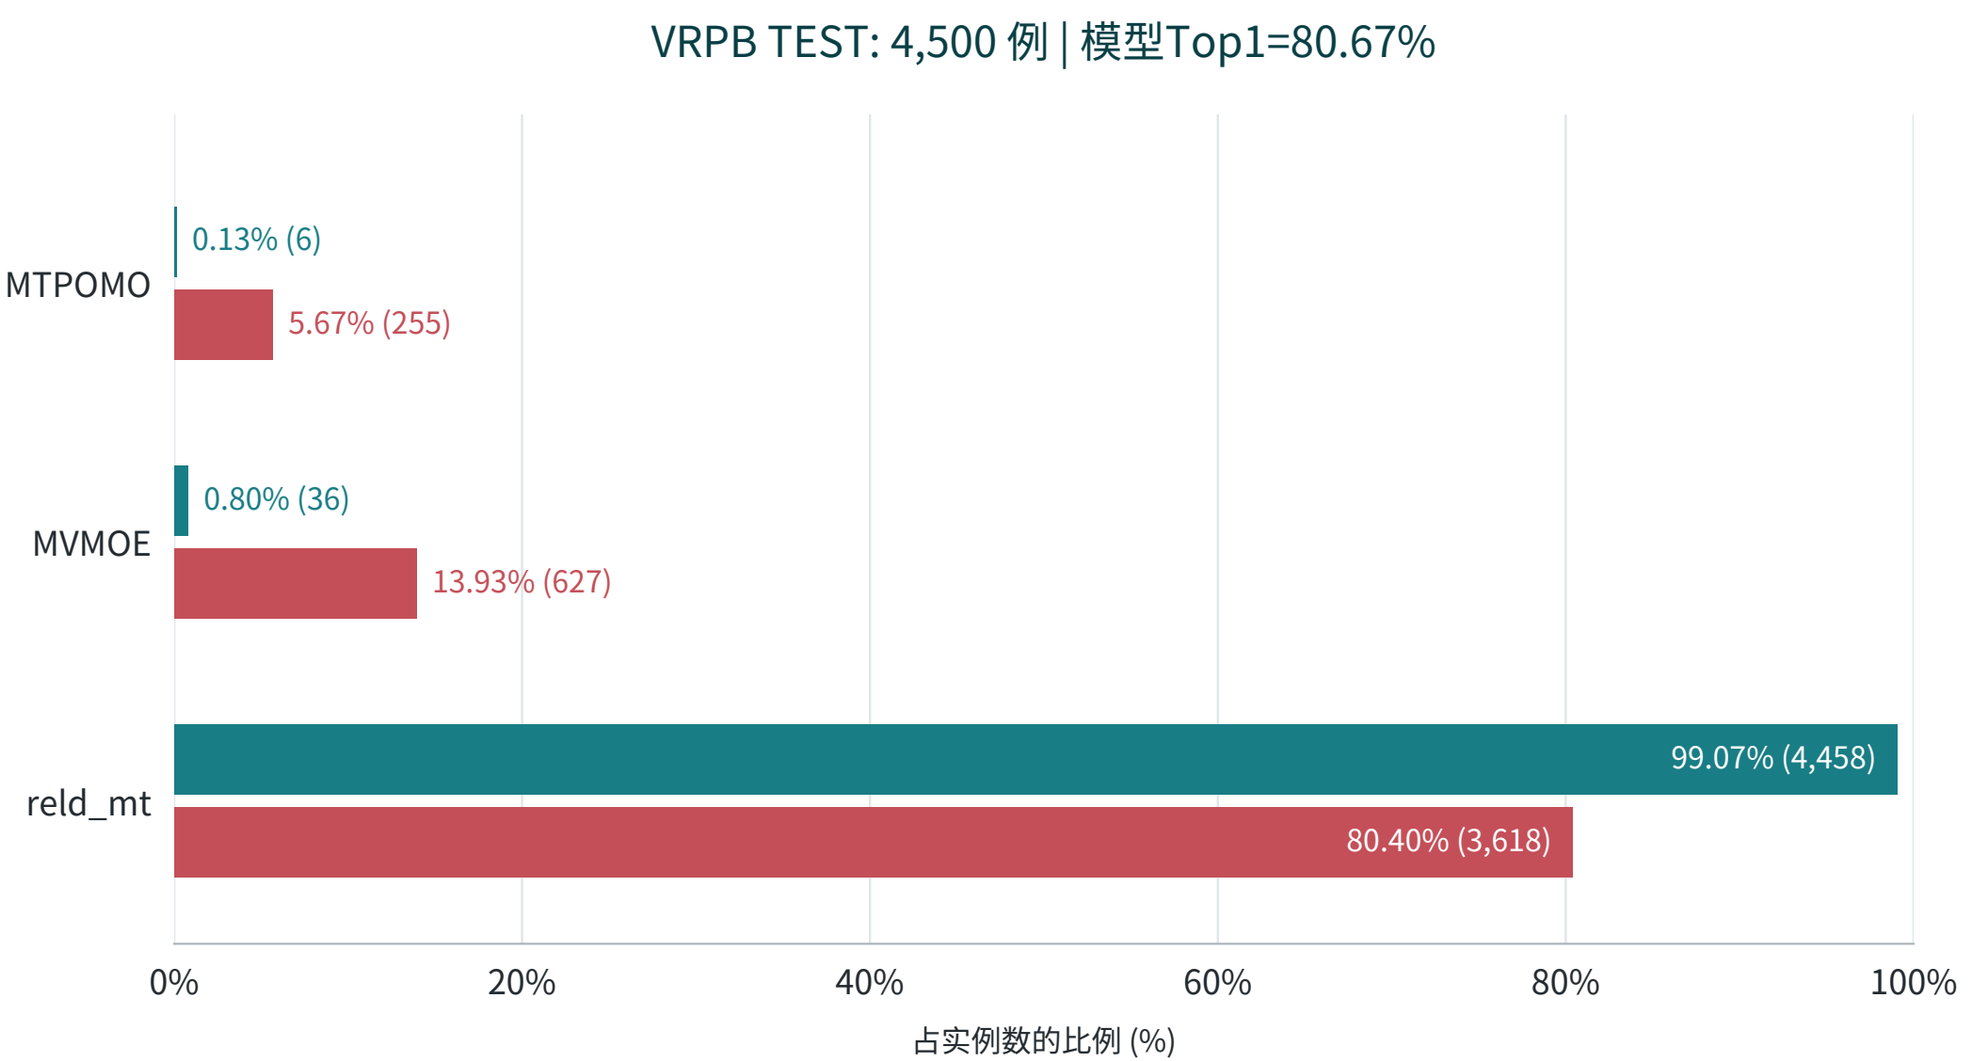

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

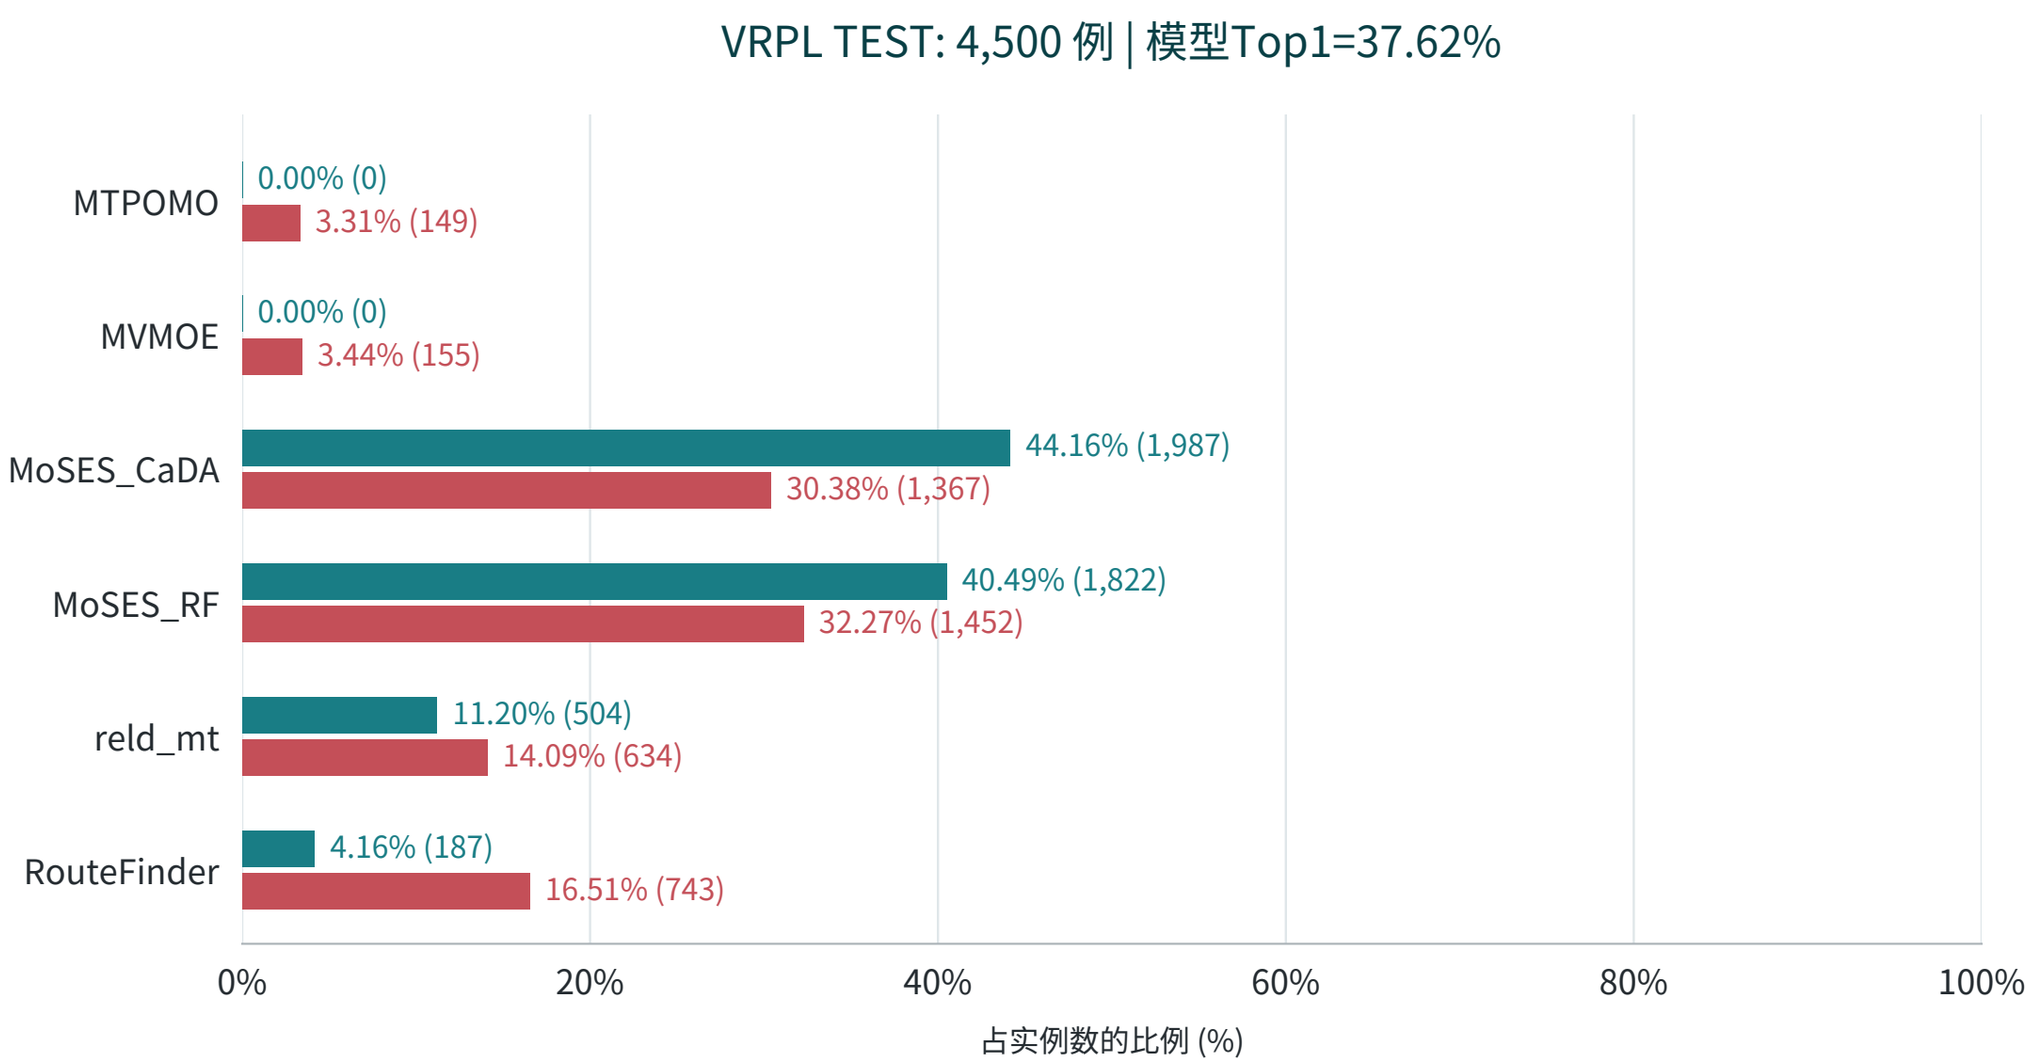

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

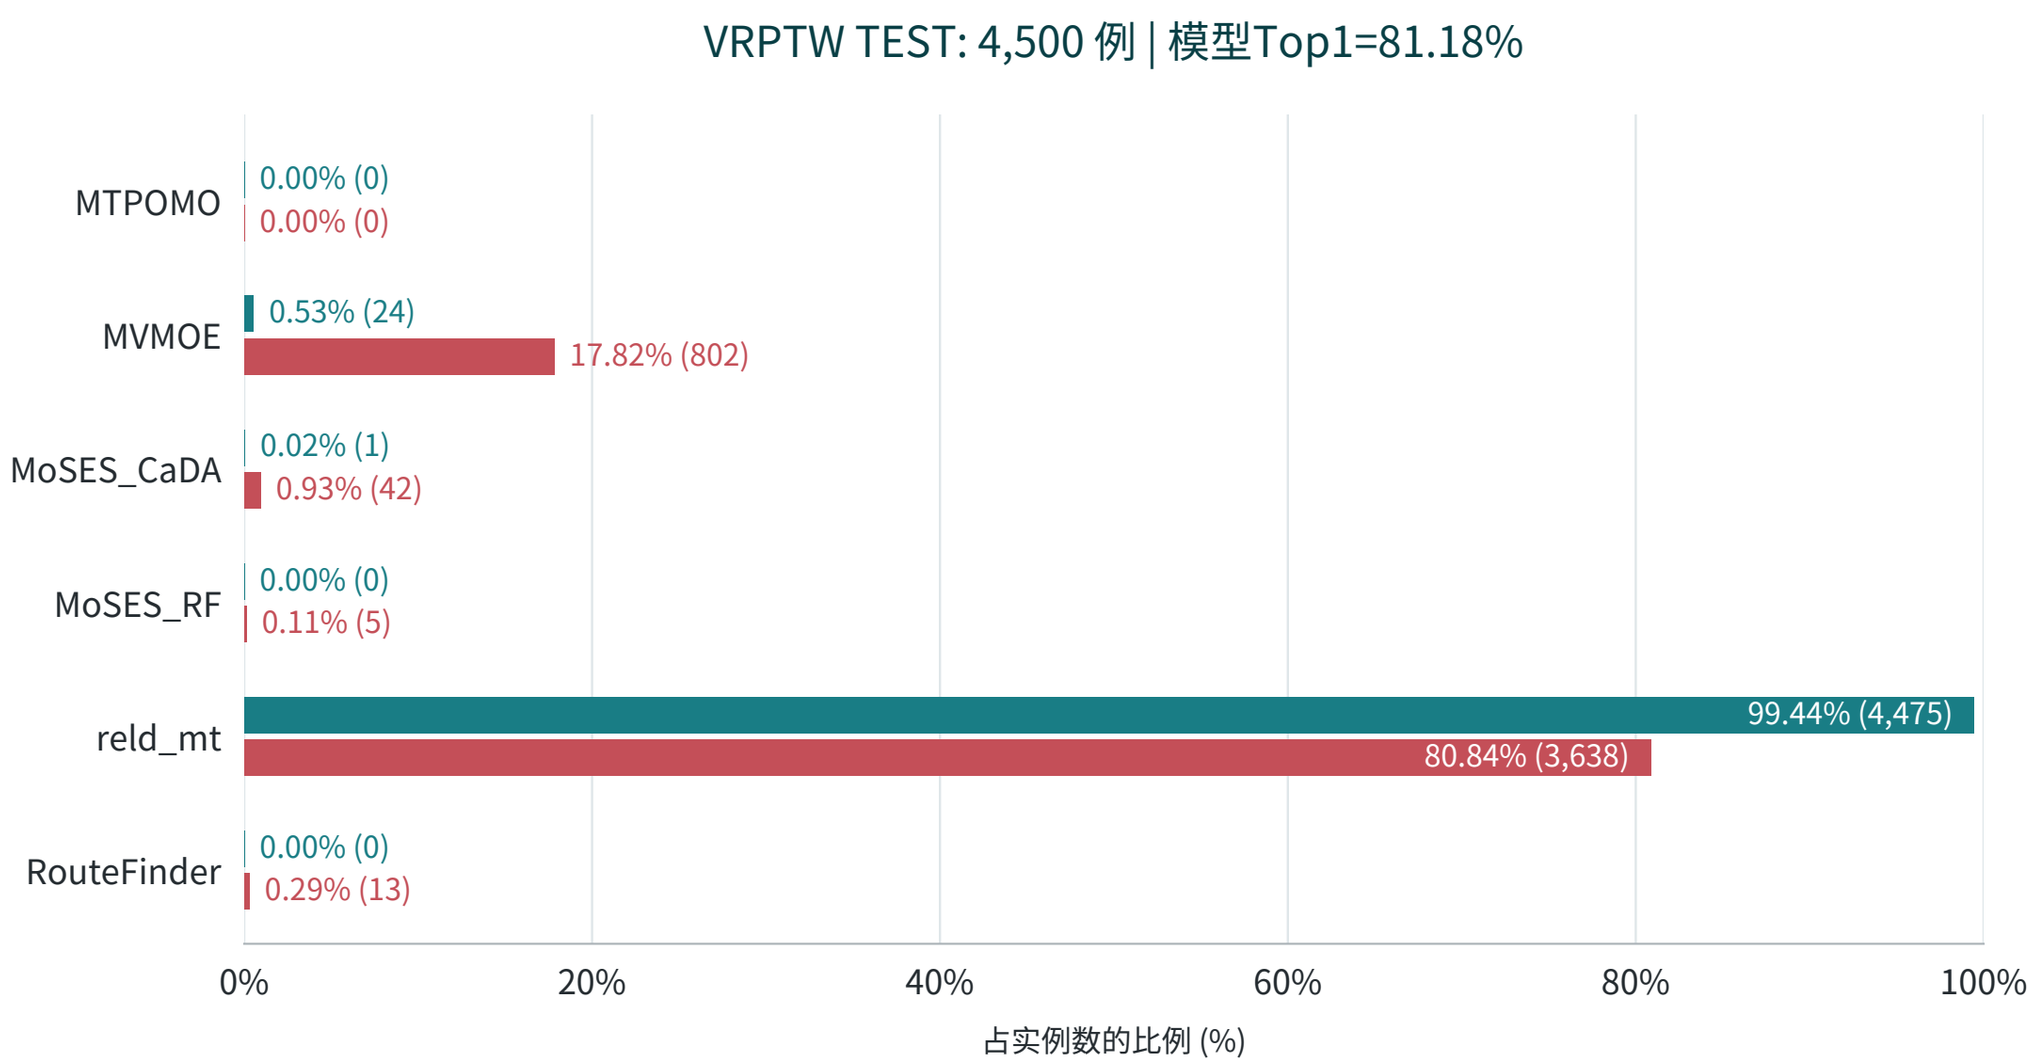

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

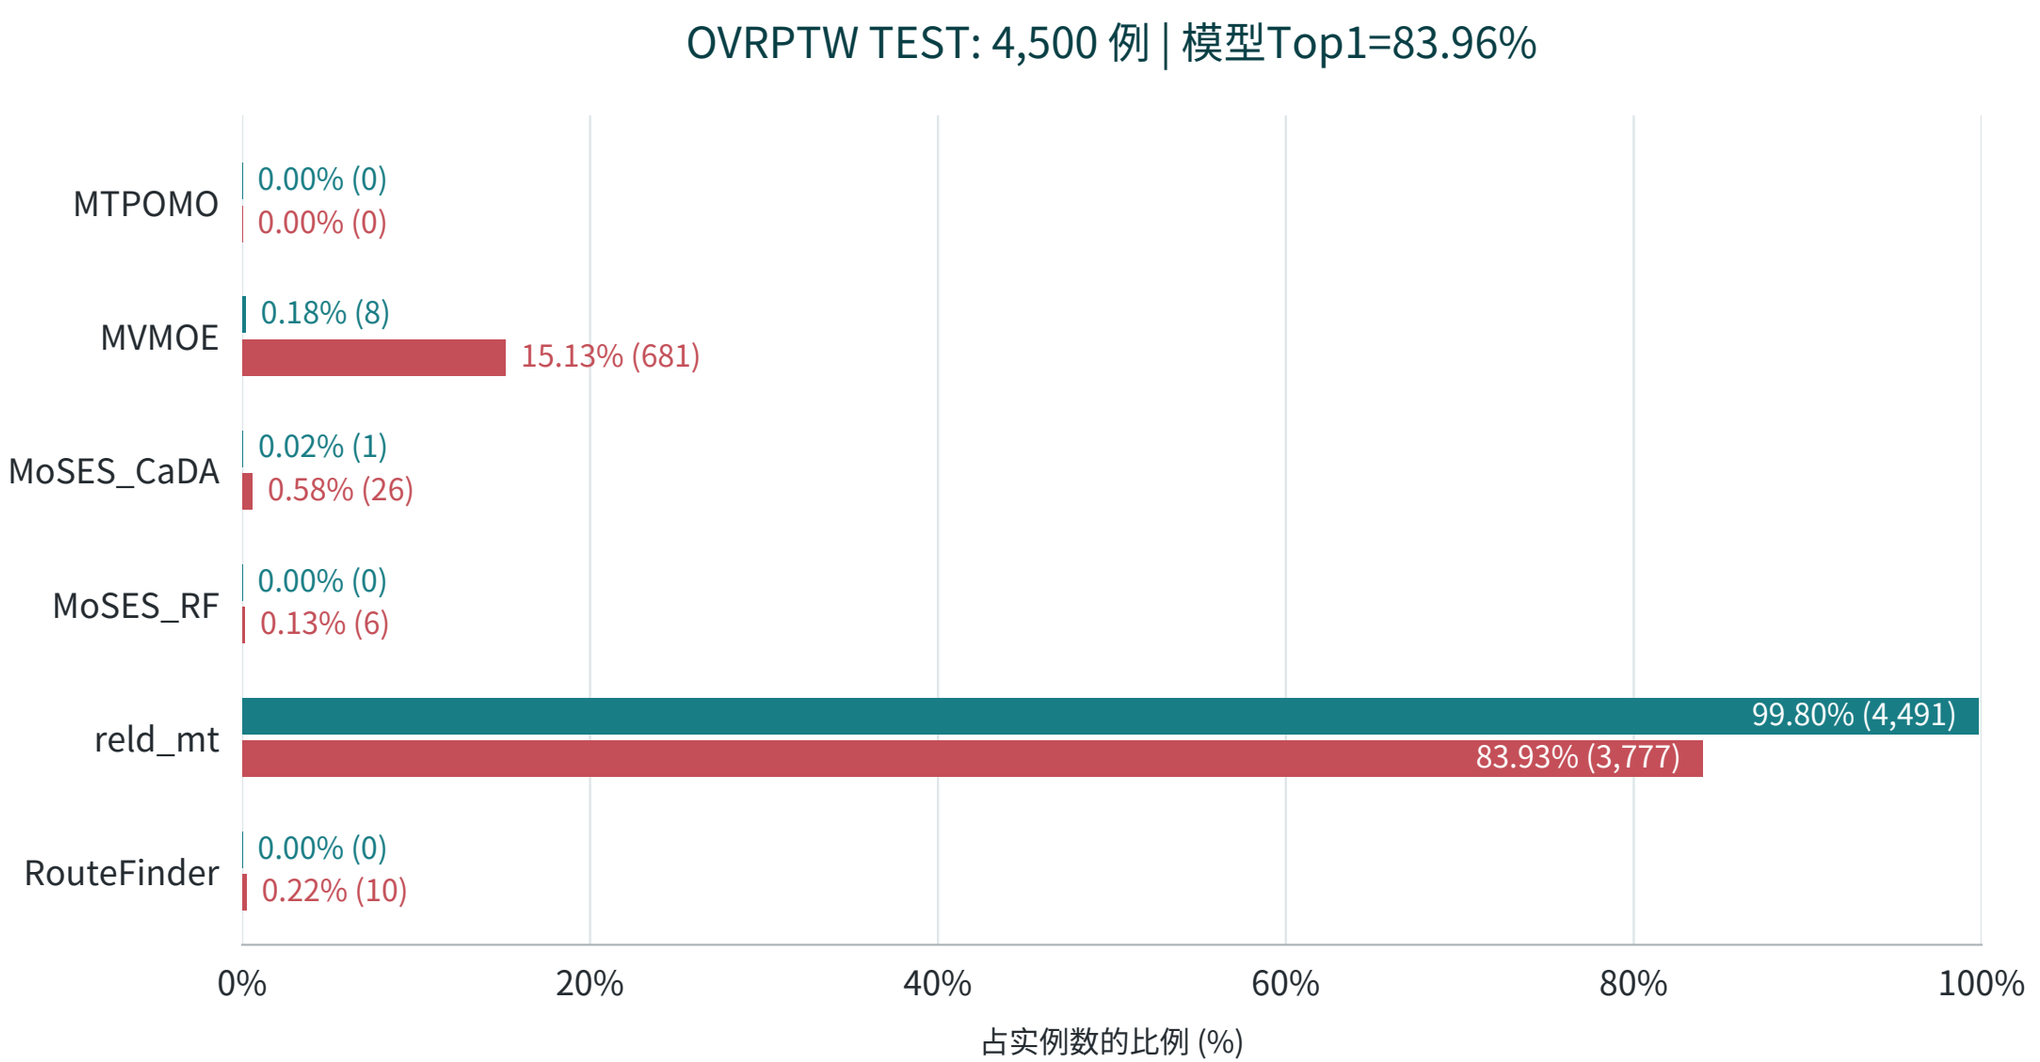

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPB | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

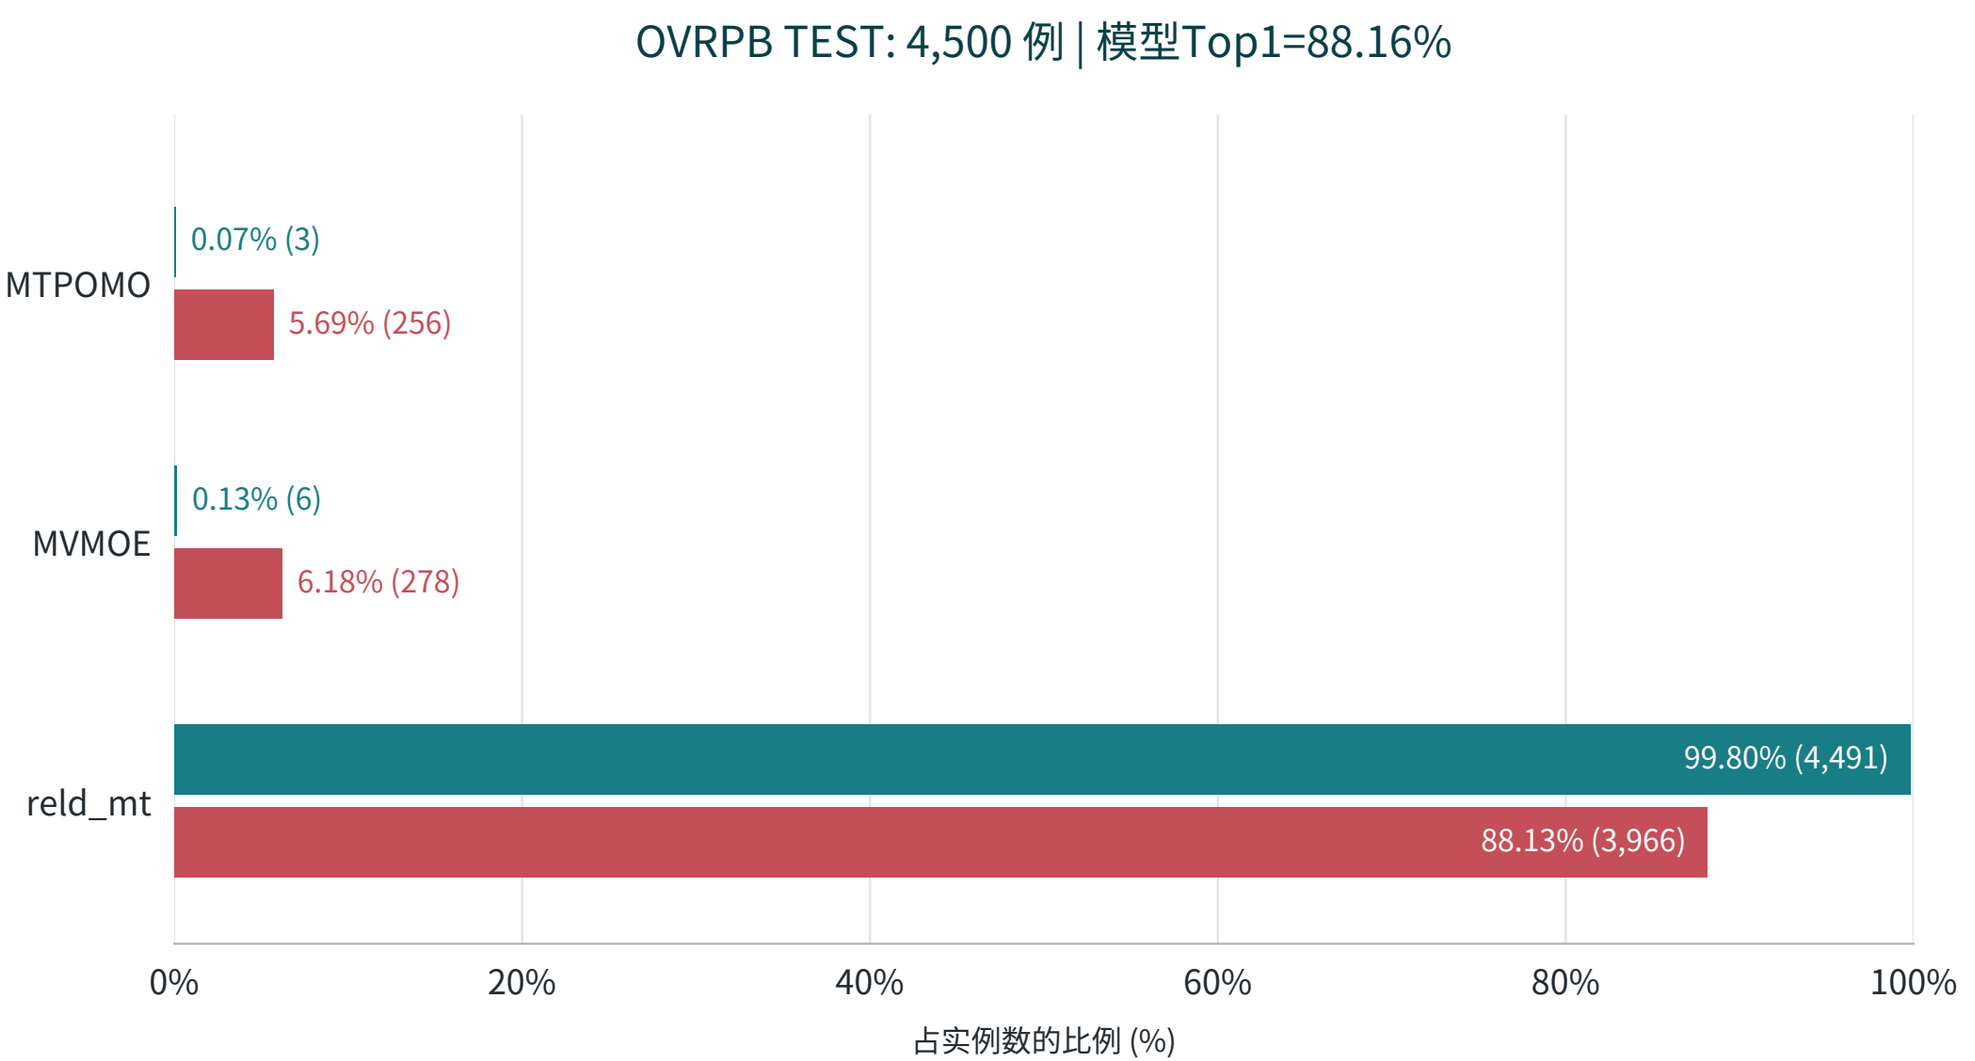

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

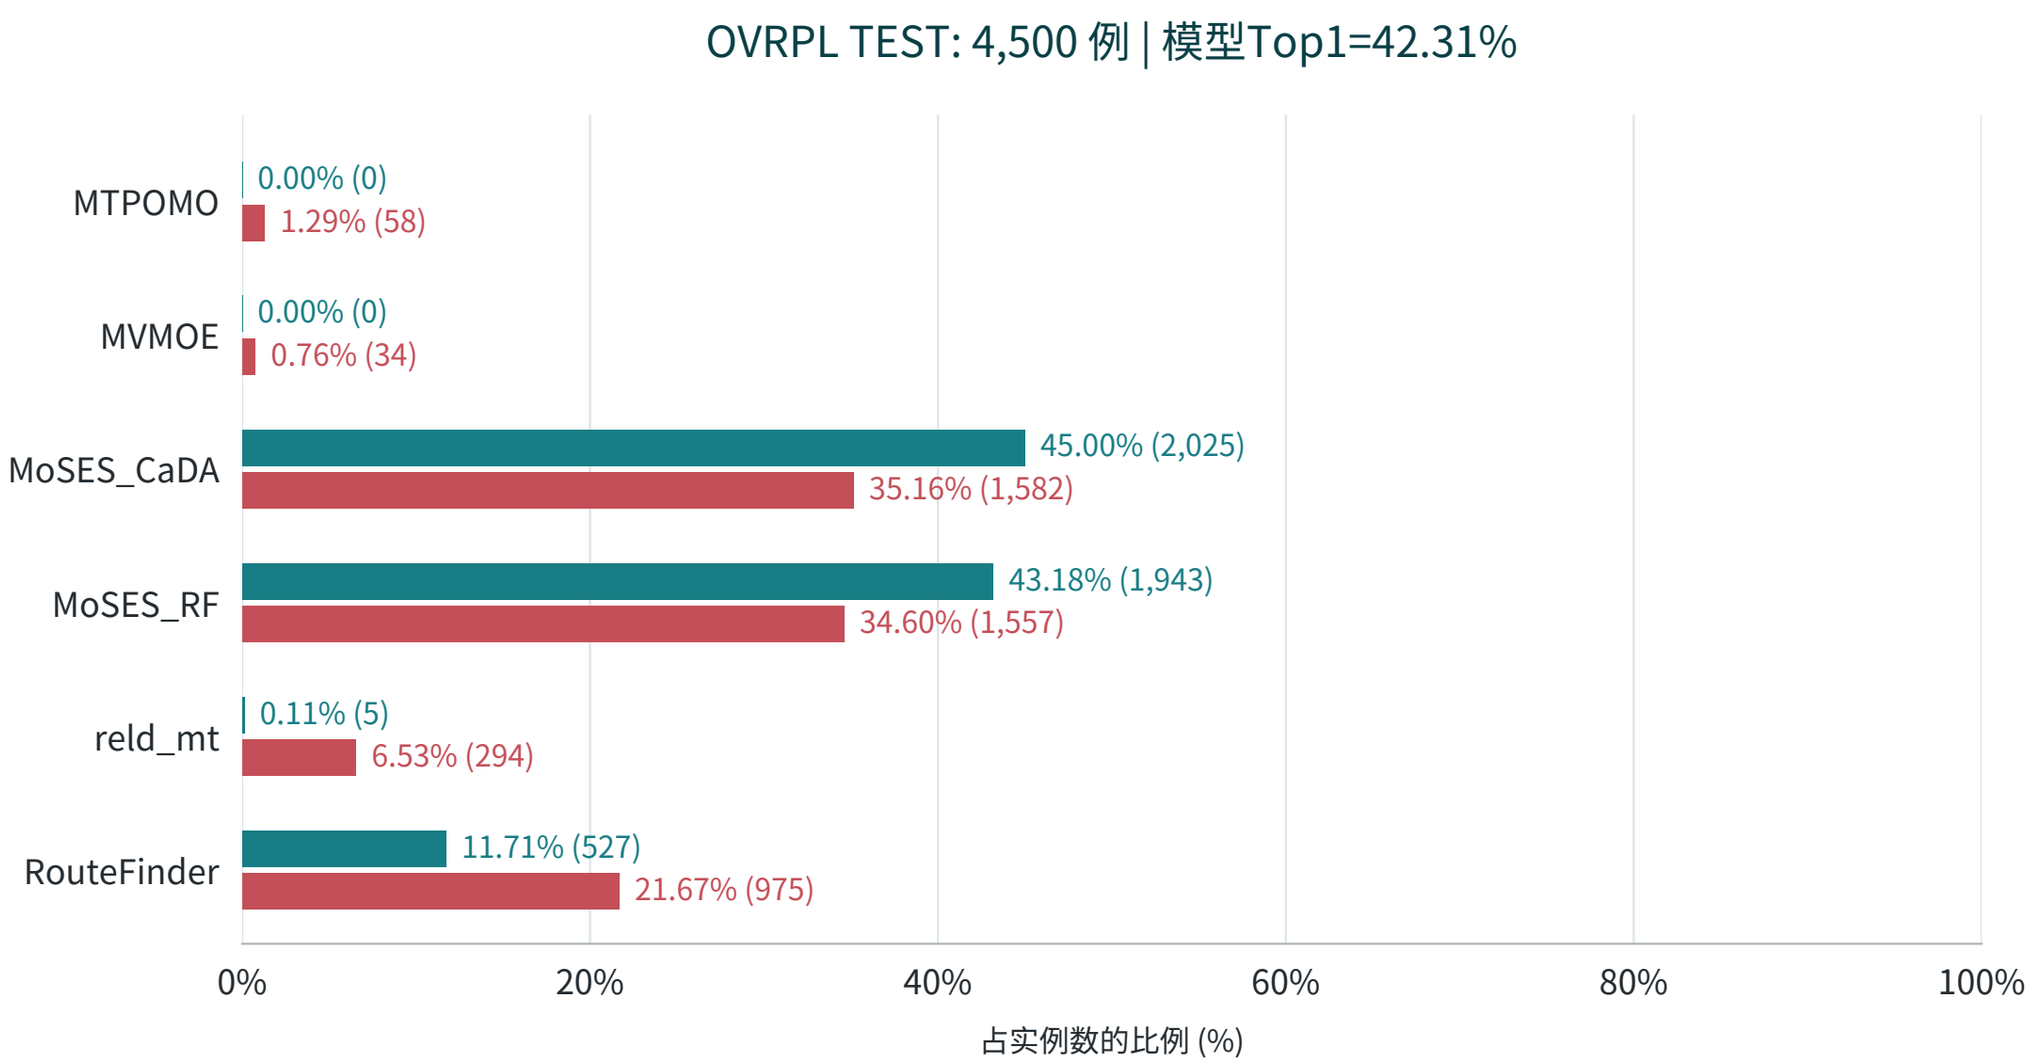

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPBL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

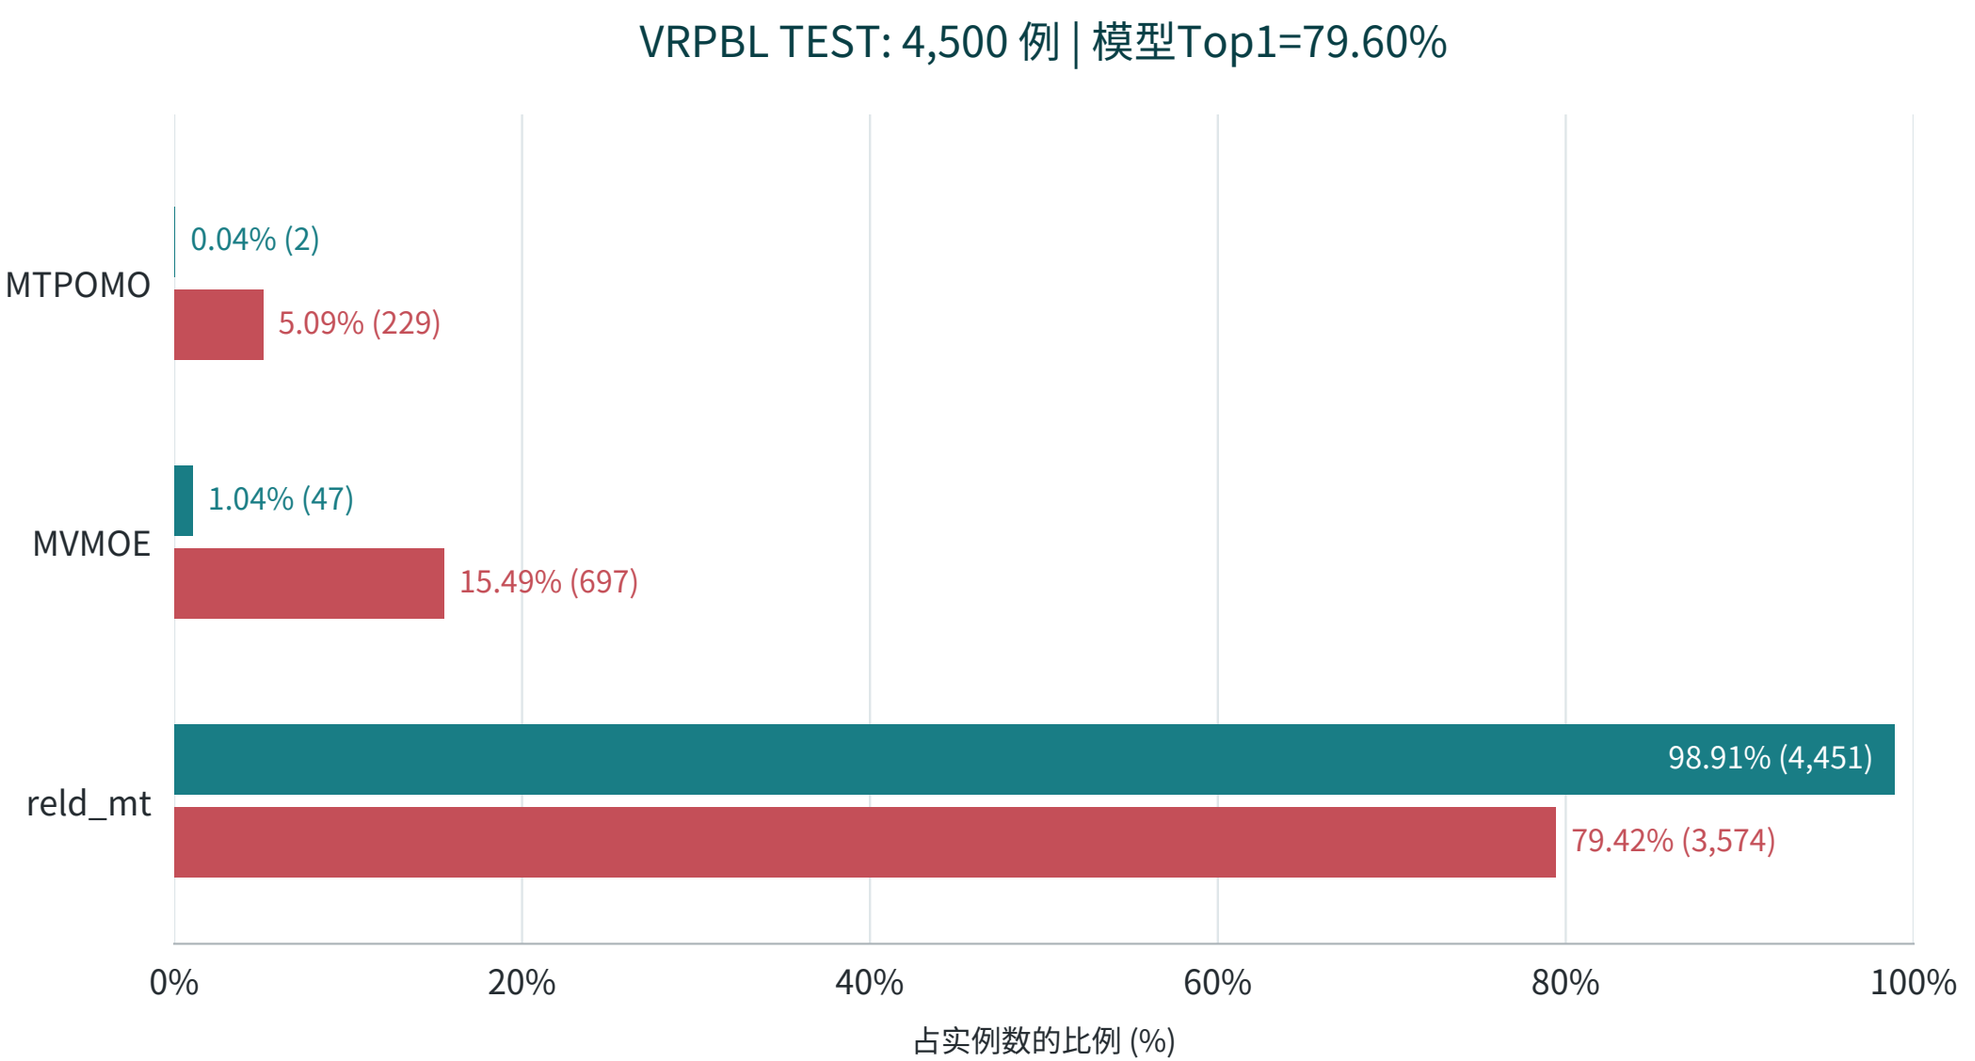

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPBTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

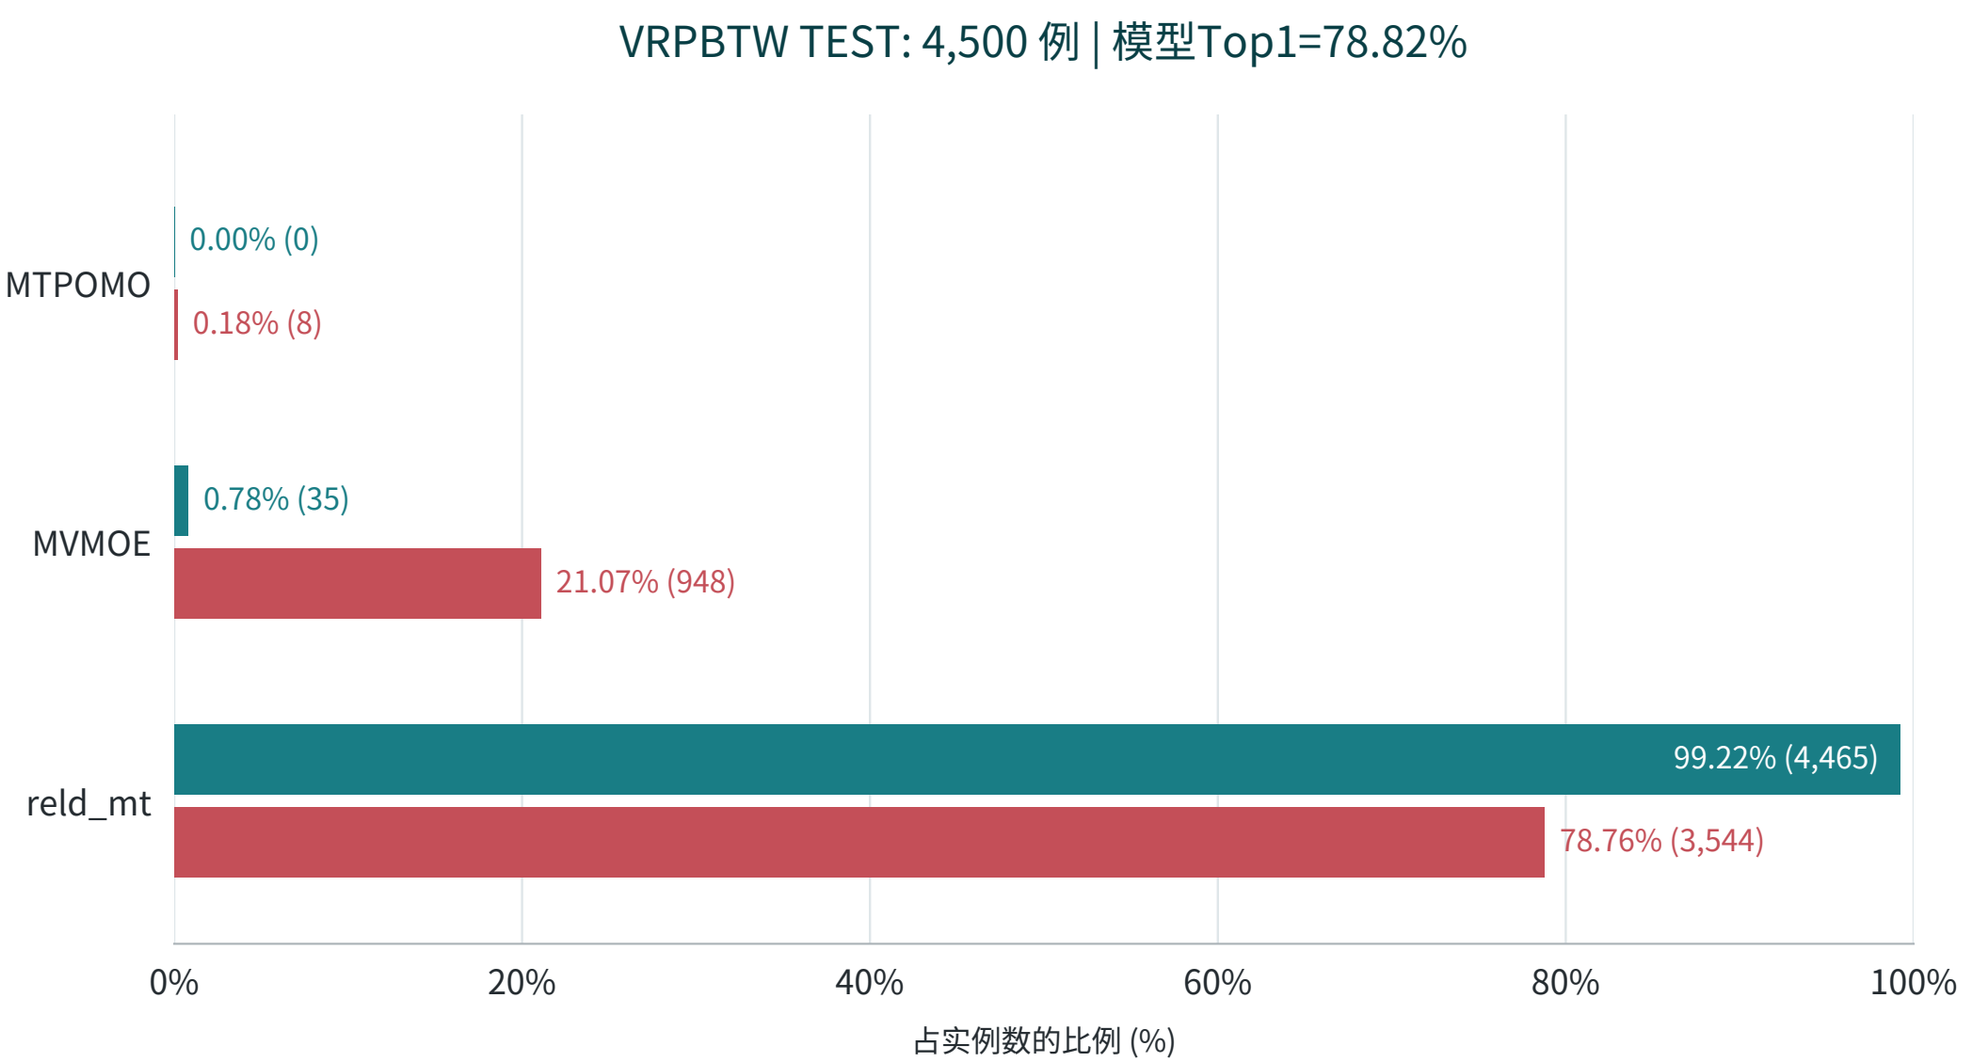

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

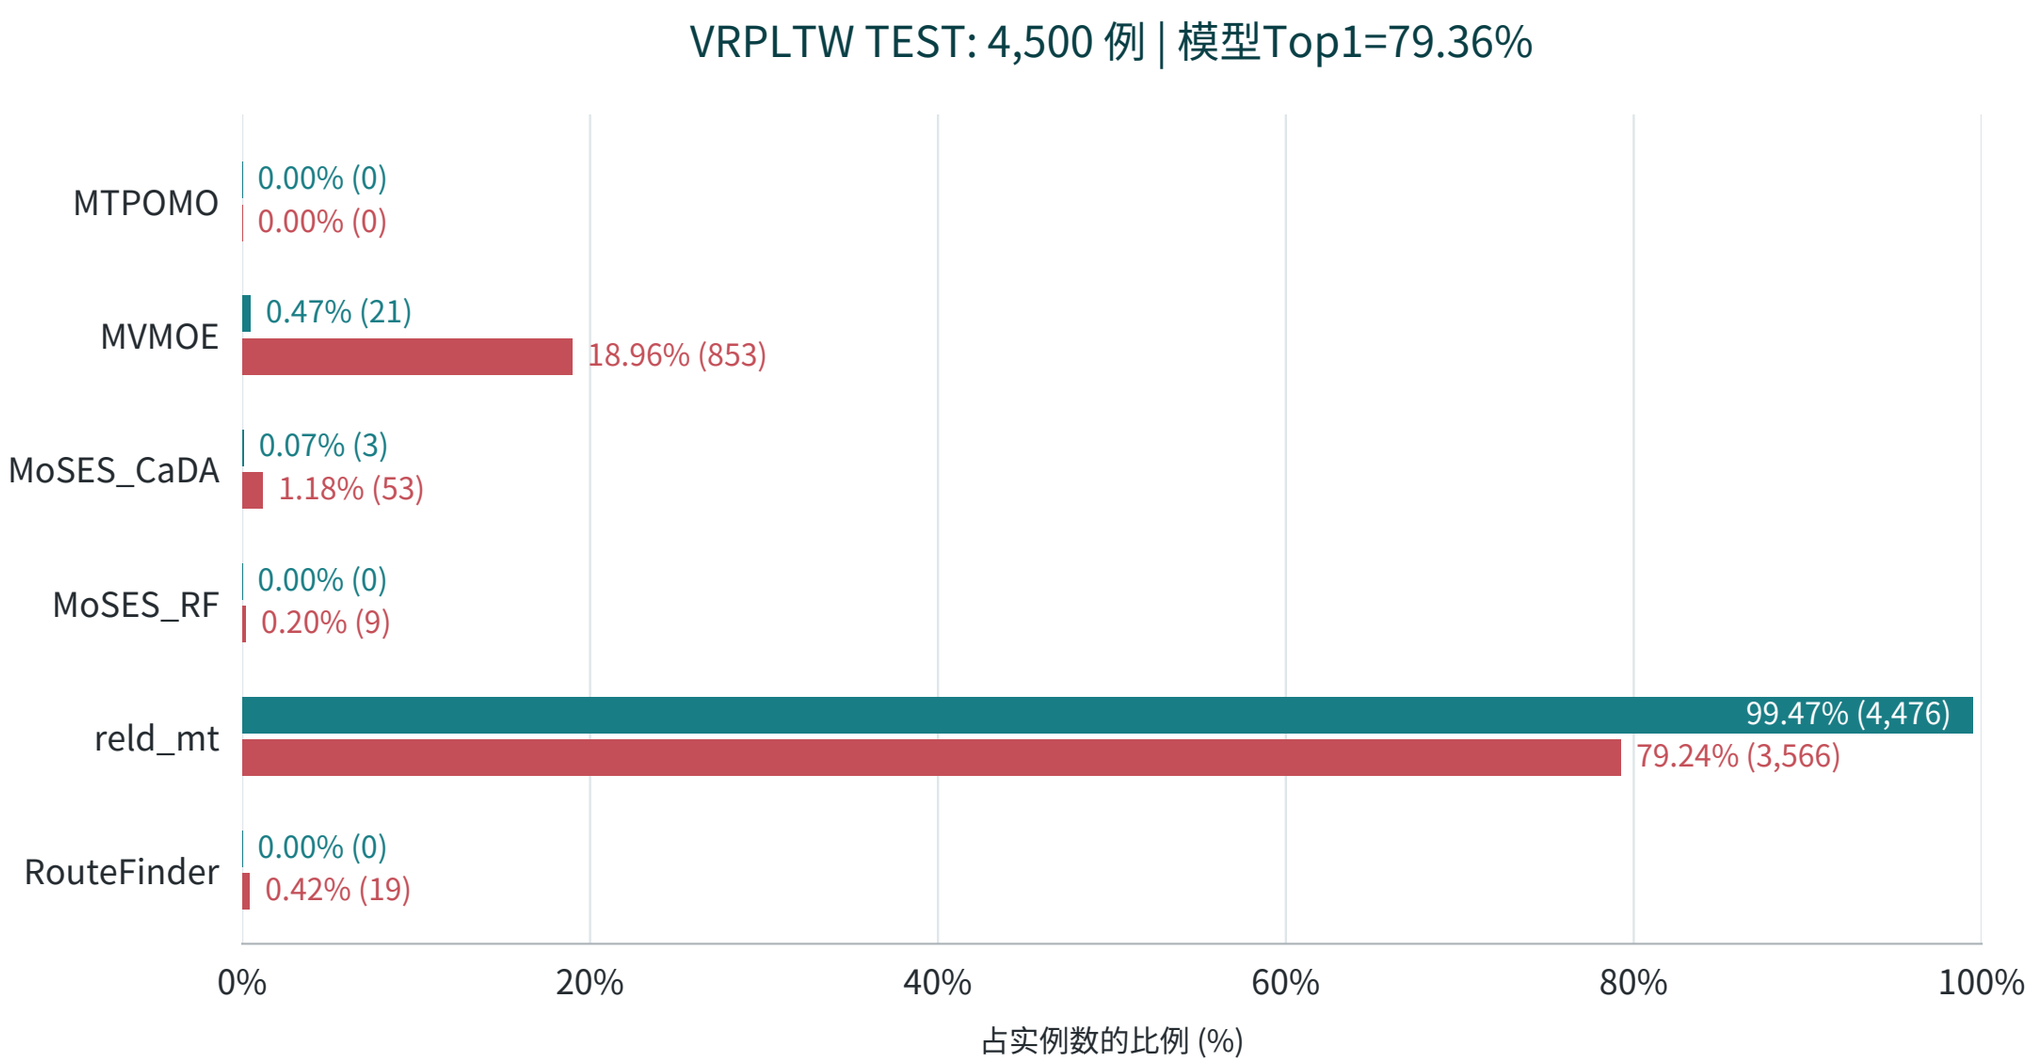

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPBL | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

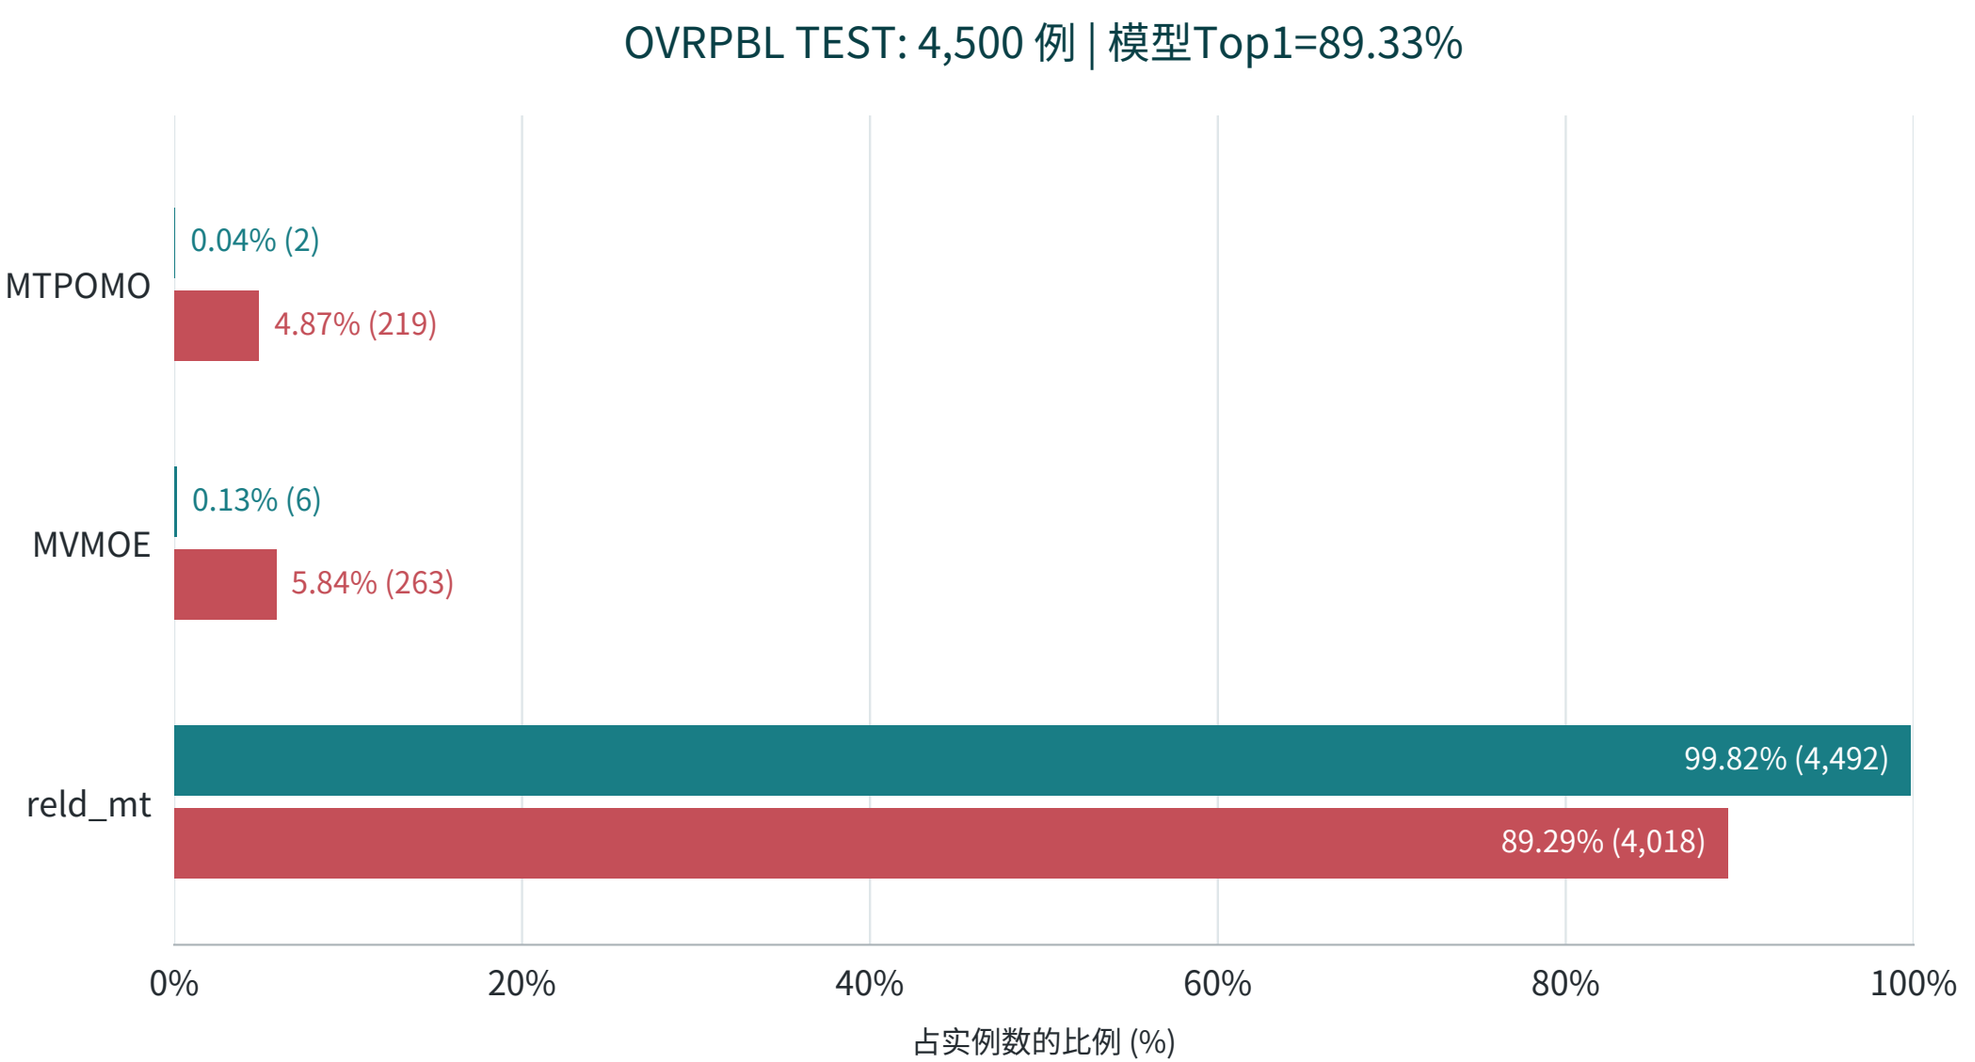

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPBTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

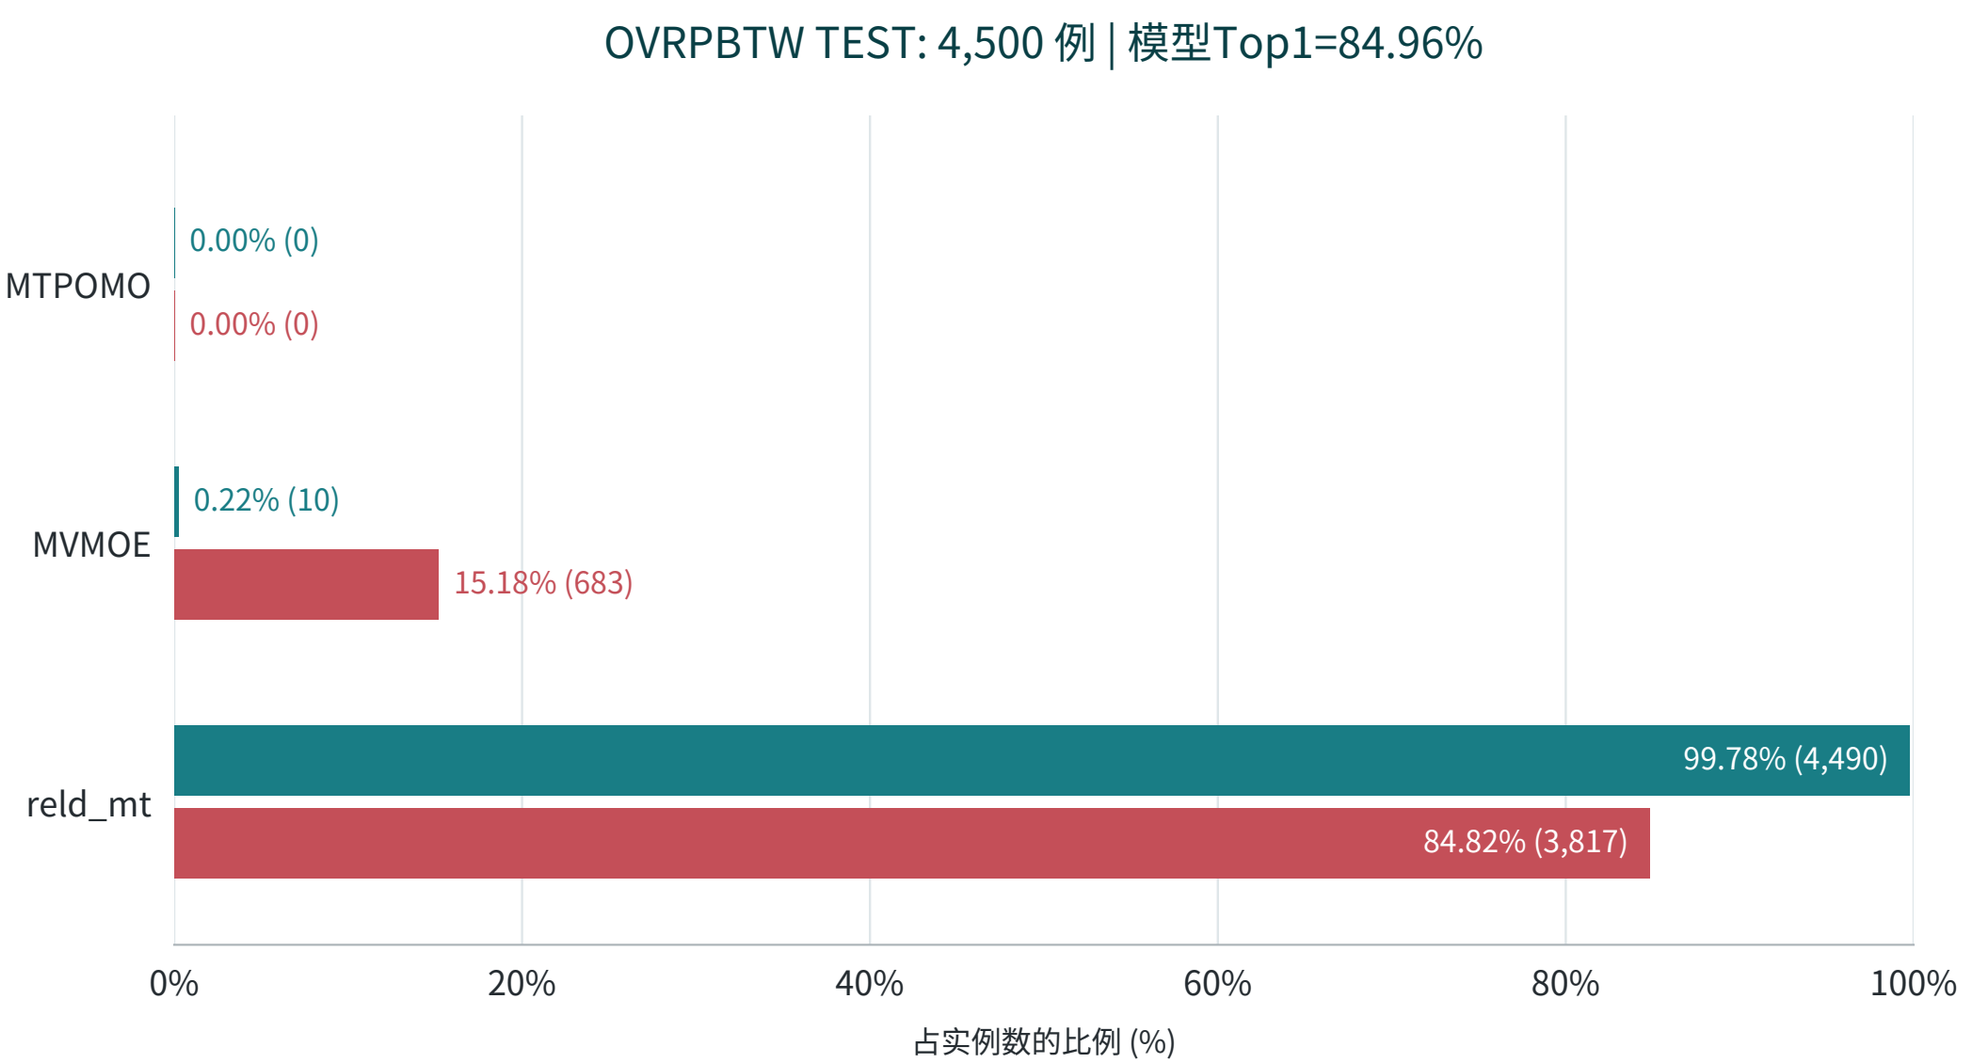

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

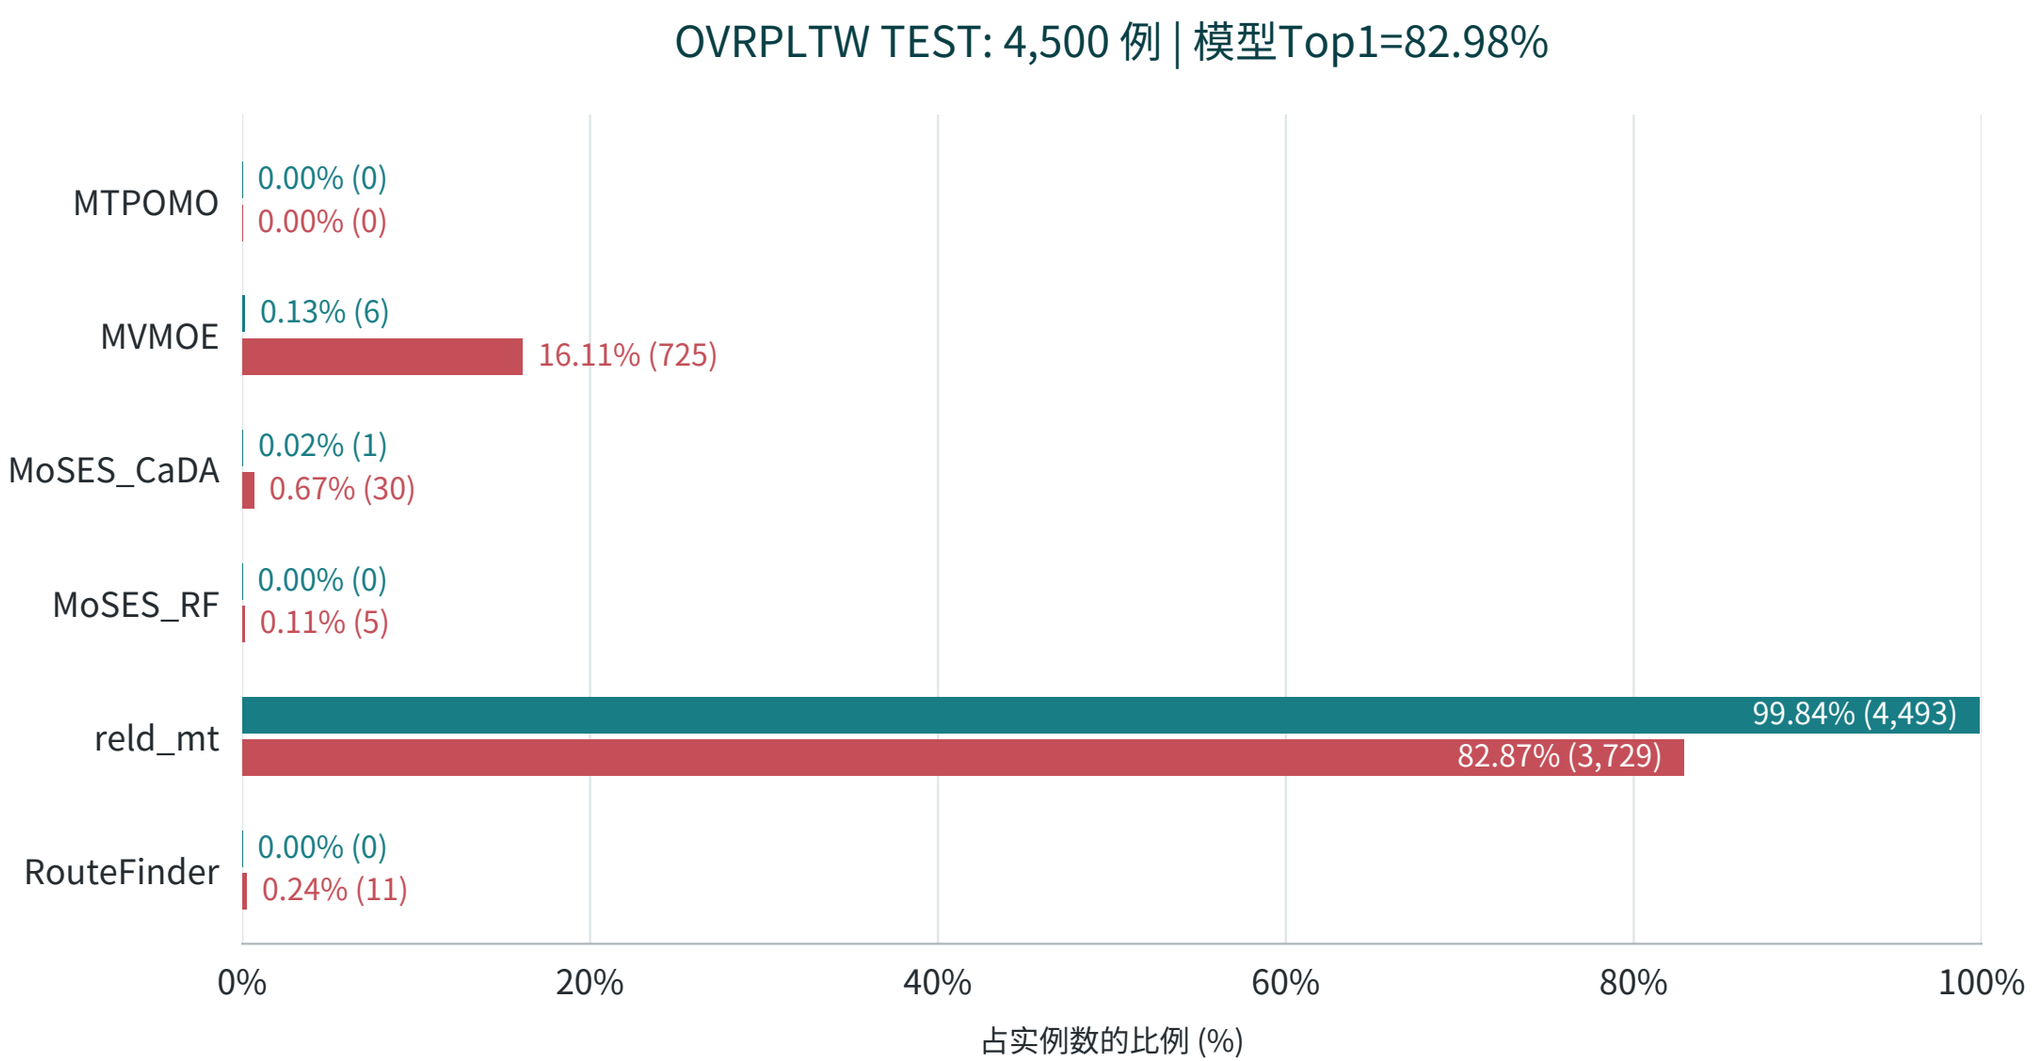

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | VRPBLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

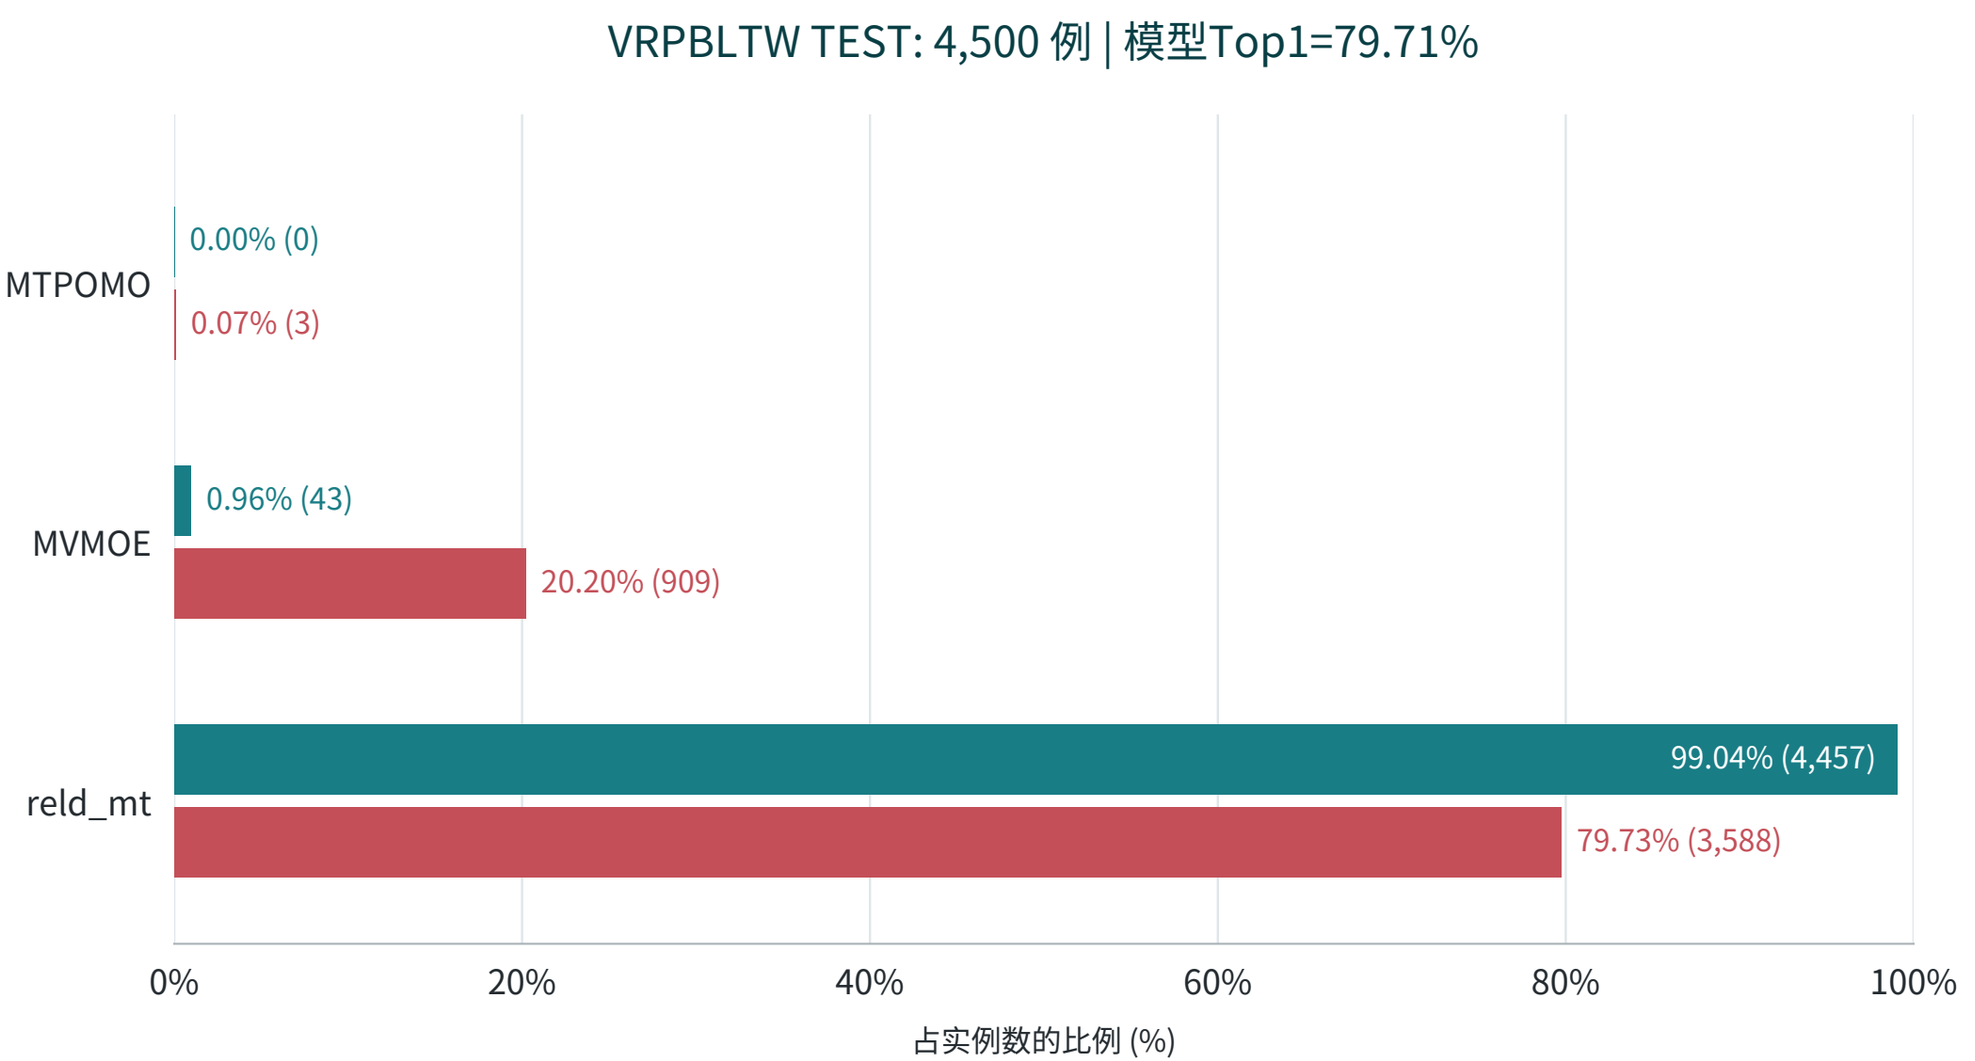

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.

R107/B_connected_paths | OVRPBLTW | 方法分布

同一锁定模型: epoch 27 / update 38880 / SHA256 81c17fe9b2d355e9

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

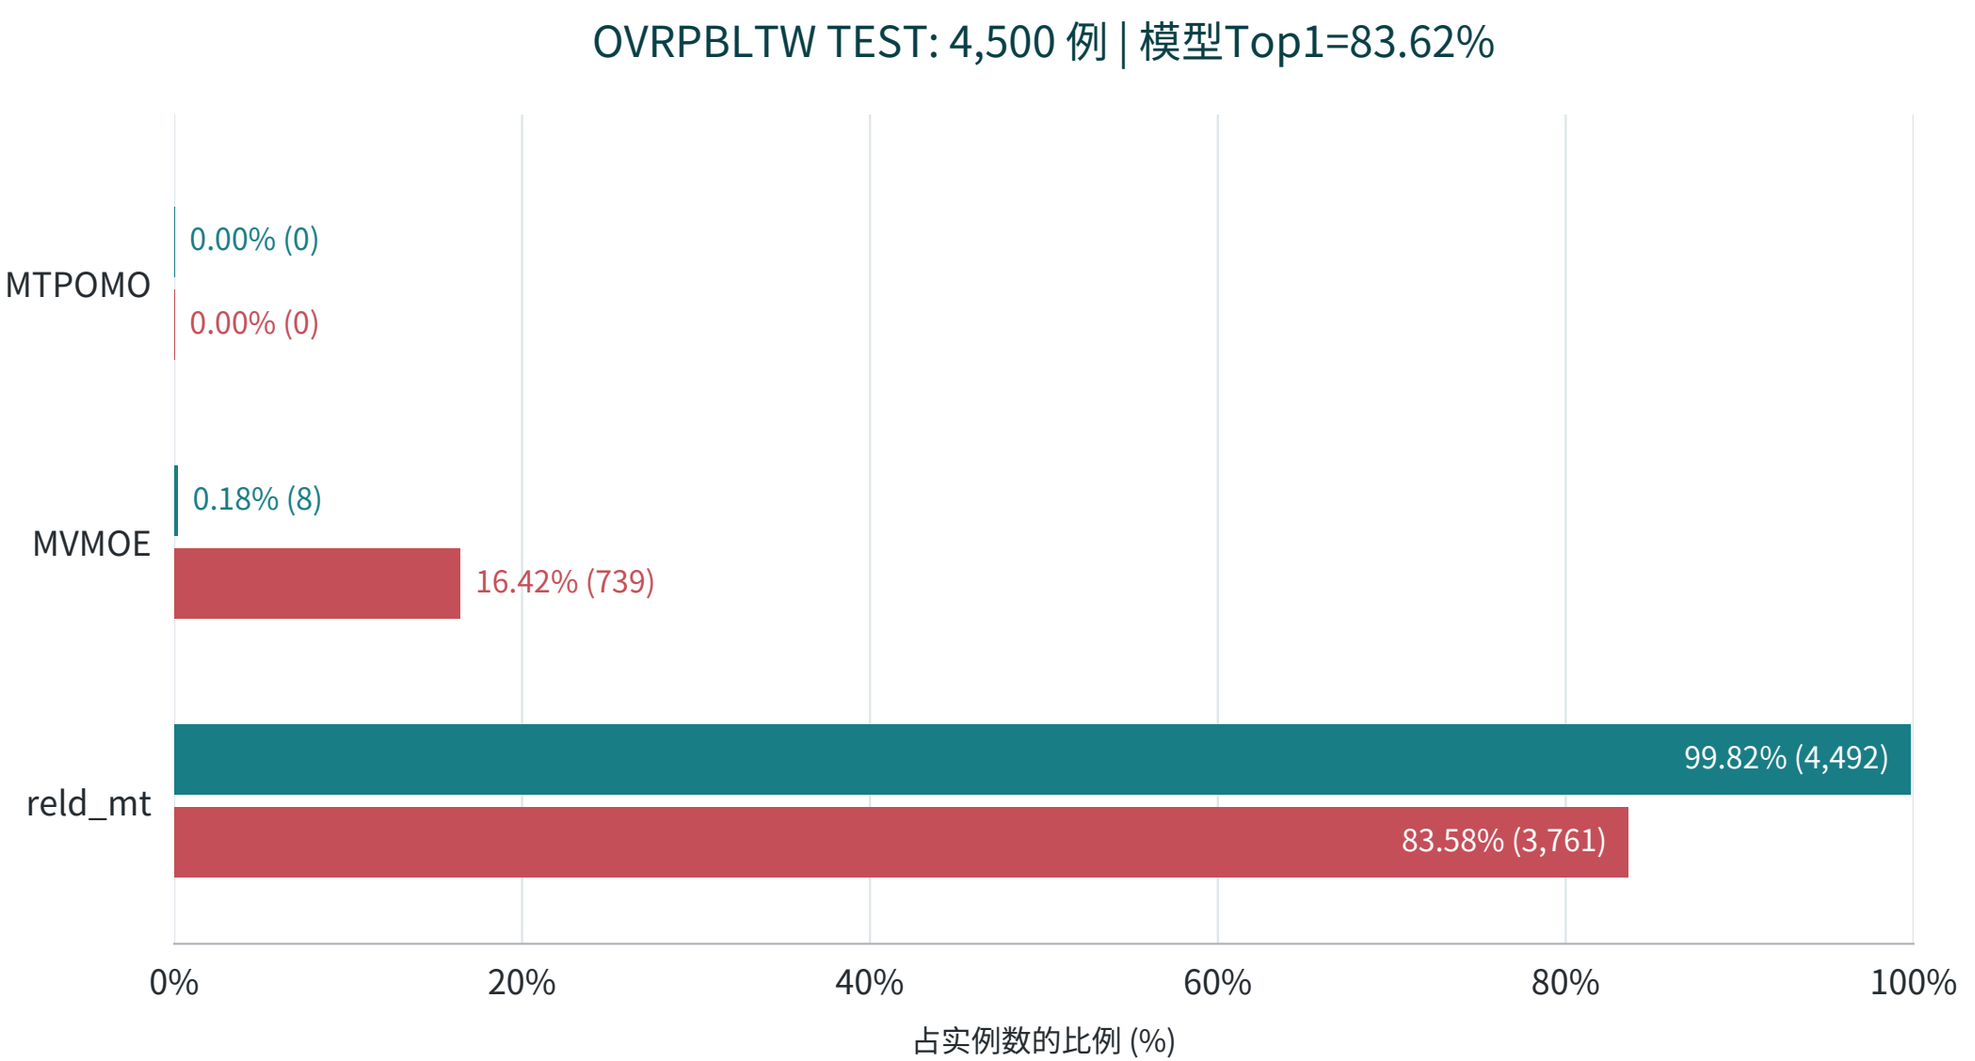

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R107/B_connected_paths: stable global solver-ID score ties. Same R107 lock; LIB inference only; no training/reselection/Rxx mixing.