R113/A_scratch | Locked full18 results

Unique VAL-selected checkpoint; native/FP64 ind; equal-problem ALL.

update 40320 | seed2 | parameters 1,659,453

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.9272	66.2037	11.417807	11.427978	11.371692	-0.1853	+0.4024	0.4134
TEST ALL	71.1642	66.1802	11.374716	11.385299	11.329932	-0.1902	+0.3931	0.4020

Dataset	n	NSS Top1 (%)	R113 Top1 (%)	NSS cost	R113 cost
TSP TEST	4500	45.888889	46.822222	7.970400719	7.972356008
CVRP TEST	4500	45.977778	46.777778	18.004802368	18.018577886
TSPLIB	49	20.408163	24.489796	8.217907074	8.209452473
CVRPLIB	100	70.000000	48.000000	67.101111717	67.599797297

NSS: saved R79 weights; no new training. Missing same-population/native references remain MISSING.

SBS: minimum mean cost on frozen81000 TRAIN; Oracle: per-instance legal-pool minimum.

ALL: equal problem weight; raw-cost average is descriptive, never a pooled optimization score.

TEST was development-exposed; only VAL chose this checkpoint. No per-problem assembly.

Distribution Top1 is instance accuracy, not the largest method frequency.

Same final recursive architecture; A scratch, B snapshots, C predicted transition pretraining.

Post-lock process diagnostics: COMPLETE; saved PDF/CSV/JSON included below.

R113/A_scratch | VAL: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	70.9272	66.2037	11.417807	11.427978	11.371692	-0.1853	+0.4024	0.4134	per-problem TRAIN SBS
TSP	46.1333	33.1111	8.025839	8.045354	7.990533	-0.2426	+0.4418	0.4312	T2T
CVRP	46.0667	18.7111	18.168150	18.269377	18.064087	-0.5541	+0.5761	0.7668	RELD_CVRP
ATSP	77.0667	47.4889	1.638757	1.676905	1.632471	-2.2749	+0.3851	0.3821	UNICO_MatPOENet
OVRP	40.5333	35.7556	7.462796	7.469579	7.415777	-0.0908	+0.6340	0.6493	MoSES_RF
VRPB	80.9111	80.8444	9.355259	9.354876	9.318750	+0.0041	+0.3918	0.4002	reld_mt
VRPL	37.6667	33.0889	12.432522	12.437959	12.383444	-0.0437	+0.3963	0.4047	MoSES_RF
VRPTW	80.0222	79.9556	18.818706	18.819431	18.766139	-0.0039	+0.2801	0.2963	reld_mt
OVRPTW	83.7778	83.7778	10.143920	10.143730	10.116859	+0.0019	+0.2675	0.2648	reld_mt
OVRPB	88.5111	88.5111	6.357254	6.357254	6.341078	+0.0000	+0.2551	0.2650	reld_mt
OVRPL	41.0444	35.9111	7.439167	7.445709	7.390416	-0.0879	+0.6597	0.6748	MoSES_RF
VRPBL	78.8667	78.5111	9.368634	9.371523	9.328366	-0.0308	+0.4317	0.4347	reld_mt
VRPBTW	78.4667	78.4222	19.949860	19.950430	19.851084	-0.0029	+0.4976	0.4757	reld_mt
VRPLTW	78.8000	78.7556	18.765198	18.765871	18.707843	-0.0036	+0.3066	0.3218	reld_mt
OVRPBL	89.2000	89.2000	6.370093	6.370093	6.352824	+0.0000	+0.2718	0.2836	reld_mt
OVRPBTW	83.4889	83.4444	10.660941	10.661098	10.623245	-0.0015	+0.3548	0.3291	reld_mt
OVRPLTW	83.4444	83.4889	10.157488	10.157423	10.129818	+0.0006	+0.2732	0.2761	reld_mt
VRPBLTW	79.4222	79.4000	19.796072	19.797044	19.706420	-0.0049	+0.4549	0.4428	reld_mt
OVRPBLTW	83.2667	83.2889	10.609877	10.609955	10.571302	-0.0007	+0.3649	0.3426	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/A_scratch | TEST: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1642	66.1802	11.374716	11.385299	11.329932	-0.1902	+0.3931	0.4020	per-problem TRAIN SBS
TSP	46.8222	34.5333	7.972356	7.989621	7.937593	-0.2161	+0.4379	0.4299	T2T
CVRP	46.7778	17.9333	18.018578	18.124983	17.918509	-0.5871	+0.5585	0.7281	RELD_CVRP
ATSP	76.8000	47.2444	1.635377	1.674207	1.629441	-2.3193	+0.3643	0.3640	UNICO_MatPOENet
OVRP	40.2667	33.6444	7.447659	7.455750	7.400487	-0.1085	+0.6374	0.6501	MoSES_RF
VRPB	80.6000	80.4000	9.350486	9.351810	9.315298	-0.0142	+0.3777	0.3802	reld_mt
VRPL	37.9111	32.2667	12.349939	12.356138	12.300958	-0.0502	+0.3982	0.4081	MoSES_RF
VRPTW	80.9333	80.8444	18.689677	18.690545	18.637408	-0.0046	+0.2805	0.2924	reld_mt
OVRPTW	83.9333	83.9333	10.093063	10.093063	10.068135	+0.0000	+0.2476	0.2385	reld_mt
OVRPB	88.1333	88.1333	6.370826	6.370826	6.352225	+0.0000	+0.2928	0.3014	reld_mt
OVRPL	40.5111	34.6000	7.465732	7.472542	7.418033	-0.0911	+0.6430	0.6517	MoSES_RF
VRPBL	79.5556	79.4222	9.395548	9.396379	9.355967	-0.0088	+0.4231	0.4263	reld_mt
VRPBTW	78.9111	78.7556	19.664458	19.665725	19.577666	-0.0064	+0.4433	0.4394	reld_mt
VRPLTW	79.2889	79.2444	18.802732	18.803136	18.745143	-0.0021	+0.3072	0.3218	reld_mt
OVRPBL	89.3111	89.2889	6.375636	6.375741	6.359310	-0.0016	+0.2567	0.2679	reld_mt
OVRPBTW	84.8000	84.8222	10.659602	10.659591	10.624748	+0.0001	+0.3280	0.3001	reld_mt
OVRPLTW	82.9333	82.8667	10.085761	10.086112	10.059001	-0.0035	+0.2660	0.2666	reld_mt
VRPBLTW	79.8444	79.7333	19.705408	19.707068	19.613284	-0.0084	+0.4697	0.4499	reld_mt
OVRPBLTW	83.6222	83.5778	10.662042	10.662149	10.625574	-0.0010	+0.3432	0.3205	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/A_scratch | LIB and provenance

Same checkpoint; no LIB selection or solver execution.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	24.4898	10.2041	8.209452	8.240435	8.142167	-0.3760	+0.8264	0.8774
CVRPLIB	48.0000	45.0000	67.599797	67.245364	66.945093	+0.5271	+0.9780	0.8352

Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b

VAL rule: maximum macroTop1; exact ties minimum actual regret; then first.

Selector:512 x57600 successful updates; AdamW1e-4 to1e-6; warmup4320.

Pretraining B/C:512 x8640; AdamW3e-4 to1e-5; warmup432; same targets/order.

All deployment: self-initialized predicted-state feedback, transition mode.

Candidates read global/node trajectory and final directed edge-state tokens.

Raw two-layer stem enters processor context only; no old-score bypass.

Fresh state SHA256: 95791a650b09425f0c1cfc362d50565a38b4ae45752f004cfec100bdbc41db14

R113/A_scratch | Post-lock VAL process: overview

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Scalar NMSE	Binary acc	Pointer acc	Directed acc	Reached acc	Frontier acc
TSP	11.4741	N/A	0.0408	0.6105	0.4905	0.5771
CVRP	19.1734	0.2244	0.0121	0.9475	0.5114	0.3223
ATSP	20.2606	N/A	0.1347	0.0000	0.5460	0.4842
OVRP	10.8506	0.2344	0.0920	0.2767	0.5486	0.8497
VRPB	9.1671	0.4578	0.0929	0.6044	0.4614	0.7001
VRPL	8.9540	0.2759	0.0957	0.6064	0.5566	0.7079
VRPTW	7.9957	0.3755	0.1040	0.4540	0.4455	0.8434
OVRPTW	6.7862	0.4512	0.1040	0.4186	0.5748	0.5083
OVRPB	8.9840	0.4530	0.0936	0.4101	0.5112	0.5053
OVRPL	12.6759	0.3414	0.0799	0.4356	0.5522	0.7924
VRPBL	7.3260	0.4224	0.0571	0.5701	0.5058	0.5109
VRPBTW	8.0995	0.4129	0.1076	0.4283	0.5131	0.8710
VRPLTW	7.9348	0.3629	0.1017	0.4341	0.5279	0.7045
OVRPBL	9.7345	0.4043	0.0862	0.5078	0.5207	0.4750
OVRPBTW	8.6602	0.5519	0.0450	0.4996	0.6000	0.5894
OVRPLTW	8.0518	0.3995	0.0953	0.4165	0.6057	0.5731
VRPBLTW	9.5095	0.4711	0.1010	0.4513	0.5193	0.8493
OVRPBLTW	7.5088	0.4572	0.0777	0.4678	0.6363	0.6760

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/A_scratch | Post-lock VAL process: binary

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	0	N/A	N/A	N/A	N/A	0
CVRP	1484	0.2244	0.9934	0.2065	0.0243	1448
ATSP	0	N/A	N/A	N/A	N/A	0
OVRP	1152	0.2344	0.9461	0.1814	0.0764	1064
VRPB	2905	0.4578	0.6896	0.4572	0.2757	2104
VRPL	1725	0.2759	0.8910	0.2129	0.1096	1536
VRPTW	1731	0.3755	0.8356	0.0540	0.3472	1130
OVRPTW	1731	0.4512	0.6657	0.3750	0.3252	1168
OVRPB	2885	0.4530	0.7677	0.3979	0.2430	2184
OVRPL	1728	0.3414	0.9272	0.3056	0.0833	1584
VRPBL	3468	0.4224	0.7376	0.3674	0.2434	2624
VRPBTW	3456	0.4129	0.5617	0.2759	0.3750	2160
VRPLTW	2320	0.3629	0.5374	0.2621	0.3388	1534
OVRPBL	3480	0.4043	0.6860	0.3431	0.2681	2547
OVRPBTW	3468	0.5519	0.8331	0.3273	0.3930	2105
OVRPLTW	2308	0.3995	0.6256	0.3439	0.3033	1608
VRPBLTW	4018	0.4711	0.7597	0.2714	0.3507	2609
OVRPBLTW	4053	0.4572	0.7019	0.2853	0.3506	2632

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/A_scratch | Post-lock VAL process: compatible

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	90942	0.6105	1.0000	0.6105	0.0000	90942
CVRP	93000	0.9475	1.0000	0.9475	0.0000	93000
ATSP	25138	0.0000	N/A	0.0000	0.0000	25138
OVRP	42616	0.2767	1.0000	0.2767	0.0000	42616
VRPB	87440	0.6044	0.9163	0.6268	0.0809	80370
VRPL	42312	0.6064	1.0000	0.6064	0.0000	42312
VRPTW	42764	0.4540	0.4474	0.8012	0.5406	19647
OVRPTW	42816	0.4186	0.4037	0.8225	0.5825	17877
OVRPB	85736	0.4101	0.8725	0.4243	0.0750	79306
OVRPL	42564	0.4356	1.0000	0.4356	0.0000	42564
VRPBL	86032	0.5701	0.9251	0.5810	0.0776	79358
VRPBTW	85128	0.4283	0.3769	0.6528	0.5993	34113
VRPLTW	43520	0.4341	0.4246	0.9149	0.5730	18584
OVRPBL	87144	0.5078	0.8831	0.5315	0.0867	79592
OVRPBTW	86136	0.4996	0.4000	0.5757	0.6114	33471
OVRPLTW	42816	0.4165	0.4001	0.8493	0.5903	17541
VRPBLTW	84328	0.4513	0.3897	0.6839	0.6045	33352
OVRPBLTW	86536	0.4678	0.3606	0.5856	0.6337	31699

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/A_scratch | Post-lock VAL process: reached

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.4905	0.4594	0.4830	0.5306	4004
CVRP	8662	0.5114	0.4939	0.3074	0.5151	4200
ATSP	3645	0.5460	0.6593	0.6425	0.3416	2400
OVRP	5228	0.5486	0.5486	1.0000	0.4514	2868
VRPB	10634	0.4614	0.4651	0.9708	0.5299	4999
VRPL	5207	0.5566	0.5652	0.9554	0.4312	2962
VRPTW	5243	0.4455	0.4201	0.7995	0.5749	2229
OVRPTW	5245	0.5748	0.5168	0.2110	0.5689	2261
OVRPB	10494	0.5112	0.4996	0.6546	0.5117	5124
OVRPL	5226	0.5522	0.5699	0.8884	0.4275	2992
VRPBL	10524	0.5058	0.4944	0.6121	0.5125	5130
VRPBTW	10452	0.5131	0.4352	0.6320	0.5902	4283
VRPLTW	5300	0.5279	0.4659	0.4480	0.5570	2348
OVRPBL	10604	0.5207	0.5013	0.3866	0.5197	5093
OVRPBTW	10528	0.6000	0.3474	0.1604	0.6494	3691
OVRPLTW	5245	0.6057	N/A	0.0000	0.6057	2068
VRPBLTW	10384	0.5193	0.4036	0.5846	0.6242	3902
OVRPBLTW	10562	0.6363	0.7008	0.0229	0.6315	3892

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/A_scratch | Post-lock VAL process: frontier

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.5771	0.0369	0.4119	0.9627	318
CVRP	8662	0.3223	0.0383	0.6928	0.9617	332
ATSP	3645	0.4842	0.0693	0.4657	0.9240	277
OVRP	5228	0.8497	0.0534	0.1056	0.9457	284
VRPB	10634	0.7001	0.0417	0.2661	0.9562	466
VRPL	5207	0.7079	0.0525	0.2457	0.9437	293
VRPTW	5243	0.8434	0.0271	0.0928	0.9630	194
OVRPTW	5245	0.5083	0.0337	0.4300	0.9619	200
OVRPB	10494	0.5053	0.0474	0.5157	0.9544	479
OVRPL	5226	0.7924	0.0605	0.1800	0.9426	300
VRPBL	10524	0.5109	0.0465	0.4938	0.9540	484
VRPBTW	10452	0.8710	0.0362	0.1019	0.9643	373
VRPLTW	5300	0.7045	0.0368	0.2621	0.9611	206
OVRPBL	10604	0.4750	0.0467	0.5470	0.9548	479
OVRPBTW	10528	0.5894	0.0303	0.4483	0.9725	290
OVRPLTW	5245	0.5731	0.0360	0.4545	0.9664	176
VRPBLTW	10384	0.8493	0.0260	0.1049	0.9688	324
OVRPBLTW	10562	0.6760	0.0309	0.3178	0.9696	321


No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: 7bbe2d341261c17d03966ac75af91764d0dceacc1aac6d794f8024aa8619596b
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json


R113/A_scratch | TSP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

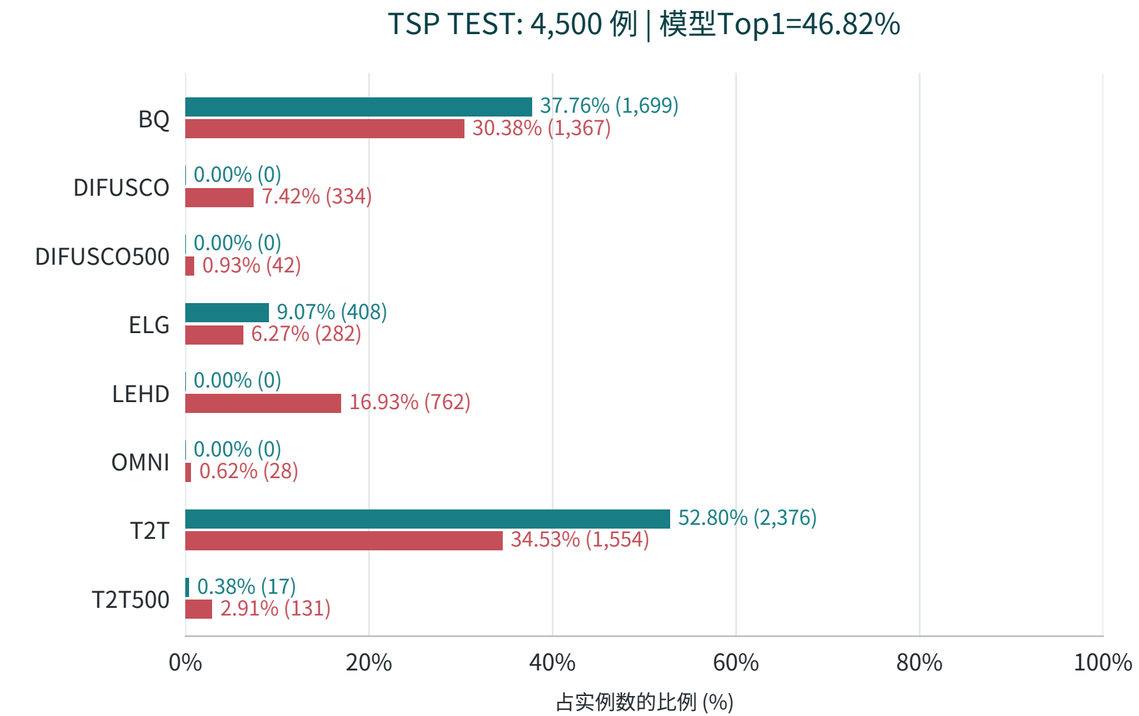

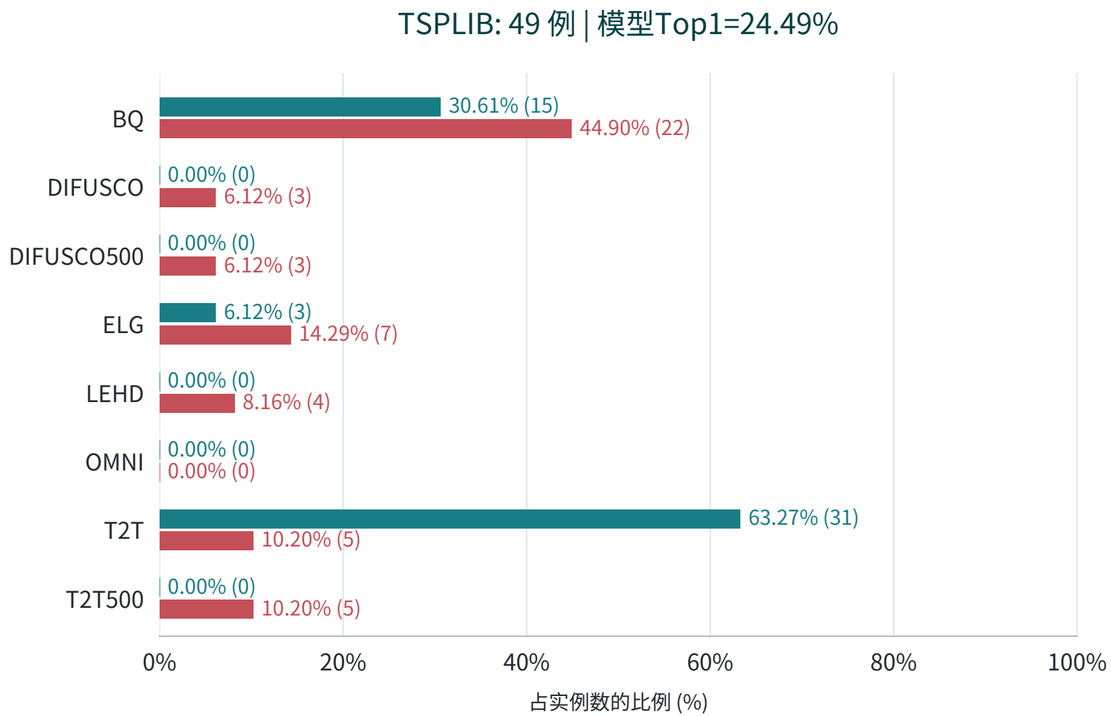

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.


R113/A_scratch | CVRP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

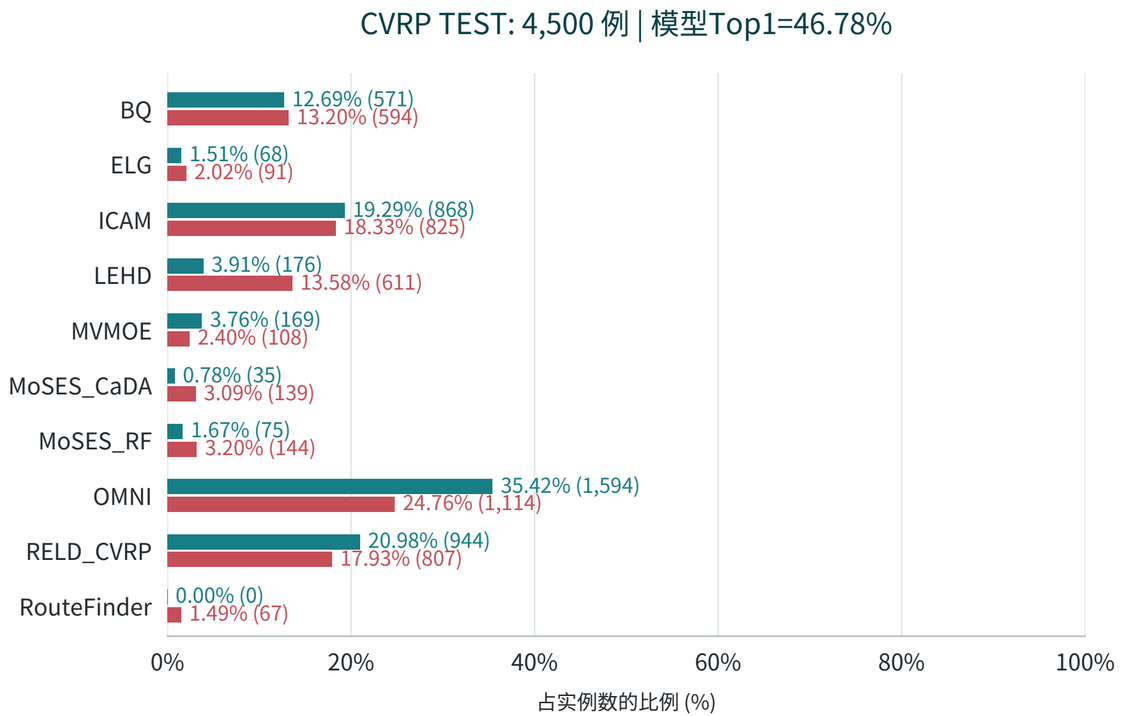

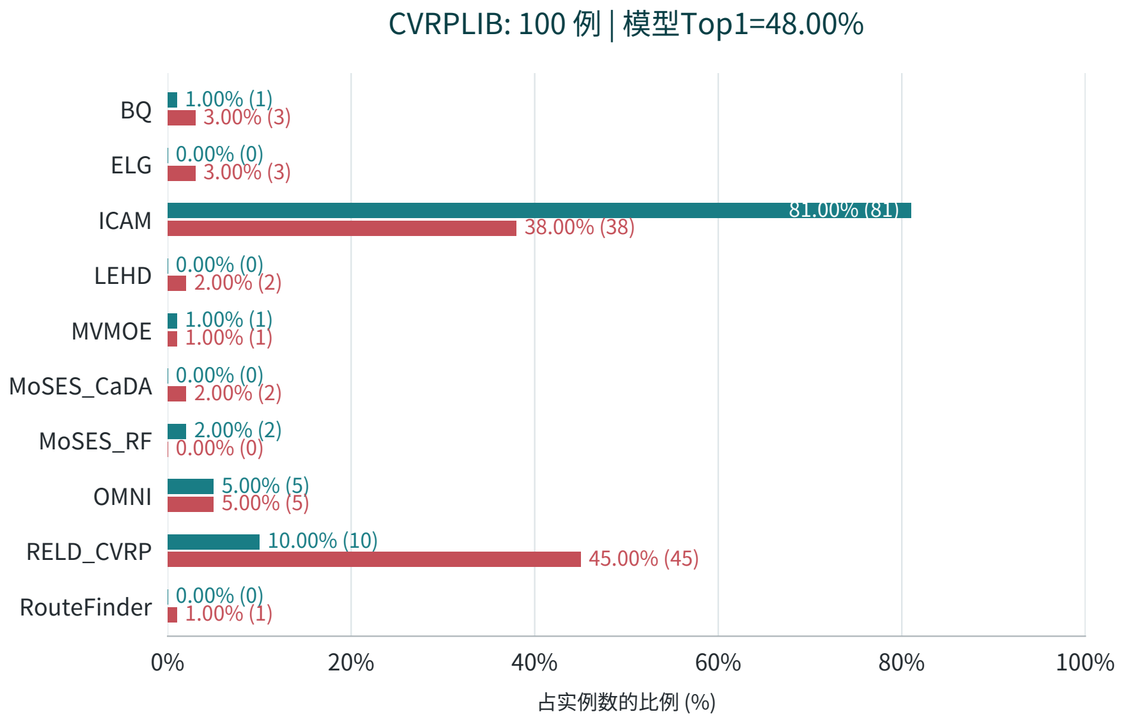

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | ATSP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

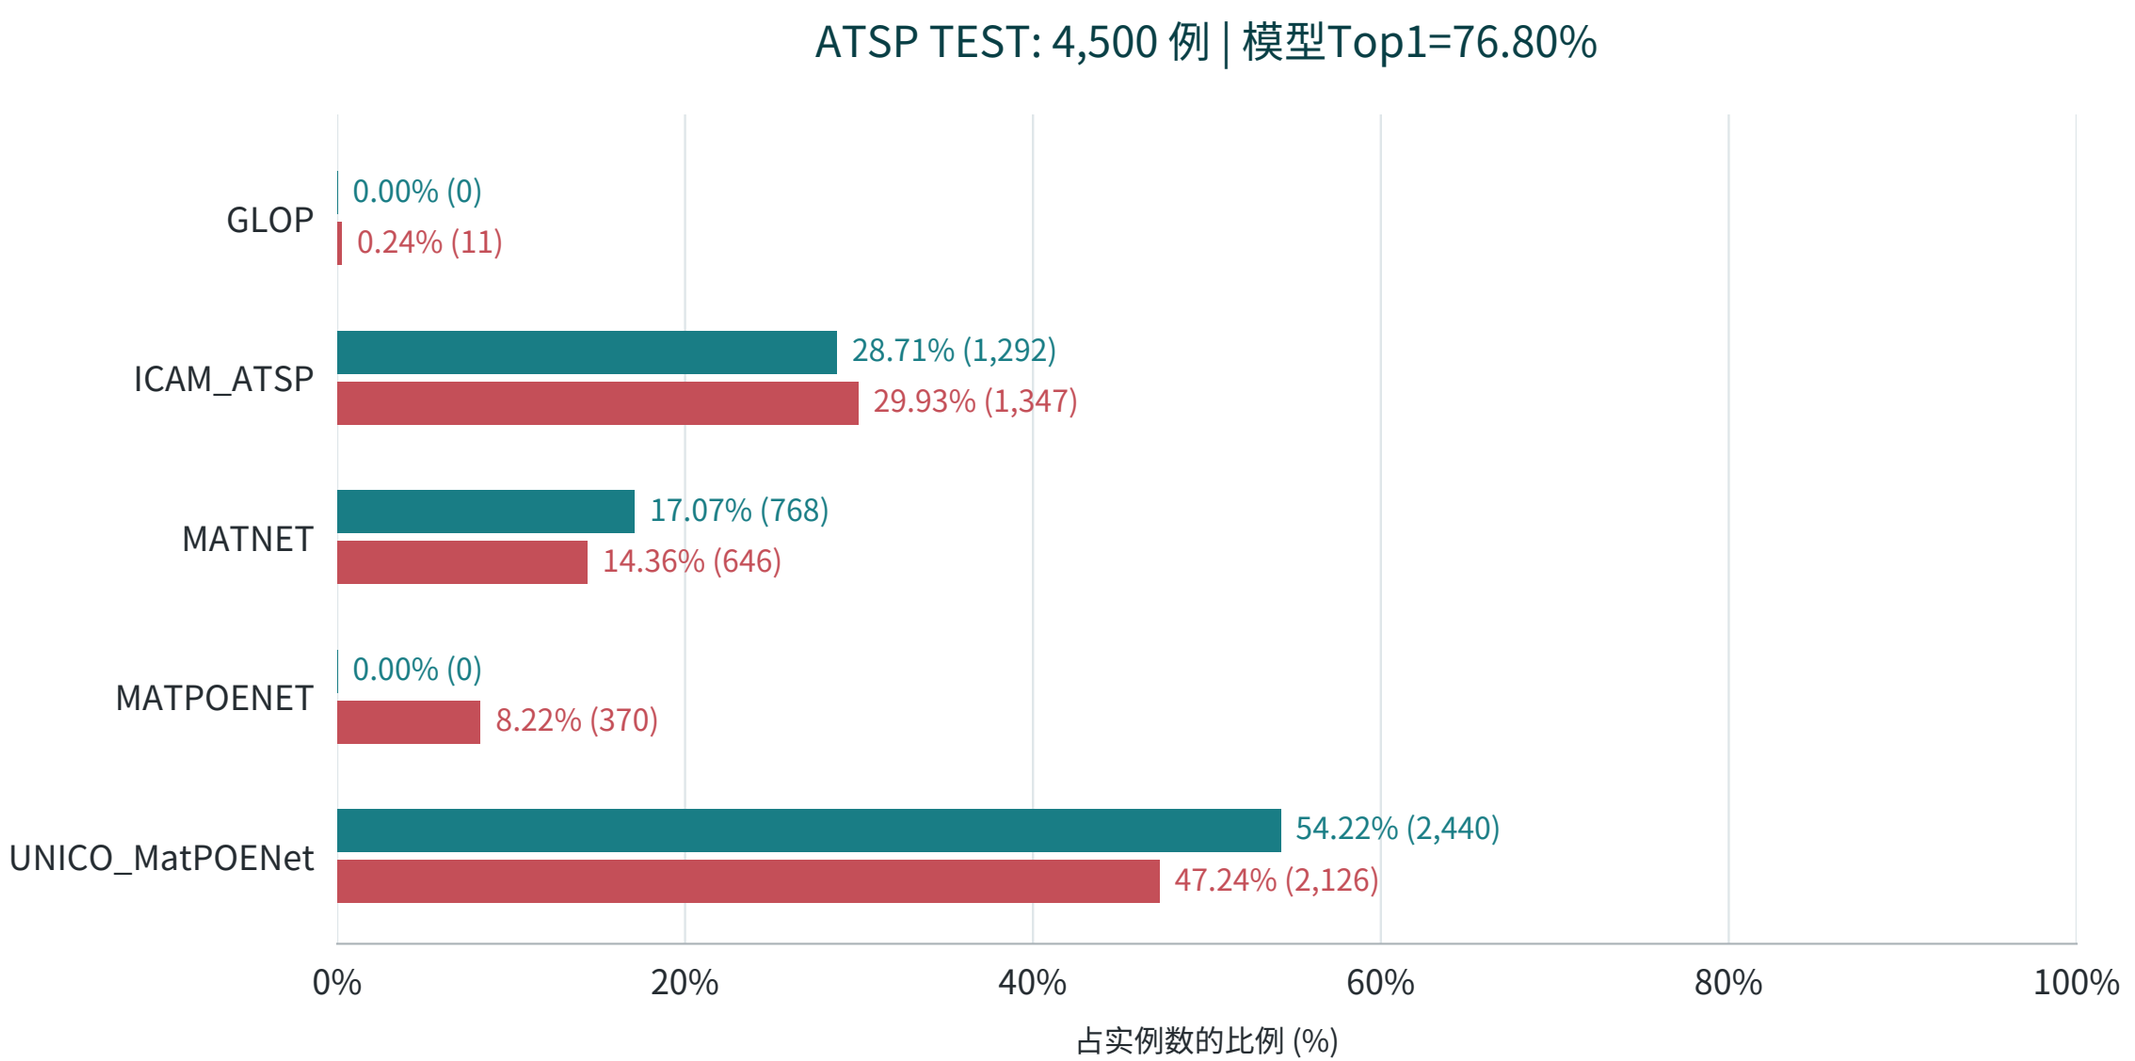

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

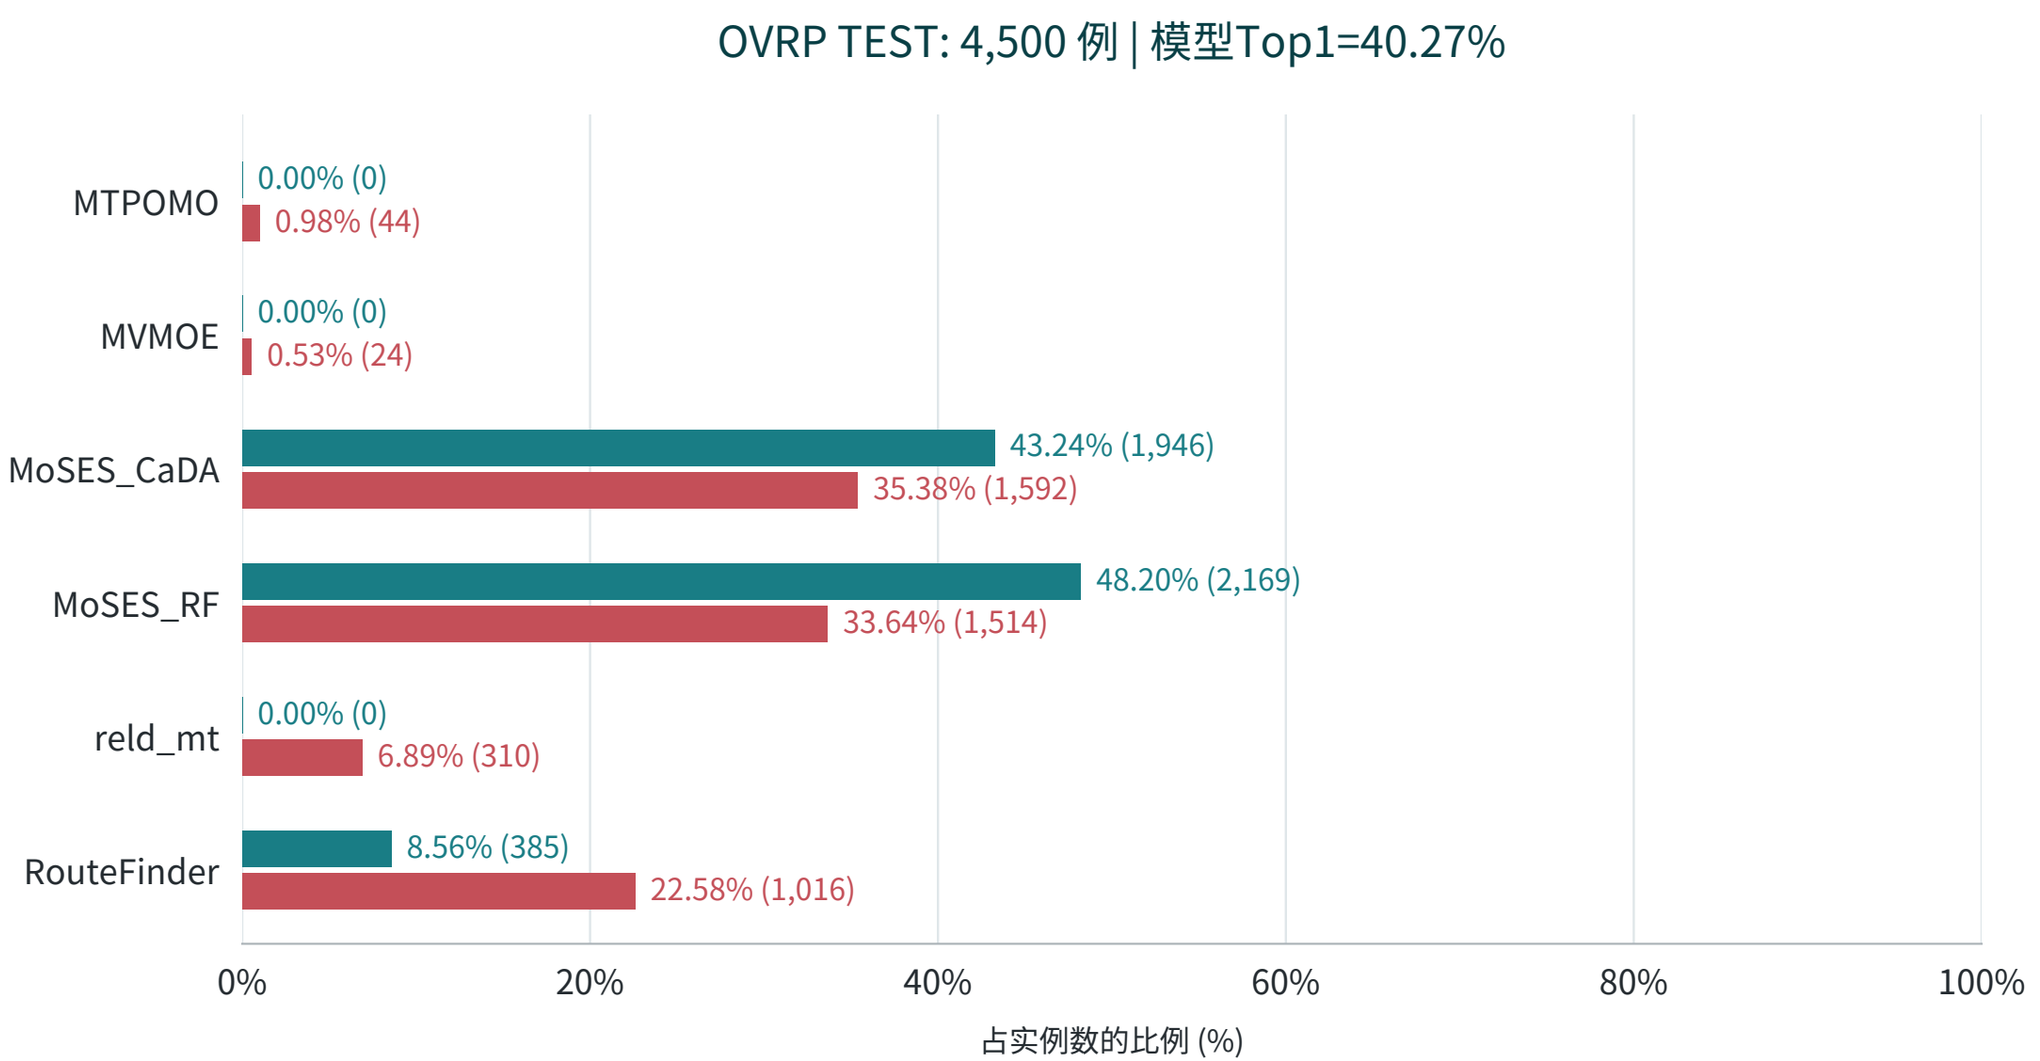

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPB | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

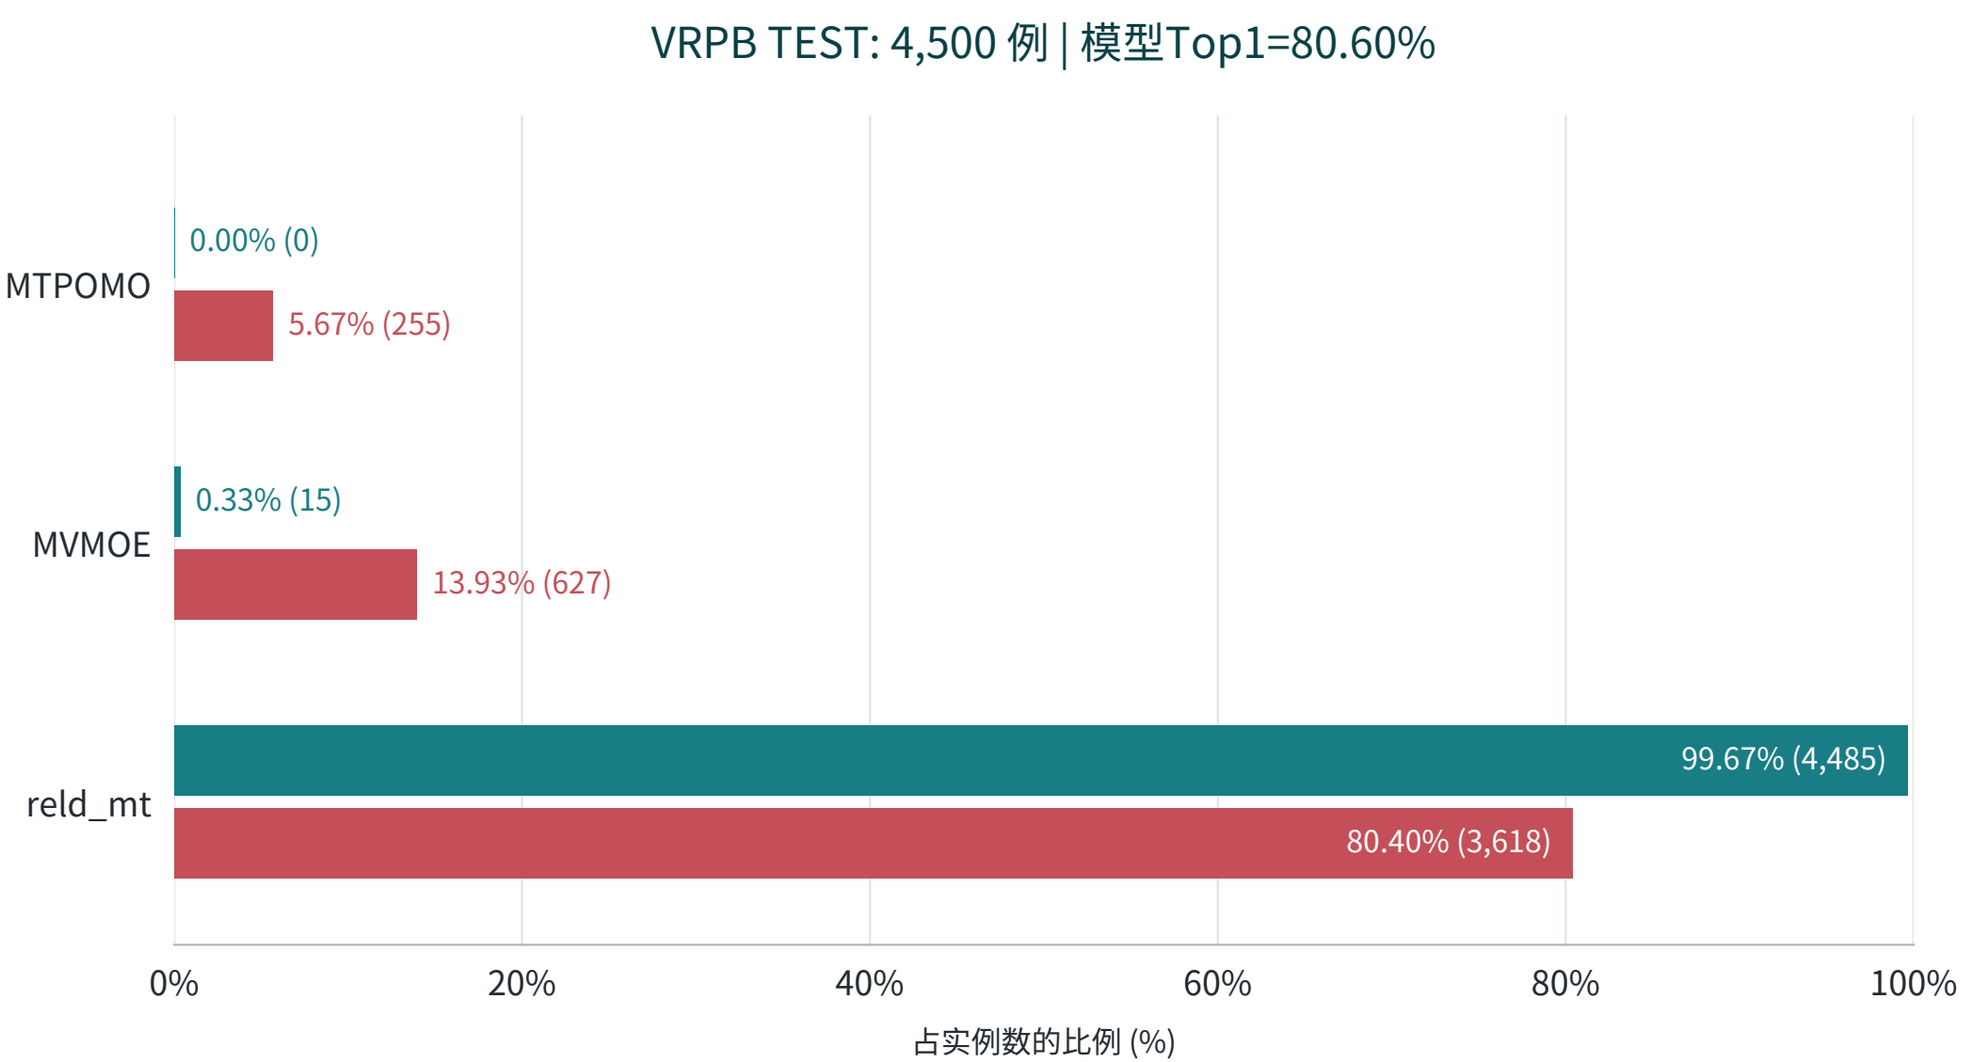

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

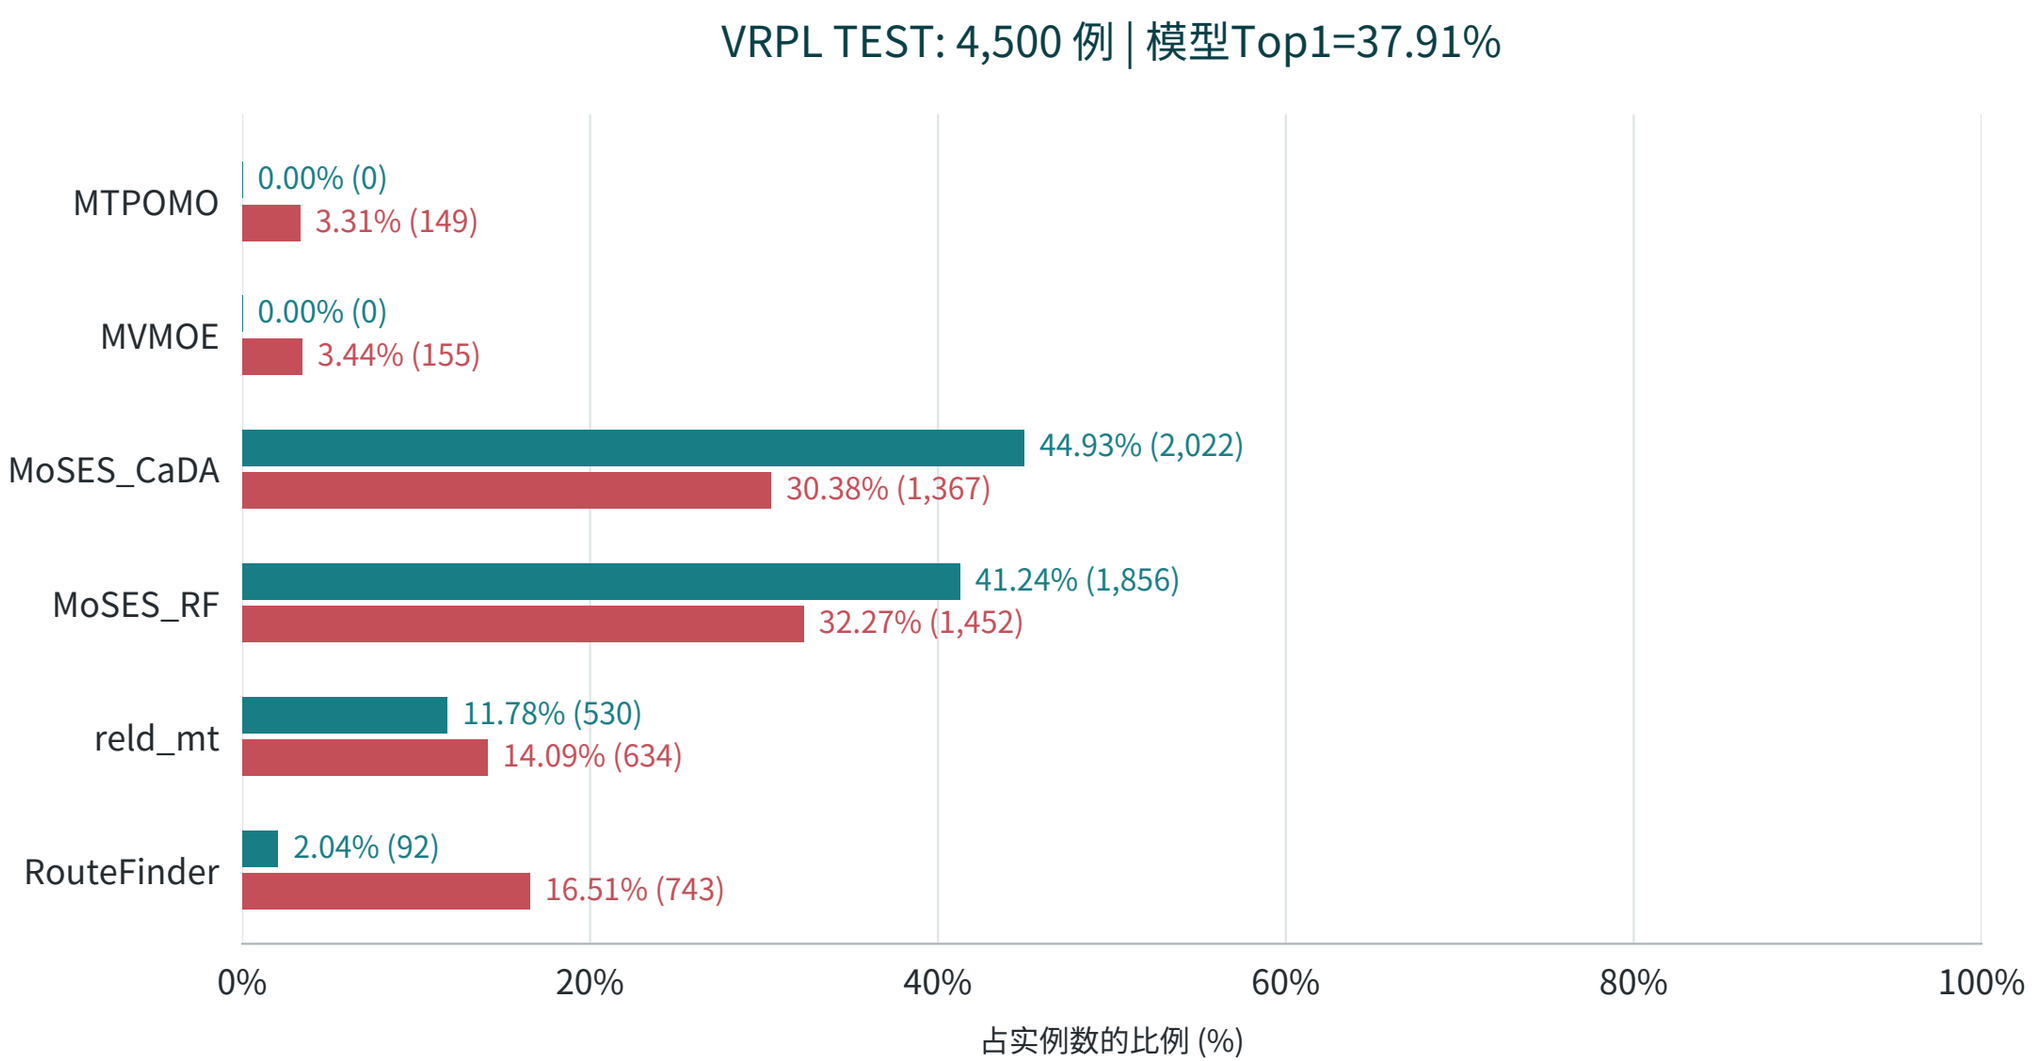

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

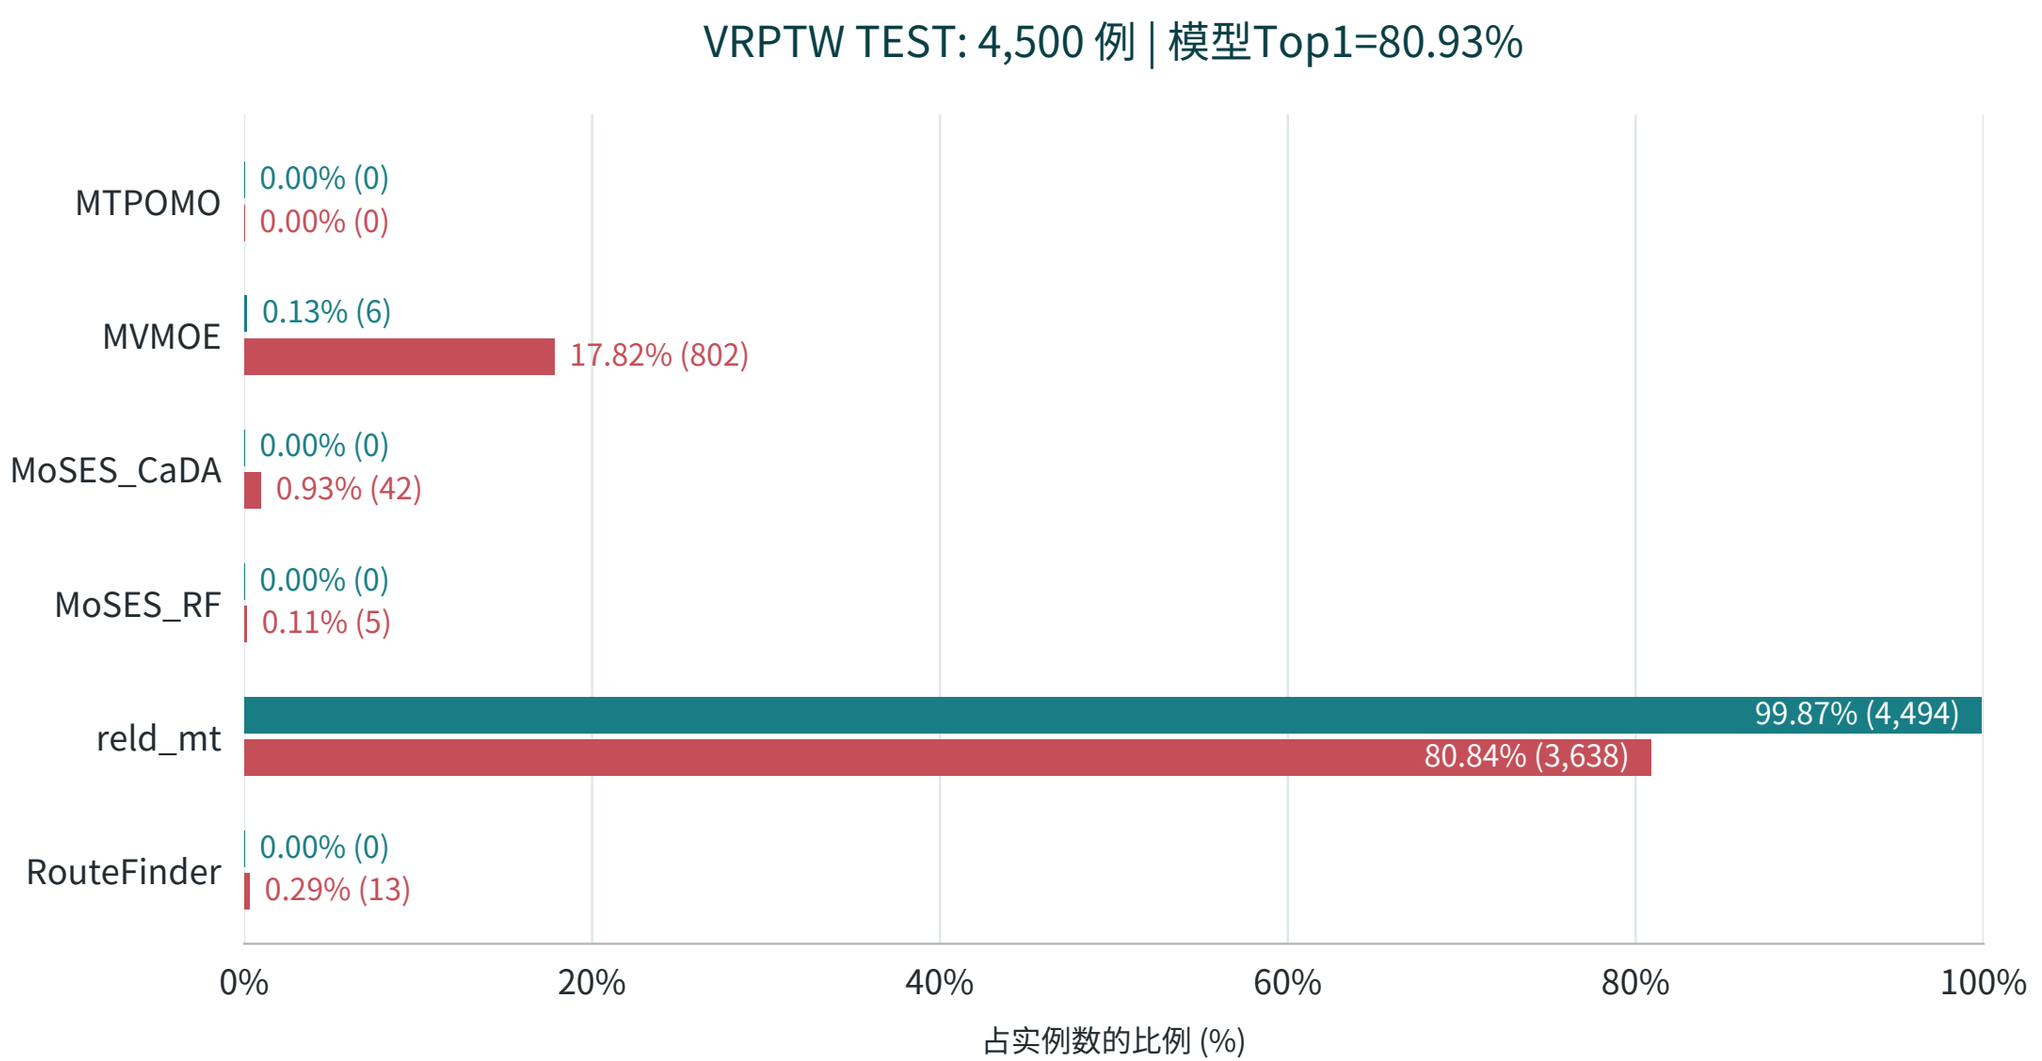

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

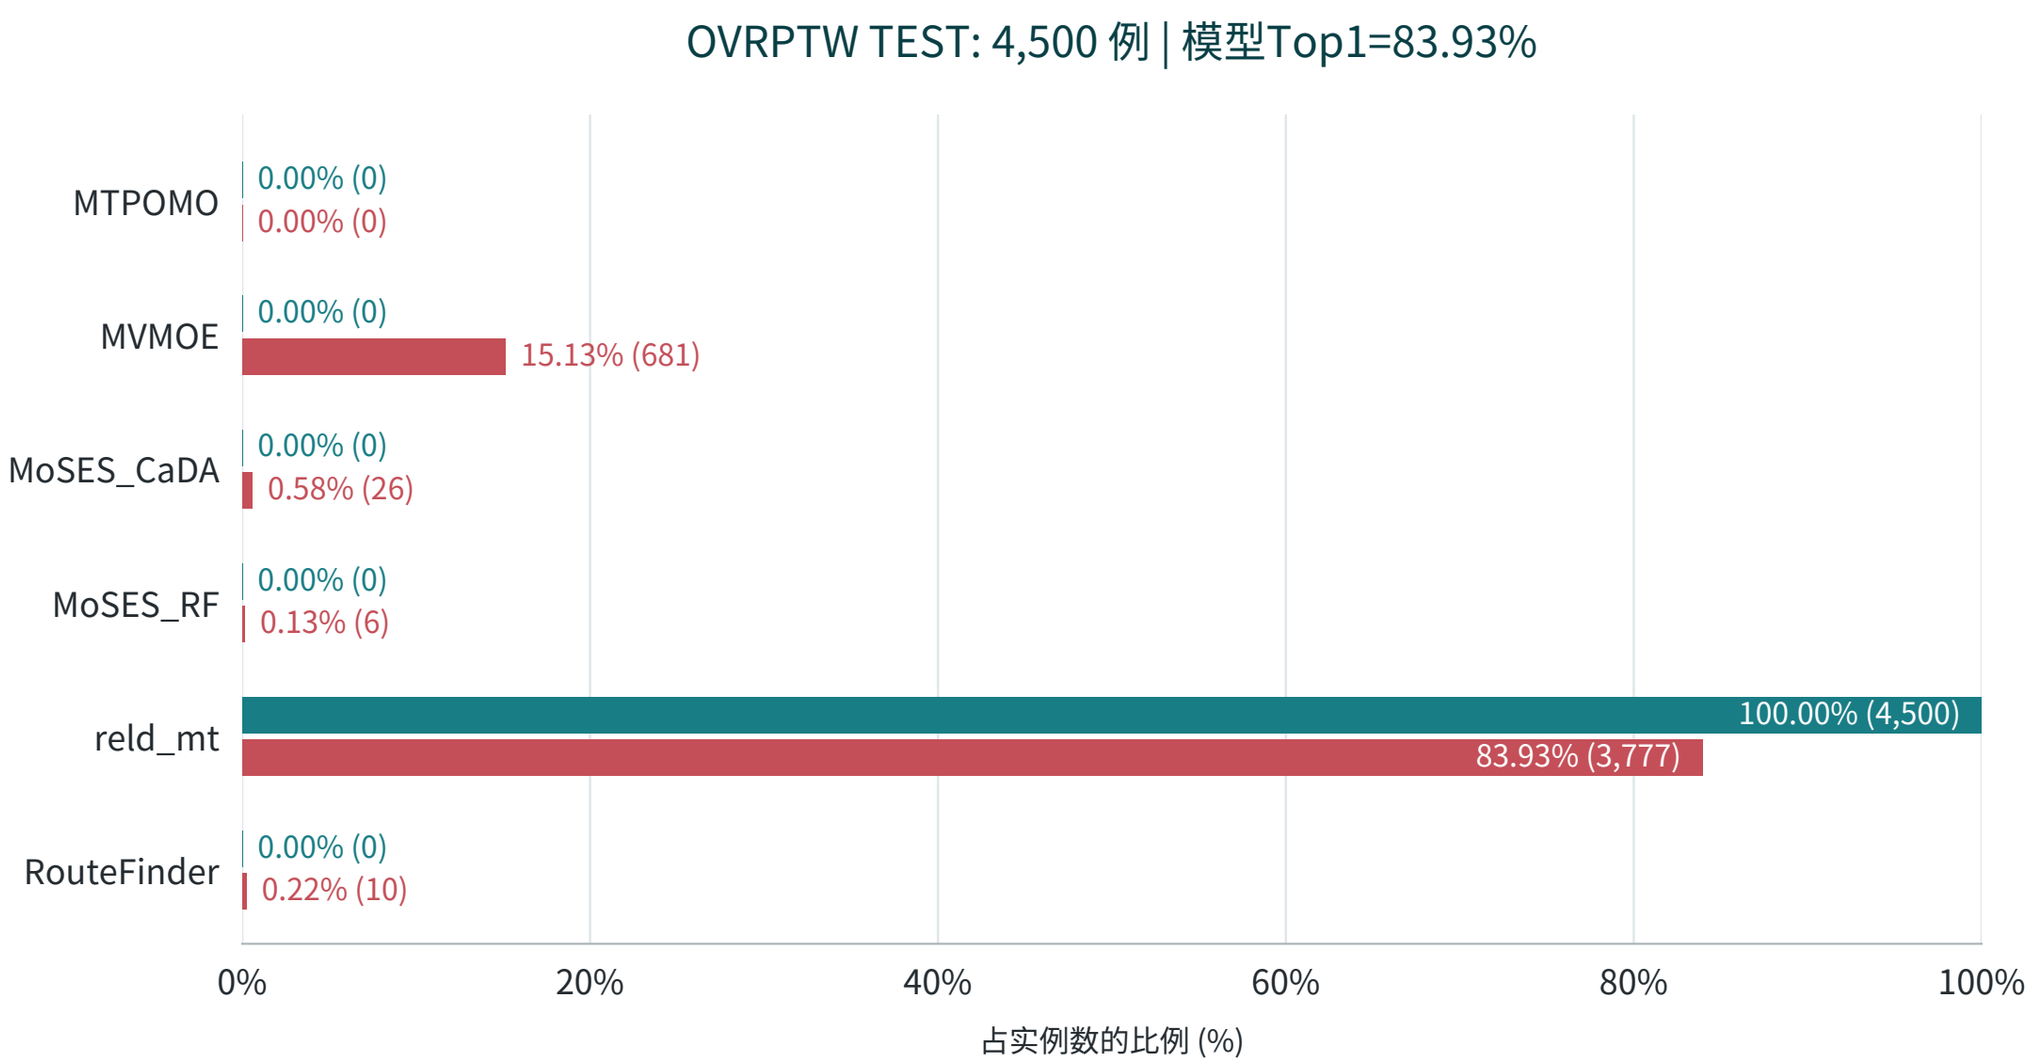

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPB | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

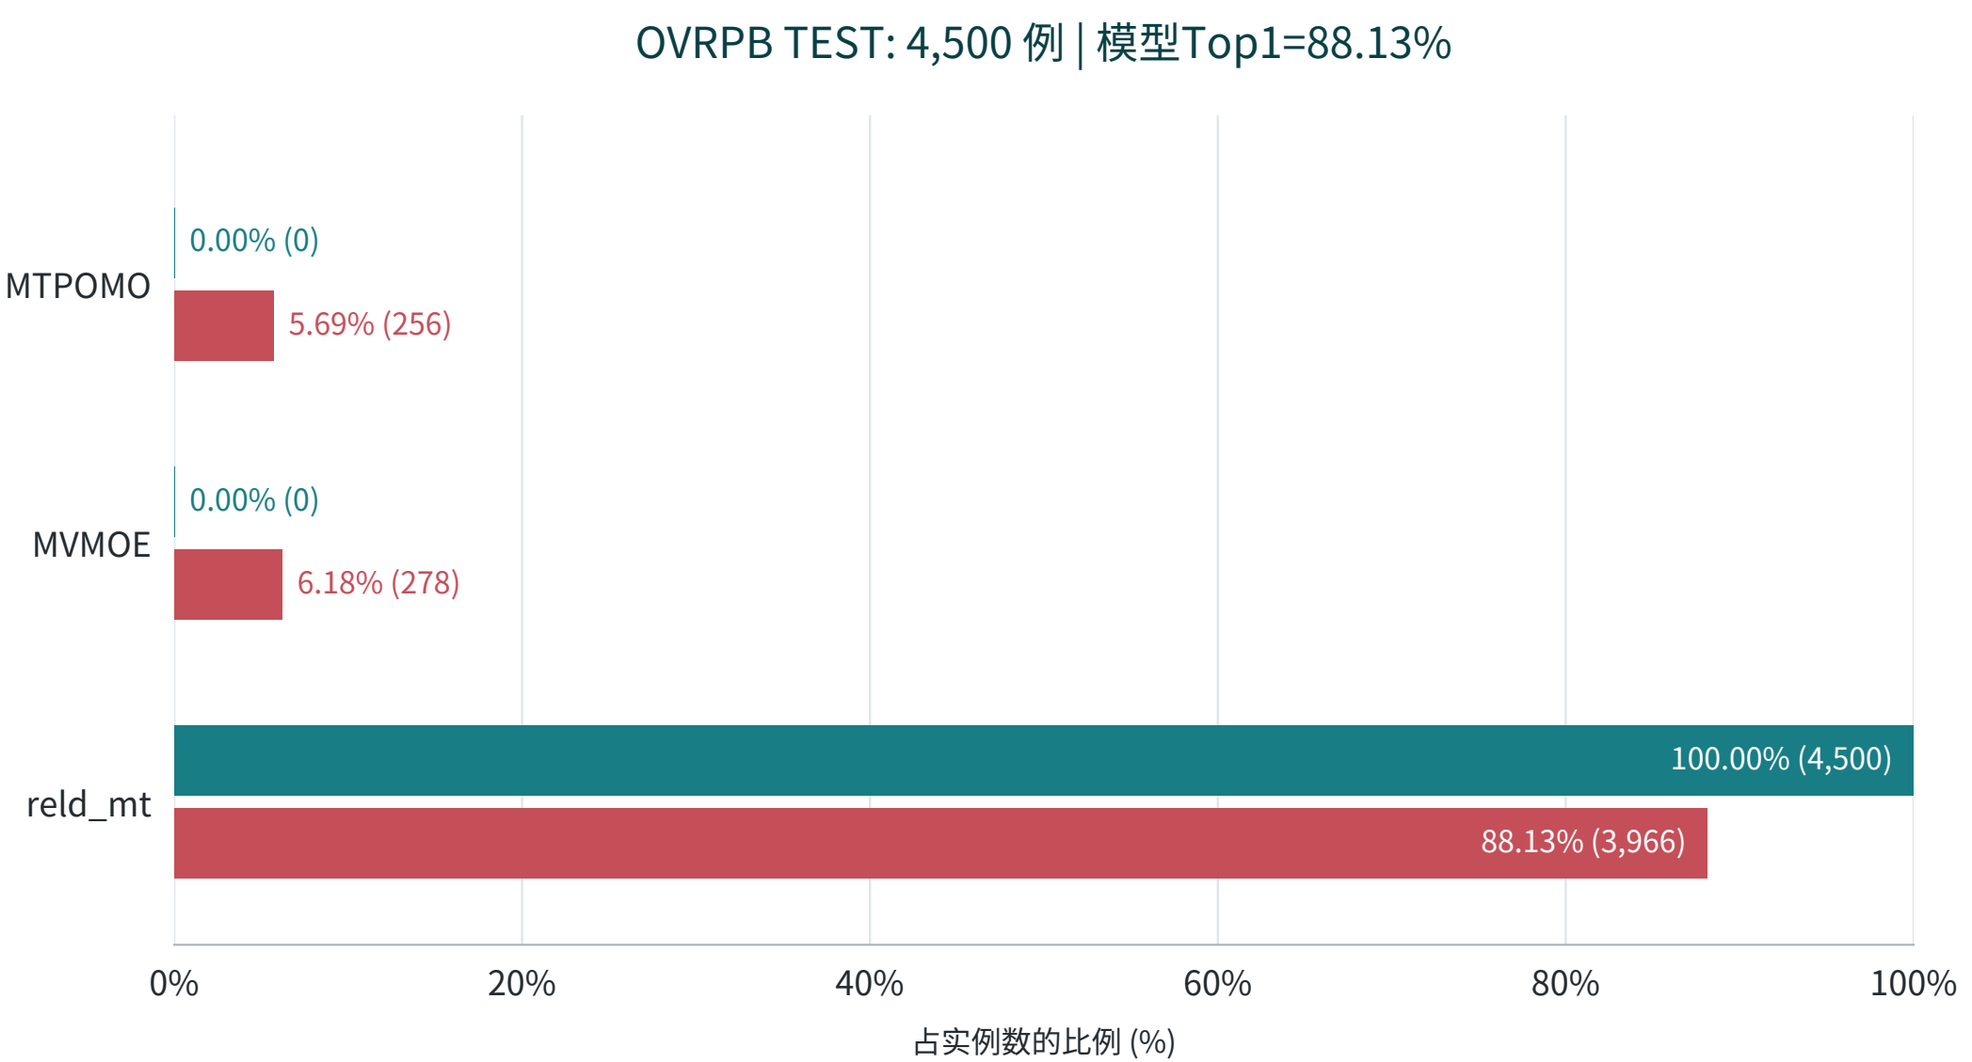

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

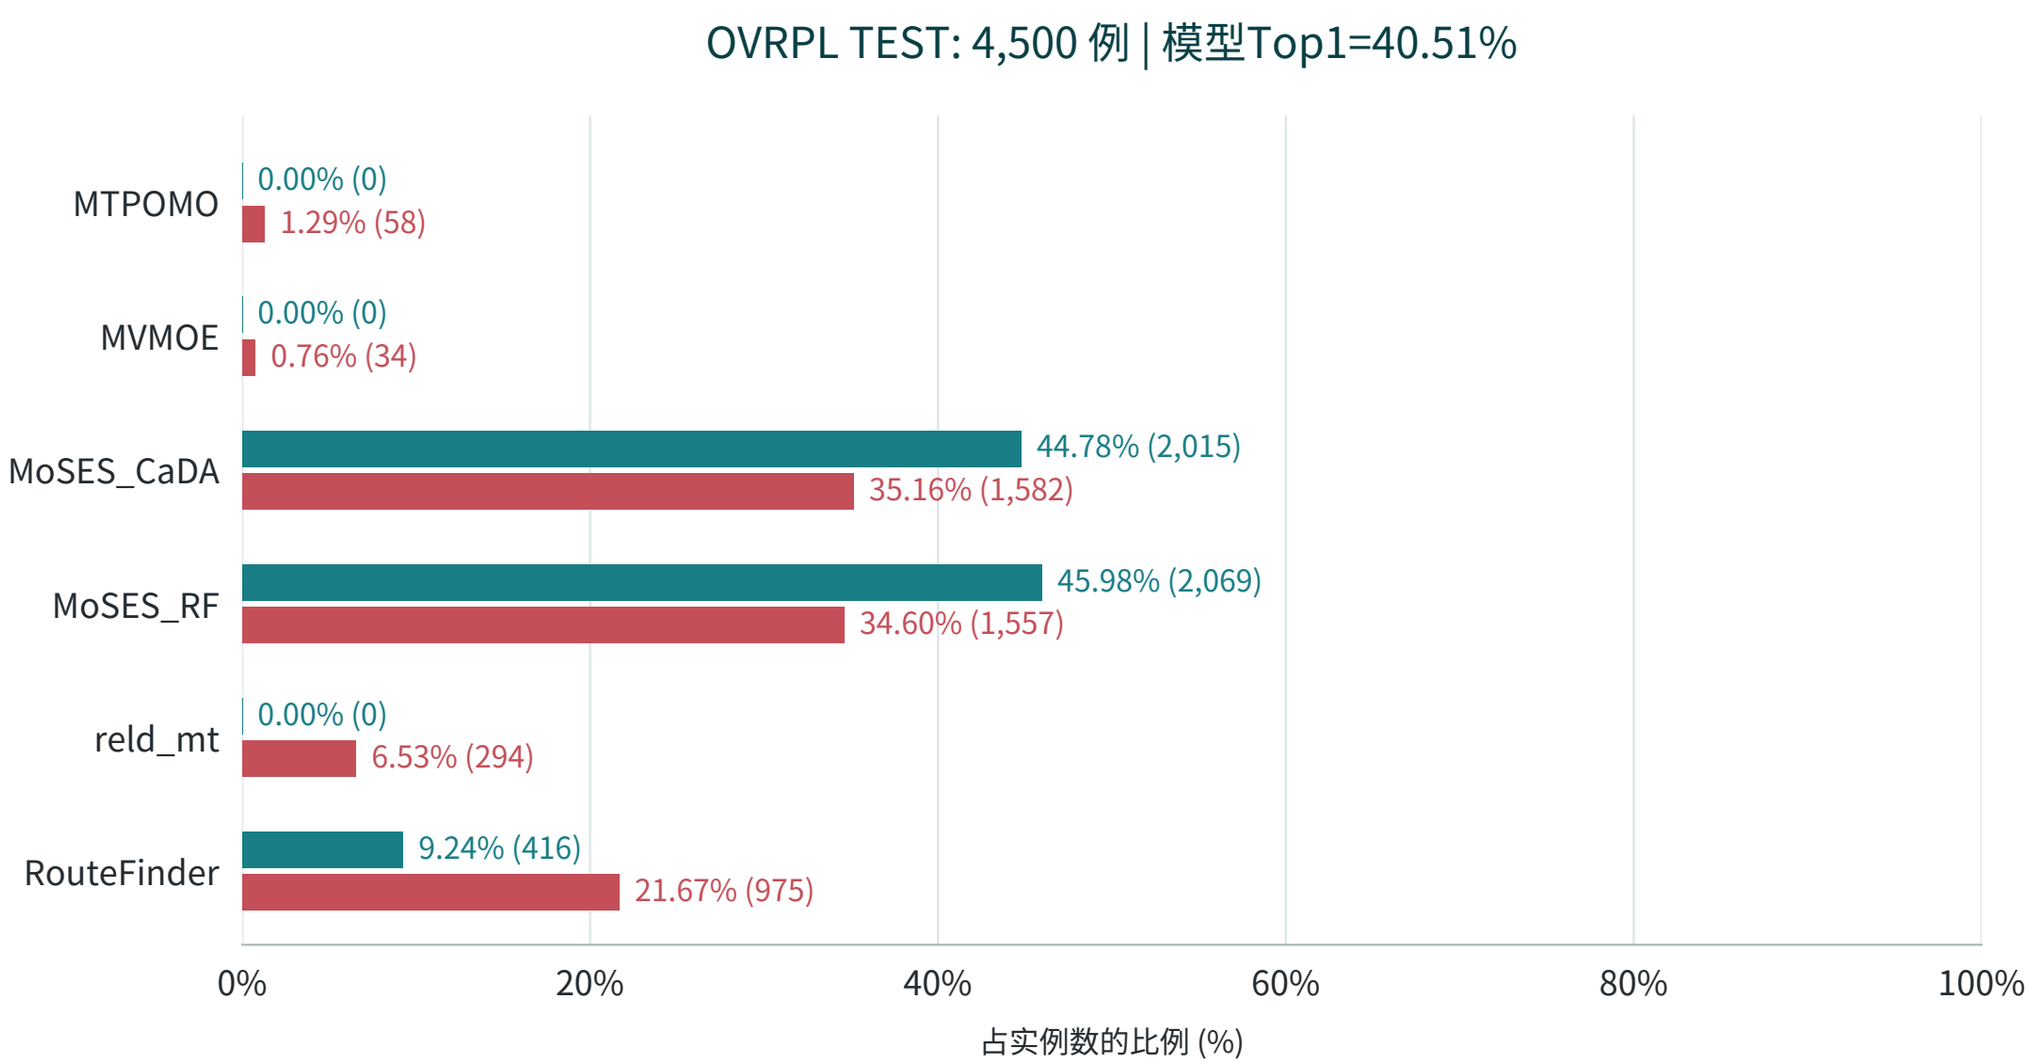

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPBL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

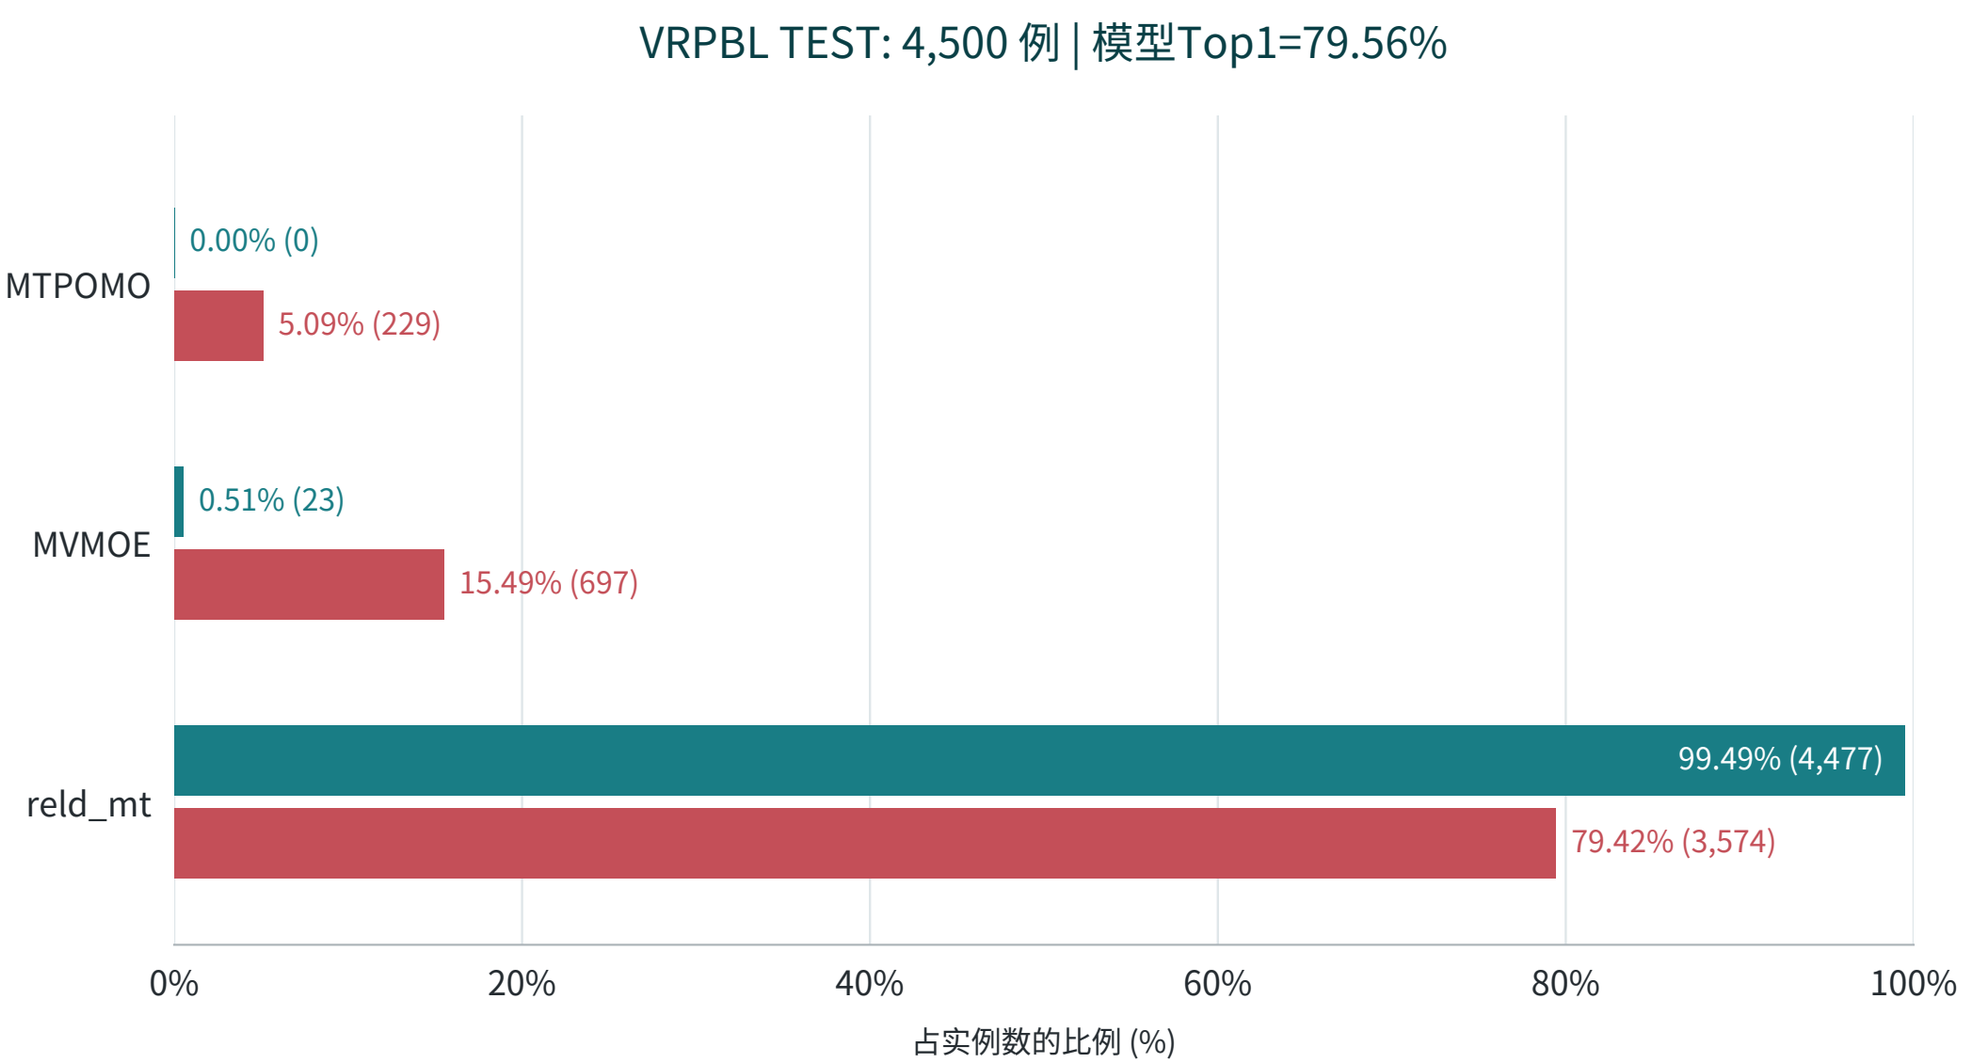

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPBTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

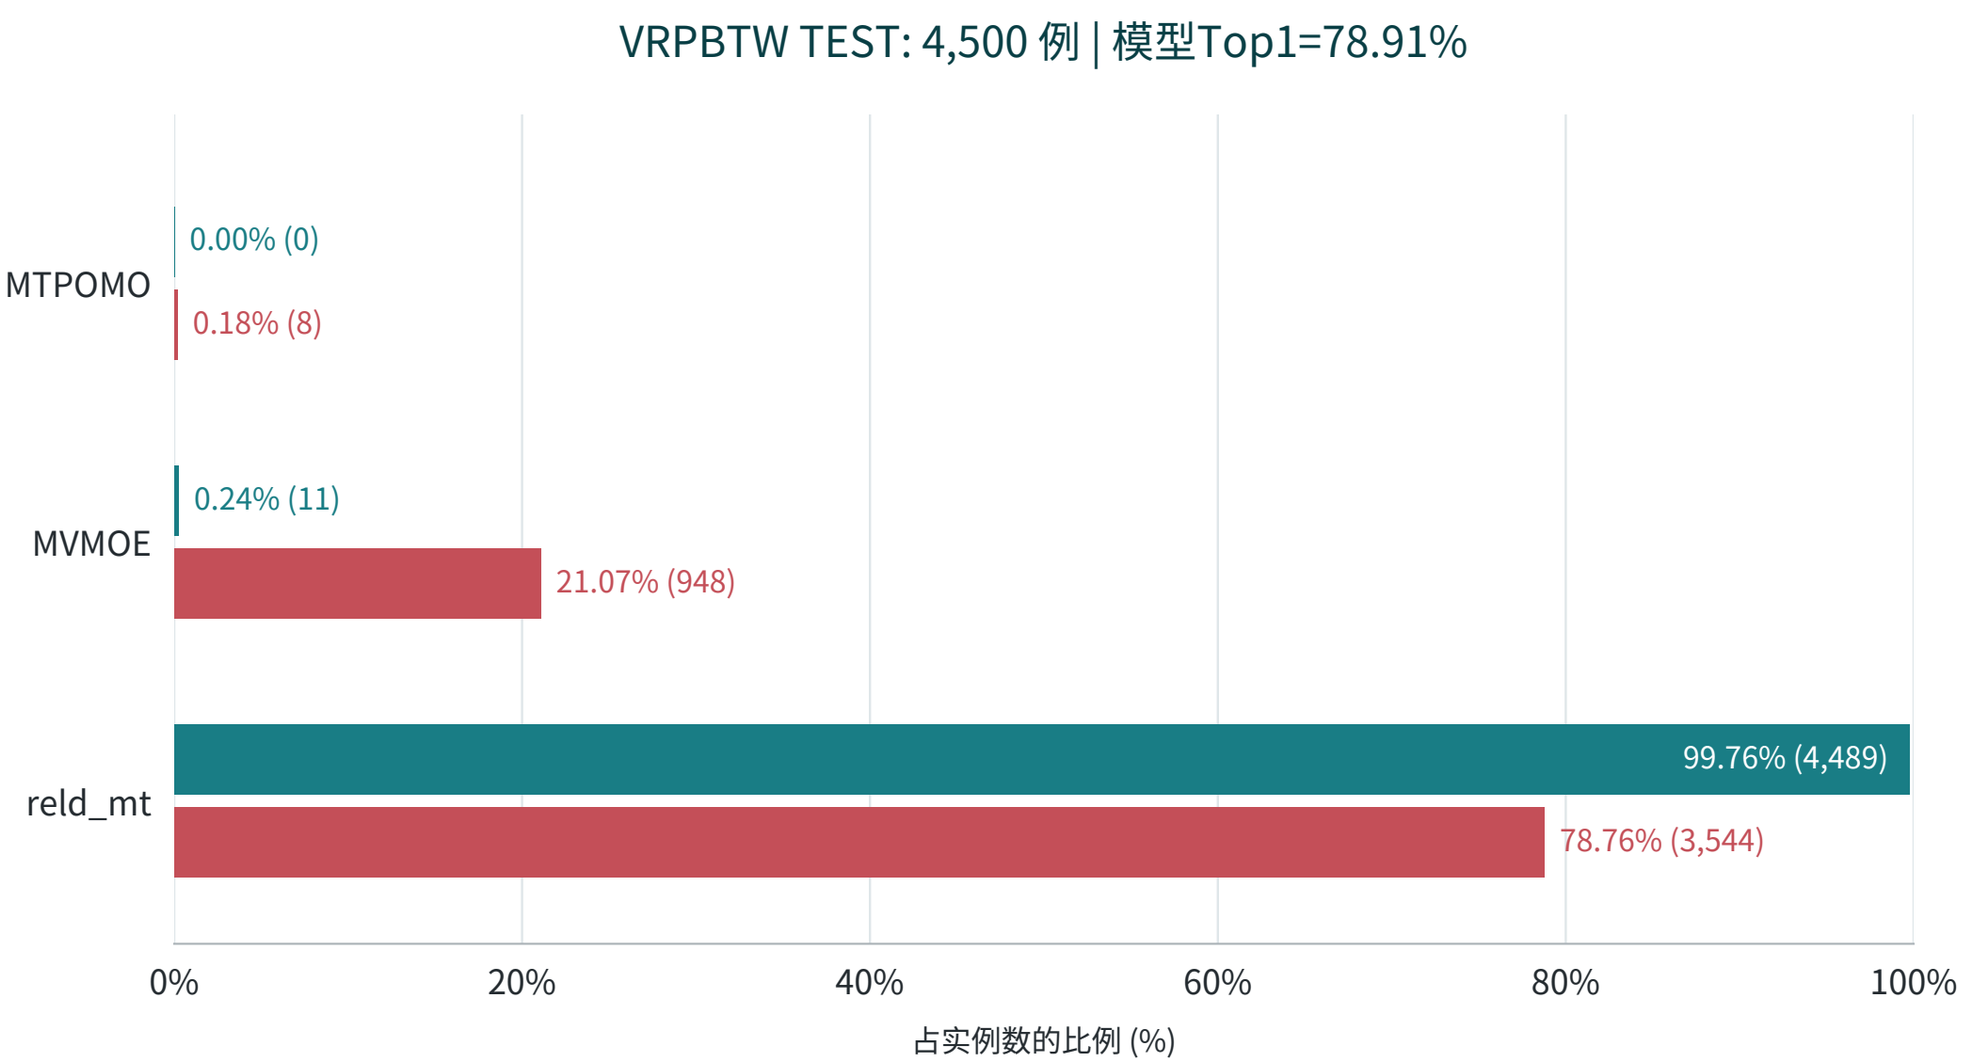

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

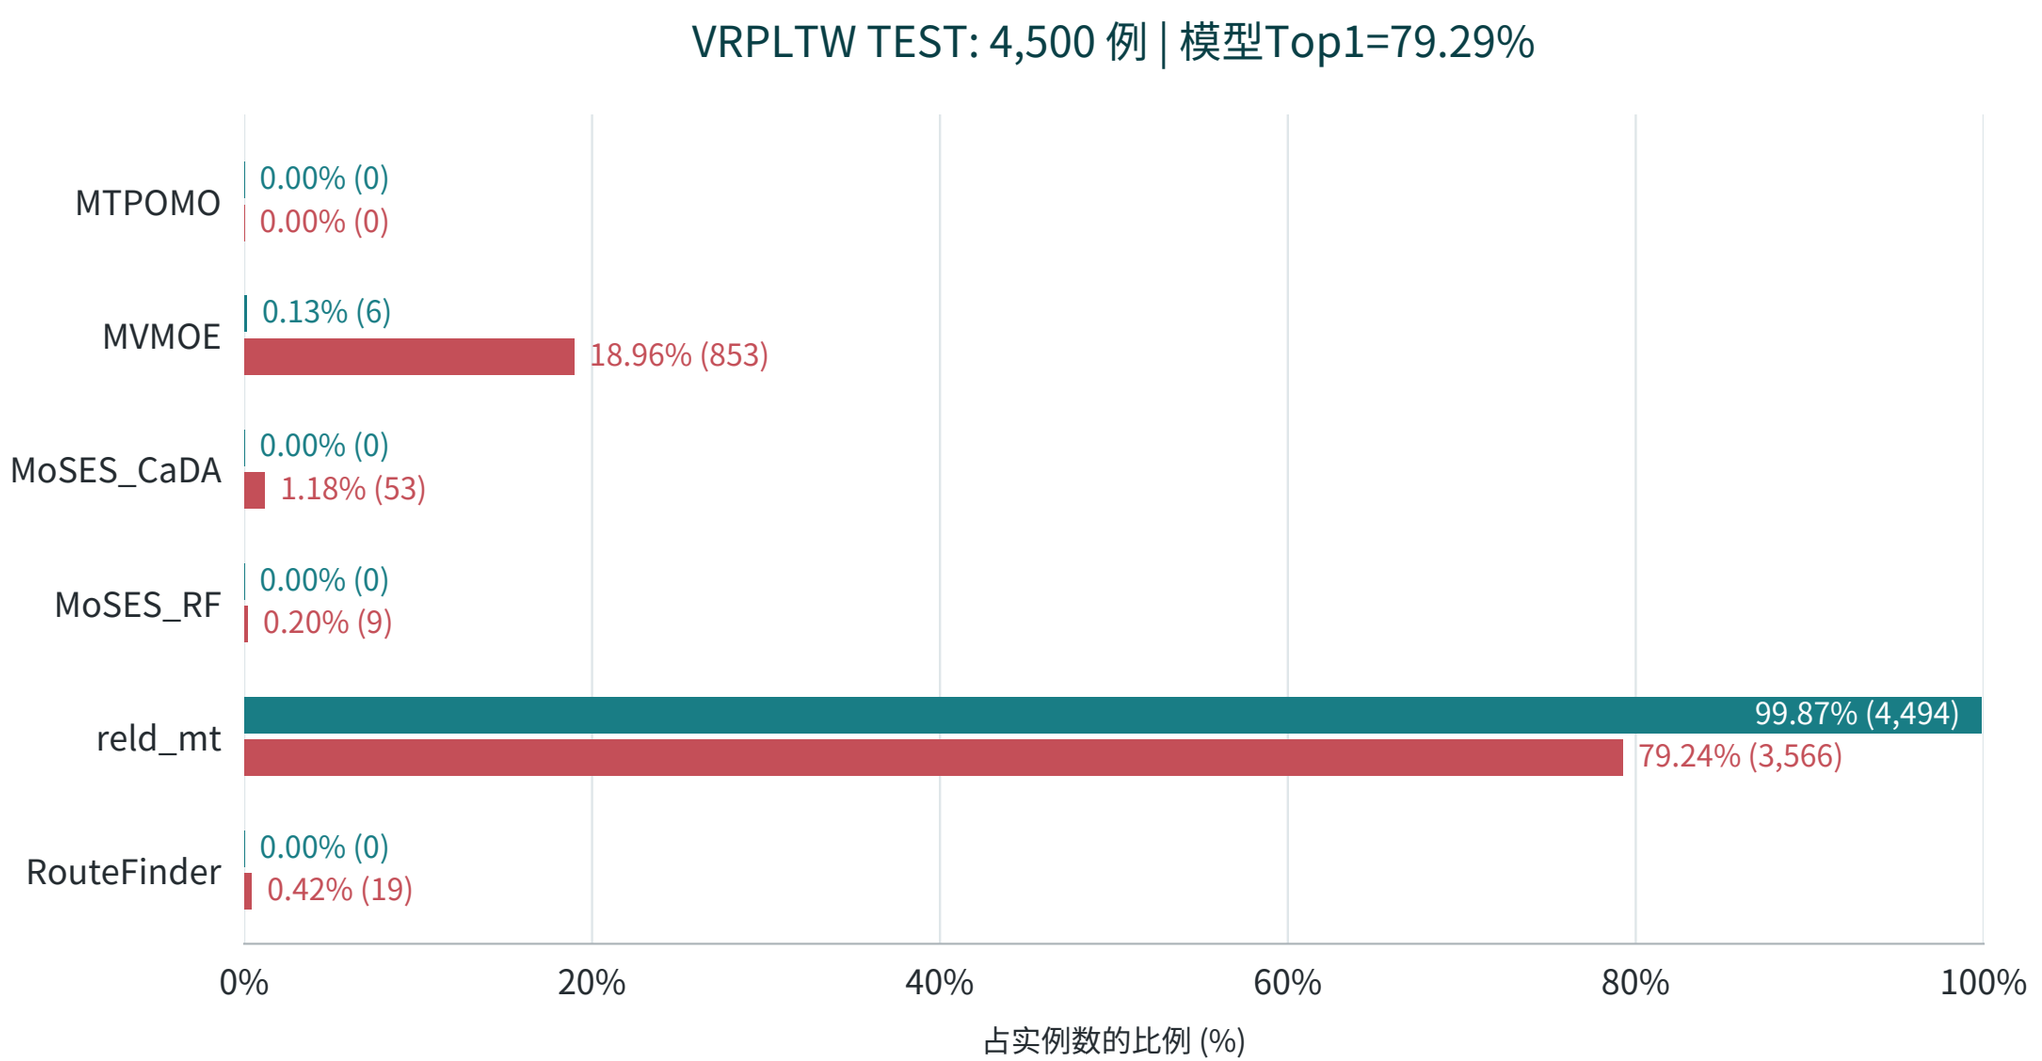

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPBL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

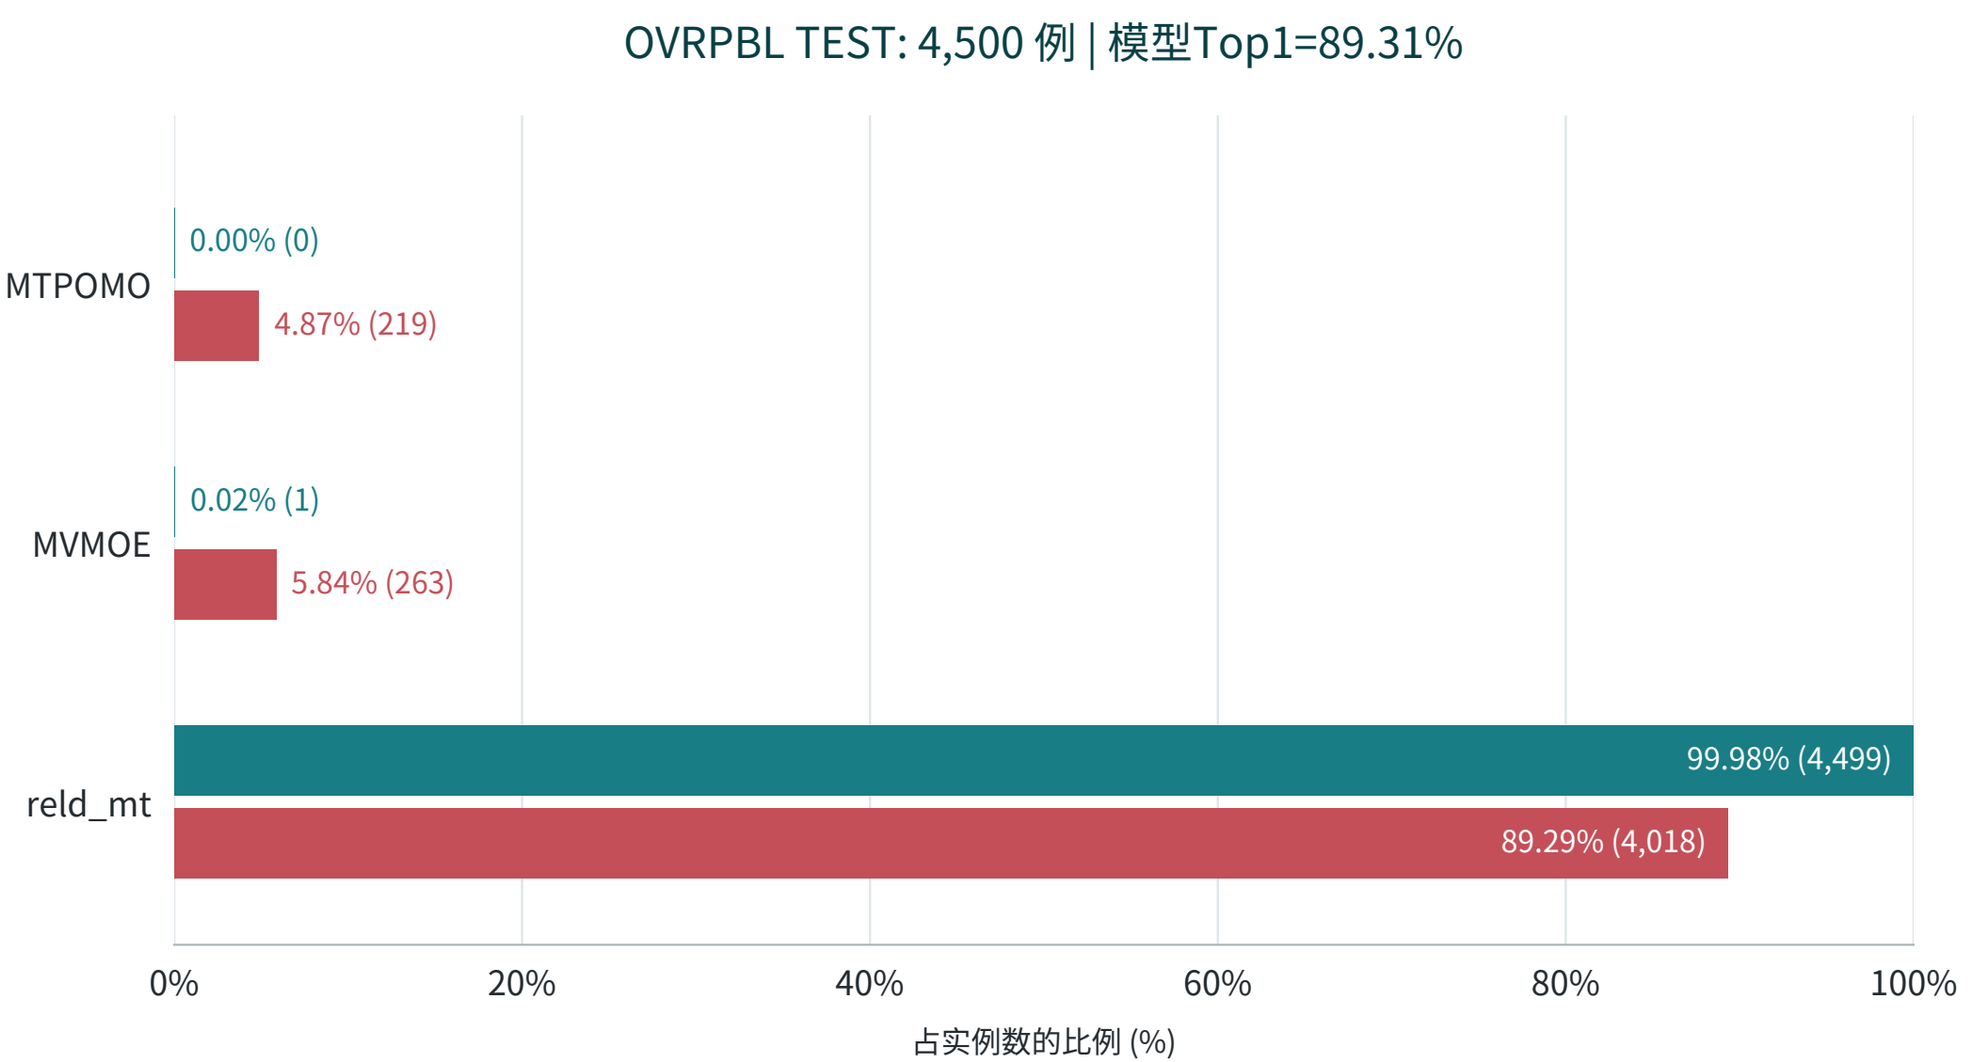

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPBTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

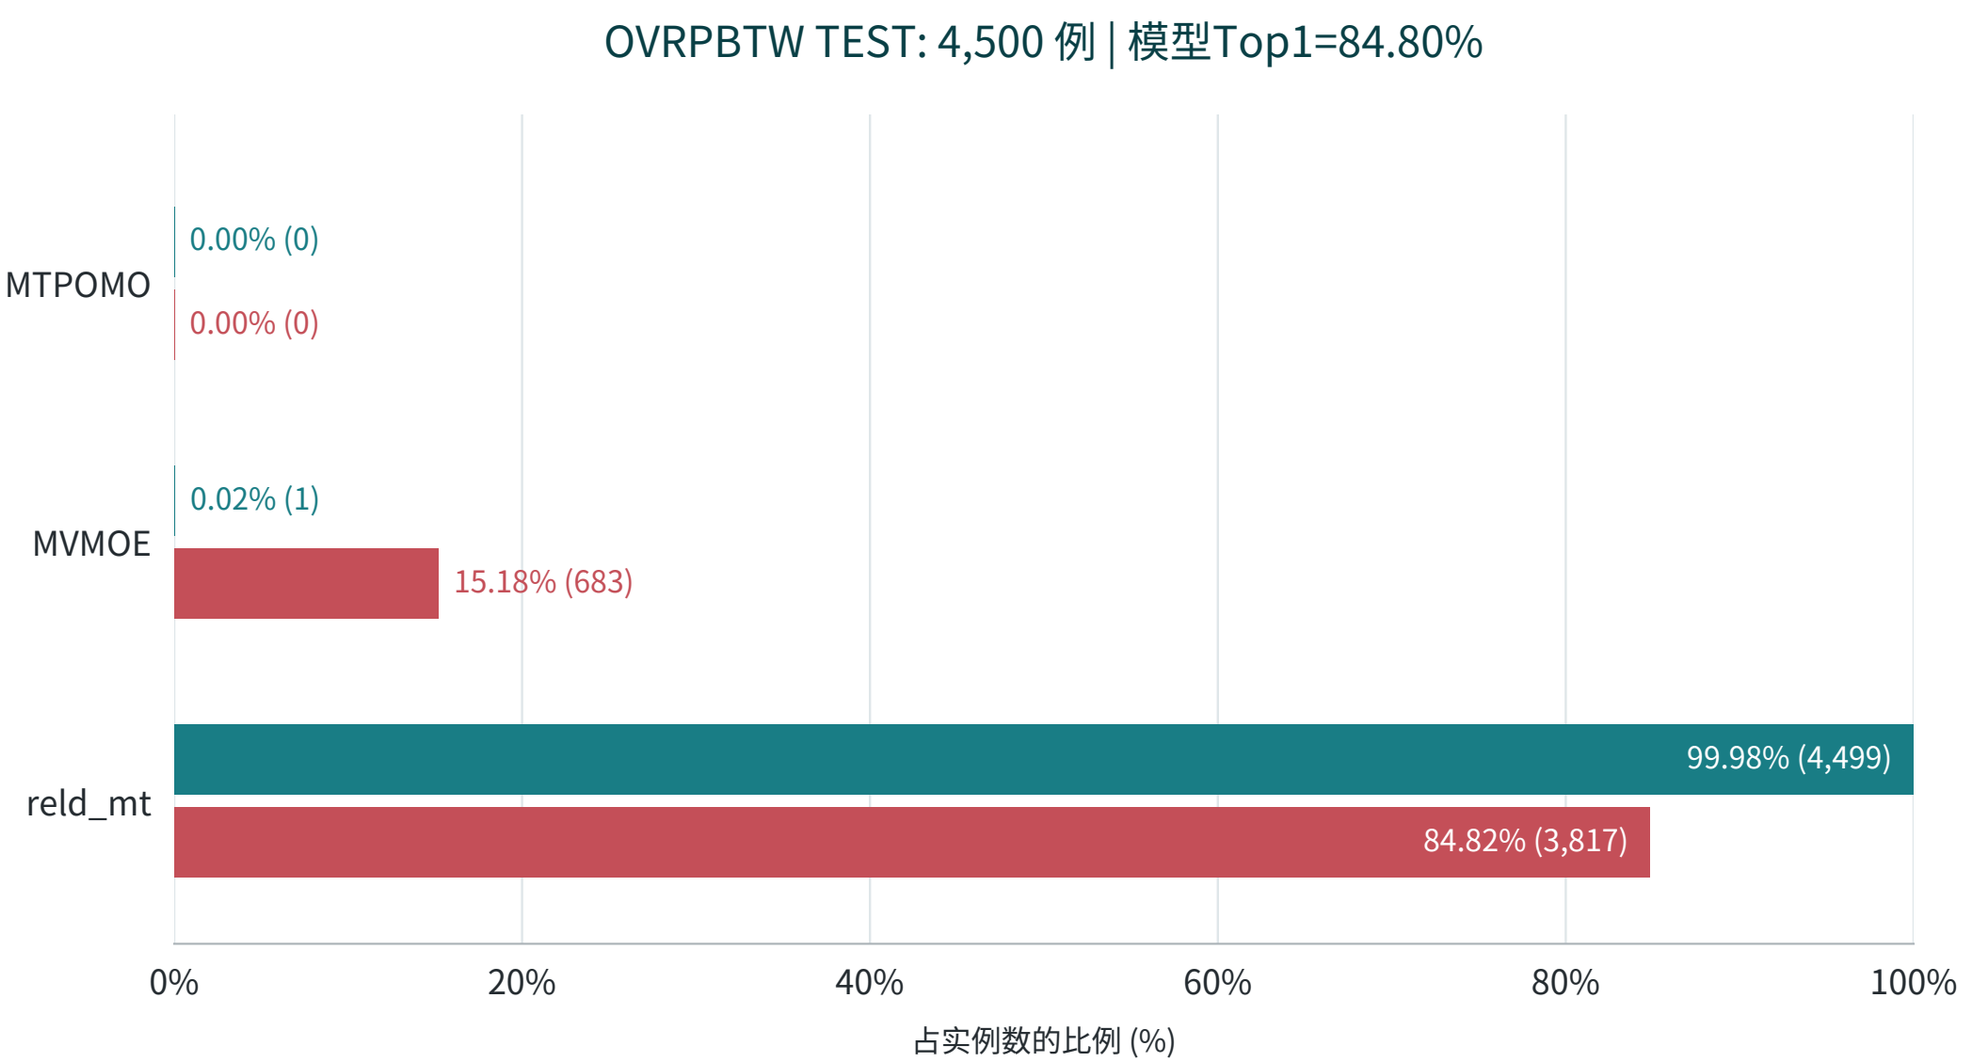

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

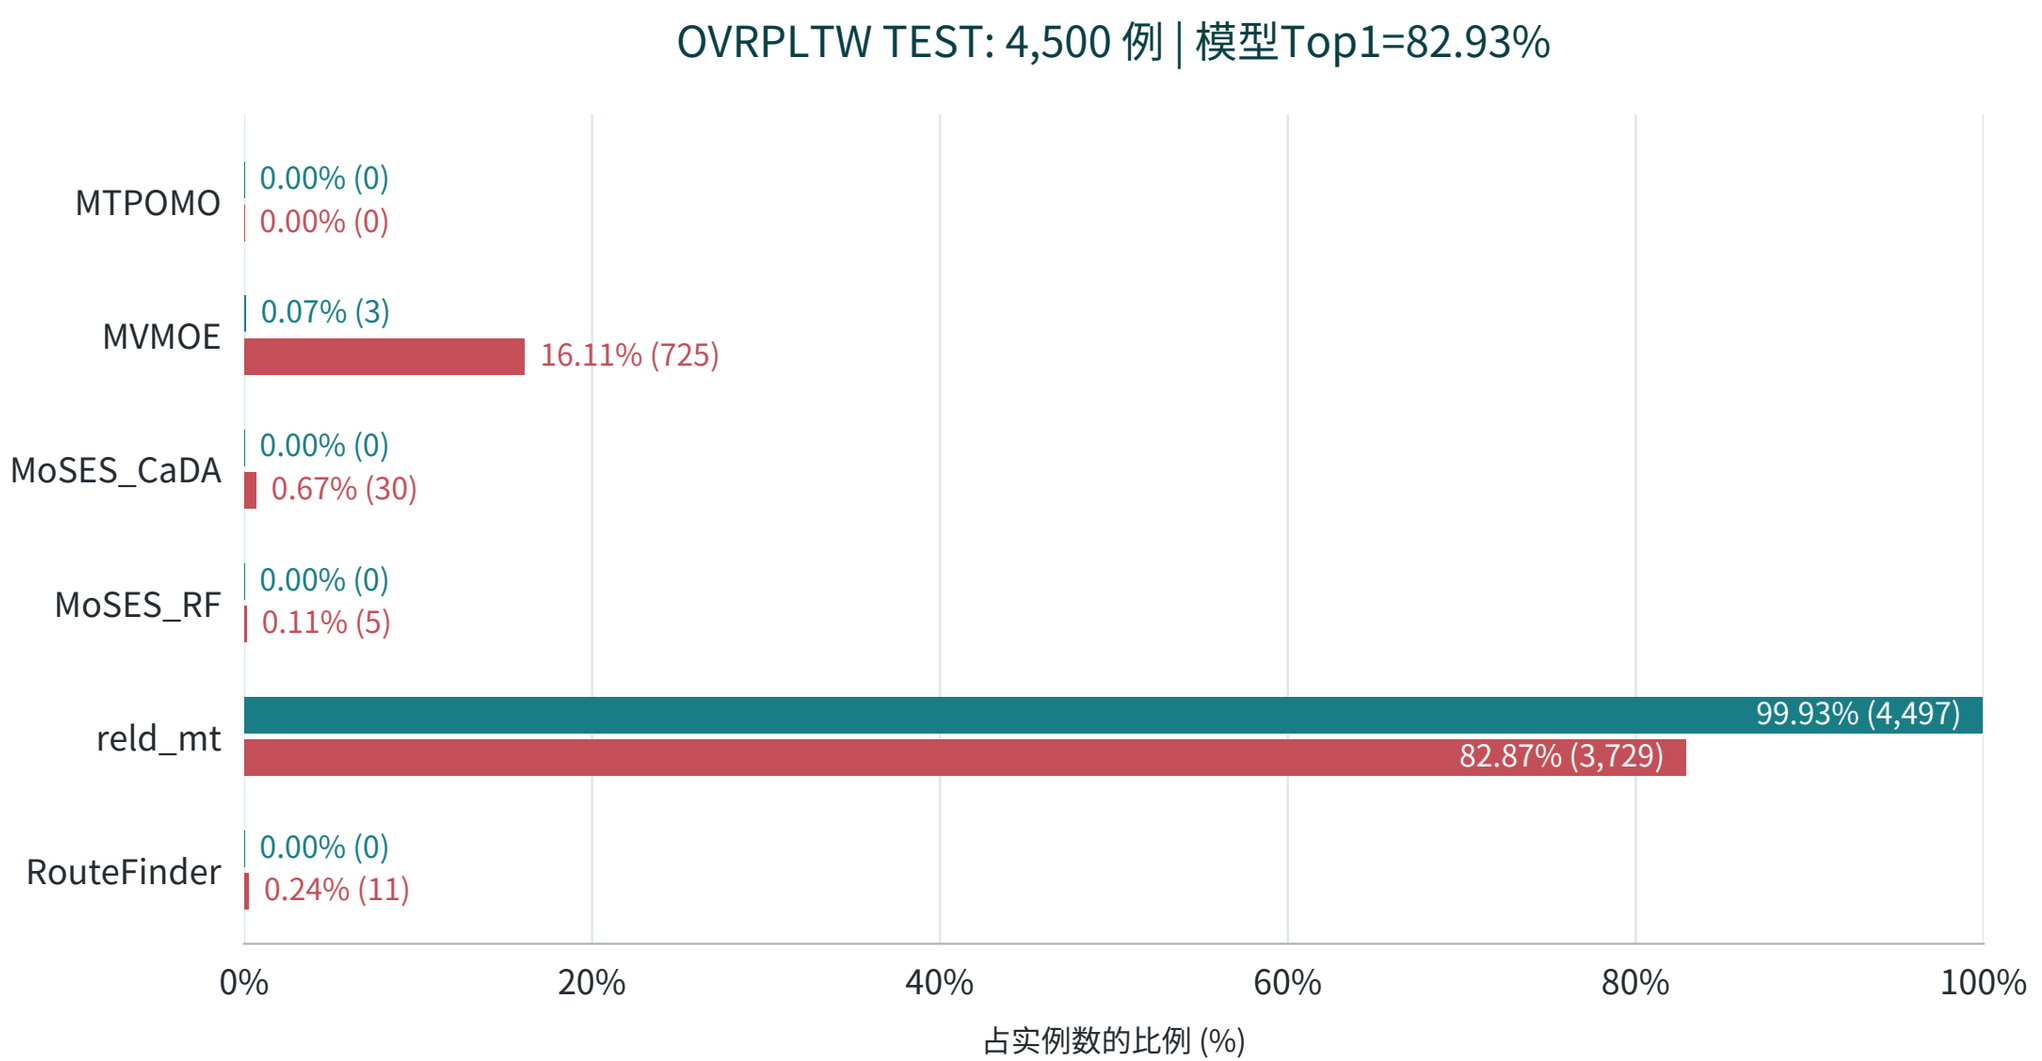

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | VRPBLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

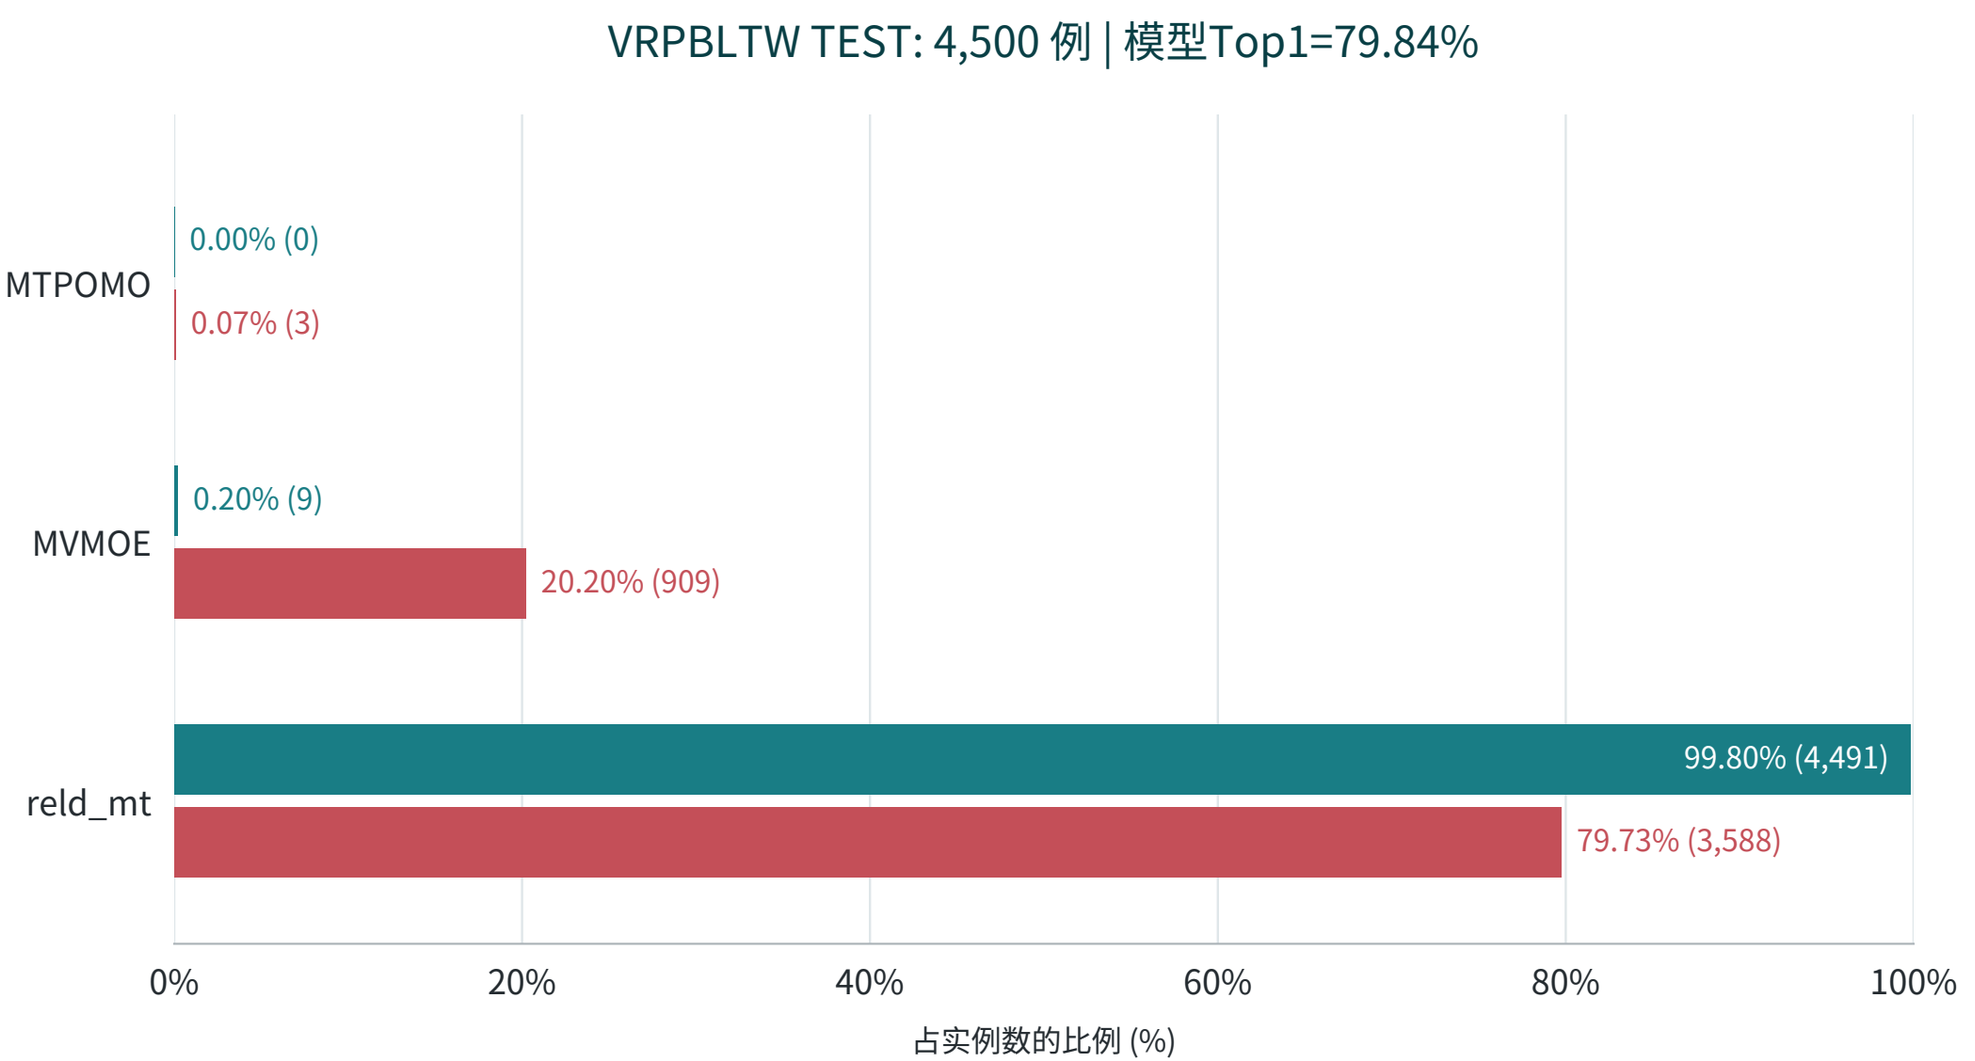

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/A_scratch | OVRPBLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 7bbe2d341261c17d

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

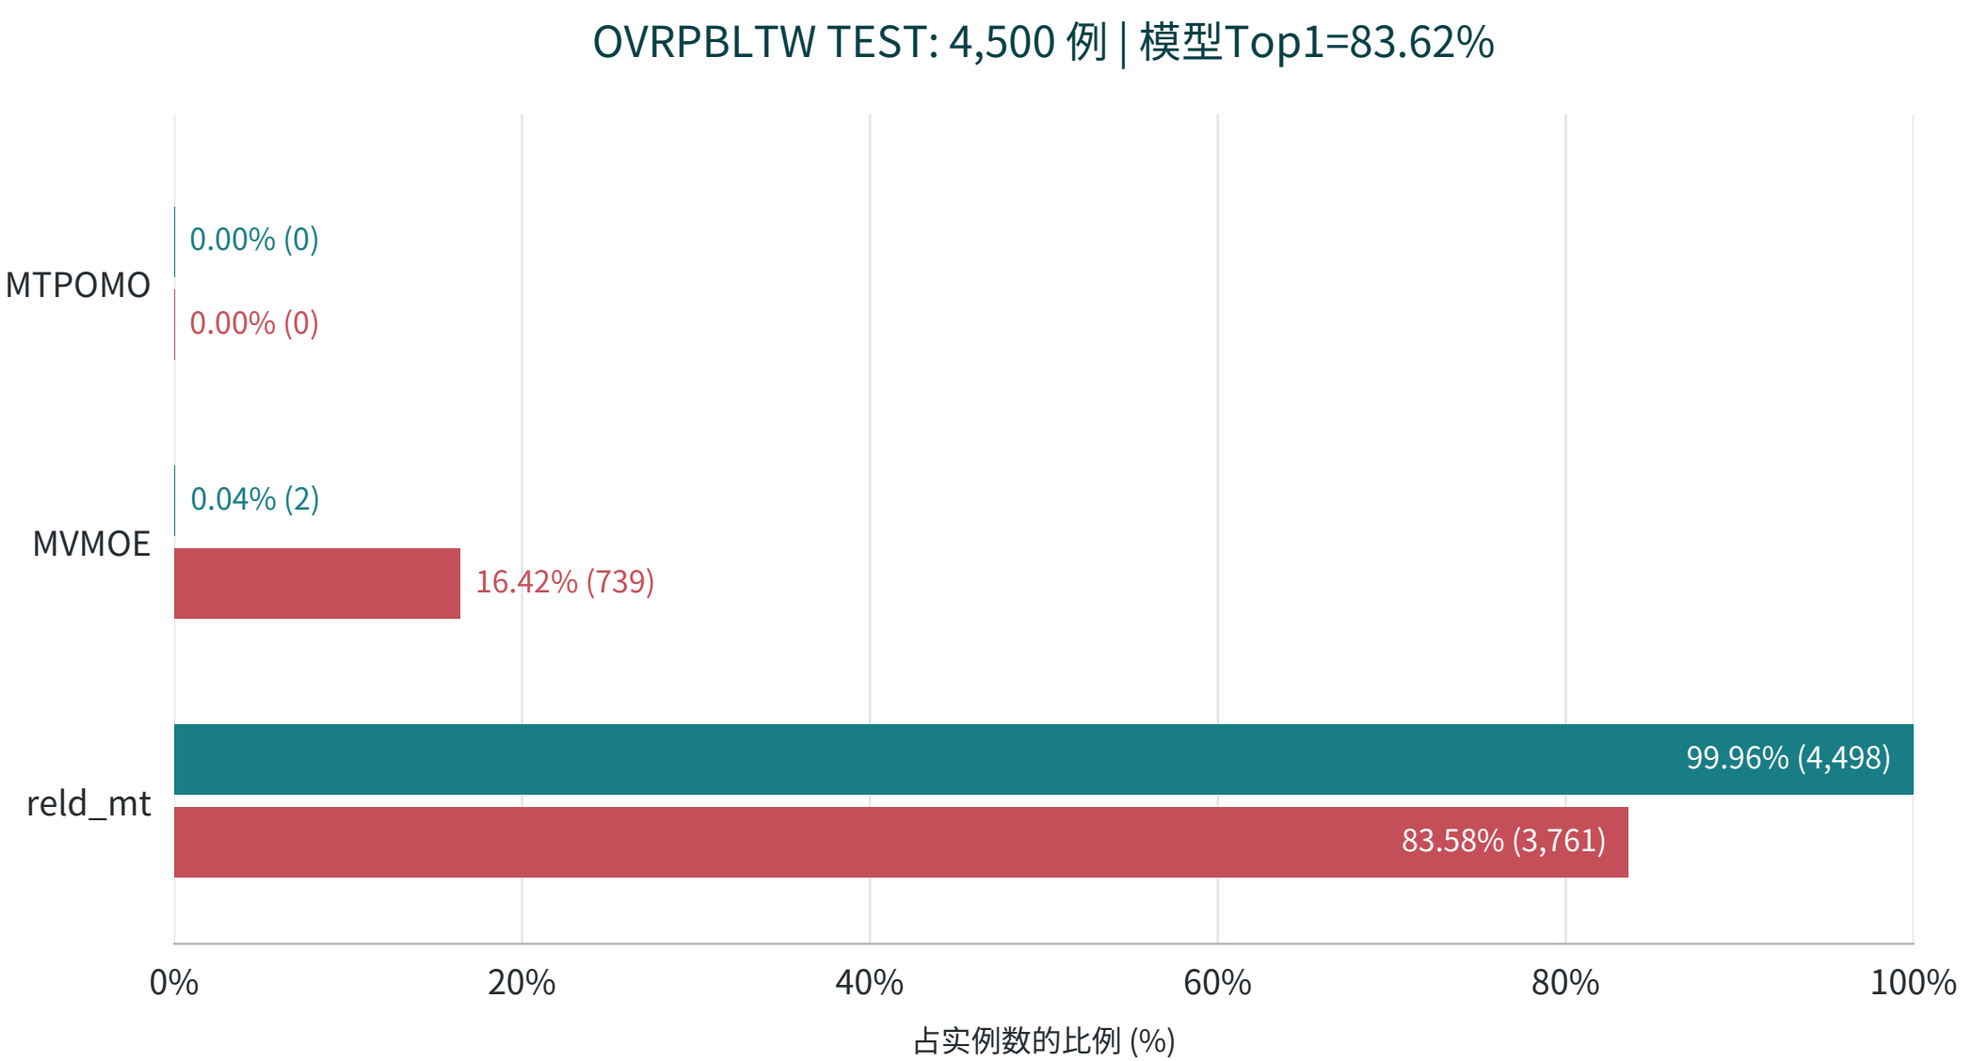

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R113/A_scratch: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.